

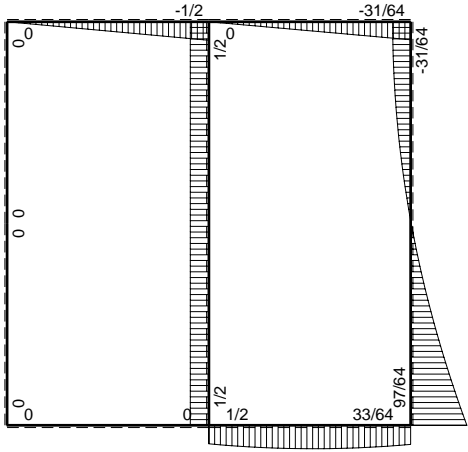


← ⊕ → F

↑ ⊕ ↓ F

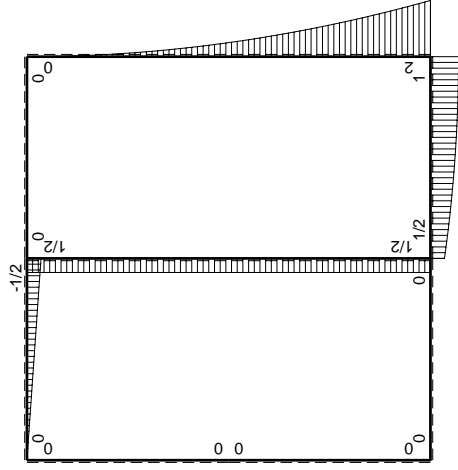

⊕ F<sub>b</sub>

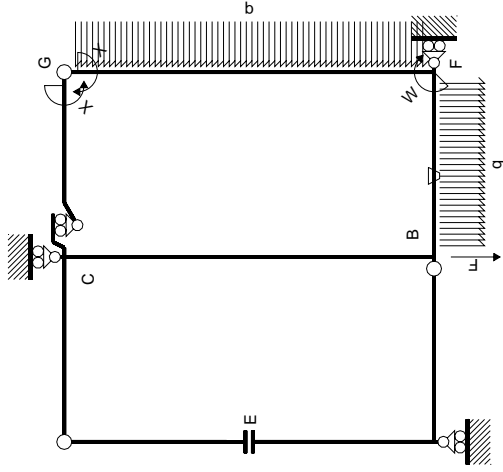

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$               | $\theta$ | $M^x M_0$                          | $M^x \theta$    | $M^x M_x$          | $\int M^x (M^0/EJ + \theta) dx$ | $\int M^x M^x/EJ dx$ |
|---------------|----------|------------------------|----------|------------------------------------|-----------------|--------------------|---------------------------------|----------------------|
| AB b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| BA b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| CD b          | 0        | $-1/2Fx + 1/2Fx$       | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| DC b          | 0        | $1/2Fx$                | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| DE b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| EA b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| AE b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| BF b          | $-x/b$   | $1/2Fb + Fx - 1/2qx^2$ | $-Fb/EJ$ | $-1/2Fx - Fx^2/b + 1/2qx^3/b$      | $Fx/EJ$         | $x^2/b^2$          | $(-1/1/24 + 1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $-Fb + 1/2qx^2$        | $Fb/EJ$  | $-Fb + Fx + 1/2Fx^2/b - 1/2qx^3/b$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $(-1/1/24 + 1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                      | 0        | 0                                  | 0               | $1-2x/b + x^2/b^2$ | 0                               | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                      | 0        | 0                                  | 0               | $x^2/b^2$          | 0                               | $1/3xb/EJ$           |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$           | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$             |
| GF 2b         | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$                       | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$             |
| CB 2b         | 0        | $1/2Fb$                | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| BC 2b         | 0        | $-1/2Fb$               | 0        | 0                                  | 0               | 0                  | 0                               | 0                    |
| totali        |          |                        |          |                                    |                 |                    | $-31/24Fb^2/EJ$                 | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

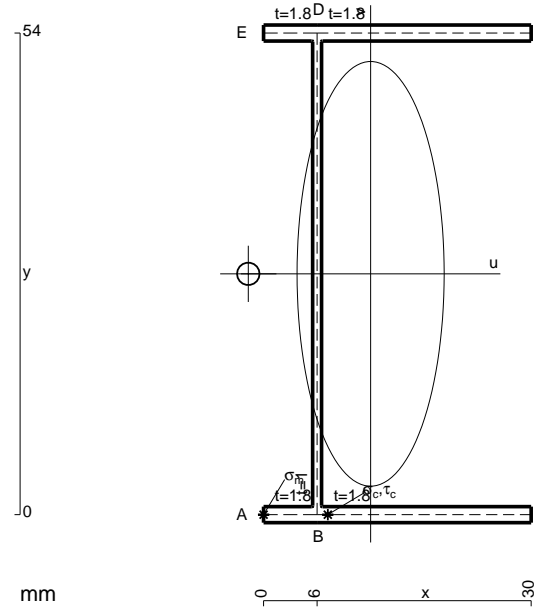

$$A = 162. \text{ mm}^2$$

$$J_u = 91854. \text{ mm}^4$$

$$J_v = 11016. \text{ mm}^4$$

$$J_t = 134.6 \text{ mm}^4$$

$$x_o = -13.71 \text{ mm}$$

$$x_g = 12. \text{ mm}$$

$$T_y = 1520. \text{ N}$$

$$M_x = -714400. \text{ Nmm}$$

$$u_m = -12. \text{ mm}$$

$$v_m = -27. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -210. \text{ N/mm}^2$$

$$x_c = 6. \text{ mm}$$

$$u_c = -6. \text{ mm}$$

$$v_c = -27. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -210. \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 289.4 \text{ N/mm}^2$$



$$\tau_g = TS_t/J_u = 10.72 \text{ N/mm}^2$$

$$\tau_o = Tx_o/tJ_t = 278.7 \text{ N/mm}^2$$

$$t_c = 5472. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 543.5 \text{ N/mm}^2$$



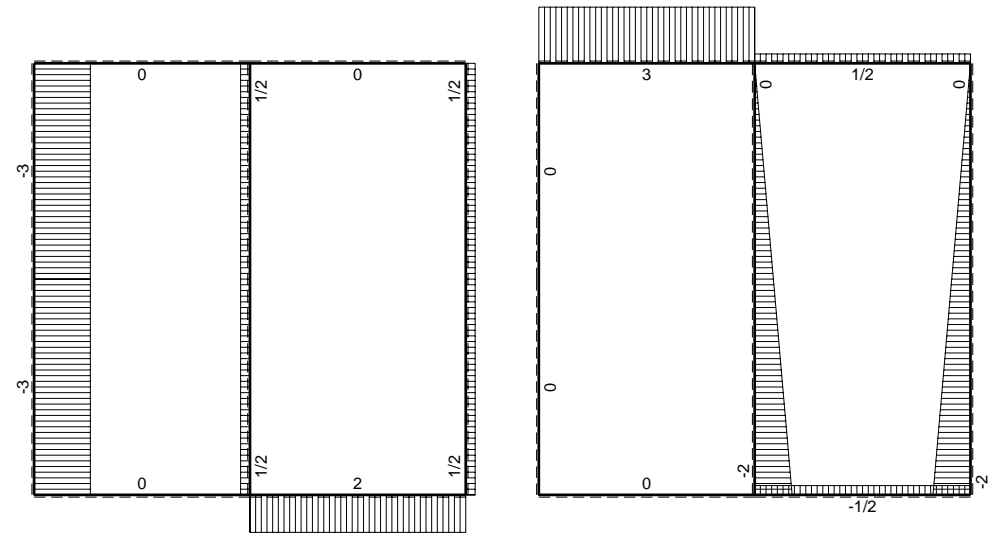
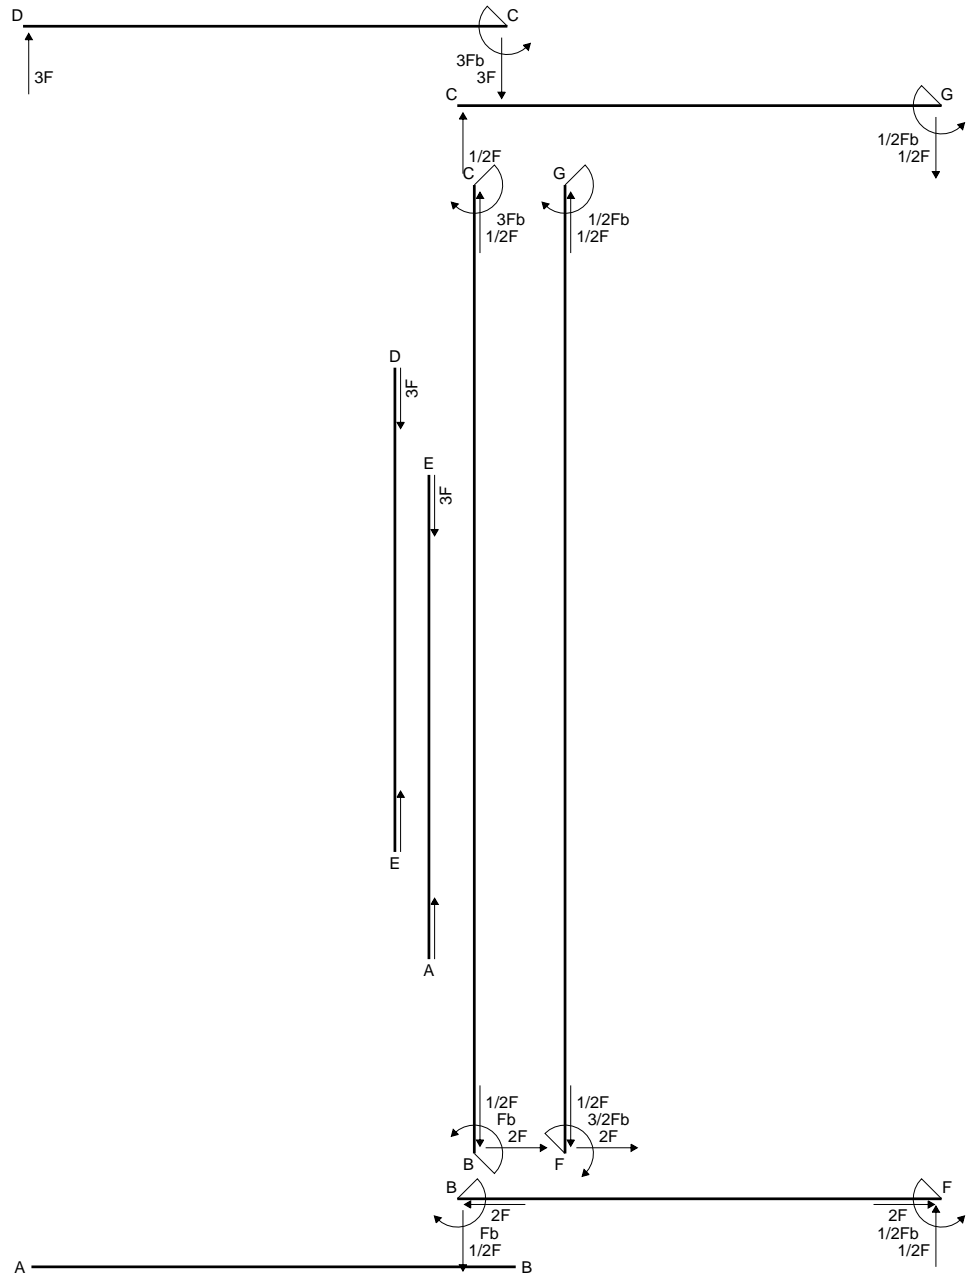


← ⊕ → F


↑ ⊕ ↓ F

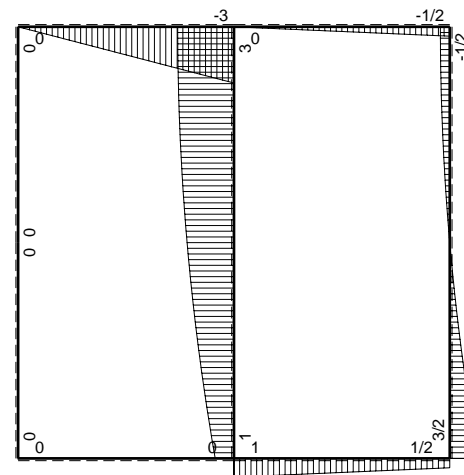

⊕ ⊖ F<sub>b</sub>

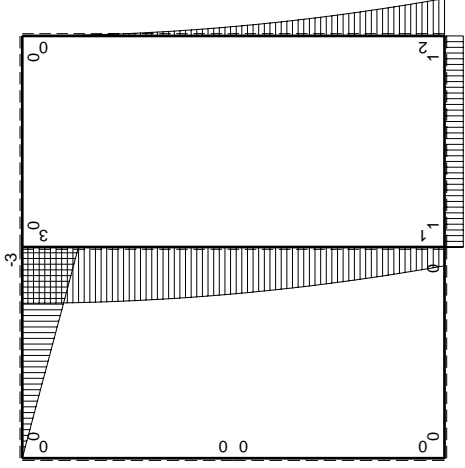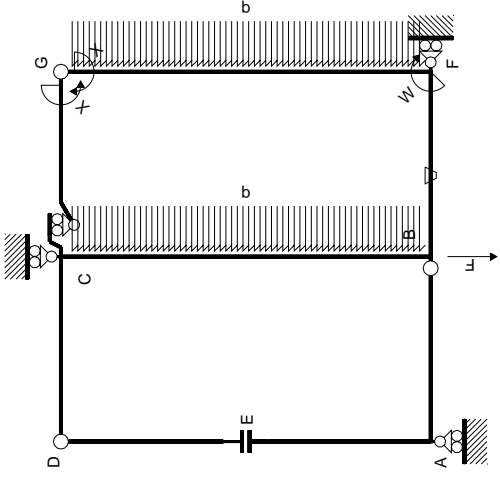

$M_0$  flessione da carichi assegnati

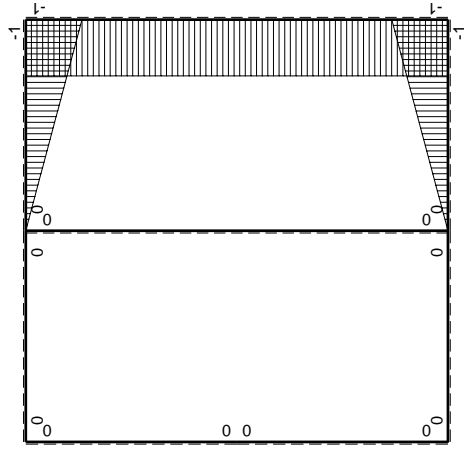

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>x</sup> (x) | M <sup>0</sup> (x)         | θ      | M <sup>x</sup> M <sub>0</sub>  | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>         | ∫M <sup>x</sup> (M <sub>0</sub> /EJ+θ)dx | ∫M <sup>x</sup> M <sub>x</sub> /EJdx |
|--------|--------------------|----------------------------|--------|--------------------------------|------------------|---------------------------------------|--|--------------------------------------|
| AB b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| BA b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| CD b   | 0                  | -3Fb+3Fx                   | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| DC b   | 0                  | 3Fx                        | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| DE b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| ED b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| EA b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| AE b   | 0                  | 0                          | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| BF b   | -x/b               | Fb                         | -Fb/EJ | -Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (-1/2+1/2)Fb <sup>2</sup> /EJ            | 1/3xb/EJ                             |
| FB b   | 1-x/b              | -Fb                        | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-1/2+1/2)Fb <sup>2</sup> /EJ            | 1/3xb/EJ                             |
| GC b   | -1+x/b             | 0                          | 0      | 0                              | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                                      | 1/3xb/EJ                             |
| CG b   | x/b                | 0                          | 0      | 0                              | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                                      | 1/3xb/EJ                             |
| FG 2b  | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup> | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ              | 2xb/EJ                               |
| GF 2b  | 1                  | -1/2qx <sup>2</sup>        | 0      | -1/2Fx <sup>2</sup> /b         | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ              | 2xb/EJ                               |
| CB 2b  | 0                  | 3Fb-1/2qx <sup>2</sup>     | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| BC 2b  | 0                  | -Fb-2Fx+1/2qx <sup>2</sup> | 0      | 0                              | 0                | 0                                     | 0+0                                      | 0                                    |
| totali |                    |                            |        |                                |                  |                                       |  |                                      |
|        |                    |                            |        |                                |                  |                                       | -4/3Fb <sup>2</sup> /EJ                  | 8/3xb/EJ                             |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$




$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

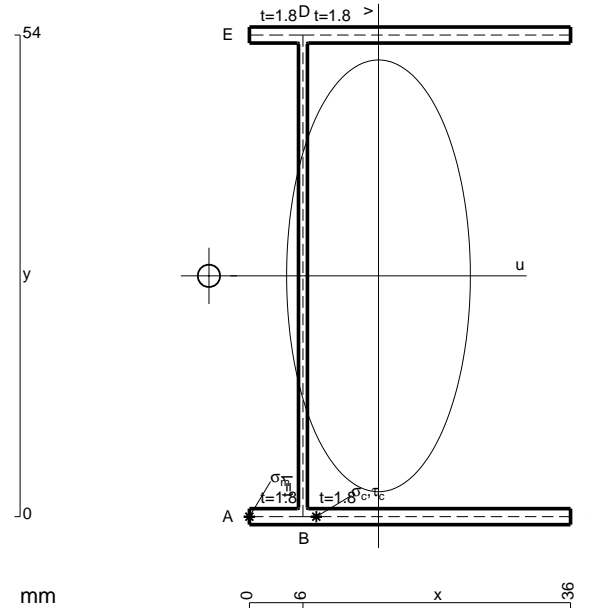

$A = 183.6 \text{ mm}^2$   
 $J_u = 107600. \text{ mm}^4$   
 $J_v = 19486. \text{ mm}^4$   
 $J_t = 158. \text{ mm}^4$   
 $x_o = -19.01 \text{ mm}$   
 $x_g = 14.47 \text{ mm}$   
 $T_y = 1710. \text{ N}$   
 $M_x = -872100. \text{ Nmm}$   
 $u_m = -14.47 \text{ mm}$   
 $v_m = -27. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -218.8 \text{ N/mm}^2$   
 $x_c = 6. \text{ mm}$   
 $u_c = -8.471 \text{ mm}$   
 $v_c = -27. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -218.8 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 383.2 \text{ N/mm}^2$   
 $\tau_g = TS'/J_u = 12.87 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 370.4 \text{ N/mm}^2$   
 $t_c = 1026. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 698.9 \text{ N/mm}^2$






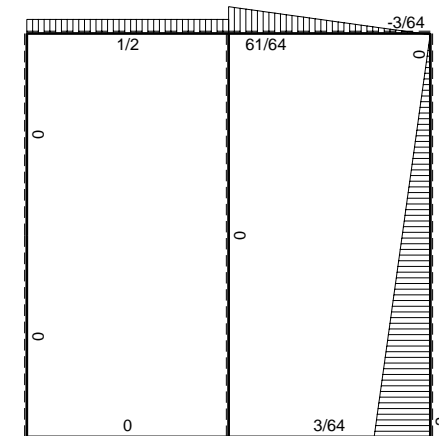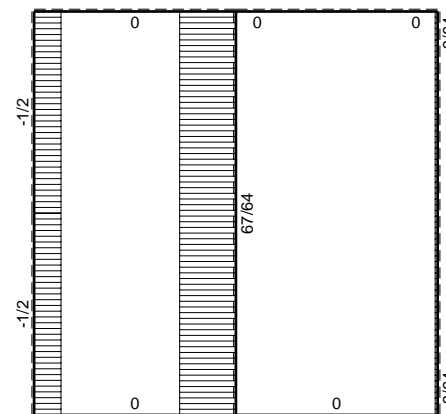
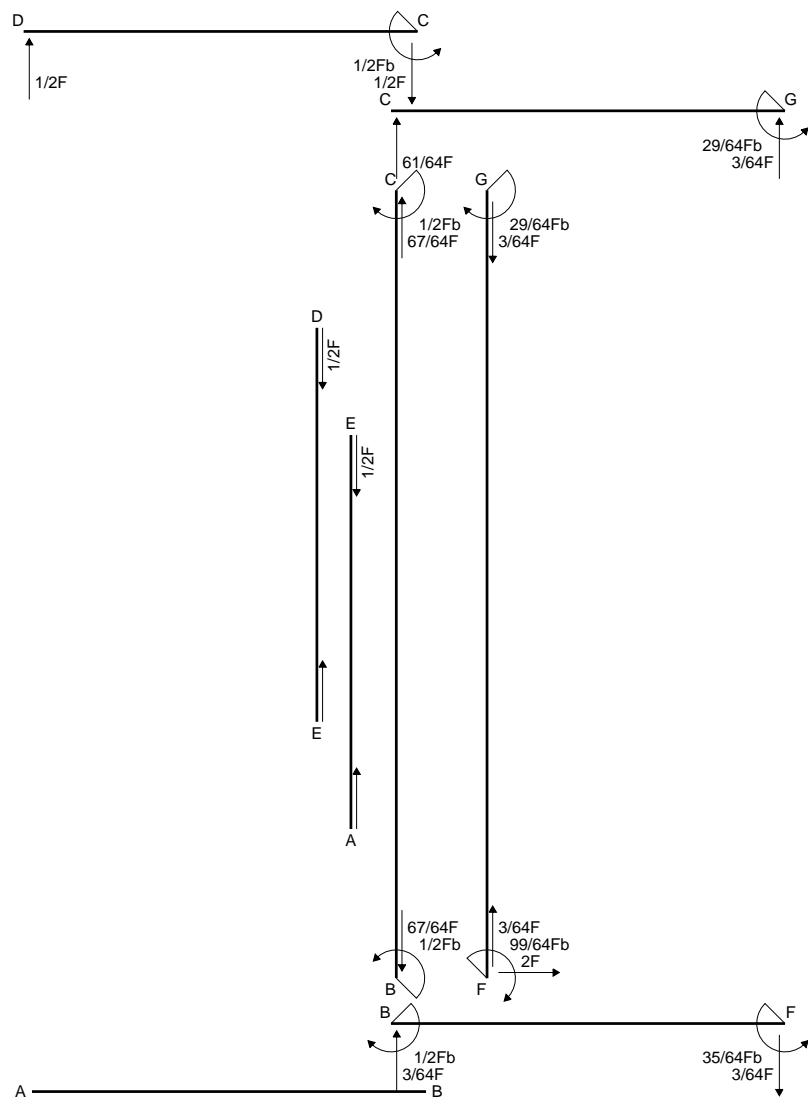


← ⊕ → F


↑ ⊕ ↓ F

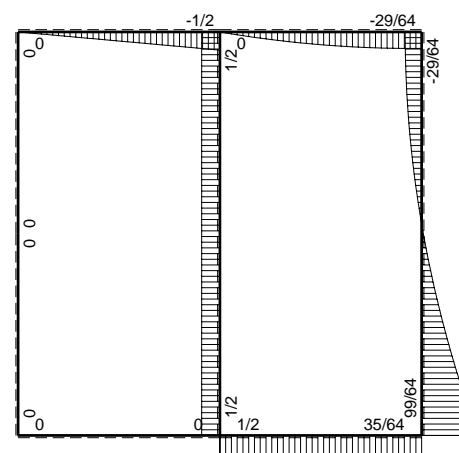

⊕ F<sub>b</sub>

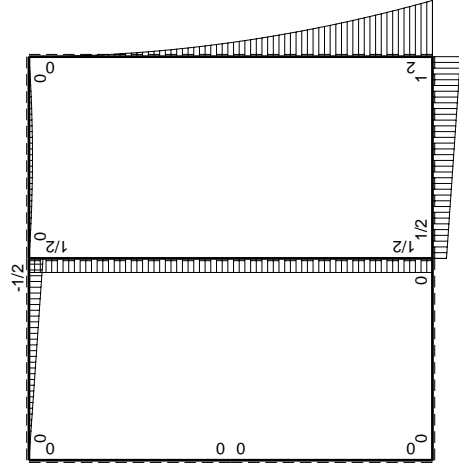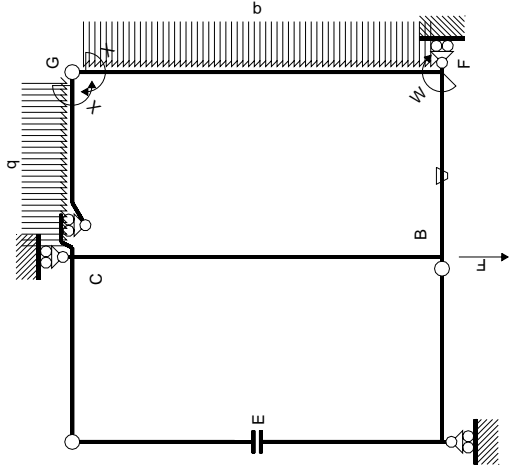

$M_0$  flessione da carichi assegnati

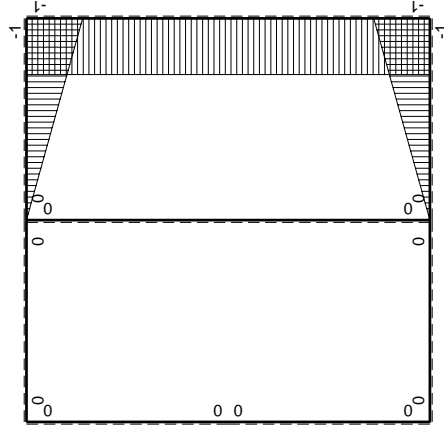

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |   | $M_x(x)$ |                   | $M_0(x)$ | $\theta$ | $M_x M_0$                | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int X M_x M_0 / E J dx$ |
|--|---|----------|-------------------|----------|----------|--------------------------|---------------|------------------|---------------------------------|---------------------------|
| AB   | B | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| BA   | A | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| CD   | D | 0        | $-1/2Fb+1/2Fx$    | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| DC   | C | 0        | $1/2Fx$           | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| DE   | E | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| ED   | D | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| EA   | A | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| AE   | E | 0        | 0                 | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| BF   | F | $-x/b$   | $1/2Fb+1/2Fx$     | $-Fb/EJ$ | $-Fb/EJ$ | $-1/2Fx-1/2Fx^2/b$       | $Fx/EJ$       | $x^2/b^2$        | $(-5/12+1/2)Fb^2/EJ$            | $1/3Xb/EJ$                |
| FB   | B | $1-x/b$  | $-Fb+1/2Fx$       | $Fb/EJ$  | $-Fb/EJ$ | $-Fb+3/2Fx-1/2Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$               | $1/3Xb/EJ$                |
| GC   | C | $-1+x/b$ | $-1/2Fx+1/2qx^2$  | 0        | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$               | $1/3Xb/EJ$                |
| CG   | G | $x/b$    | $1/2Fx-1/2qx^2$   | 0        | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$               | $1/3Xb/EJ$                |
| FG   | G | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | 0        | $-2Fb+2Fx-1/2Fx^2/b$     | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2Xb/EJ$                  |
| GF   | F | 1        | $-1/2qx^2$        | 0        | 0        | $-1/2Fx^2/b$             | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2Xb/EJ$                  |
| CB   | B | 0        | $1/2Fb$           | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| BC   | C | 0        | $-1/2Fb$          | 0        | 0        | 0                        | 0             | 0                | 0+0                             | 0                         |
| totali   |   |          |                   |          |          |                          |               |                  |                                 | $8/3Xb/EJ$                |
|  |   |          |                   |          |          |                          |               |                  |                                 | $29/64Fb$                 |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x\theta} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x\theta} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

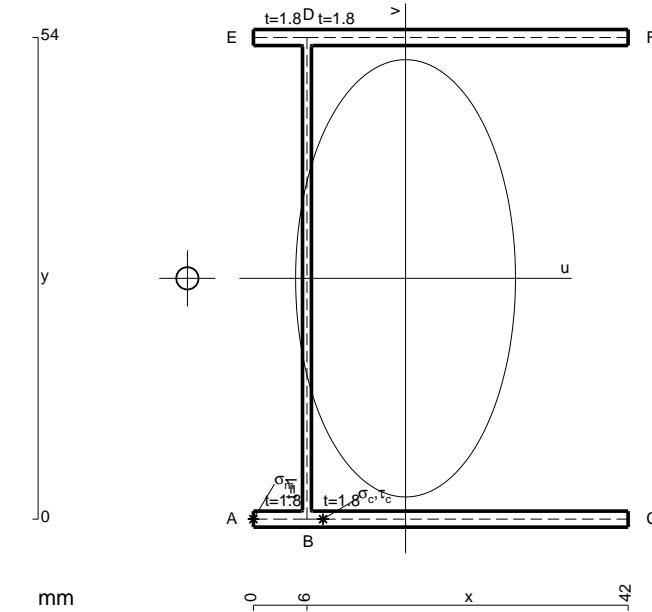


- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 31179. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = -24.46 mm
- x<sub>g</sub> = 17.05 mm
- T<sub>y</sub> = 1910. N
- M<sub>x</sub> = -1050500. Nmm
- u<sub>m</sub> = -17.05 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -11.05 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 478.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS'/tJ<sub>u</sub> = 15.05 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 463.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 6876. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 860.7 N/mm<sup>2</sup>



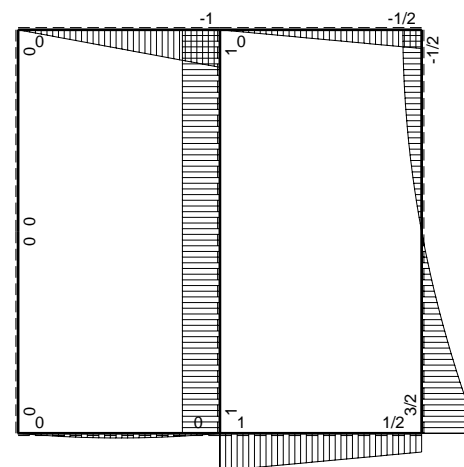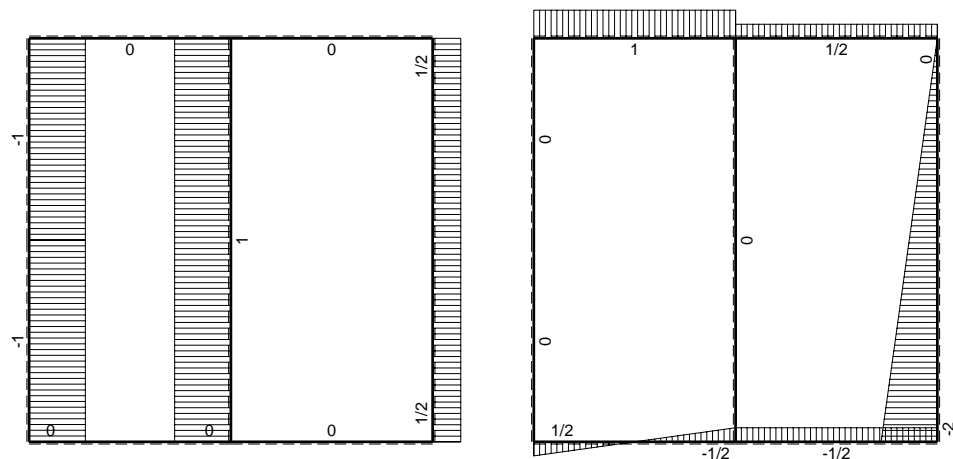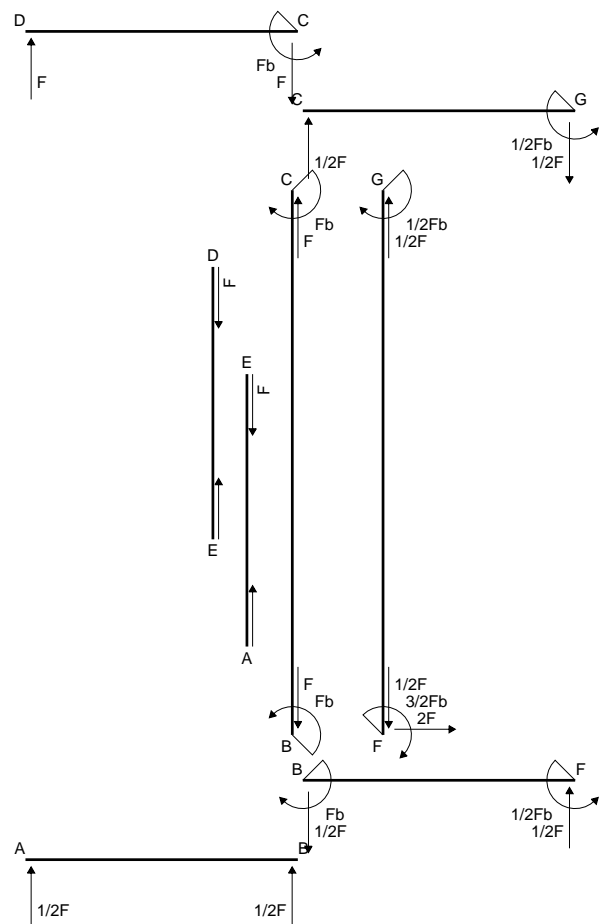

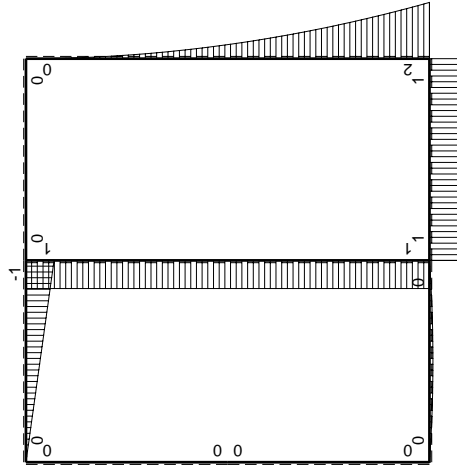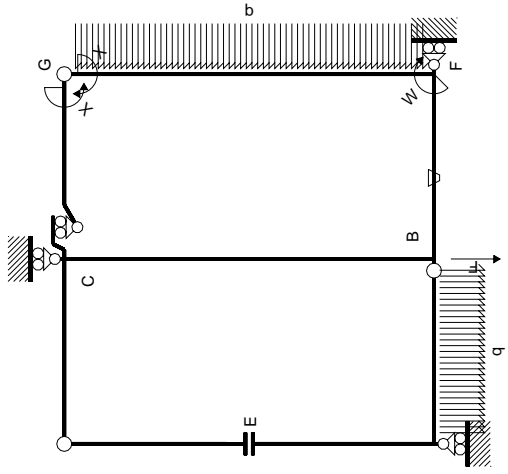

$M_0$  flessione da carichi assegnati

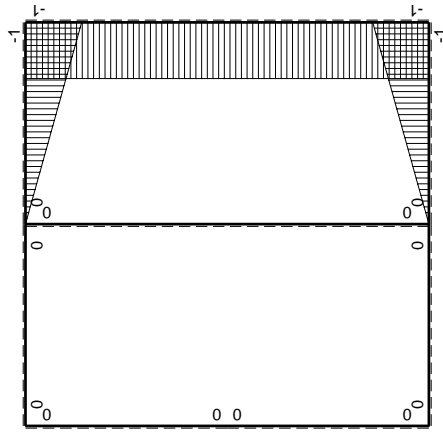

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>0</sup> (x) | M <sup>0</sup> (x) | θ      | M <sup>x</sup> M <sub>0</sub> | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub> | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_0/EJdx$ |
|--------|--------------------|--------------------|--------|-------------------------------|------------------|-------------------------------|-----------------------------|---------------------|
| AB b   | 0                  | $1/2Fx-1/2qx^2$    | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BA b   | 0                  | $-1/2Fx+1/2qx^2$   | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| CD b   | 0                  | -b+Fx              | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| DC b   | 0                  | Fx                 | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| DE b   | 0                  | 0                  | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| ED b   | 0                  | 0                  | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| EA b   | 0                  | 0                  | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| AE b   | 0                  | 0                  | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BF b   | -x/b               | Fb                 | -Fb/EJ | -Fx                           | Fx/EJ            | $x^2/b^2$                     | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          |
| FB b   | 1-x/b              | -Fb                | Fb/EJ  | -Fb+Fx                        | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$              | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          |
| GC b   | -1+x/b             | 0                  | 0      | 0                             | 0                | $1-2x/b+x^2/b^2$              | 0+0                         | $1/3xb/EJ$          |
| CG b   | x/b                | 0                  | 0      | 0                             | 0                | $x^2/b^2$                     | 0+0                         | $1/3xb/EJ$          |
| FG 2b  | -1                 | $2Fb-2Fx+1/2qx^2$  | 0      | $-2Fb+2Fx-1/2Fx^2/b$          | 0                | 1                             | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$            |
| GF 2b  | 1                  | $-1/2qx^2$         | 0      | $-1/2Fx^2/b$                  | 0                | 1                             | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$            |
| CB 2b  | 0                  | Fb                 | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BC 2b  | 0                  | -Fb                | 0      | 0                             | 0                | 0                             | 0+0                         | 0                   |
| totali |                    |                    |        |                               |                  |                               |                             | $8/3xb/EJ$          |
|        |                    |                    |        |                               |                  |                               |                             | $1/2Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

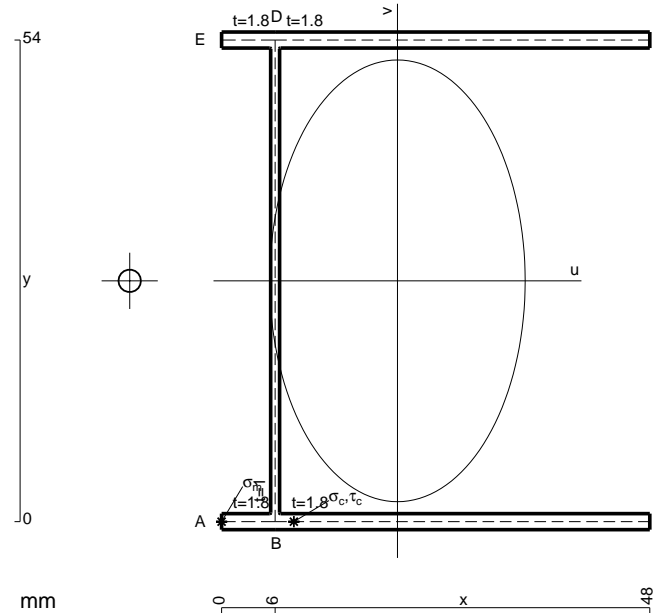

- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 46508. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>o</sub> = -30.02 mm
- x<sub>g</sub> = 19.71 mm
- T<sub>y</sub> = 2060. N
- M<sub>x</sub> = -1236000. Nmm
- u<sub>m</sub> = -19.71 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -13.71 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 560.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 16.79 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t / J<sub>t</sub> = 543.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 3708. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 1000. N/mm<sup>2</sup>





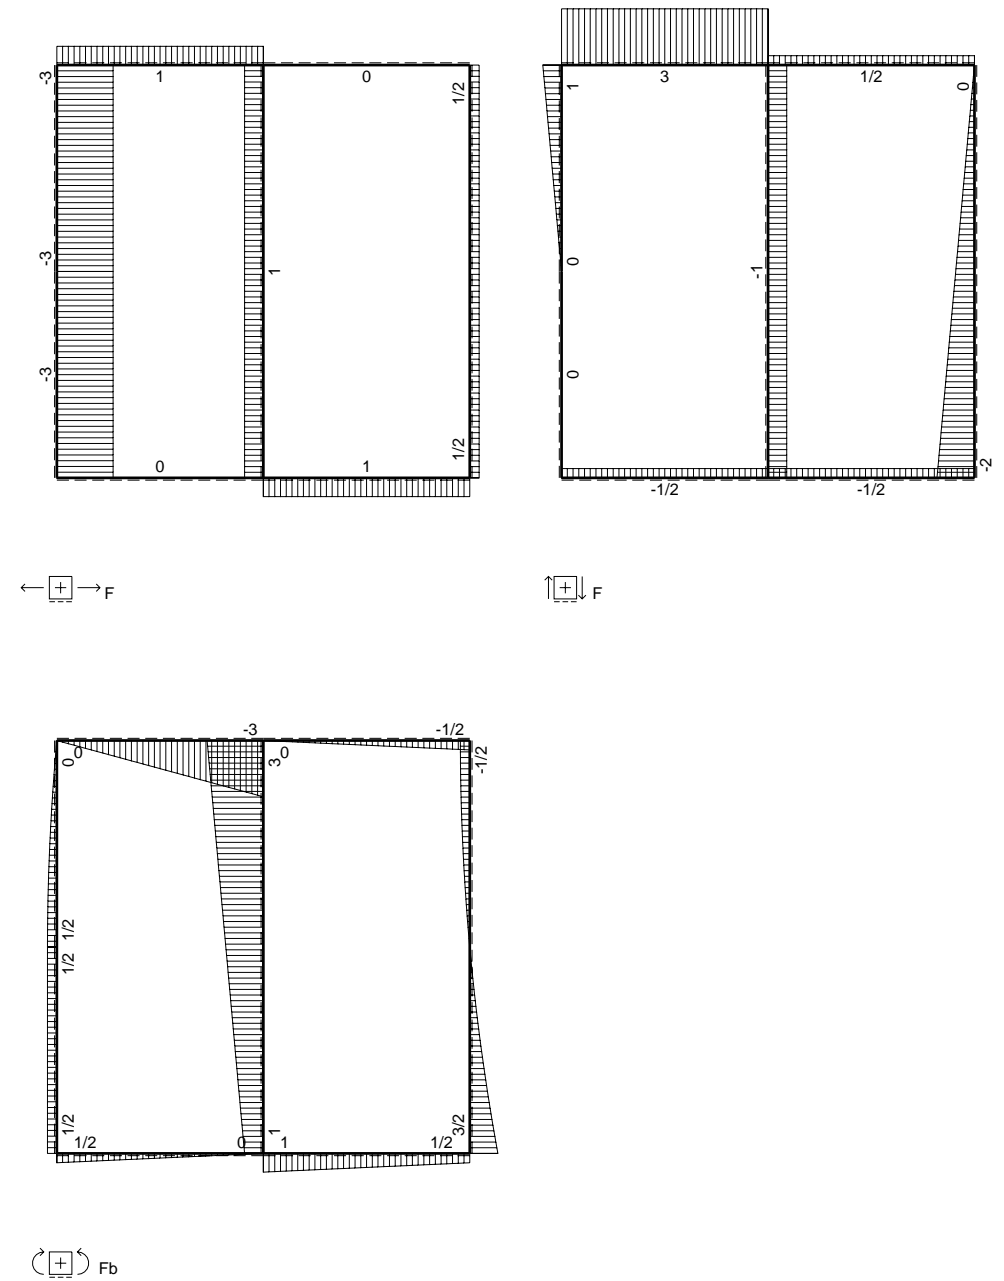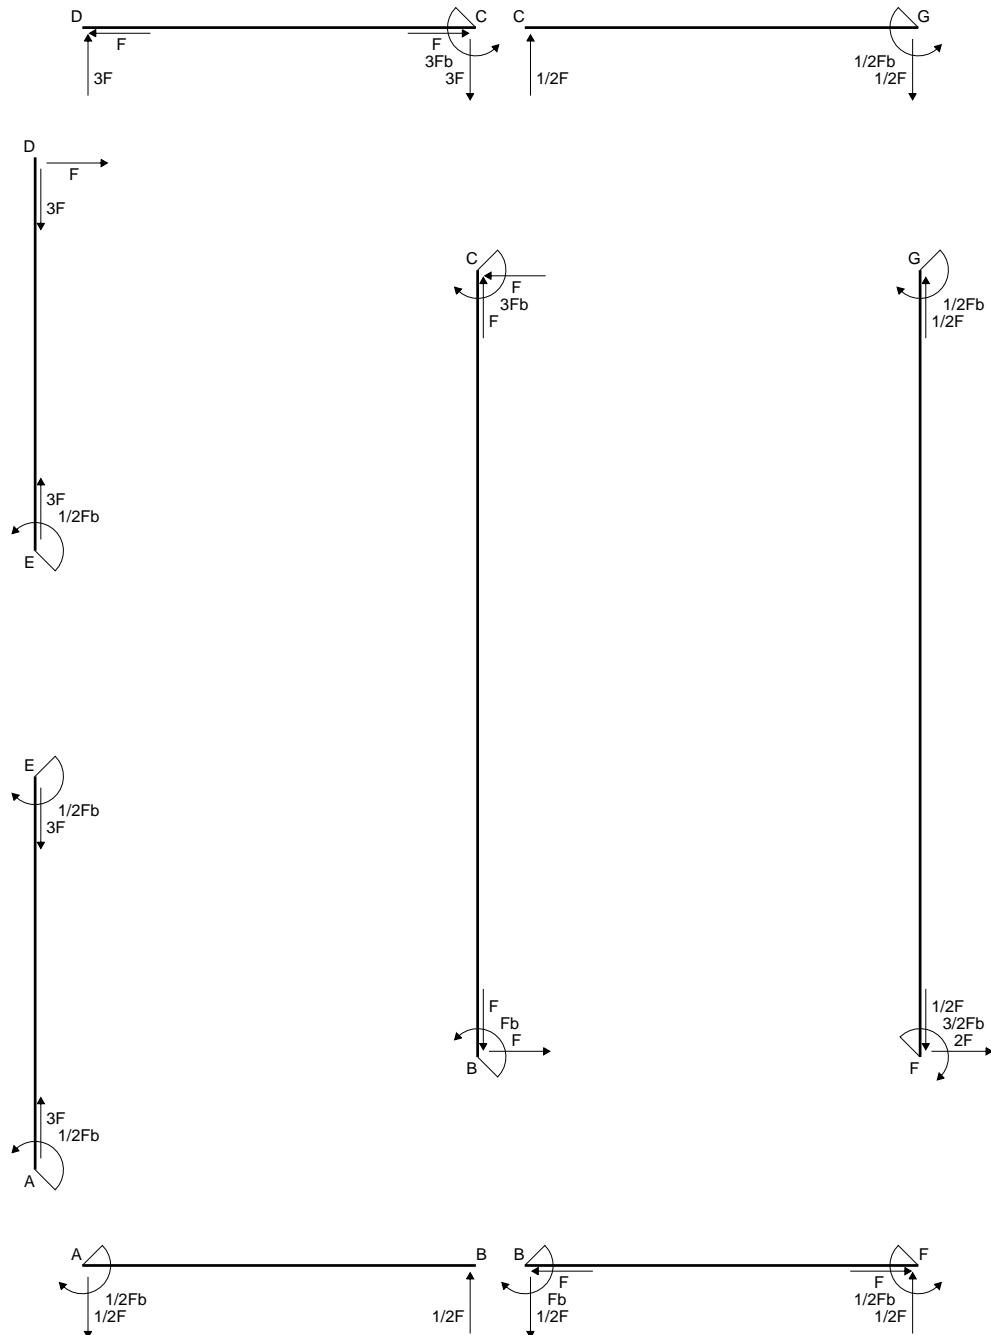



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


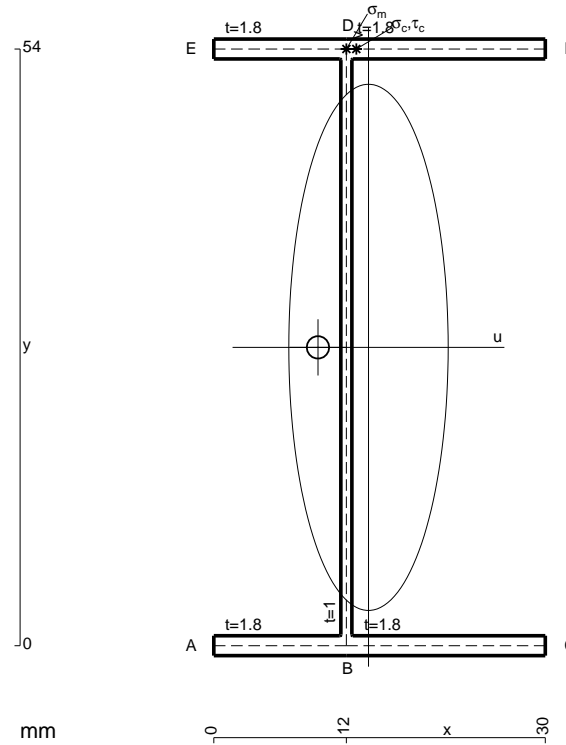


- A = 162. mm<sup>2</sup>
- J<sub>u</sub> = 91854. mm<sup>4</sup>
- J<sub>v</sub> = 8424. mm<sup>4</sup>
- J<sub>t</sub> = 134.6 mm<sup>4</sup>
- x<sub>o</sub> = -4.571 mm
- x<sub>g</sub> = 14. mm
- N = 350. N
- T<sub>y</sub> = 1050. N
- M<sub>x</sub> = -672000. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = -2. mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = -2. mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 69.73 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.556 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 64.17 N/mm<sup>2</sup>
- t<sub>c</sub> = 630. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 233.4 N/mm<sup>2</sup>




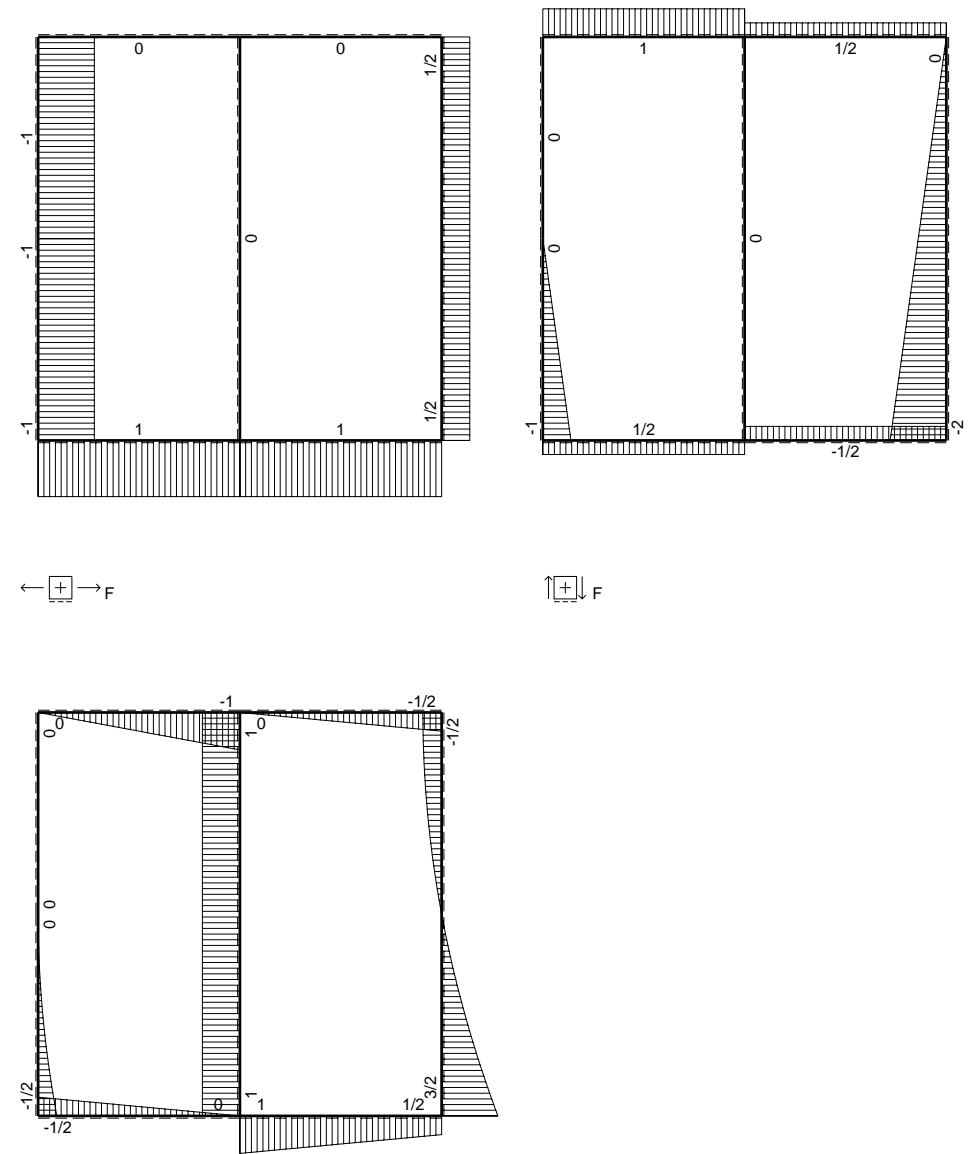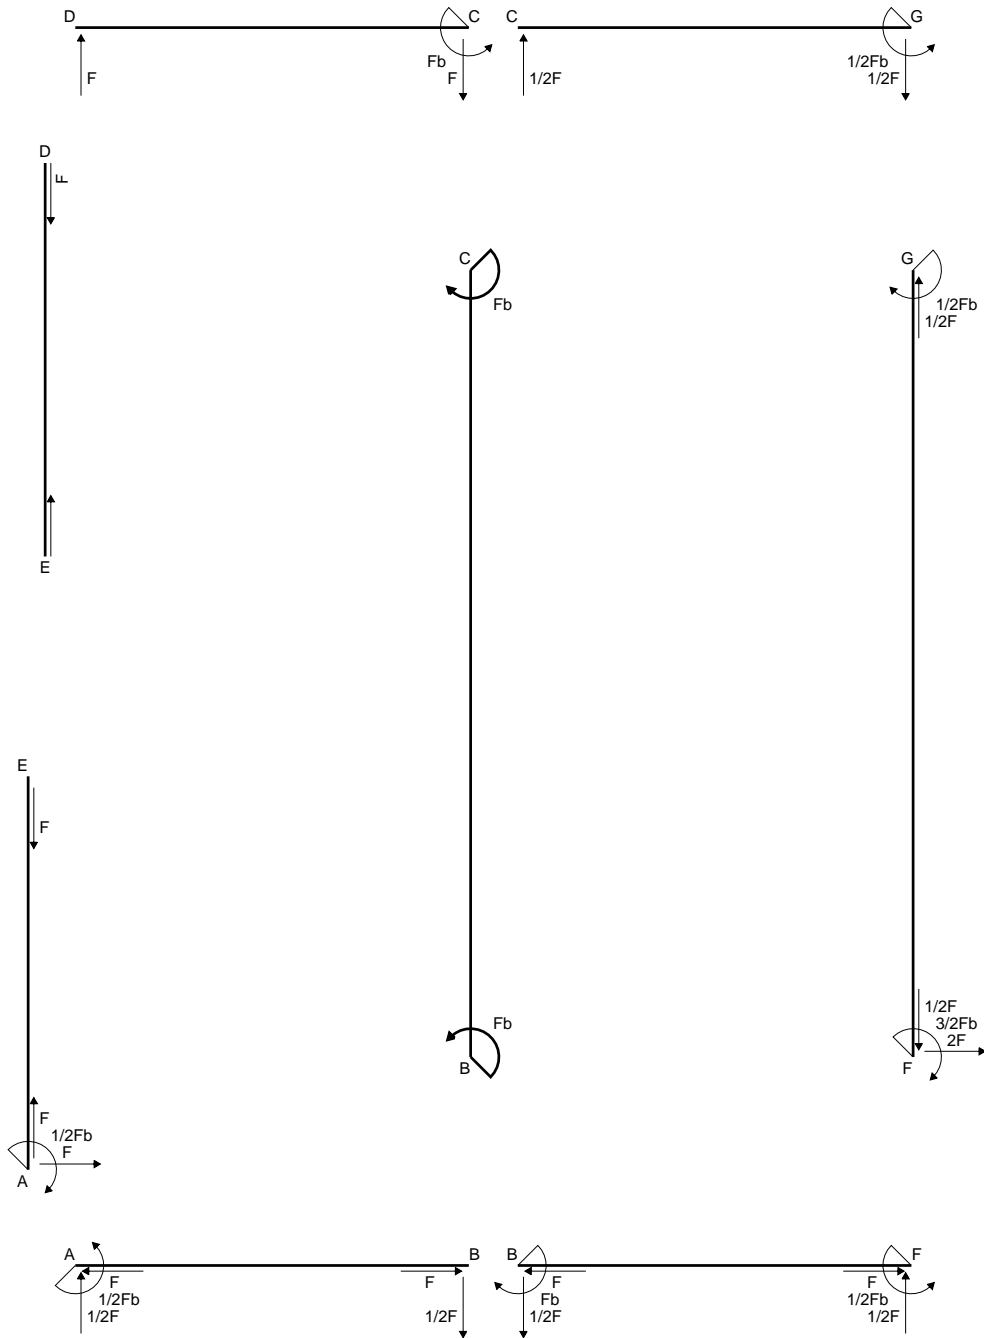

⊕ F<sub>b</sub>

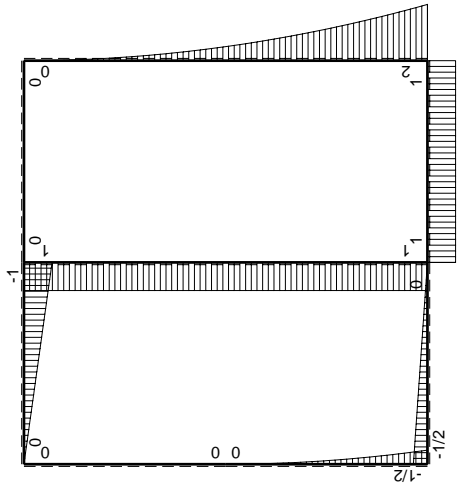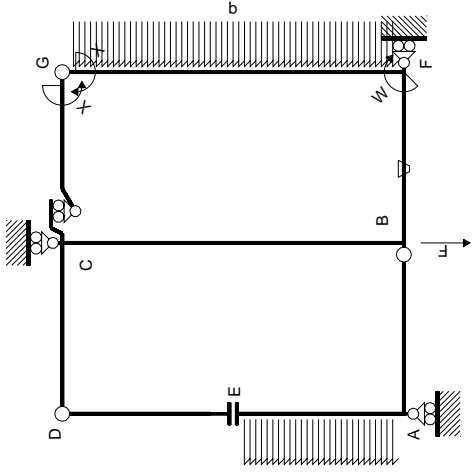

$M_0$  flessione da carichi assegnati

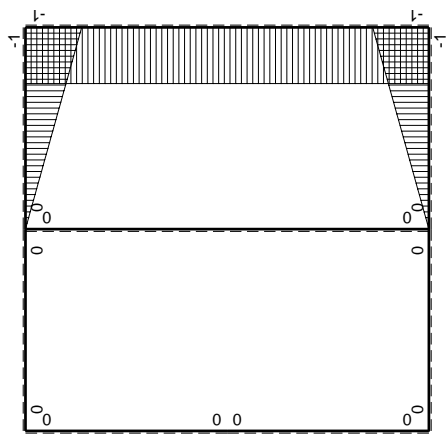

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M^0(x)$           | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|--------------|----------|--------------------|----------|----------------------|---------------|------------------|---------------------------------|-----------------------|
| AB b         | 0        | $-1/2Fb+1/2Fx$     | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| BA b         | 0        | $1/2Fx$            | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| CD b         | 0        | $-Fb+Fx$           | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| DC b         | 0        | $Fx$               | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| ED b         | 0        | 0                  | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| EA b         | 0        | $-1/2qx^2$         | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| AE b         | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| BF b         | $-x/b$   | $Fb$               | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            |
| FB b         | $1-x/b$  | $-Fb$              | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            |
| GC b         | $-1+x/b$ | 0                  | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b         | $x/b$    | 0                  | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$            |
| FG 2b        | -1       | $2Fb-2Fx+1/2qx^2$  | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| GF 2b        | 1        | $-1/2qx^2$         | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| CB 2b        | 0        | $Fb$               | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| BC 2b        | 0        | $-Fb$              | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| totali       |          |                    |          |                      |               |                  | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


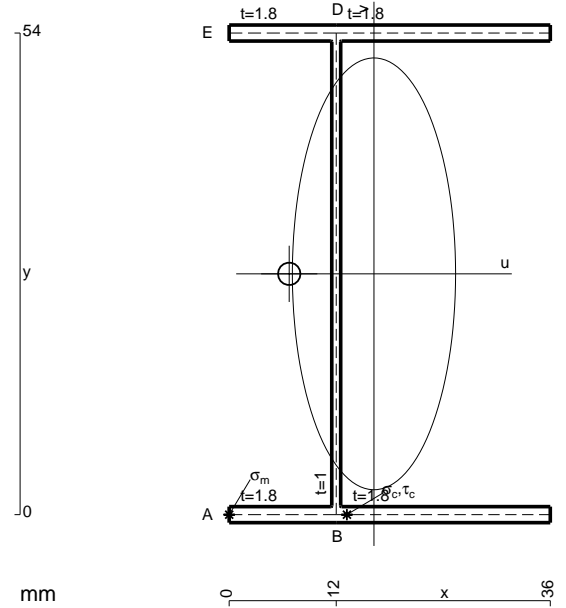


$A = 183.6 \text{ mm}^2$   
 $J_u = 107600. \text{ mm}^4$   
 $J_v = 15369. \text{ mm}^4$   
 $J_t = 158. \text{ mm}^4$   
 $x_o = -9.504 \text{ mm}$   
 $x_g = 16.24 \text{ mm}$   
 $T_y = 1230. \text{ N}$   
 $M_x = -836400. \text{ Nmm}$   
 $u_m = -16.24 \text{ mm}$   
 $v_m = -27. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -209.9 \text{ N/mm}^2$   
 $x_c = 12. \text{ mm}$   
 $u_c = -4.235 \text{ mm}$   
 $v_c = -27. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -209.9 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 140.6 \text{ N/mm}^2$   
 $\tau_g = TS'/J_u = 7.407 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 133.2 \text{ N/mm}^2$   
 $t_c = 2214. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 321.5 \text{ N/mm}^2$






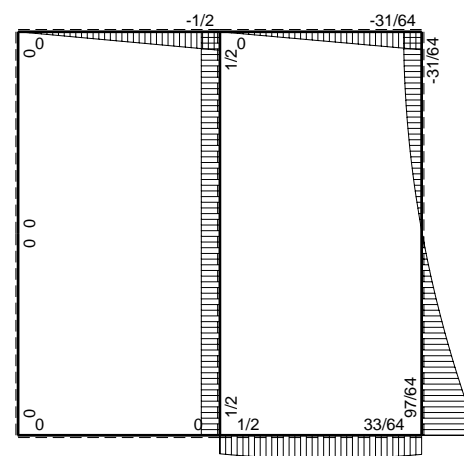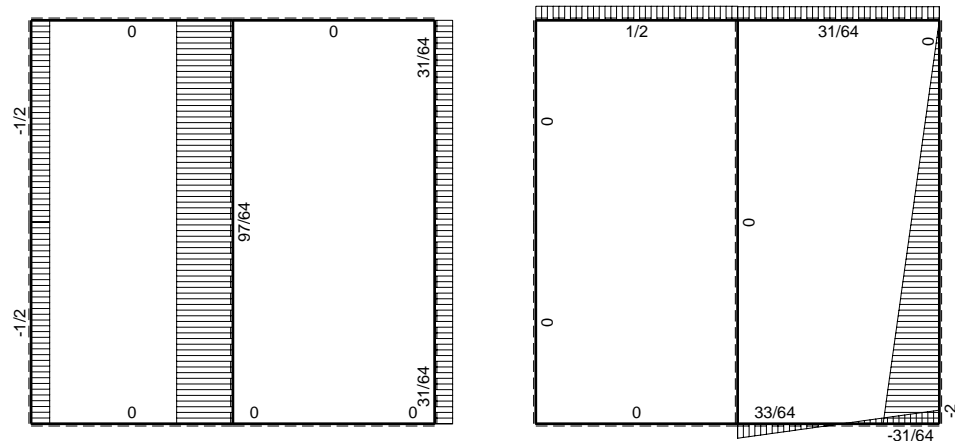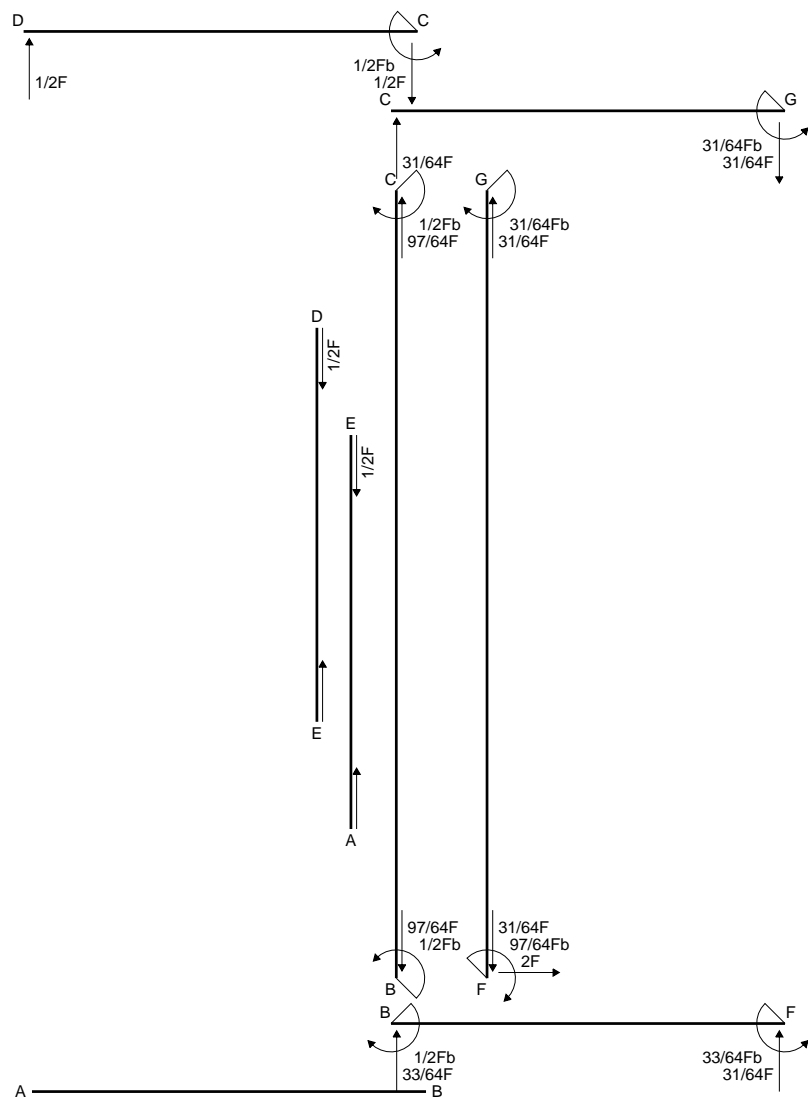

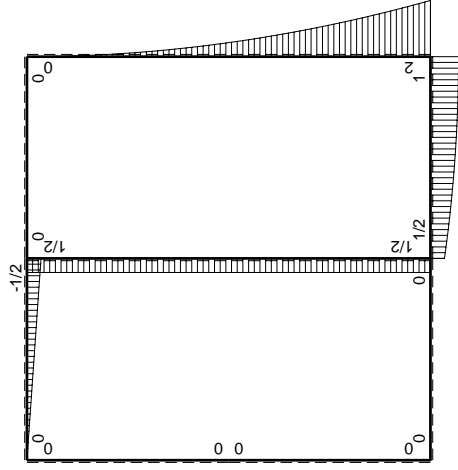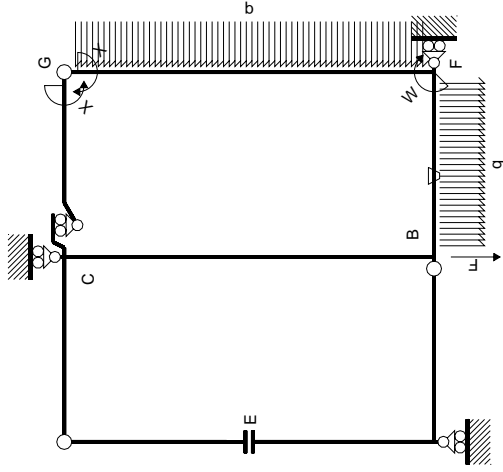

$M_0$  flessione da carichi assegnati

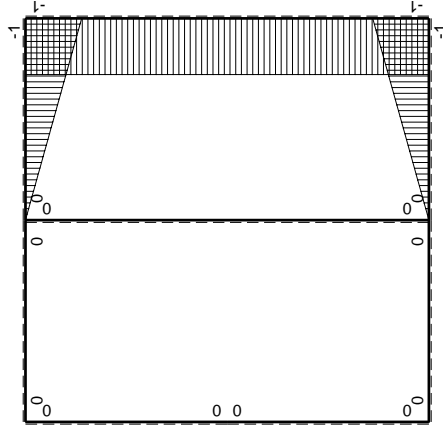

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$           | $\theta$ | $M^x M_0$                    | $M^x \theta$  | $M^x M_x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|---------------|----------|--------------------|----------|------------------------------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | 0                  | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| BA b          | 0        | 0                  | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| CD b          | 0        | $-1/2Fx+1/2Fx$     | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| DC b          | 0        | $1/2Fx$            | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| DE b          | 0        | 0                  | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| EA b          | 0        | 0                  | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| AE b          | 0        | 0                  | 0        | 0                            | 0             | 0                | 0                           | 0                    |
| BF b          | $-x/b$   | $1/2Fb+Fx-1/2qx^2$ | $-Fb/EJ$ | $-1/2Fx-Fx^2/b+1/2qx^3/b$    | $Fx/EJ$       | $x^2/b^2$        | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $-Fb+1/2qx^2$      | $Fb/EJ$  | $-Fb+Fx+1/2Fx^2/b-1/2qx^3/b$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                  | 0        | 0                            | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                  | 0        | 0                            | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | $2Fb-2Fx+1/2qx^2$  | 0        | $-2Fb+2Fx-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b         | 1        | $-1/2qx^2$         | 0        | $-1/2Fx^2/b$                 | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b         | 0        | $1/2Fb$            | 0        | 0                            | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $-1/2Fb$           | 0        | 0                            | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                    |          |                              |               |                  | $-31/24Fb^2/EJ$             | $8/3xb/EJ$           |
|               |          |                    |          |                              |               |                  | $31/64Fb$                   |                      |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

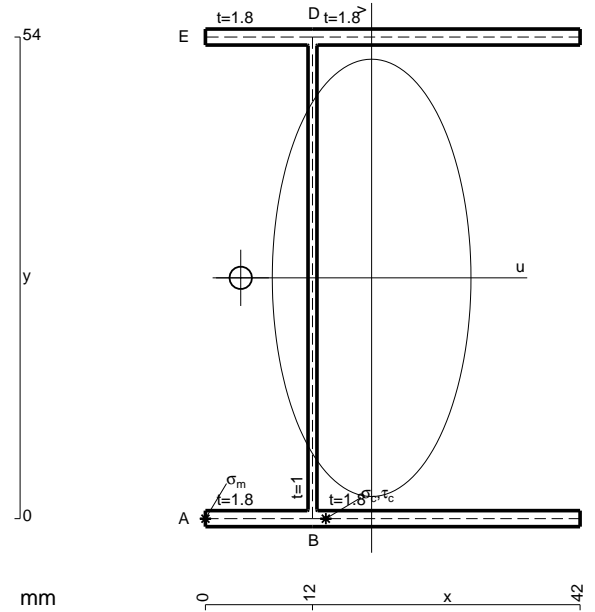


- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 25449. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = -14.67 mm
- x<sub>g</sub> = 18.63 mm
- T<sub>y</sub> = 1375. N
- M<sub>x</sub> = -1003750. Nmm
- u<sub>m</sub> = -18.63 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -219.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -6.632 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -219.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 209.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.029 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 200.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 4950. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 424. N/mm<sup>2</sup>



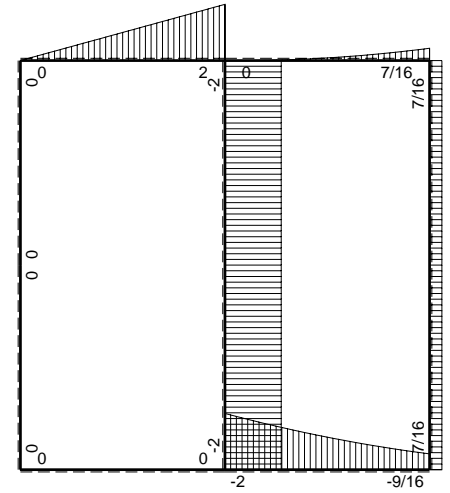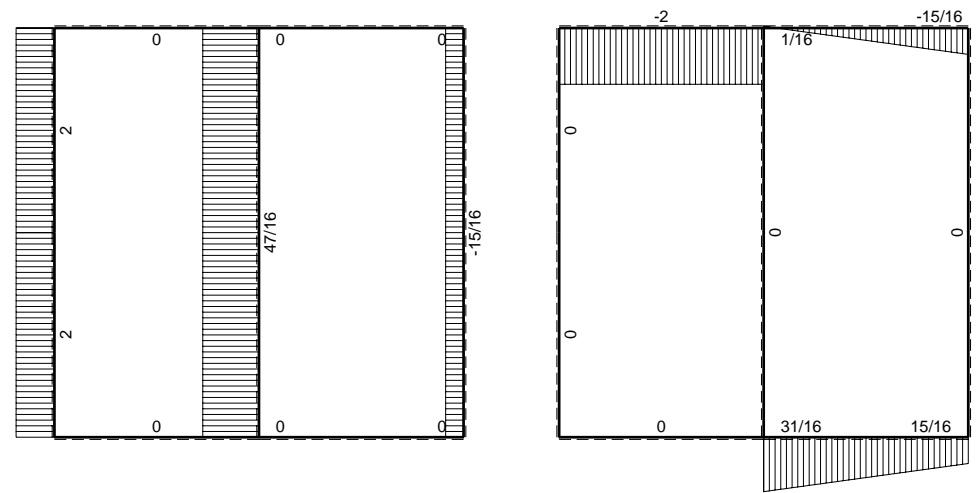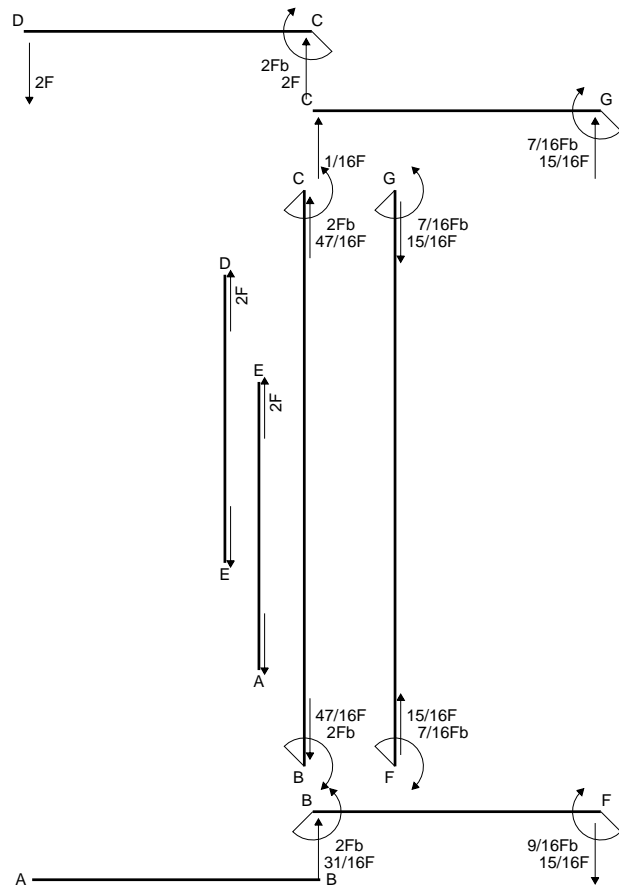


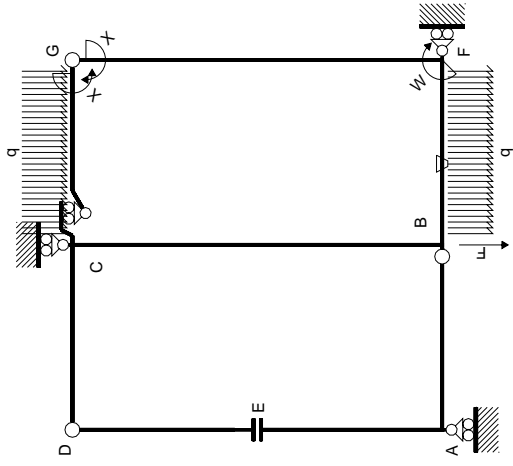

Schema di calcolo iperstatico

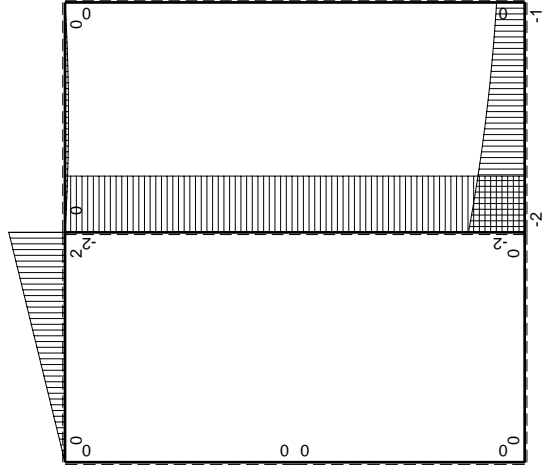

$M_0$  flessione da carichi assegnati

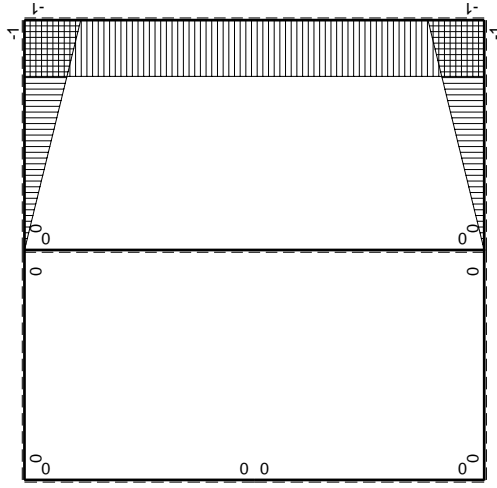

$M_x$  flessione da iperstatica  $X=1$

| ←      |   | Quadro contributi PLV per iperstatica $X=W_{gc}$ |                      |          |                           |               |                  |                             |
|--------|---|--|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|
|        |   | $M_x(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ |
| AB     | B | 0  | 0                    | 0        | 0                         | 0             | 0                | 0                           |
| BA     | A | 0  | 0                    | 0        | 0                         | 0             | 0                | 0                           |
| CD     | D | 0  | $2Fb-2Fx$            | 0        | 0                         | 0             | 0                | 0                           |
| DC     | C | 0  | $-2Fx$               | 0        | 0                         | 0             | 0                | 0                           |
| DE     | E | 0  | 0                    | 0        | 0                         | 0             | 0                | 0                           |
| EA     | A | 0  | 0                    | 0        | 0                         | 0             | 0                | 0                           |
| AE     | E | 0  | 0                    | 0        | 0                         | 0             | 0                | 0                           |
| BF     | F | $-x/b$   | $-2Fx+3/2Fx-1/2qx^2$ | $-Fb/EJ$ | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          |
| FB     | B | $1-x/b$  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           |
| GC     | C | $-1+x/b$   | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           |
| CG     | G | $x/b$  | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx^2/b-1/2qx^3/b$     | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           |
| FG     | G | -1   | 0                    | 0        | 0                         | 0             | 1                | $2Xb/EJ$                    |
| GF     | F | 1  | 0                    | 0        | 0                         | 0             | 1                | $2Xb/EJ$                    |
| CB     | B | 0  | $-2Fb$               | 0        | 0                         | 0             | 0                | 0                           |
| BC     | C | 0  | $2Fb$                | 0        | 0                         | 0             | 0                | 0                           |
| totali |   |  |                      |          |                           |               |                  |                             |
|        |   | $7/6Fb^2/EJ$                                     |                      |          |                           |               |                  |                             |
|        |   | $-7/16Fb$  |                      |          |                           |               |                  |                             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

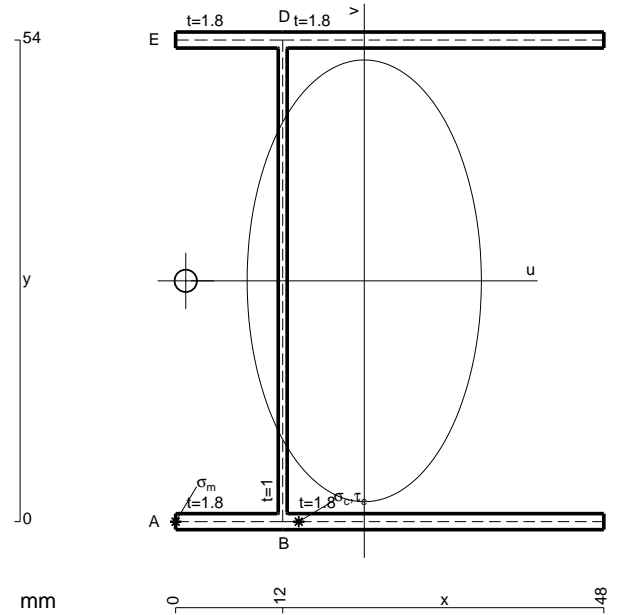

- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 39102. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>o</sub> = -20.01 mm
- x<sub>g</sub> = 21.14 mm
- T<sub>y</sub> = -1520. N
- M<sub>x</sub> = 1170400. Nmm
- u<sub>m</sub> = -21.14 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 227.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -9.143 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 227.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 278.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.62 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t/J<sub>t</sub> = 267.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 1368. mm
- σ<sub>o</sub> = √σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup> = 532.7 N/mm<sup>2</sup>






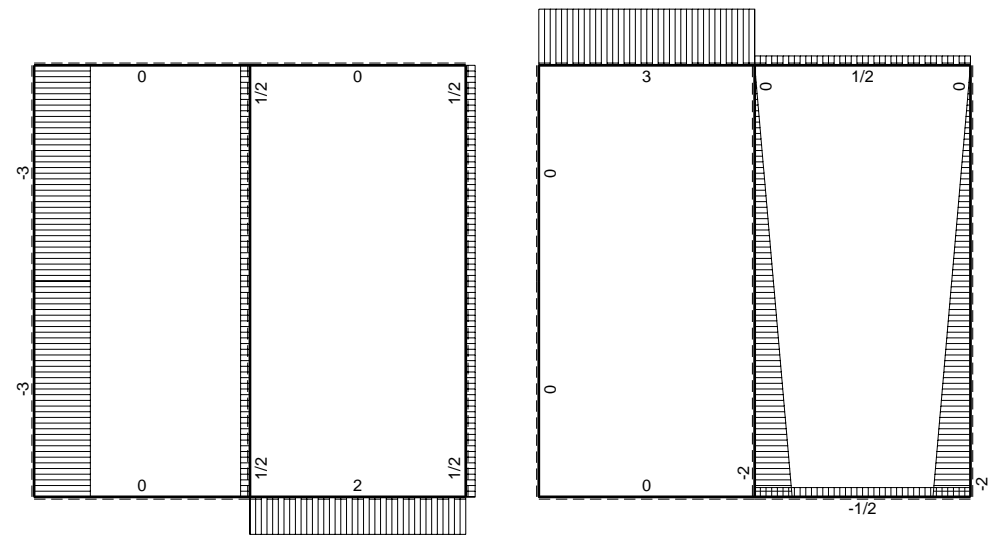
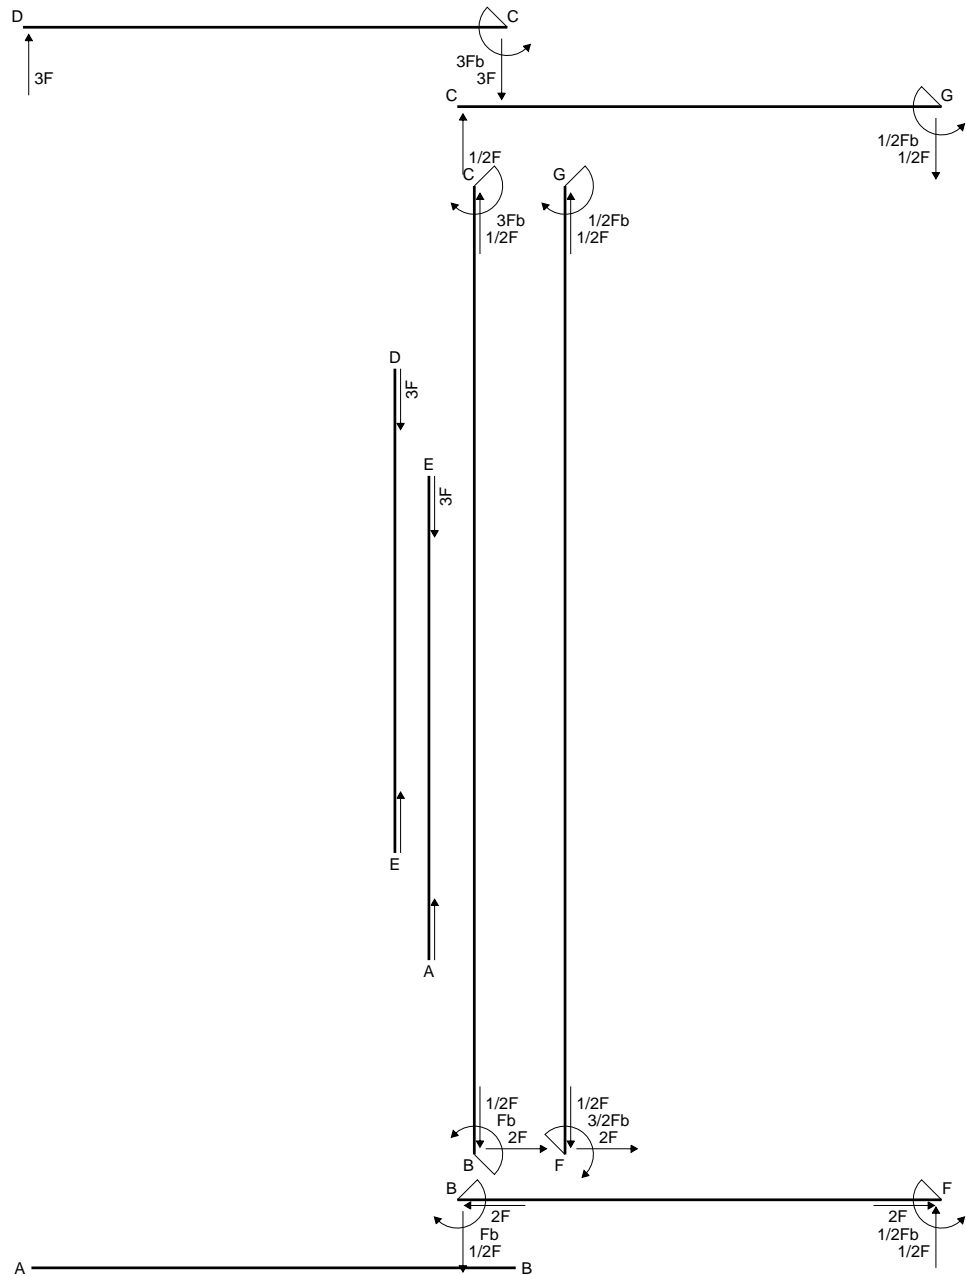


← ⊕ → F


↑ ⊕ ↓ F

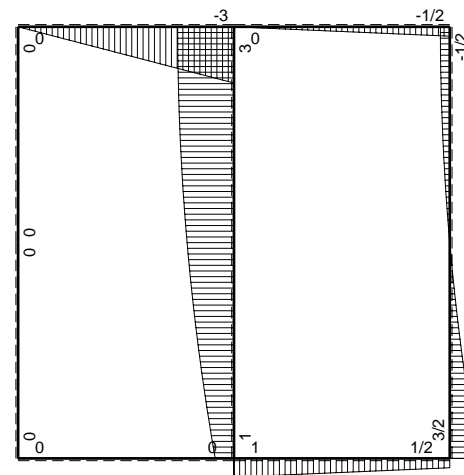

⊕ ⊖ F<sub>b</sub>

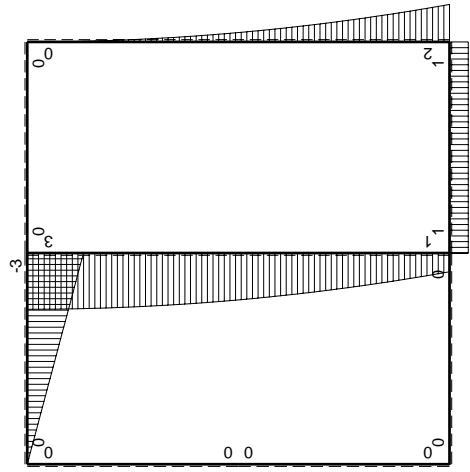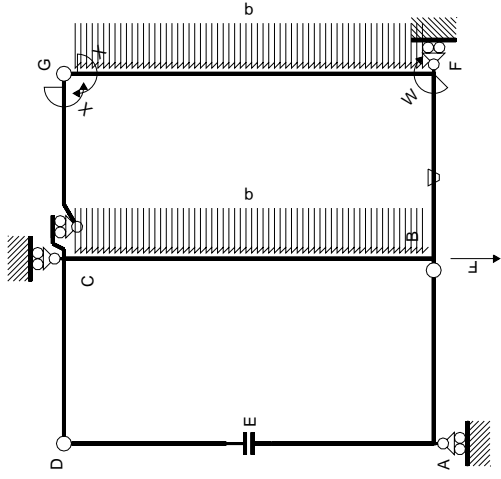

$M_0$  flessione da carichi assegnati

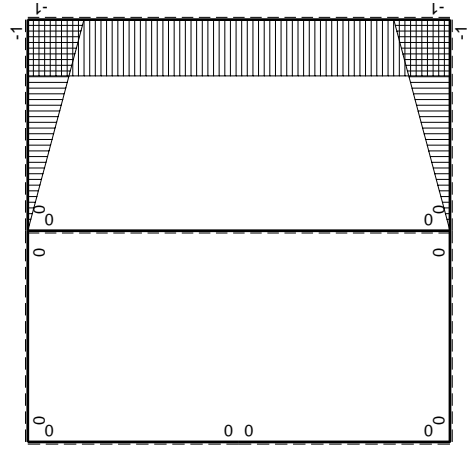

$M_x$  flessione da iperstatica  $X=1$

| ←      | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ | iperstatica $X=W_{gc}$ |            |
|--------|----------|-------------------|----------|----------------------|--------------|------------------|---------------------------------|-----------------------|------------------------|------------|
|        |          |                   |          |                      |              |                  |                                 |                       | totali                 |            |
| AB b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| CD b   | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| DC b   | 0        | $3Fx$             | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| DE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| ED b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| EA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| AE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BF b   | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$      | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            | 0                      | 0          |
| FB b   | $1-x/b$  | $-Fb$             | Fb/EJ    | $-Fb+Fx$             | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            | 0                      | 0          |
| GC b   | $-1+x/b$ | 0                 | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0                               | 0                     | 0                      | 0          |
| CG b   | $x/b$    | 0                 | 0        | 0                    | 0            | $x^2/b^2$        | 0                               | 0                     | 0                      | 0          |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              | 0                      | 0          |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                | 0                               | 0                     | 0                      | 0          |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| totali |          |                   |          |                      |              |                  |                                 |                       | $-4/3Fb^2/EJ$          | $8/3xb/EJ$ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

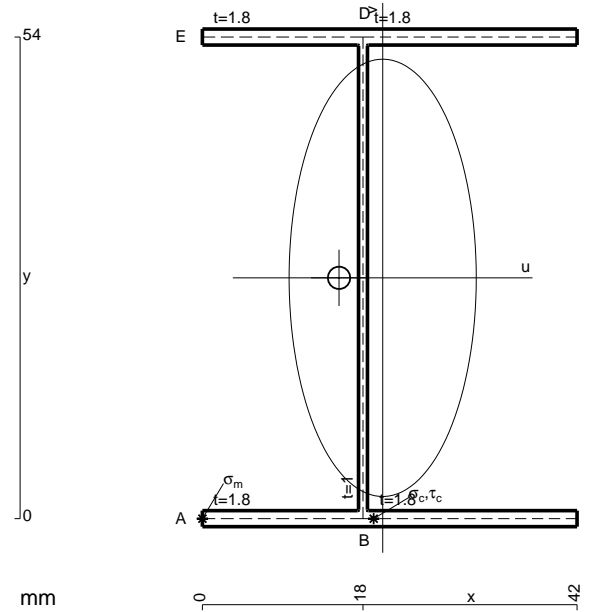

- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 22585. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = -4.891 mm
- x<sub>g</sub> = 20.21 mm
- T<sub>y</sub> = 1350. N
- M<sub>x</sub> = -1093500. Nmm
- u<sub>m</sub> = -20.21 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -239.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -2.211 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -239.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 72.65 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 7.092 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 65.56 N/mm<sup>2</sup>
- t<sub>c</sub> = 810. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 270.4 N/mm<sup>2</sup>




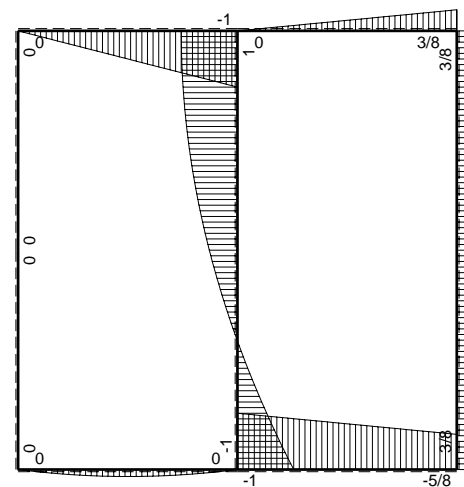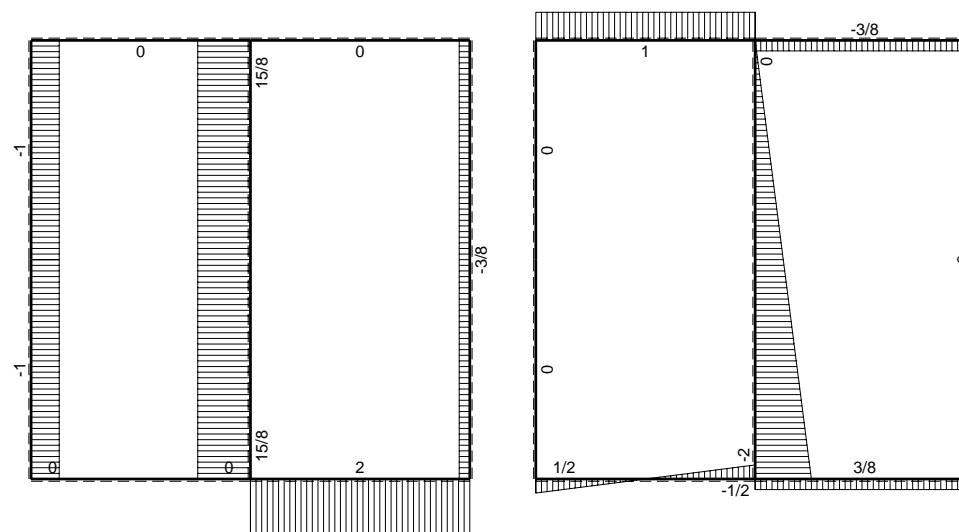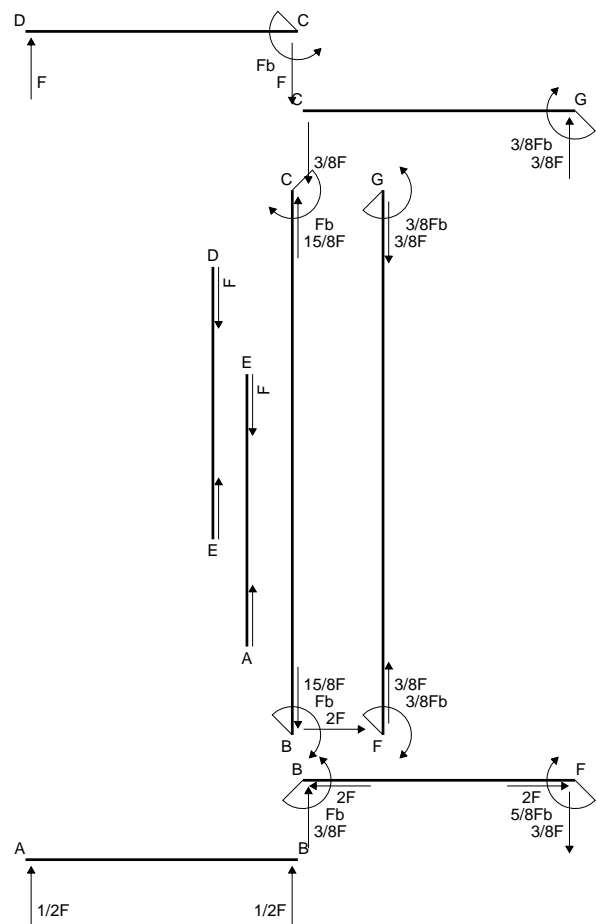

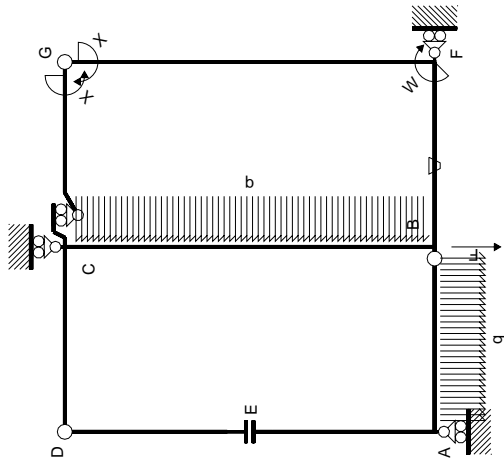

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

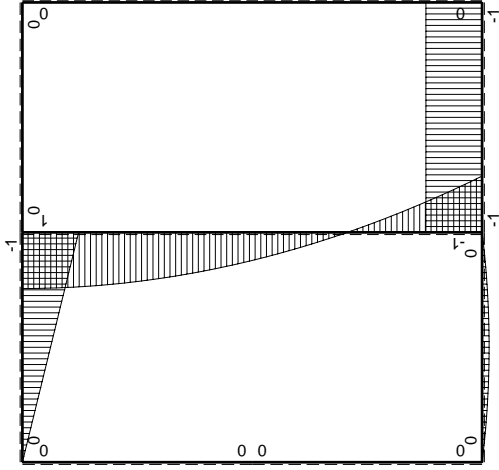

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M^x(x)$ | $M_0(x)$             | $\theta$ | $M^x M_0$ | $M^x \theta$    | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x/EJ dx$ |
|--------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|----------------------|
| AB b         | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| BA b         | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| CD b         | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| DC b         | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| DE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| EA b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| AE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| BF b         | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$           |
| FB b         | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$             |
| GF 2b        | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$             |
| CB 2b        | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| BC 2b        | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                    |
| totali       |          |                      |          |           |                 |                  |                                 | $Fb^2/EJ$            |
|              |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


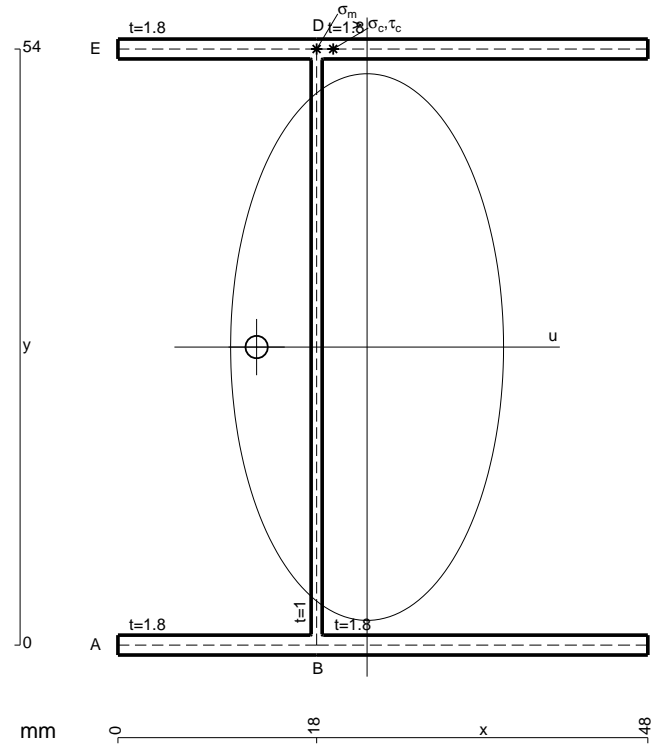


- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 34659. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>0</sub> = -10.01 mm
- x<sub>g</sub> = 22.57 mm
- N = 4088. N
- T<sub>y</sub> = -4360. N
- M<sub>x</sub> = -937400. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = -4.571 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 200. N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = -4.571 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 200. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 409.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 25.39 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>/J<sub>t</sub> = 383.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 3924. mm
- σ<sub>0</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 736.3 N/mm<sup>2</sup>






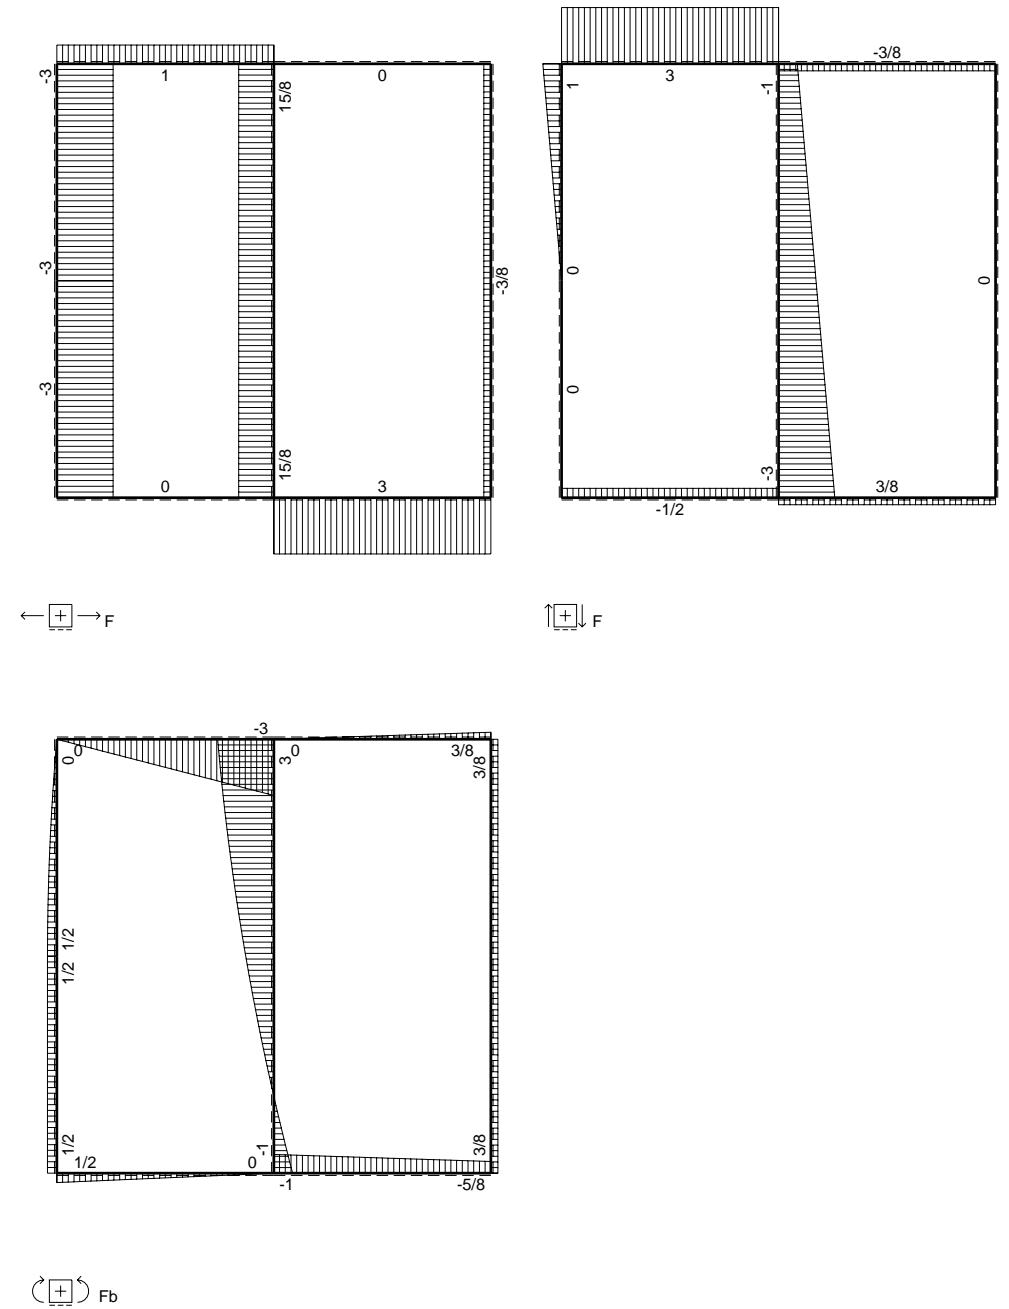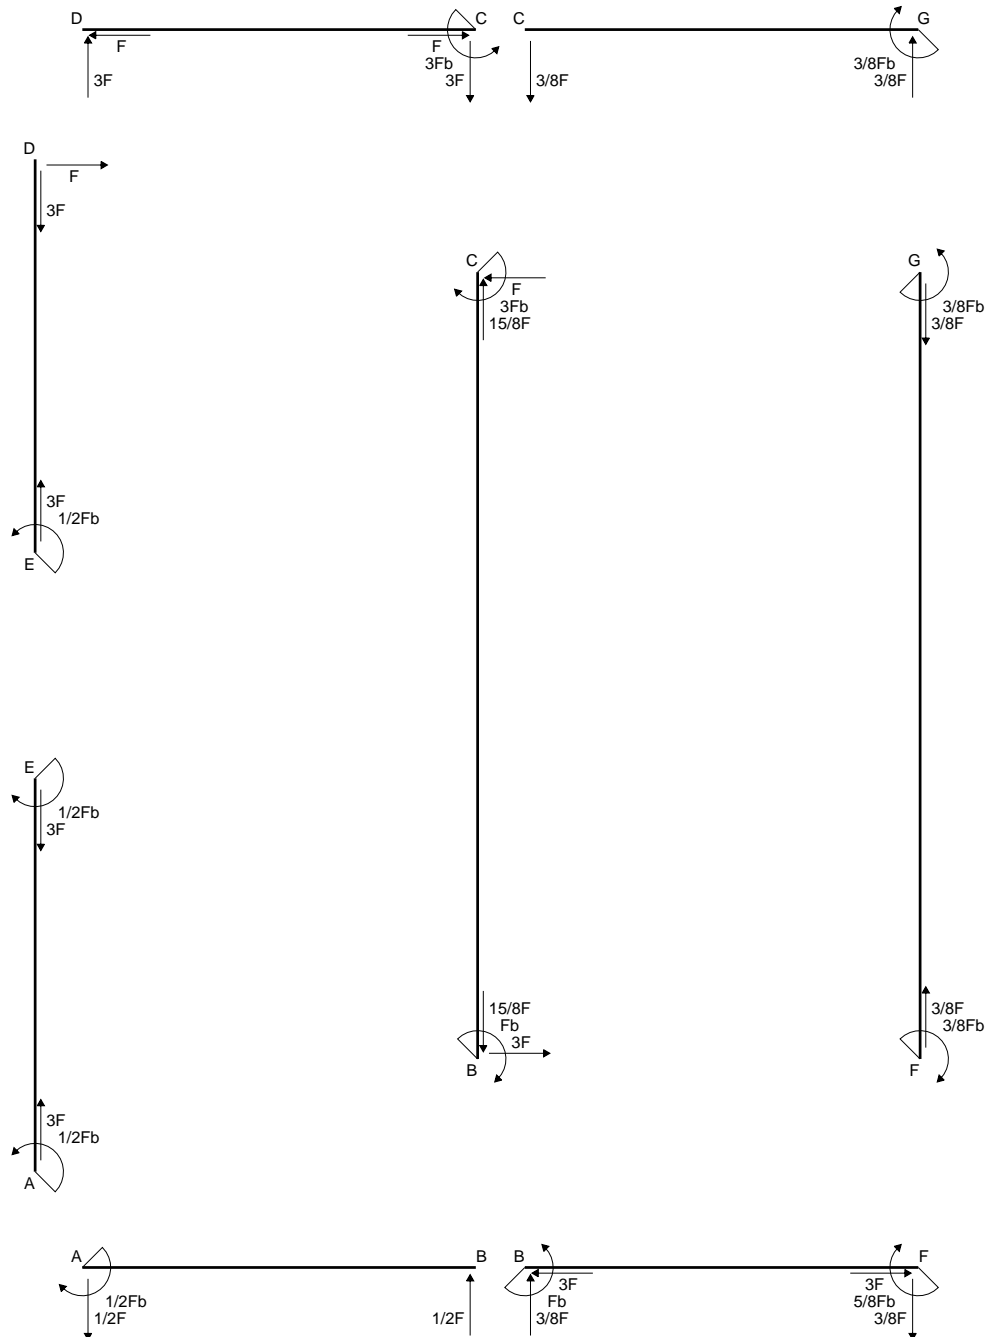

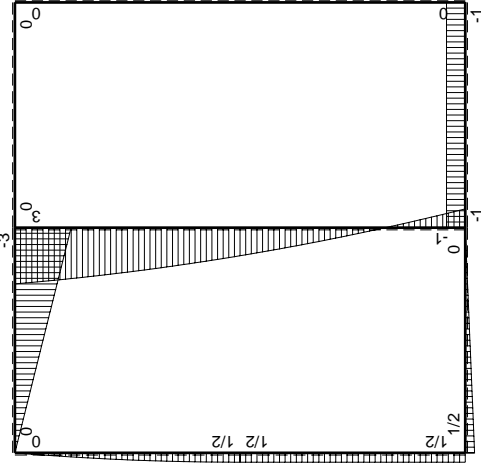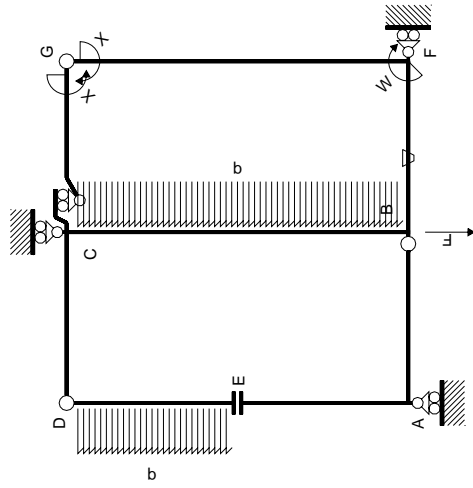

Schema di calcolo iperstatico

$(+)$   $M_0$  flessione da carichi assegnati

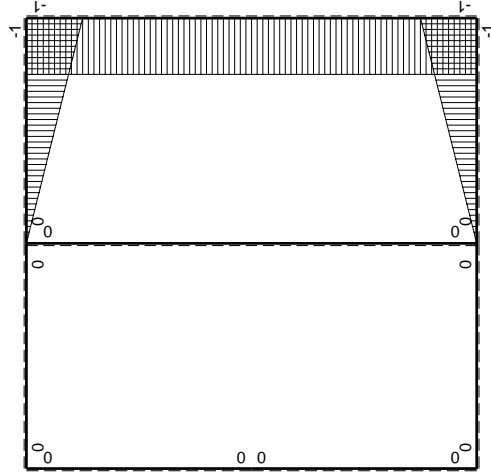

$(+)$   $M_x$  flessione da iperstatica  $X=1$

Quadro contribuiti PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------------|----------|------------------|----------|-----------|---------------|------------------|-----------------------------|---------------------|
| AB b         | 0        | $1/2Fb-1/2Fx$    | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| BA b         | 0        | $-1/2Fx$         | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| CD b         | 0        | $-3Fb+3Fx$       | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| DC b         | 0        | $3Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| DE b         | 0        | $Fx-1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| ED b         | 0        | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| EAB          | 0        | $1/2Fb$          | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| EA b         | 0        | $-1/2Fb$         | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| BF b         | $-x/b$   | $-Fb$            | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FBB          | $1-x/b$  | $Fb$             | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ |                             | $1/3xb/EJ$          |
| GC b         | $-1+x/b$ | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$          |
| CG b         | $x/b$    | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$          |
| FG 2b        | -1       | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b        | 1        | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b        | 0        | $3Fb-Fx-1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| BC 2b        | 0        | $Fb-3Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                   |
| totali       |          |                  |          |           |               |                  |                             | $8/3xb/EJ$          |

iperstatica  $X=W_{gc}$   $-3/8Fb$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

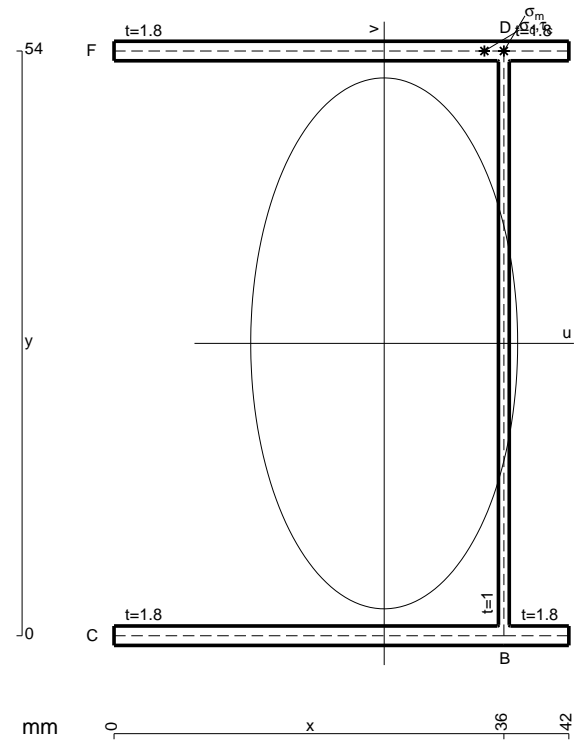

- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 31179. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = 24.46 mm
- x<sub>g</sub> = 24.95 mm
- N = 660. N
- T<sub>y</sub> = 1980. N
- M<sub>x</sub> = -930600. Nmm
- x<sub>m</sub> = 36. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 11.05 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 206.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 11.05 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 206.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 496.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.6 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 480.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1188. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 884.3 N/mm<sup>2</sup>




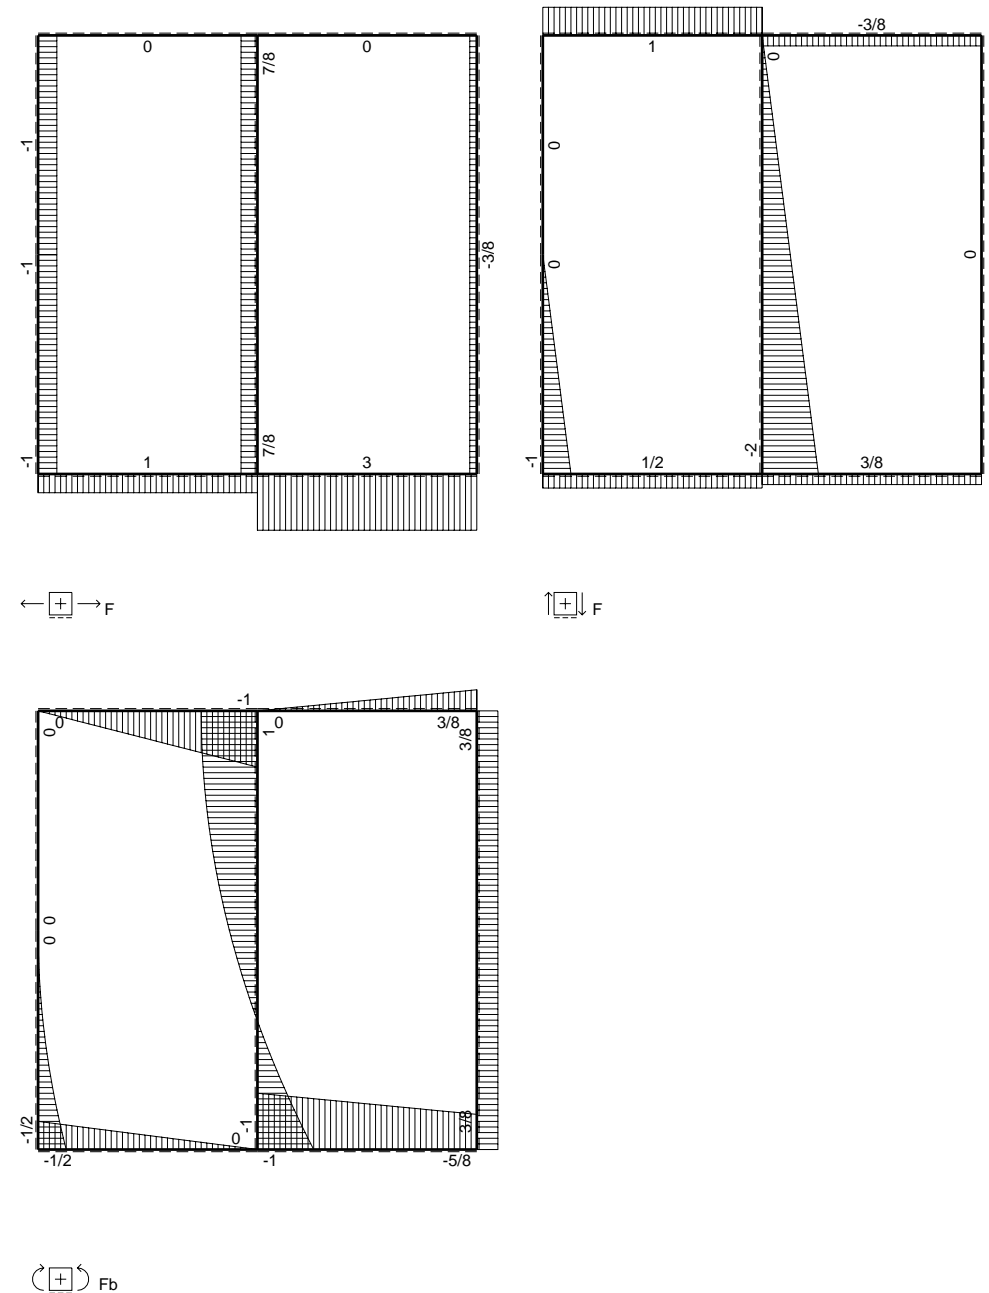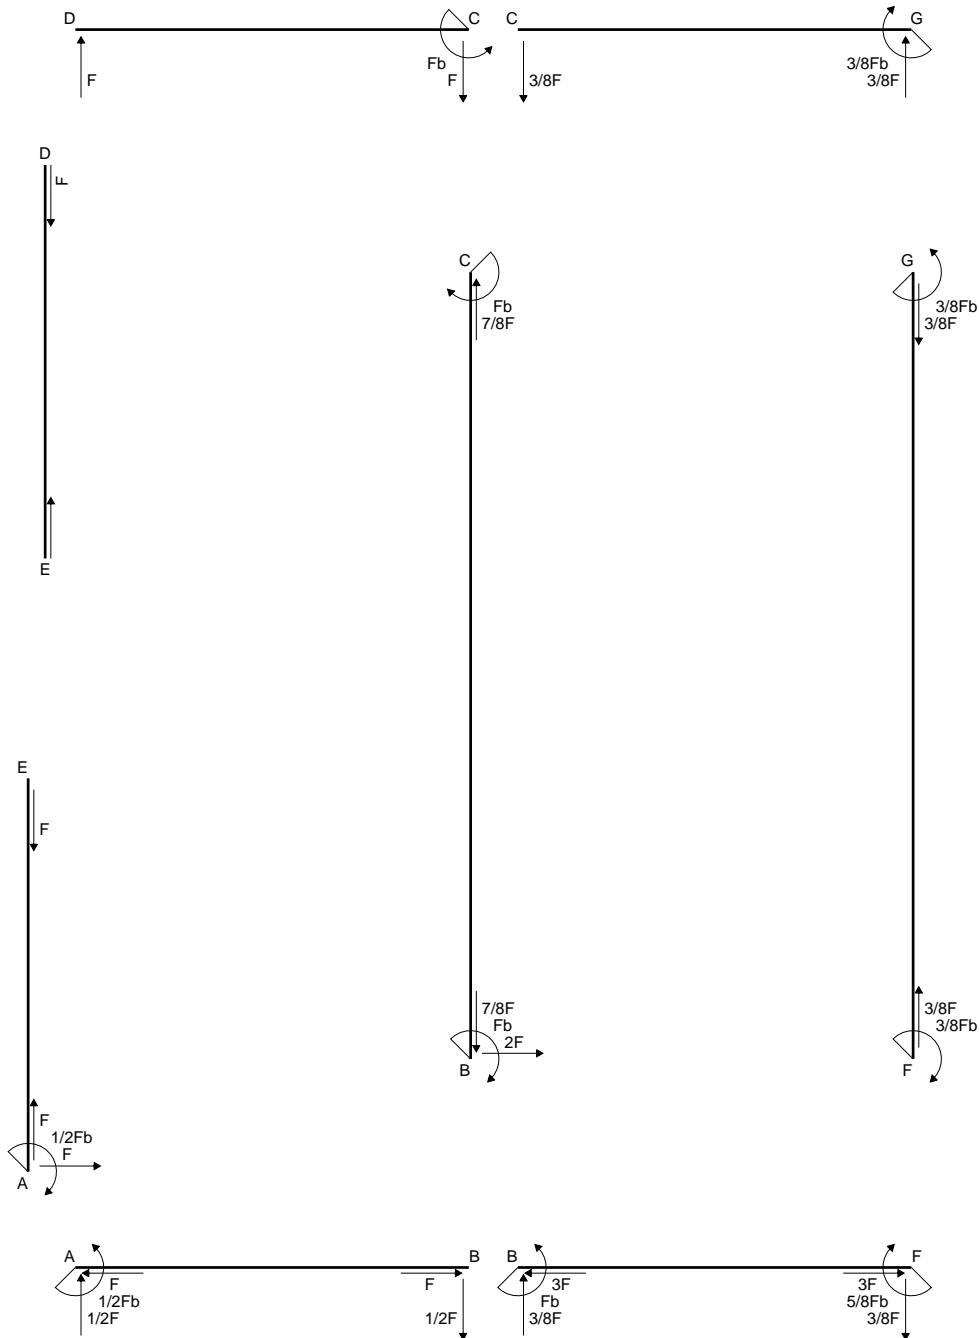

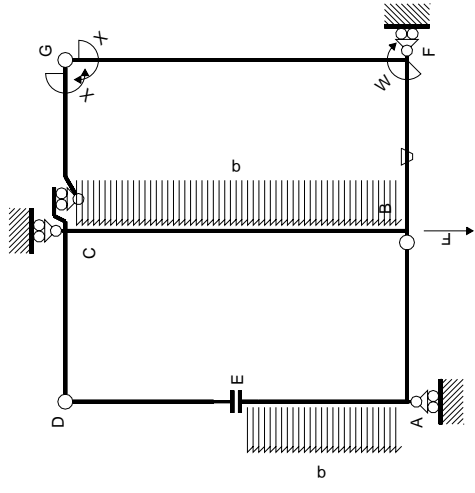

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

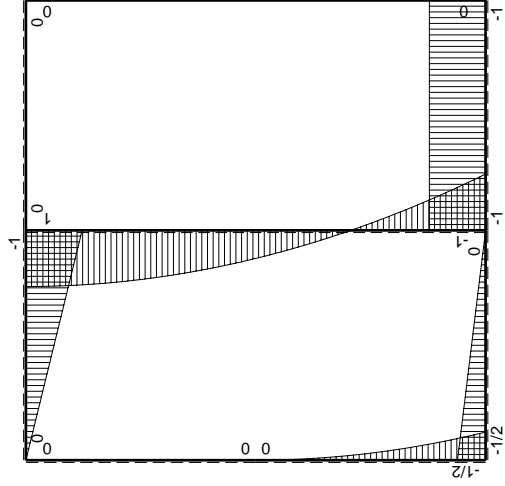


Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M^x(x)$ | $M^0(x)$           | $\theta$ | $M^x M_0$     | $M^x \theta$     | $M^x M_x$        | $\int M^x(M_0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|---------------|------------------|------------------|-----------------------------|----------------------|
| AB B         | 0        | $-1/2Fx$           | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| BA B         | 0        | $1/2Fx$            | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| CD B         | 0        | $-Fb+Fx$           | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| DC B         | 0        | $Fx$               | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| ED B         | 0        | 0                  | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| EAB          | 0        | $-1/2qx^2$         | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| AEB          | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | $Fb/EJ$       | $Fx/EJ$          | $Fb/EJ-Fx/EJ$    | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| BFB          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$          | $Fx/EJ$          | $Fb/EJ-Fx/EJ$    | $x^2/b^2$                   | $1/3xb/EJ$           |
| FB B         | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1-2x/b+x^2/b^2$ | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| GC B         | $-1+x/b$ | 0                  | 0        | 0             | 0                | 0                | 0+0                         | $1/3xb/EJ$           |
| CG B         | $x/b$    | 0                  | 0        | 0             | 0                | 0                | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0             | 0                | 0                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0             | 0                | 0                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-1/2qx^2$       | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0             | 0                | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |               |                  |                  |                             | $Fb^2/EJ$            |
|              |          |                    |          |               |                  |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

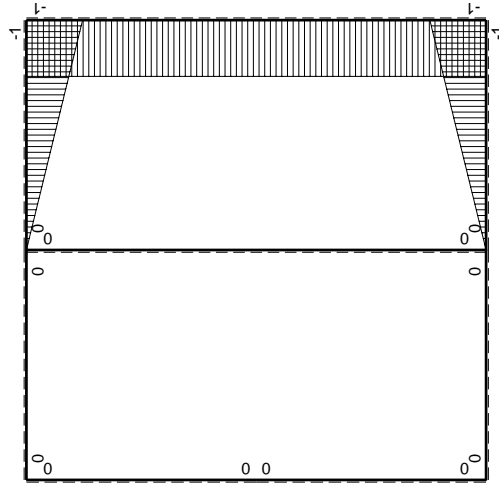

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

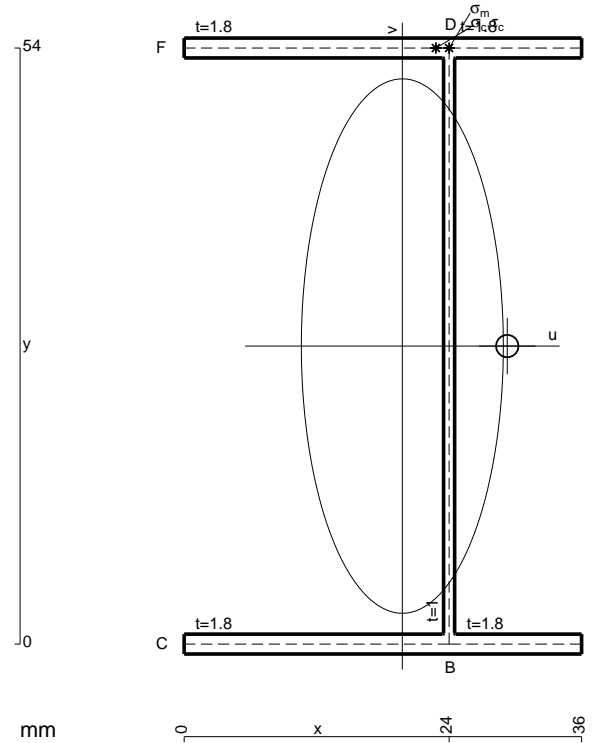

- A = 183.6 mm<sup>2</sup>
- J<sub>u</sub> = 107600. mm<sup>4</sup>
- J<sub>v</sub> = 15369. mm<sup>4</sup>
- J<sub>t</sub> = 158. mm<sup>4</sup>
- x<sub>0</sub> = 9.504 mm
- x<sub>g</sub> = 19.76 mm
- N = 1444. N
- T<sub>y</sub> = -3300. N
- M<sub>x</sub> = -841500. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 4.235 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 219. N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 4.235 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 219. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 377.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 19.87 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>t/J<sub>t</sub> = 357.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 2970. mm
- σ<sub>0</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 689.1 N/mm<sup>2</sup>






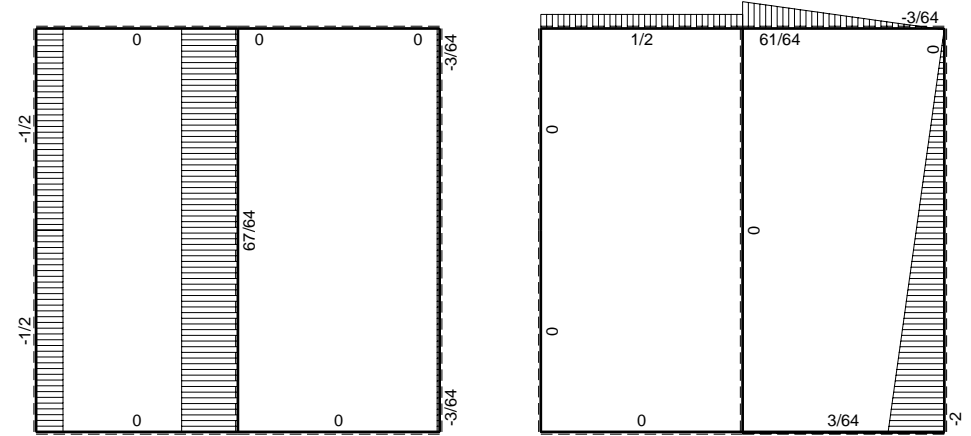
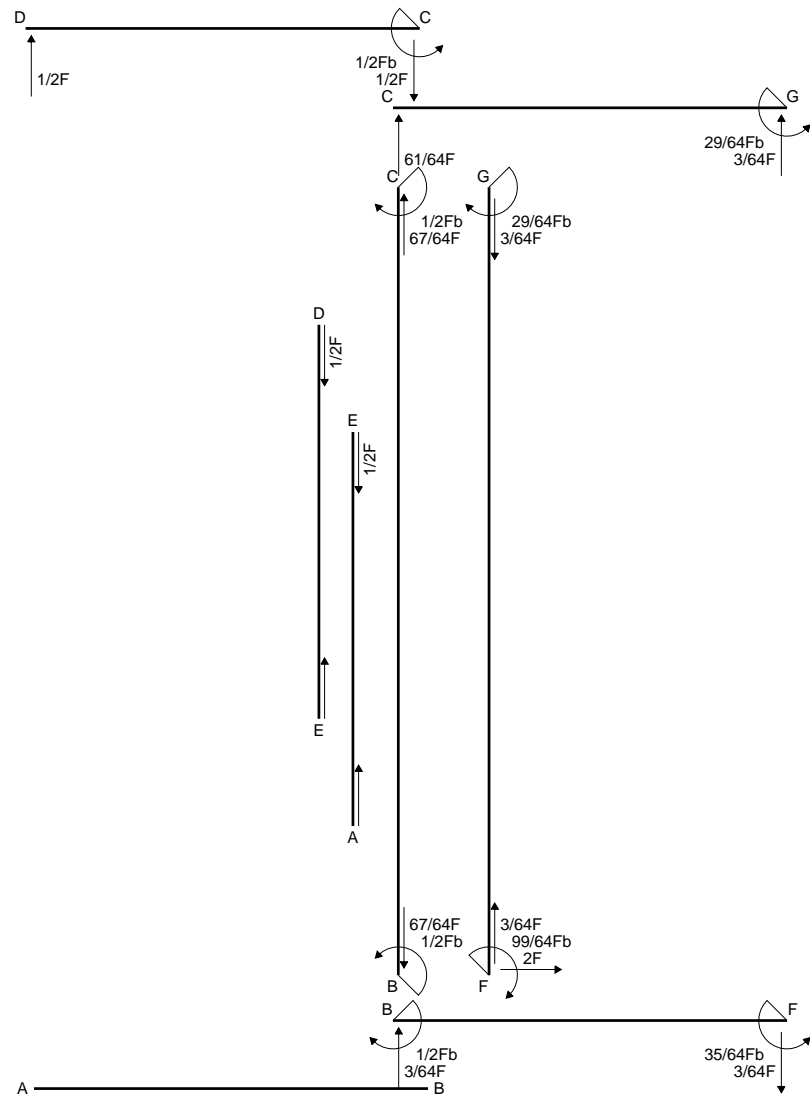


← ⊕ → F


↑ ⊕ ↓ F

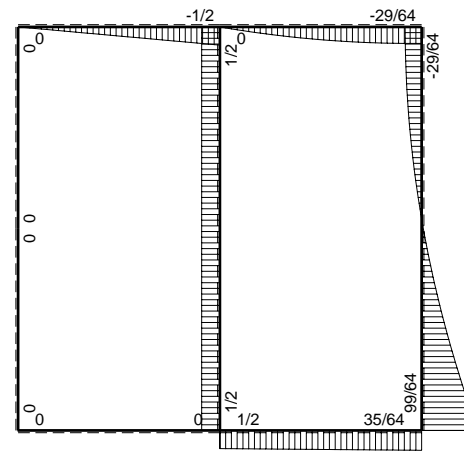

⊕ ⊖ F<sub>b</sub>

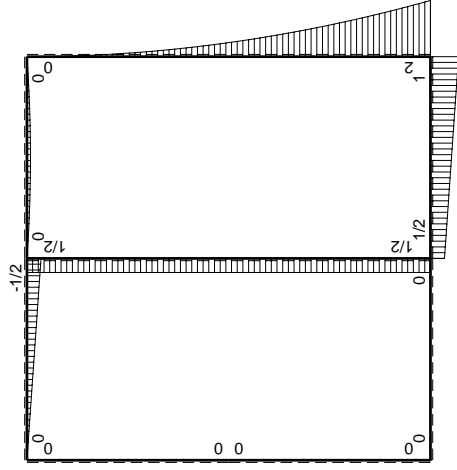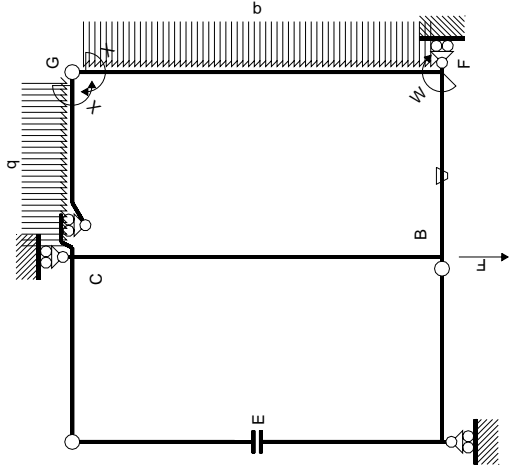

$M_0$  flessione da carichi assegnati

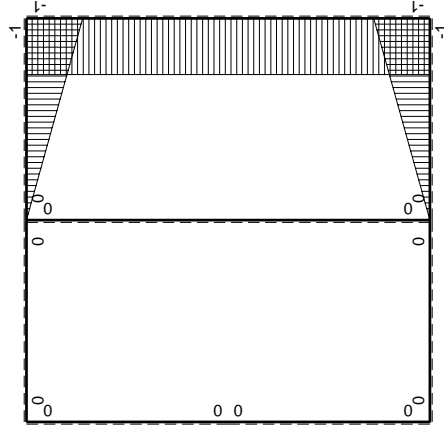

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |        | $M_x(x)$                   |        | $M_0(x)$                                       |             | $\theta$                              |                                | $M_x M_0$ |   | $M_x \theta$ |   | $M_x M_x$ |   | $\int M_x(M_0/EJ+\theta)dx$ |   | $\int M_x M_x/EJ dx$ |   |
|--|--------|----------------------------|--------|--|-------------|---------------------------------------|--------------------------------|-----------|---|--------------|---|-----------|---|-----------------------------|---|----------------------|---|
| AB b   | 0      | 0                          | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| BA b   | 0      | 0                          | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| CD b   | 0      | -1/2Fb+1/2Fx               | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| DC b   | 0      | 1/2Fx                      | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| DE b   | 0      | 0                          | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| EA b   | 0      | 0                          | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| AE b   | 0      | 0                          | 0      | 0  | 0           | 0                                     | 0                              | 0         | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| BF b   | -x/b   | 1/2Fb+1/2Fx                | -Fb/EJ | -1/2Fx-1/2Fx <sup>2</sup> /b                   | Fx/EJ       | x <sup>2</sup> /b <sup>2</sup>        | (-5/12+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| FB b   | 1-x/b  | -Fb+1/2Fx                  | Fb/EJ  | -Fb+3/2Fx-1/2Fx <sup>2</sup> /b                | Fb/EJ-Fx/EJ | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-5/12+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| GC b   | -1+x/b | -1/2Fx+1/2qx <sup>2</sup>  | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0           | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ    | 1/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| CG b   | x/b    | 1/2Fx-1/2qx <sup>2</sup>   | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0           | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ    | 1/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| FG 2b  | -1     | 2Fb-2Fx+1/2qx <sup>2</sup> | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                 | 0           | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ    | 2xb/EJ    | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| GF 2b  | 1      | -1/2qx <sup>2</sup>        | 0      | -1/2Fx <sup>2</sup> /b                         | 0           | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ    | 2xb/EJ    | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| CB 2b  | 0      | 1/2Fb                      | 0      | 0  | 0           | 0                                     | -29/24Fb <sup>2</sup> /EJ      | 8/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| BC 2b  | 0      | -1/2Fb                     | 0      | 0  | 0           | 0                                     | -29/24Fb <sup>2</sup> /EJ      | 8/3xb/EJ  | 0 | 0            | 0 | 0         | 0 | 0+0                         | 0 | 0                    | 0 |
| totali   |        |                            |        |  |             |                                       |                                |           |   |              |   |           |   |                             |   |                      |   |
|  |        | iperstatica $X=W_{gc}$     |        |  |             |                                       |                                |           |   |              |   |           |   |                             |   |                      |   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$





$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

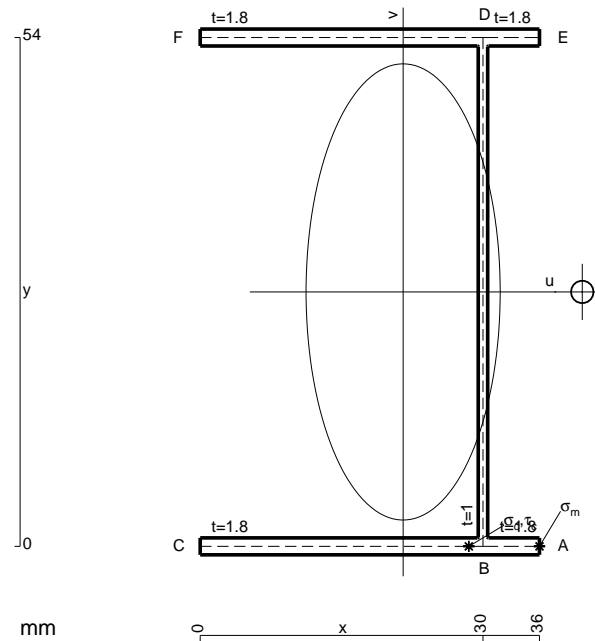


- A = 183.6 mm<sup>2</sup>
- J<sub>u</sub> = 107600. mm<sup>4</sup>
- J<sub>v</sub> = 19486. mm<sup>4</sup>
- J<sub>t</sub> = 158. mm<sup>4</sup>
- x<sub>o</sub> = 19.01 mm
- x<sub>g</sub> = 21.53 mm
- T<sub>y</sub> = 1665. N
- M<sub>x</sub> = -915750. Nmm
- x<sub>m</sub> = 36. mm
- u<sub>m</sub> = 14.47 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 8.471 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 373.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 12.53 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 360.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 5994. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 685.9 N/mm<sup>2</sup>



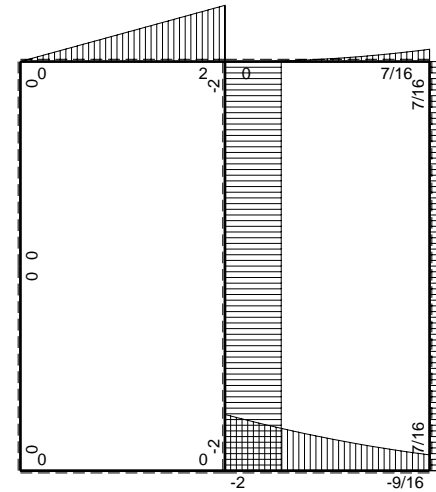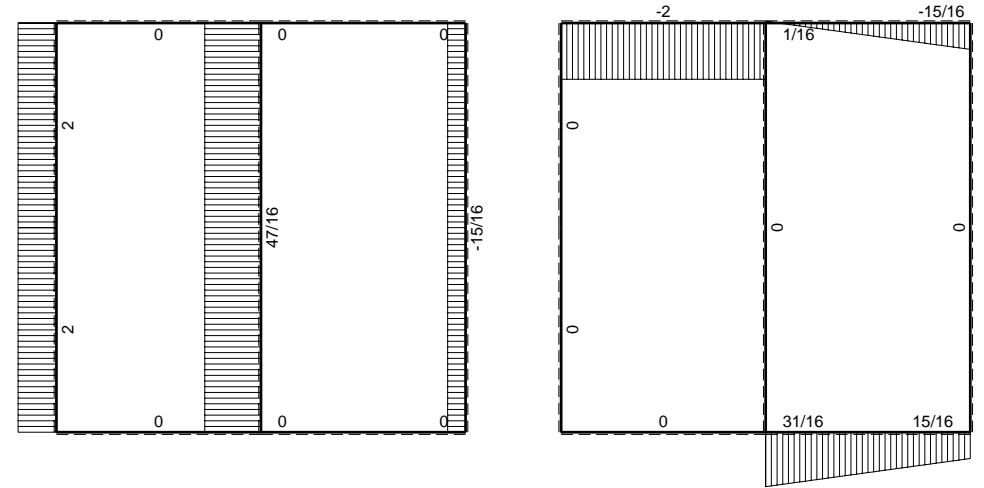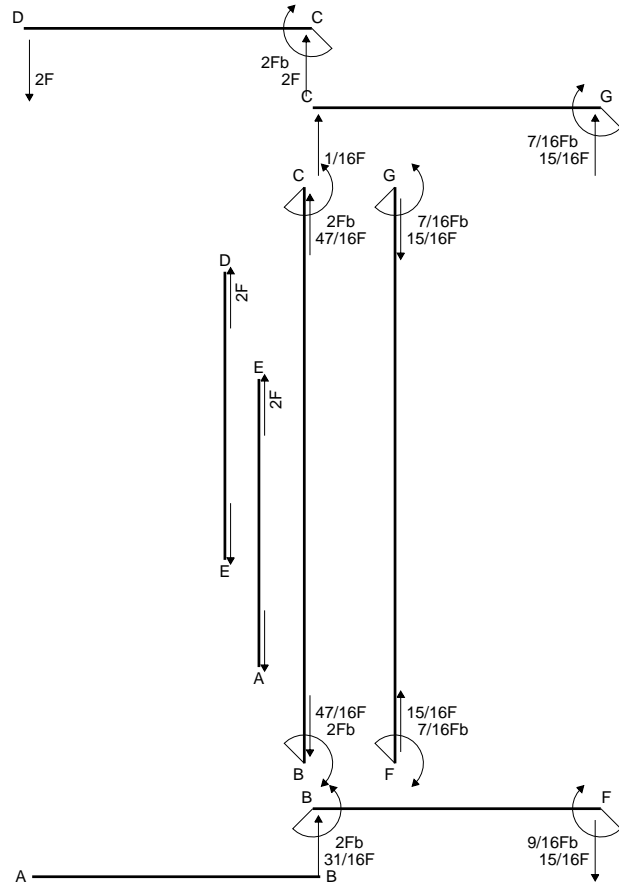


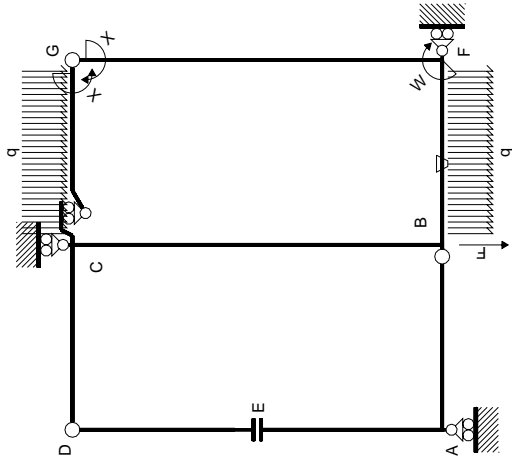

Schema di calcolo iperstatico

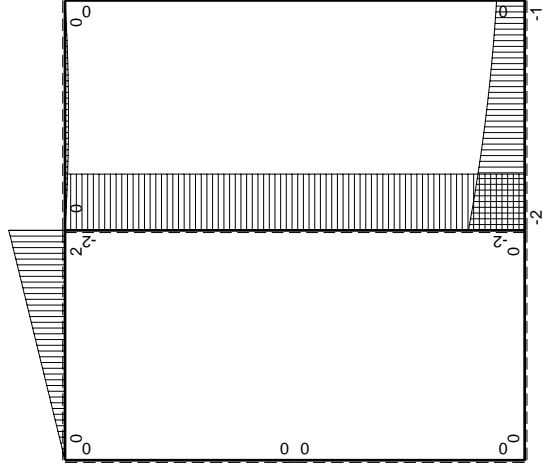

$M_0$  flessione da carichi assegnati

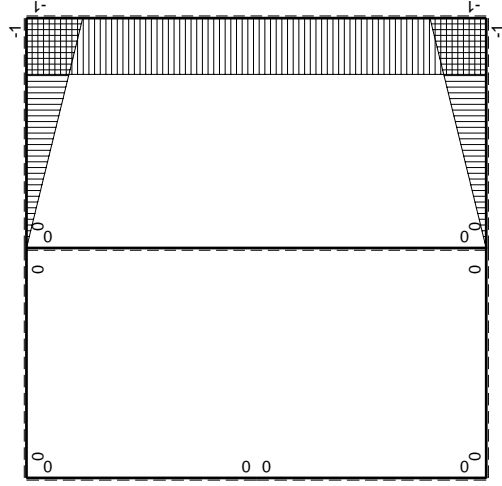

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | iperstatica X=W <sub>gc</sub> |        |   |                  |                                       |  |
|---|--------------------|-------------------------------|--------|---|------------------|---------------------------------------|--|
| ←   | M <sup>x</sup> (x) | M <sup>o</sup> (x)            | θ      | M <sub>x</sub> M <sub>o</sub>                   | M <sub>x</sub> θ | M <sub>x</sub> M <sub>x</sub>         | ∫M <sub>x</sub> (M <sub>o</sub> /EJ+θ)dx |
| AB B  | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0  |
| BA B  | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0  |
| CD B  | 0                  | 2Fb-2Fx                       | 0      | 0   | 0                | 0                                     | 0  |
| DC B  | 0                  | -2Fx                          | 0      | 0   | 0                | 0                                     | 0  |
| DE B  | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0  |
| EA B  | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0  |
| AE B  | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0  |
| BF B  | -x/b               | -2Fb+3/2Fx-1/2qx <sup>2</sup> | -Fb/EJ | 2Fx-3/2Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (5/8+1/2)Fb <sup>2</sup> /EJ             |
| FB B  | 1-x/b              | Fb+1/2Fx+1/2qx <sup>2</sup>   | Fb/EJ  | Fb-1/2Fx-1/2qx <sup>3</sup> /b                  | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                                 |
| GC B  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                                 |
| CG B  | x/b                | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b     | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ              |
| FG 2b   | -1                 | 0                             | 0      | 0   | 0                | 1                                     | 2xb/EJ                                   |
| GF 2b   | 1                  | 0                             | 0      | 0   | 0                | 1                                     | 2xb/EJ                                   |
| CB 2b   | 0                  | -2Fb                          | 0      | 0   | 0                | 0                                     | 0  |
| BC 2b   | 0                  | 2Fb                           | 0      | 0   | 0                | 0                                     | 0  |
| totali  |                    |                               |        |   |                  |                                       |  |
|   | M <sup>x</sup> (x) |                               |        |   |                  |                                       | 7/6Fb <sup>2</sup> /EJ                   |
|   | M <sup>o</sup> (x) |                               |        |   |                  |                                       | -7/16Fb                                  |
|   | θ                  |                               |        |   |                  |                                       | 8/3xb/EJ                                 |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

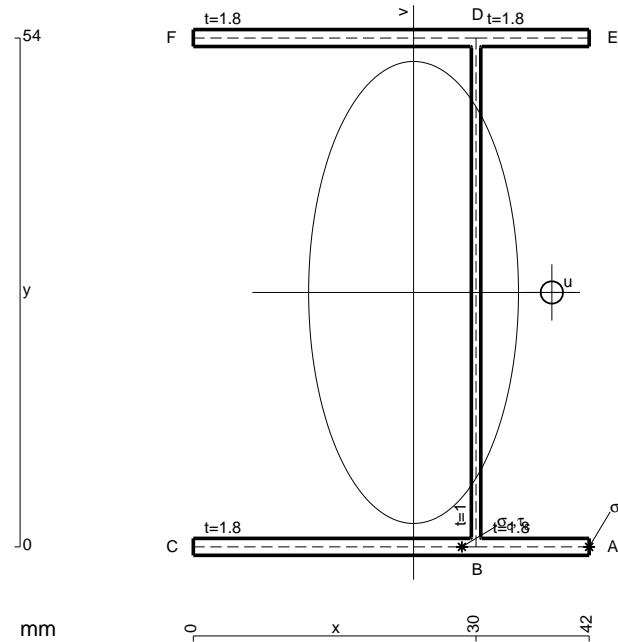

- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 25449. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = 14.67 mm
- x<sub>g</sub> = 23.37 mm
- T<sub>y</sub> = -1820. N
- M<sub>x</sub> = 1092000. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 18.63 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 239. N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 6.632 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 239. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 277.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.95 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 265.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 1638. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 536.2 N/mm<sup>2</sup>






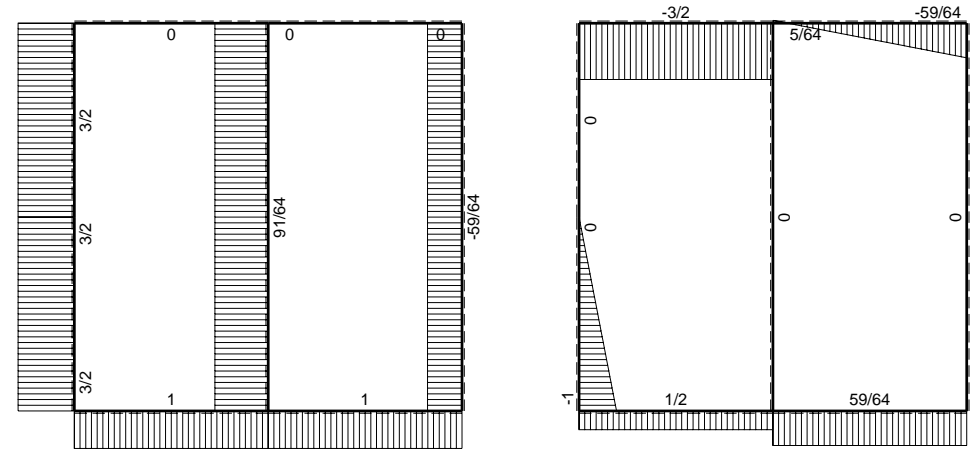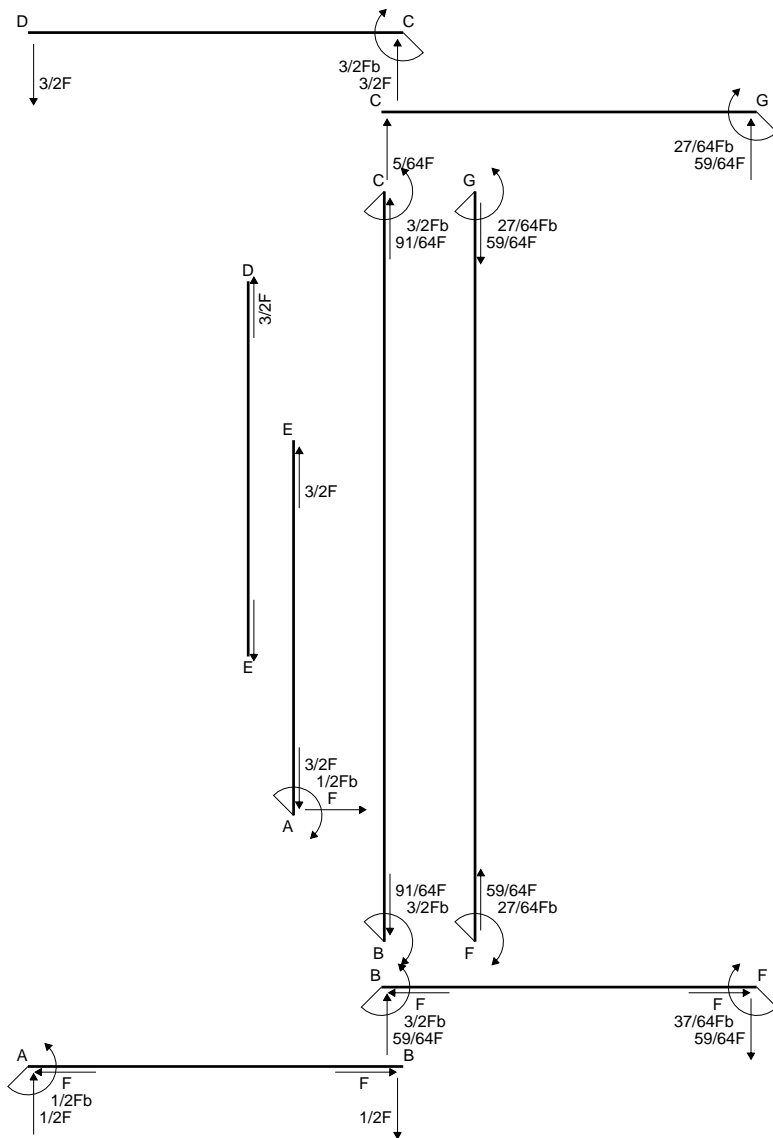


← ⊕ → F


↑ ⊕ ↓ F

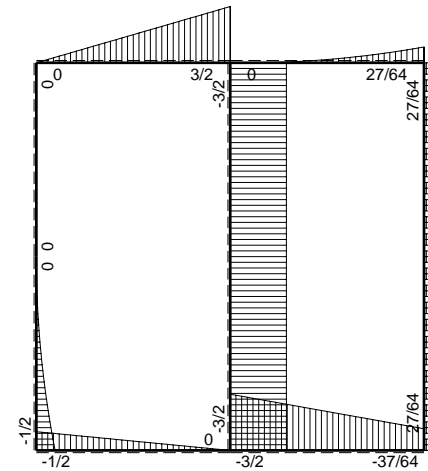


⊕ ⊖ F<sub>b</sub>

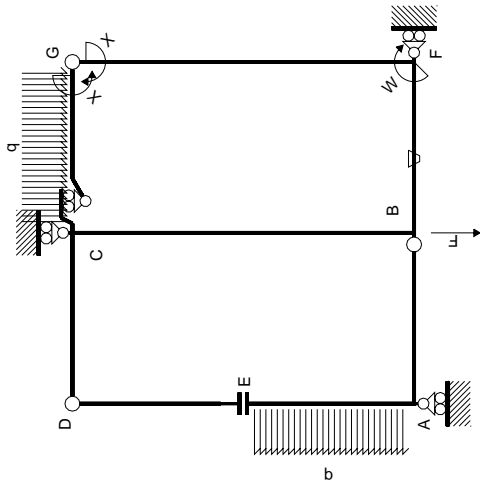

Schema di calcolo iperstatico

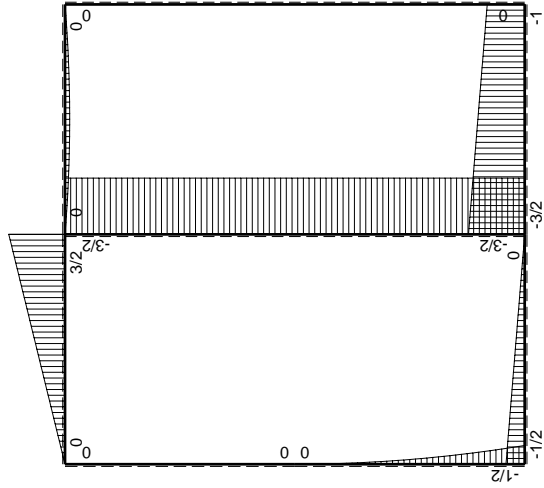

$M_0$  flessione da carichi assegnati

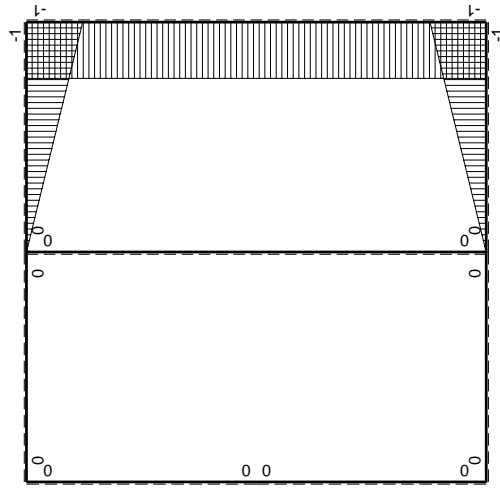

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | Sviluppi di calcolo iperstatica |        |  |                  |                                       |                               |
|---|--------------------|---------------------------------|--------|--|------------------|---------------------------------------|-------------------------------|
| ←   | M <sub>0</sub> (x) | M <sub>0</sub> (x)              | θ      | M <sub>0</sub> M <sub>0</sub>                  | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | $\int M_x(M_0/EJ+\theta)dx$   |
| AB b  | 0                  | -1/2Fb+1/2Fx                    | 0      | 0  | 0                | 0                                     | 0+0                           |
| BA b  | 0                  | 1/2Fx                           | 0      | 0  | 0                | 0                                     | 0+0                           |
| CD b  | 0                  | 3/2Fb-3/2Fx                     | 0      | 0  | 0                | 0                                     | 0+0                           |
| DC b  | 0                  | -3/2Fx                          | 0      | 0  | 0                | 0                                     | 0+0                           |
| DE b  | 0                  | 0                               | 0      | 0  | 0                | 0                                     | 0+0                           |
| EA b  | 0                  | -1/2qx <sup>2</sup>             | 0      | 0  | 0                | 0                                     | 0+0                           |
| AE b  | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup>     | 0      | 0  | 0                | 0                                     | 0+0                           |
| BF b  | -x/b               | -3/2Fb+1/2Fx                    | -Fb/EJ | 3/2Fx-1/2Fx <sup>2</sup> /b                    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (7/12+1/2)Fb <sup>2</sup> /EJ |
| FB b  | 1-x/b              | Fb+1/2Fx                        | Fb/EJ  | Fb-1/2Fx-1/2Fx <sup>2</sup> /b                 | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ   |
| GC b  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>       | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ   |
| CG b  | x/b                | 1/2Fx-1/2qx <sup>2</sup>        | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ   |
| FG 2b   | -1                 | 0                               | 0      | 0  | 0                | 1                                     | 0+0                           |
| GF 2b   | 1                  | 0                               | 0      | 0  | 0                | 1                                     | 0+0                           |
| CB 2b   | 0                  | -3/2Fb                          | 0      | 0  | 0                | 0                                     | 0+0                           |
| BC 2b   | 0                  | 3/2Fb                           | 0      | 0  | 0                | 0                                     | 0+0                           |
| totali  |                    |                                 |        |  |                  |                                       | 9/8Fb <sup>2</sup> /EJ        |
|   |                    |                                 |        |  |                  |                                       | -27/64Fb                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$






$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

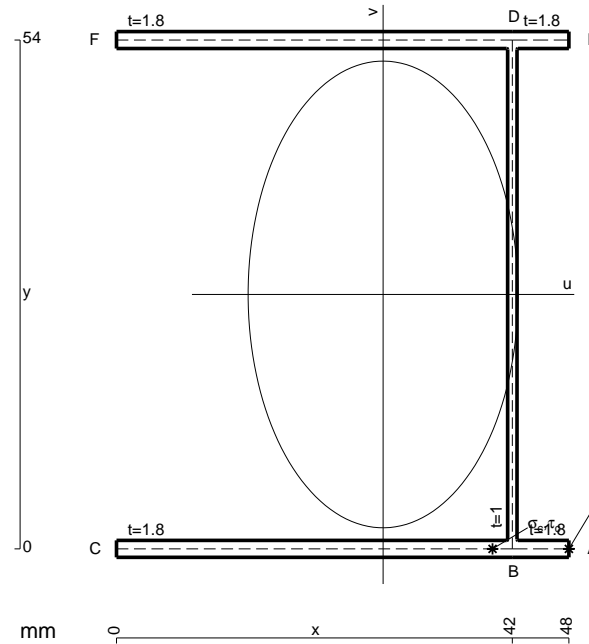


- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 46508. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>o</sub> = 30.02 mm
- x<sub>g</sub> = 28.29 mm
- T<sub>y</sub> = -1605. N
- M<sub>x</sub> = 1027200. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 19.71 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- u<sub>c</sub> = 13.71 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 436.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.09 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 423.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1926. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 782.5 N/mm<sup>2</sup>



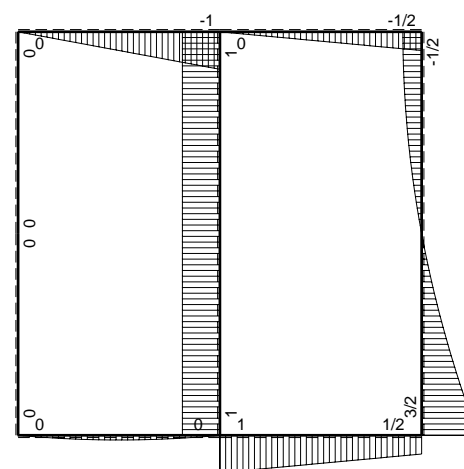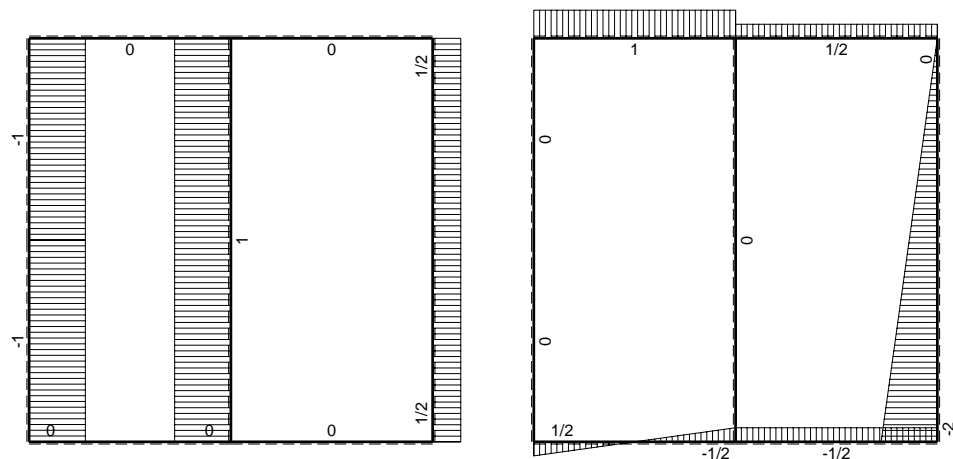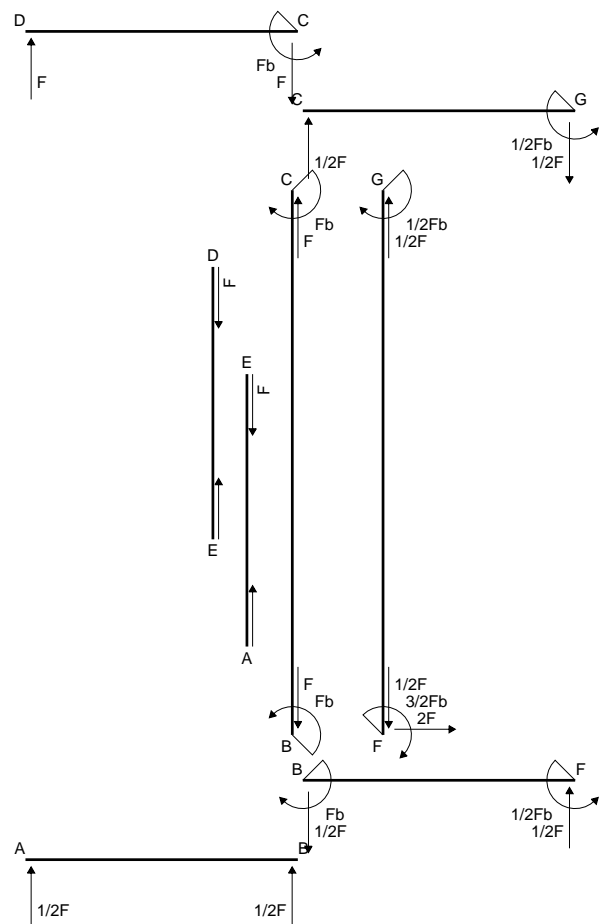

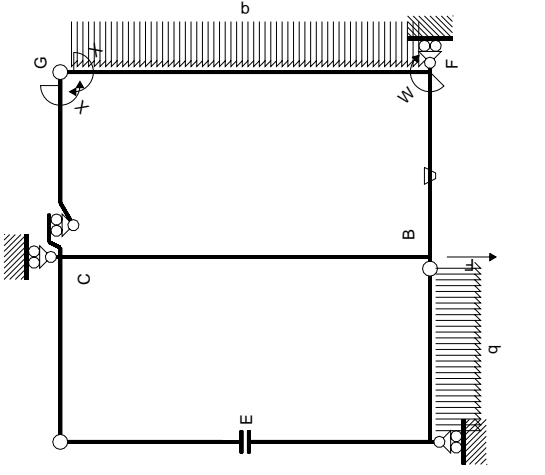

$M_0$  flessione da carichi assegnati

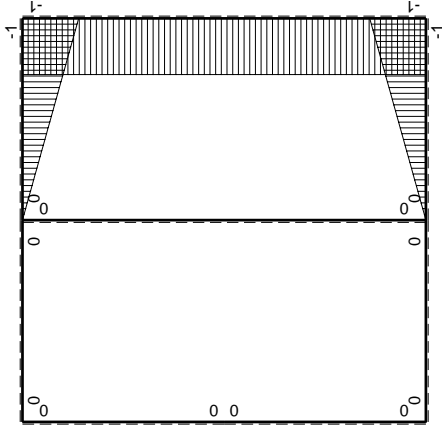

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | $M^0(x)$          | $\theta$ | $M_x M_0$            | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------|-------------------|----------|----------------------|--------------|------------------|-----------------------------|---------------------|
| AB b   | $1/2Fx-1/2qx^2$   | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| BA b   | $-1/2Fx+1/2qx^2$  | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| CD b   | -b+Fx             | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| DC b   | Fx                | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| DE b   | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| EA b   | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| FB b   | -x/b              | -Fb/EJ   | -Fx                  | Fx/EJ        | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          |
| GC b   | -1+x/b            | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$          |
| CG b   | x/b               | 0        | 0                    | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$          |
| FG 2b  | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$            |
| GF 2b  | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$            |
| CB 2b  | Fb                | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| BC 2b  | -Fb               | 0        | 0                    | 0            | 0                | 0+0                         | 0                   |
| totali |                   |          |                      |              |                  |                             | $8/3xb/EJ$          |
|        |                   |          |                      |              |                  |                             | $1/2Fb$             |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

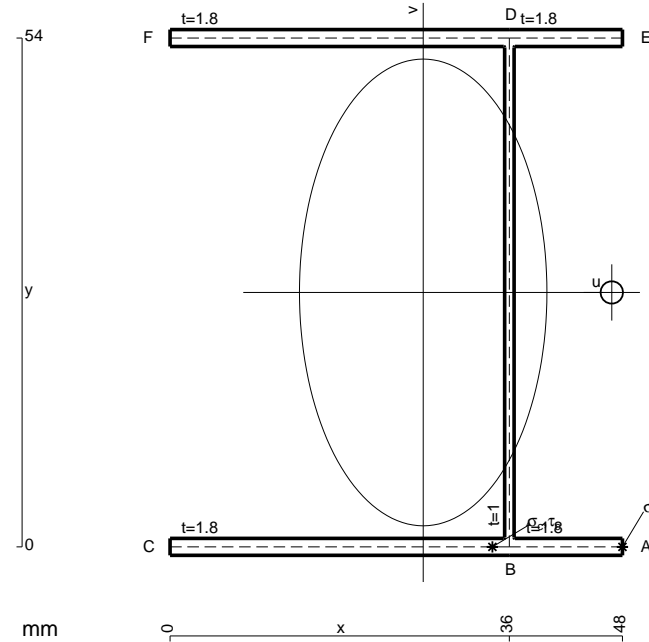


- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 39102. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>o</sub> = 20.01 mm
- x<sub>g</sub> = 26.86 mm
- T<sub>y</sub> = 1590. N
- M<sub>x</sub> = -1081200. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 21.14 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.143 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 291. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.11 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 279.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 2862. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 546. N/mm<sup>2</sup>






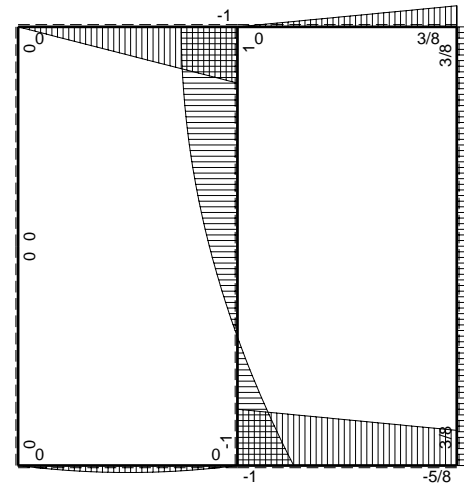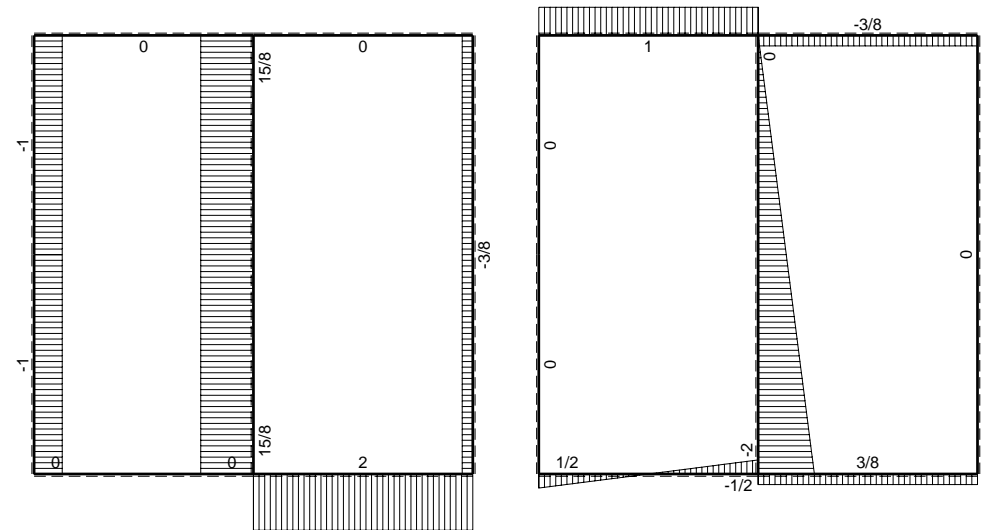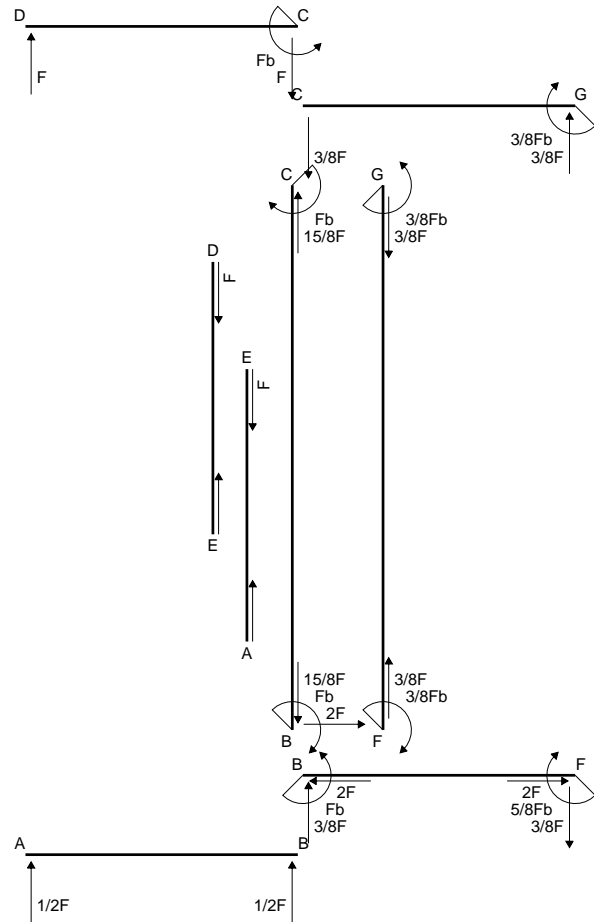


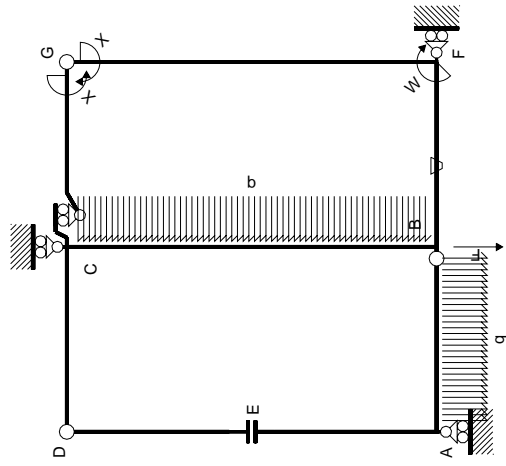

Schema di calcolo iperstatico

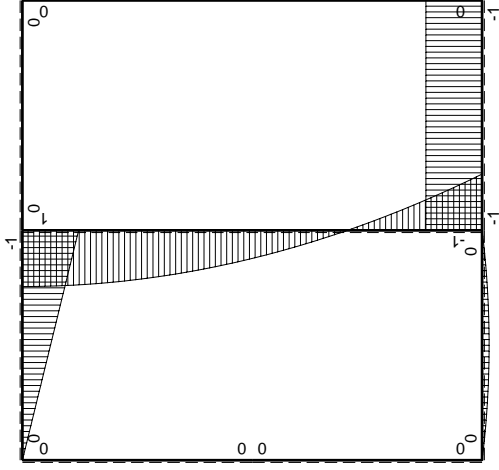

$M_0$  flessione da carichi assegnati

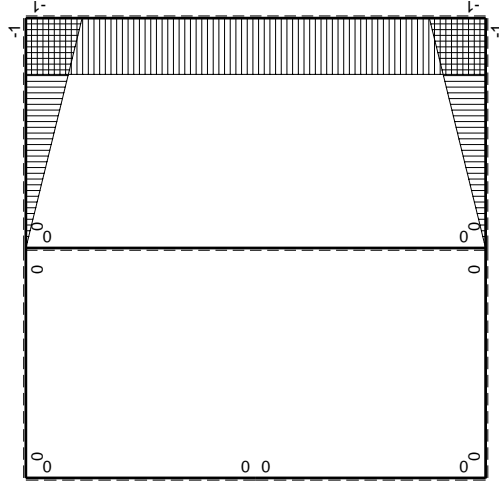

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | $1/2Fx-1/2qx^2$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | $-1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-Fb+Fx$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $Fx$             | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | 0                | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | 0                | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | 0                | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $-Fb$            | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b         | $1-x/b$  | $Fb$             | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                  |          |           |               |                  |                             | $Fb^2/EJ$            |
|              |          |                  |          |           |               |                  |                             | $8/3xb/EJ$           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

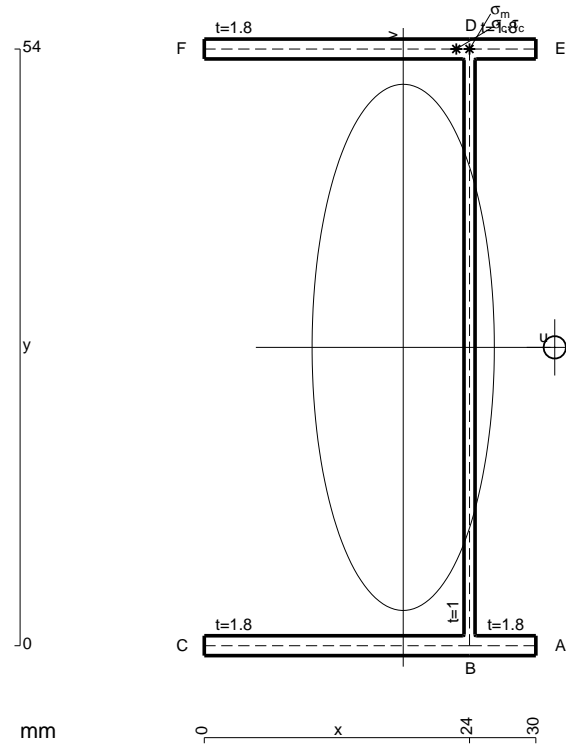


- A = 162. mm<sup>2</sup>
- J<sub>u</sub> = 91854. mm<sup>4</sup>
- J<sub>v</sub> = 11016. mm<sup>4</sup>
- J<sub>t</sub> = 134.6 mm<sup>4</sup>
- x<sub>o</sub> = 13.71 mm
- x<sub>g</sub> = 18. mm
- N = 1819. N
- T<sub>y</sub> = -1940. N
- M<sub>x</sub> = -708100. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 6. mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 219.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 6. mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 219.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 369.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.69 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 355.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 1746. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 676.3 N/mm<sup>2</sup>



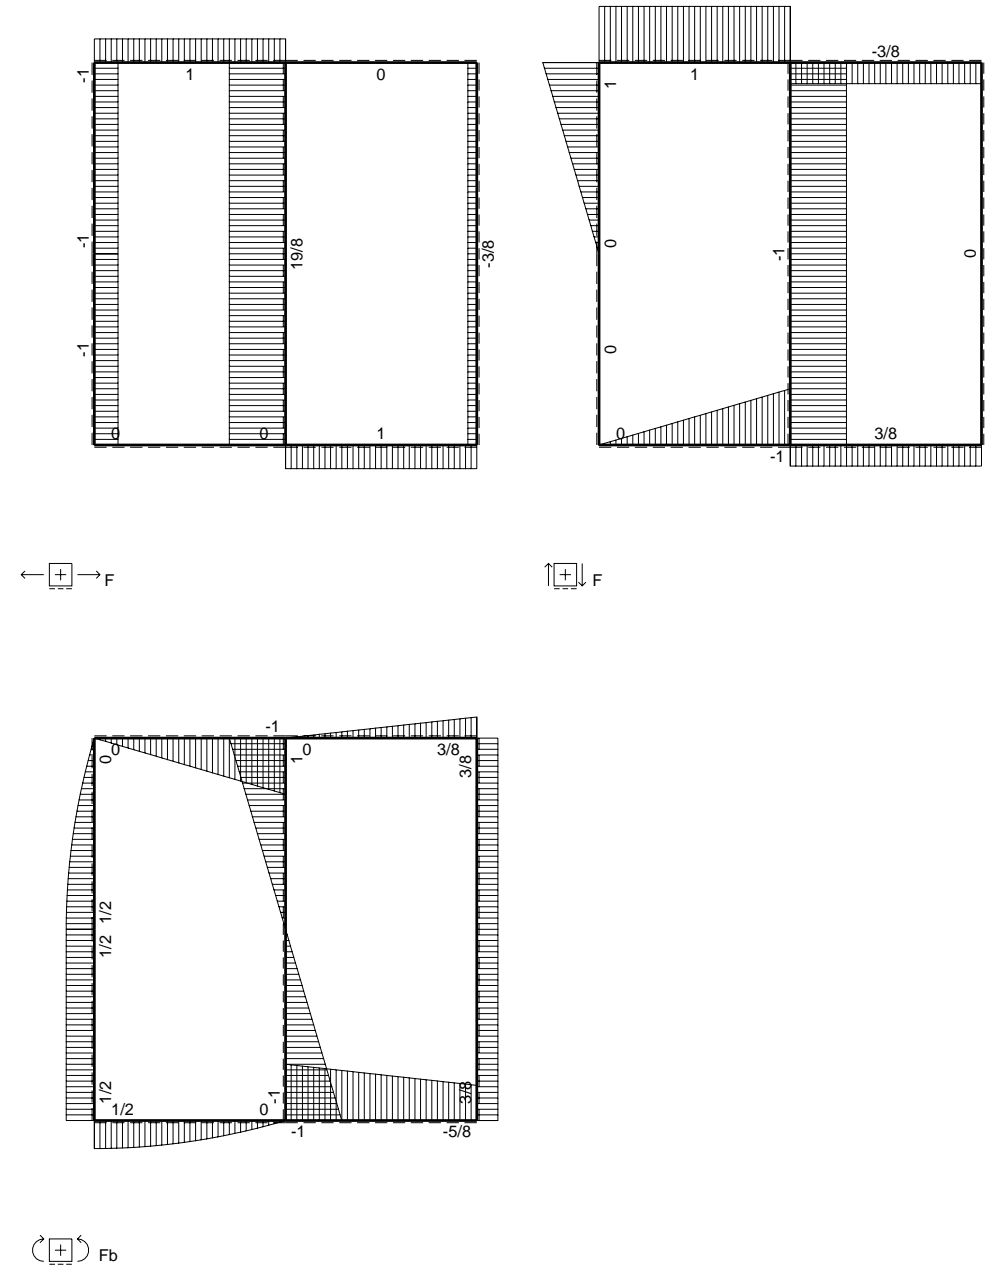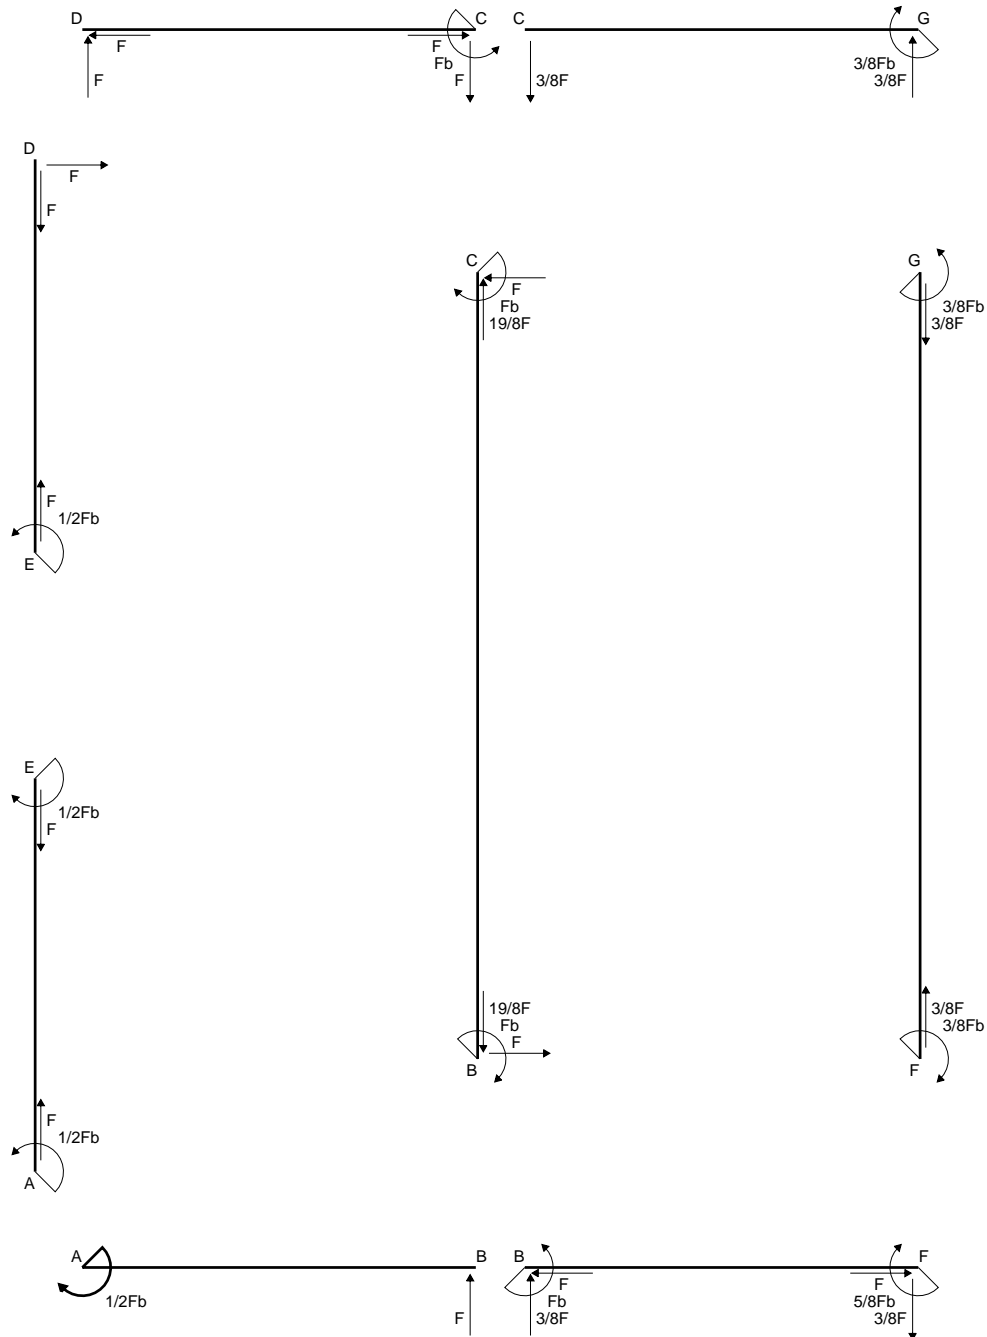


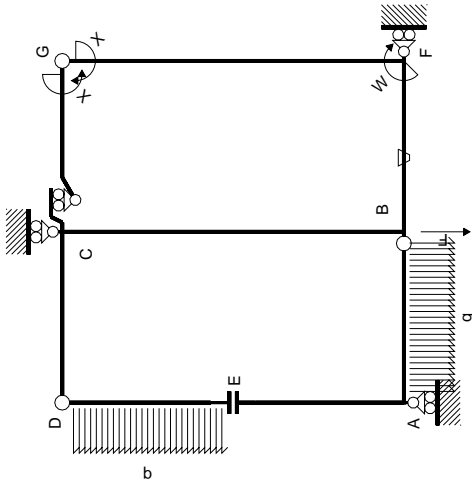

Schema di calcolo iperstatico

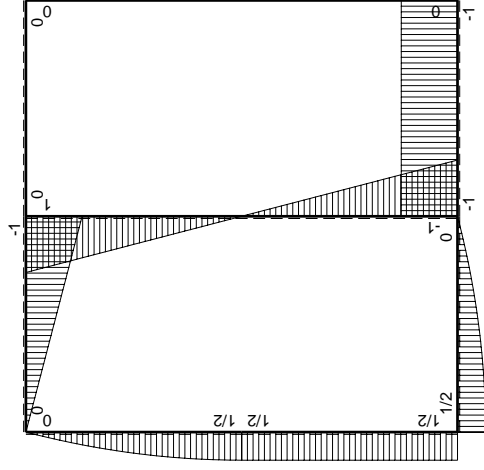

$M_0$  flessione da carichi assegnati

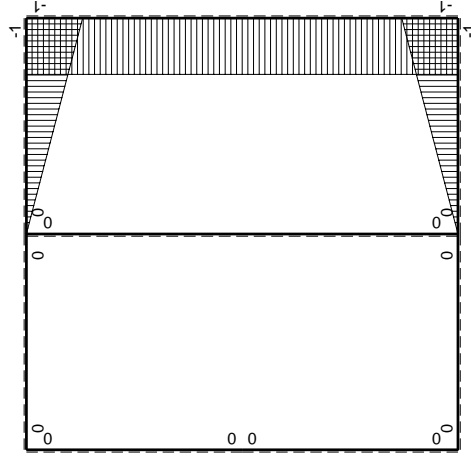

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$ | $\theta$  | $M_x M_0$       | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|-----------------------|----------|-----------|-----------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| BA b          | $-Fb + 1/2 q x^2$     | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| CD b          | $-Fb + Fx$            | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| DC b          | $Fx$                  | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| DE b          | $Fx - 1/2 q x^2$      | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| EA b          | $1/2 Fb$              | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| AE b          | $-1/2 Fb$             | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| BF b          | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fx/EJ$         | $Fb/EJ - Fx/EJ$    | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 Xb/EJ$           |
| FB b          | $1-x/b$               | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/2 + 1/2 Fb^2/EJ$             | $1/3 Xb/EJ$           |
| GC b          | $-1+x/b$              | 0        | 0         | 0               | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3 Xb/EJ$           |
| CG b          | $x/b$                 | 0        | 0         | 0               | 0               | $x^2/b^2$          | 0+0                             | $1/3 Xb/EJ$           |
| FG 2b         | -1                    | 0        | 0         | 0               | 0               | 1                  | 0+0                             | $2Xb/EJ$              |
| GF 2b         | 1                     | 0        | 0         | 0               | 0               | 1                  | 0+0                             | $2Xb/EJ$              |
| CB 2b         | $Fb - Fx$             | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| BC 2b         | $Fb - Fx$             | 0        | 0         | 0               | 0               | 0                  | 0+0                             | 0                     |
| totali        |                       |          |           |                 |                 |                    |                                 | $8/3 Xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


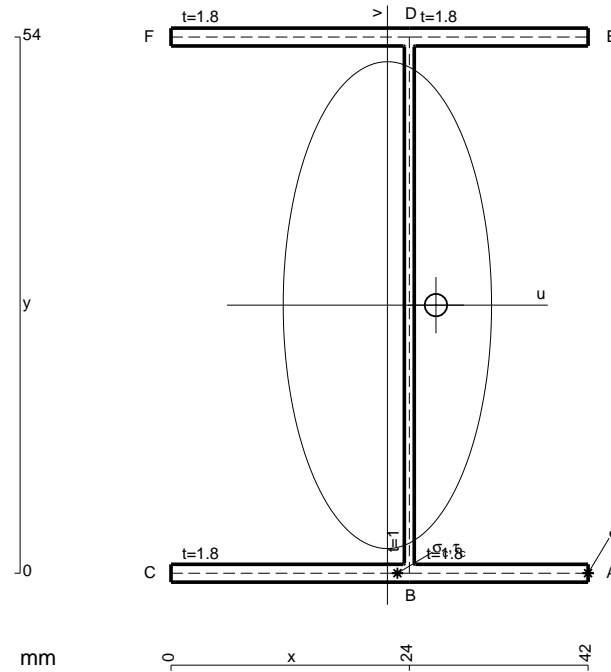


- A = 205.2 mm<sup>2</sup>
- J<sub>u</sub> = 123347. mm<sup>4</sup>
- J<sub>v</sub> = 22585. mm<sup>4</sup>
- J<sub>t</sub> = 181.3 mm<sup>4</sup>
- x<sub>o</sub> = 4.891 mm
- x<sub>g</sub> = 21.79 mm
- N = 3016. N
- T<sub>y</sub> = -1270. N
- M<sub>x</sub> = 977900. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 20.21 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 228.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 2.211 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 228.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 68.35 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.672 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 61.68 N/mm<sup>2</sup>
- t<sub>c</sub> = 2286. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 257.6 N/mm<sup>2</sup>






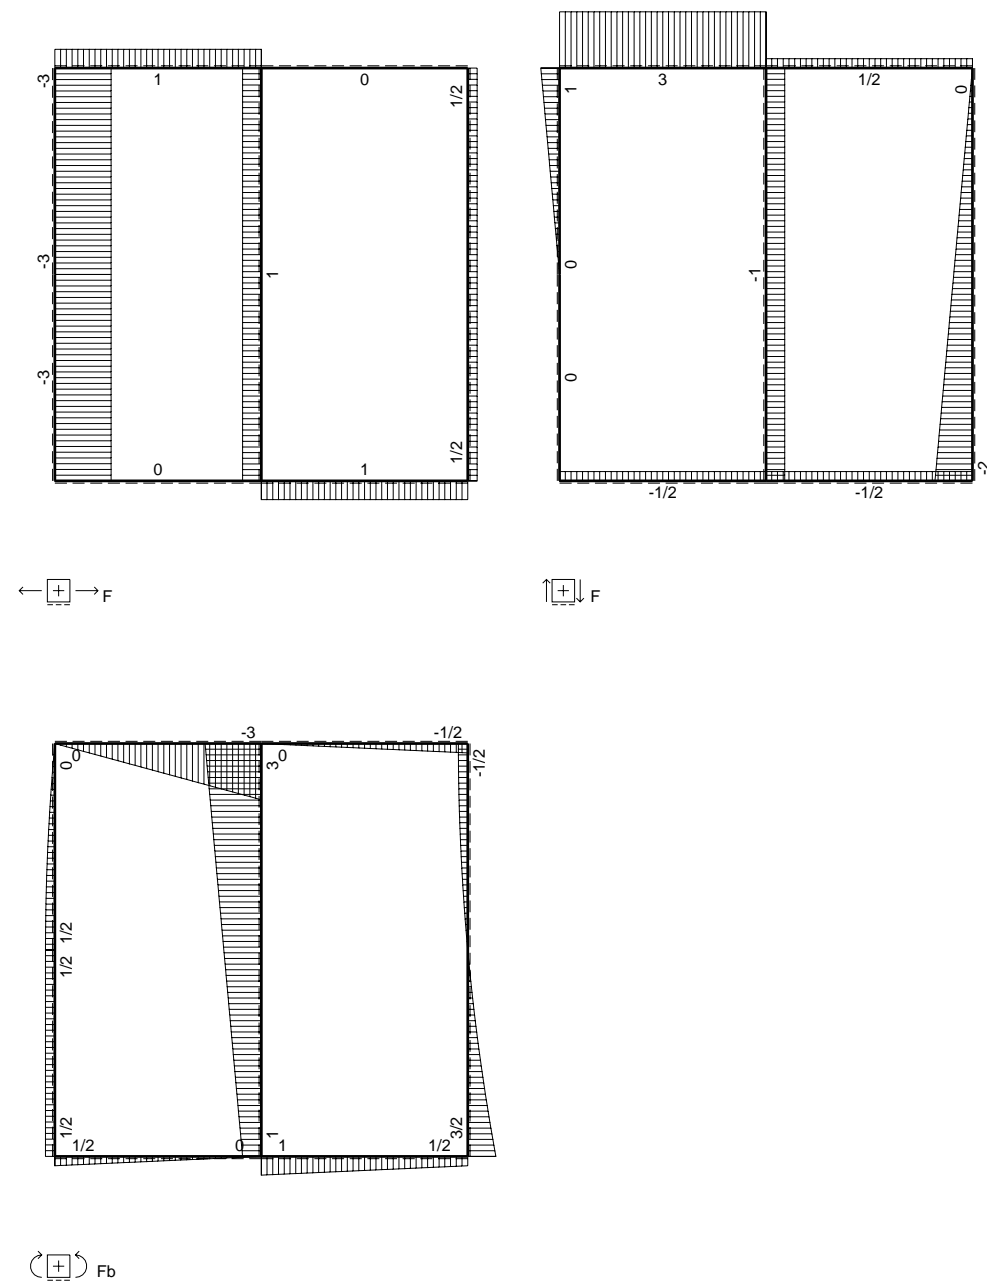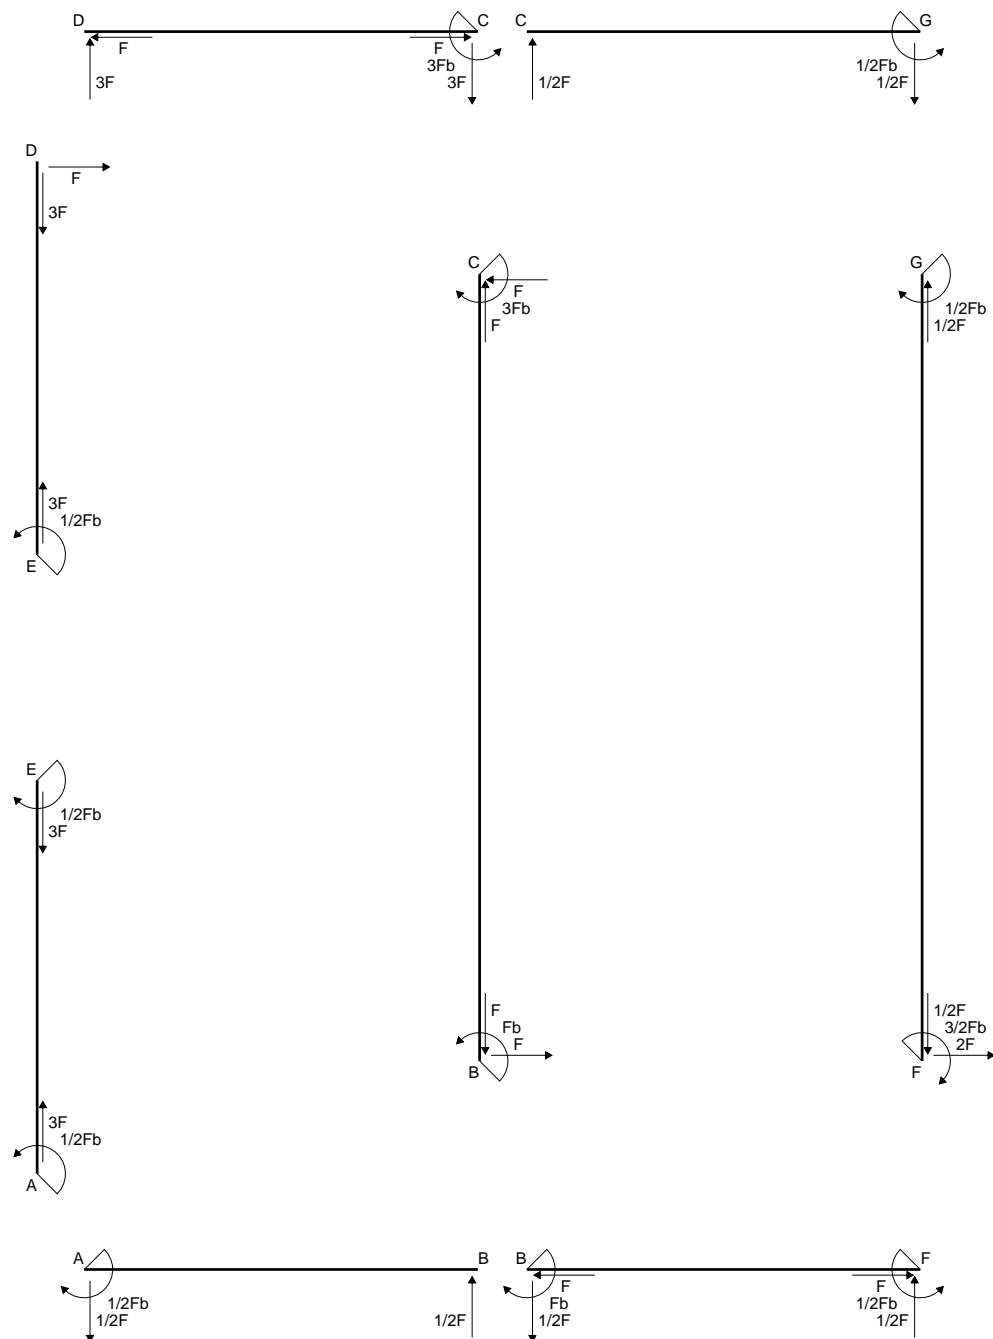

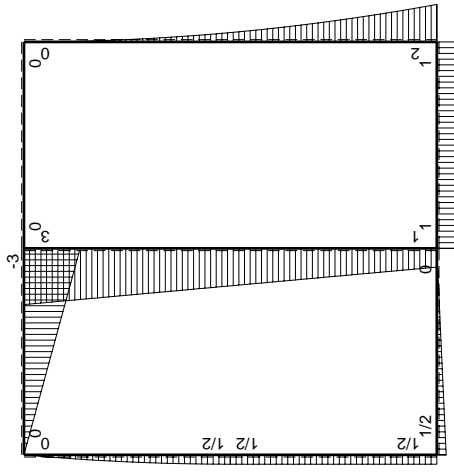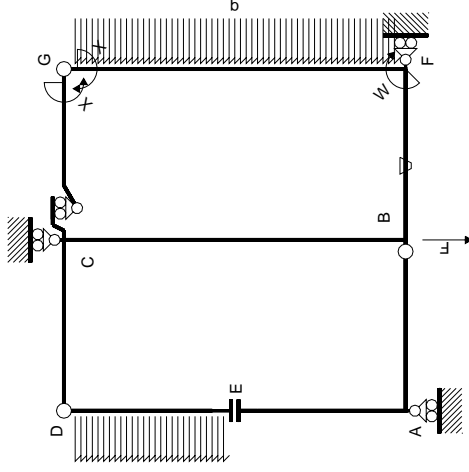

$M_0$  flessione da carichi assegnati

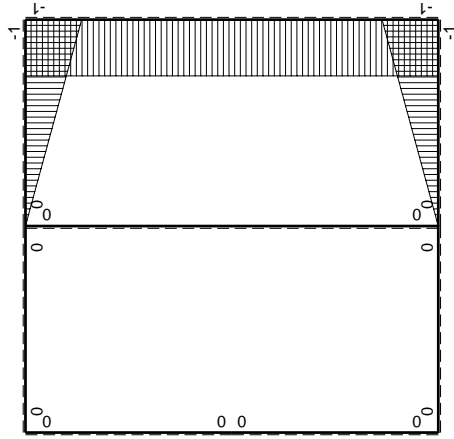

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M^0(x)$              | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|----------|-----------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-----------------------|
| AB b          | 0        | $1/2Fb - 1/2Fx$       | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BA b          | 0        | $-1/2Fx$              | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| DC b          | 0        | $3Fx$                 | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| DE b          | 0        | $Fx - 1/2qx^2$        | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| ED b          | 0        | $-1/2Fb + 1/2qx^2$    | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| EA b          | 0        | $1/2Fb$               | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| AE b          | 0        | $-1/2Fb$              | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BF b          | $-x/b$   | $Fb$                  | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                 | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                     | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0                               | 0                     |
| CG b          | $x/b$    | 0                     | 0        | 0                        | 0               | $x^2/b^2$            | 0                               | 0                     |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$ | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$            | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0        | $3Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BC 2b         | 0        | $-Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| totali        |          |                       |          |                          |                 |                      | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

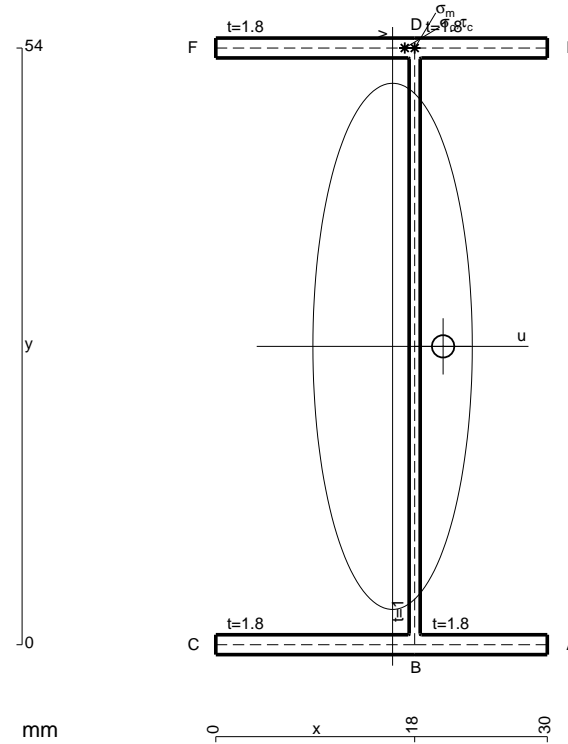


- A = 162. mm<sup>2</sup>
- J<sub>u</sub> = 91854. mm<sup>4</sup>
- J<sub>v</sub> = 8424. mm<sup>4</sup>
- J<sub>t</sub> = 134.6 mm<sup>4</sup>
- x<sub>o</sub> = 4.571 mm
- x<sub>g</sub> = 16. mm
- N = 330. N
- T<sub>y</sub> = 990. N
- M<sub>x</sub> = -801900. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 2. mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 237.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 2. mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 237.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 65.74 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.238 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 60.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 594. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 263.6 N/mm<sup>2</sup>



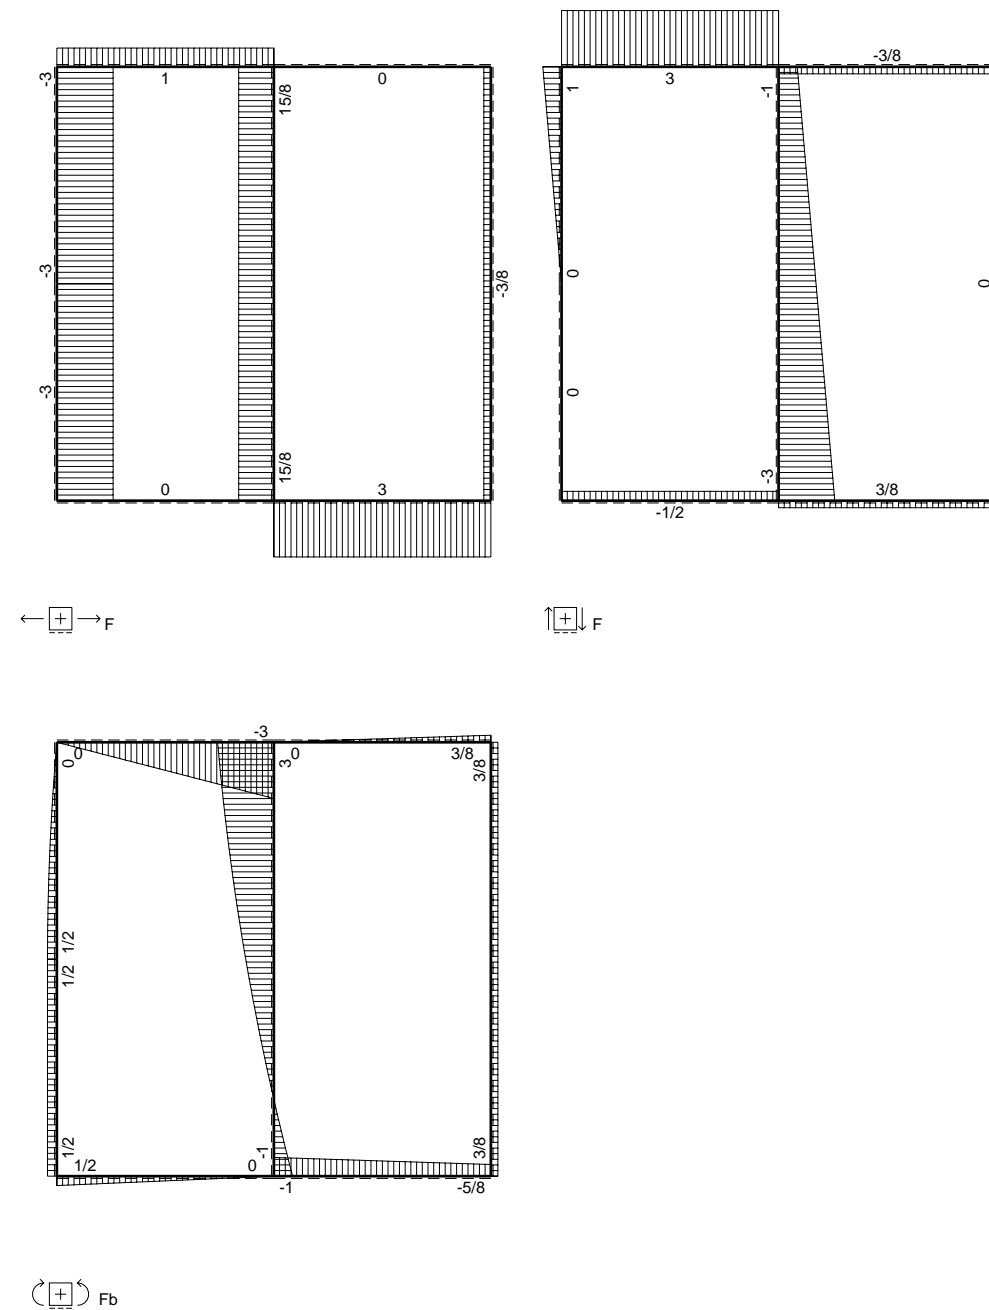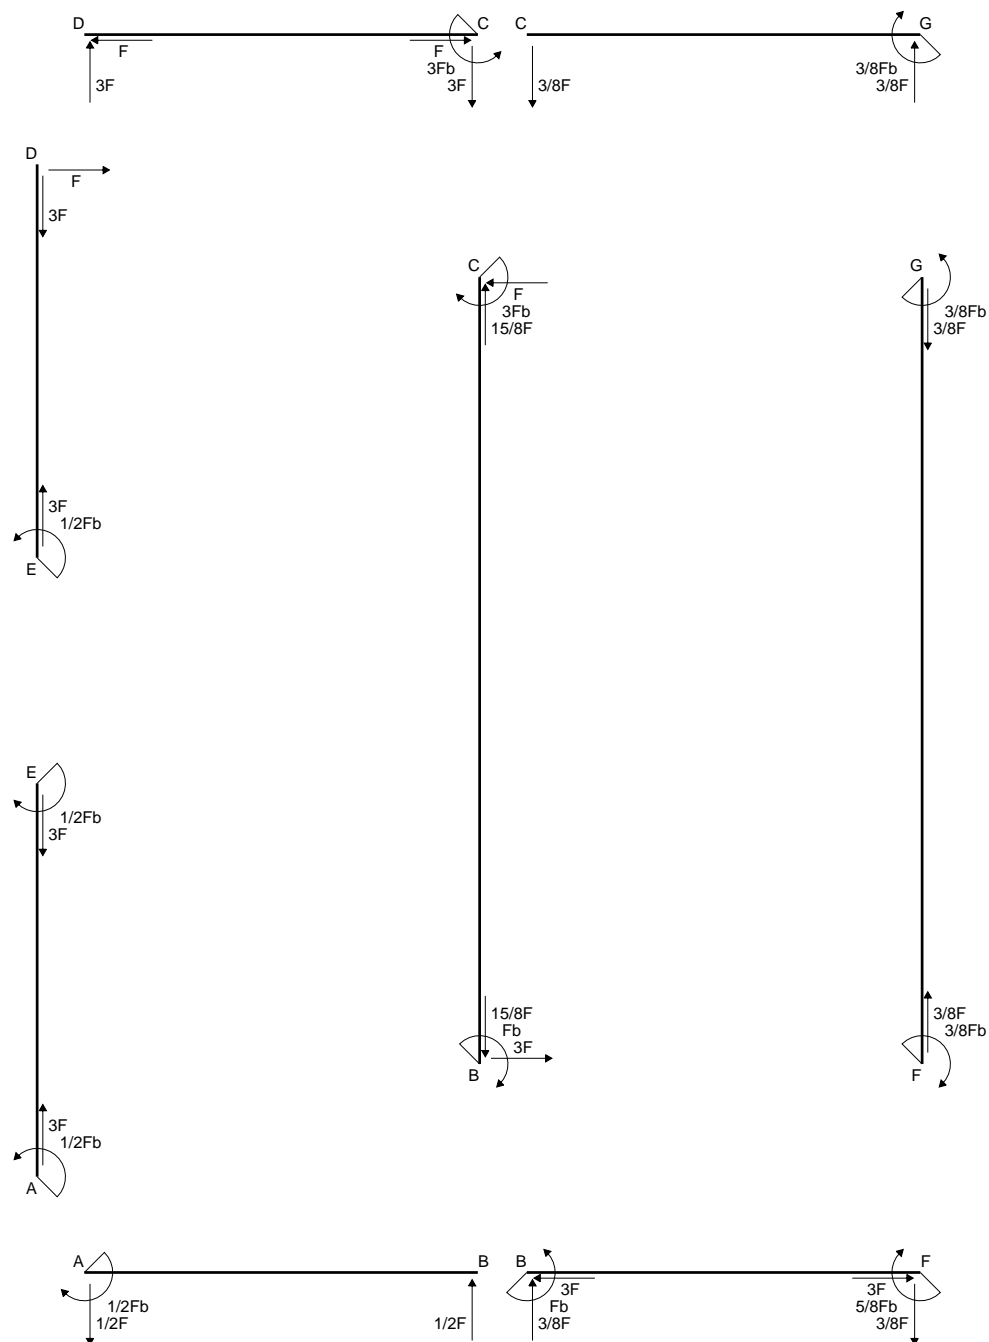


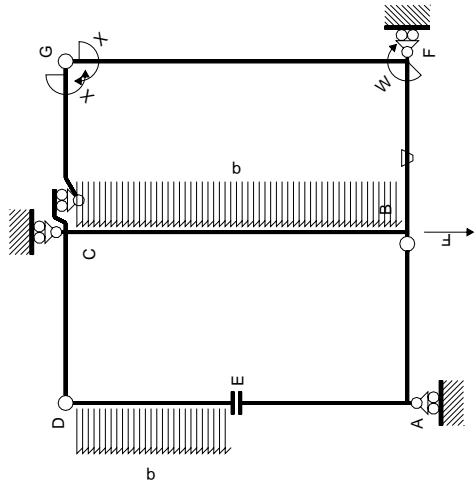

Schema di calcolo iperstatico

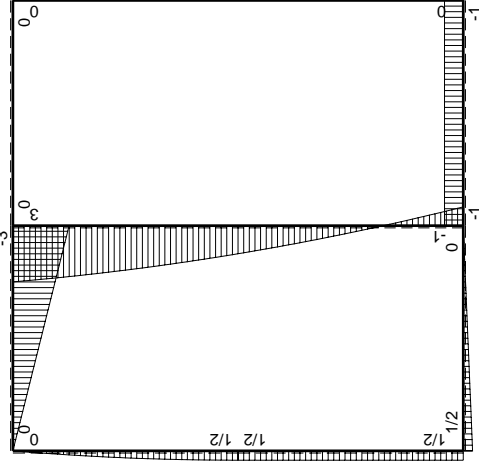

$M_0$  flessione da carichi assegnati

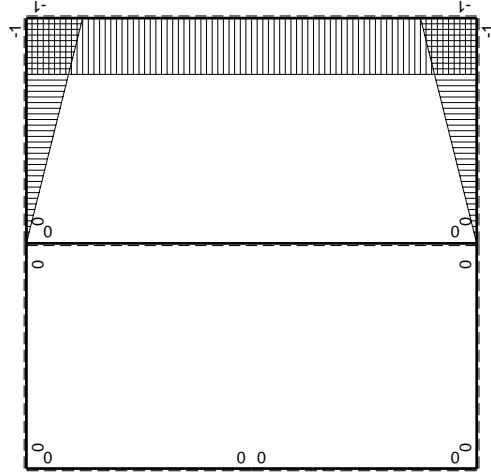

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$                  | $\theta$  | $M_x M_0$   | $M_x \theta$      | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|---------------------------|-----------|-------------|-------------------|----------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 F b - 1/2 F x$       | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 F x$                | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| CD b          | 0        | $-3 F x$                  | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| DC b          | 0        | $3 F x$                   | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| DE b          | 0        | $F x - 1/2 q x^2$         | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 F b + 1/2 q x^2$    | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| EA b          | 0        | $1/2 F b$                 | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 F b$                | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-F b$                    | $-F b/EJ$ | $F x$       | $F x/EJ$          | $x^2/b^2$            | $(1/2 + 1/2) F b^2/EJ$          | $1/3 x b/EJ$           |
| FB b          | $1-x/b$  | $F b$                     | $F b/EJ$  | $F b - F x$ | $F b/EJ - F x/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/3 x b/EJ$                    | $1/3 x b/EJ$           |
| GC b          | $-1+x/b$ | 0                         | 0         | 0           | 0                 | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3 x b/EJ$           |
| CG b          | $x/b$    | 0                         | 0         | 0           | 0                 | $x^2/b^2$            | 0+0                             | $1/3 x b/EJ$           |
| FG 2b         | -1       | 0                         | 0         | 0           | 0                 | 1                    | 0+0                             | $2 x b/EJ$             |
| GF 2b         | 1        | 0                         | 0         | 0           | 0                 | 1                    | 0+0                             | $2 x b/EJ$             |
| CB 2b         | 0        | $3 F b - F x - 1/2 q x^2$ | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| BC 2b         | 0        | $F b - 3 F x + 1/2 q x^2$ | 0         | 0           | 0                 | 0                    | 0+0                             | 0                      |
| totali        |          |                           |           |             |                   |                      |                                 | $F b^2/EJ$             |
|               |          |                           |           |             |                   |                      |                                 | $8/3 x b/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

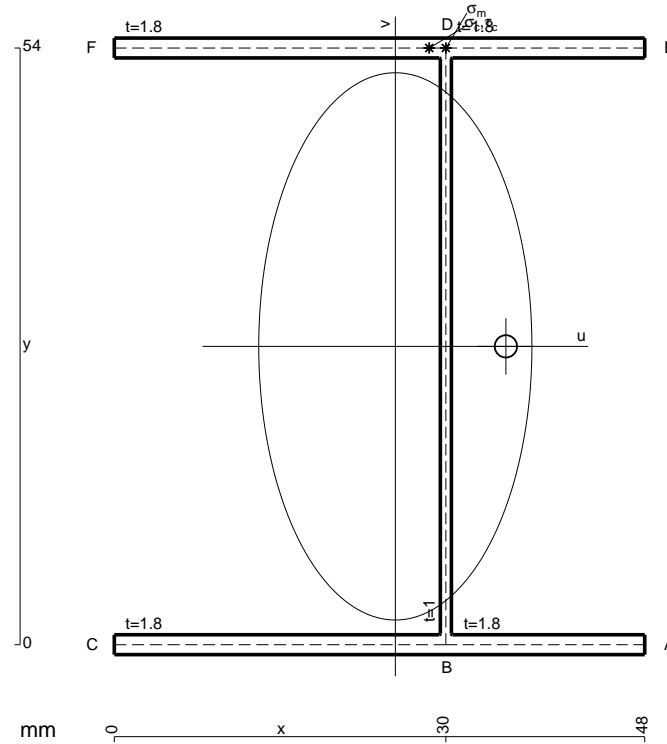


- A = 226.8 mm<sup>2</sup>
- J<sub>u</sub> = 139093. mm<sup>4</sup>
- J<sub>v</sub> = 34659. mm<sup>4</sup>
- J<sub>t</sub> = 204.6 mm<sup>4</sup>
- x<sub>o</sub> = 10.01 mm
- x<sub>g</sub> = 25.43 mm
- N = 780. N
- T<sub>y</sub> = 2340. N
- M<sub>x</sub> = -1006200. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 4.571 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 4.571 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 219.6 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.63 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 206. N/mm<sup>2</sup>
- t<sub>c</sub> = 1404. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 429.1 N/mm<sup>2</sup>






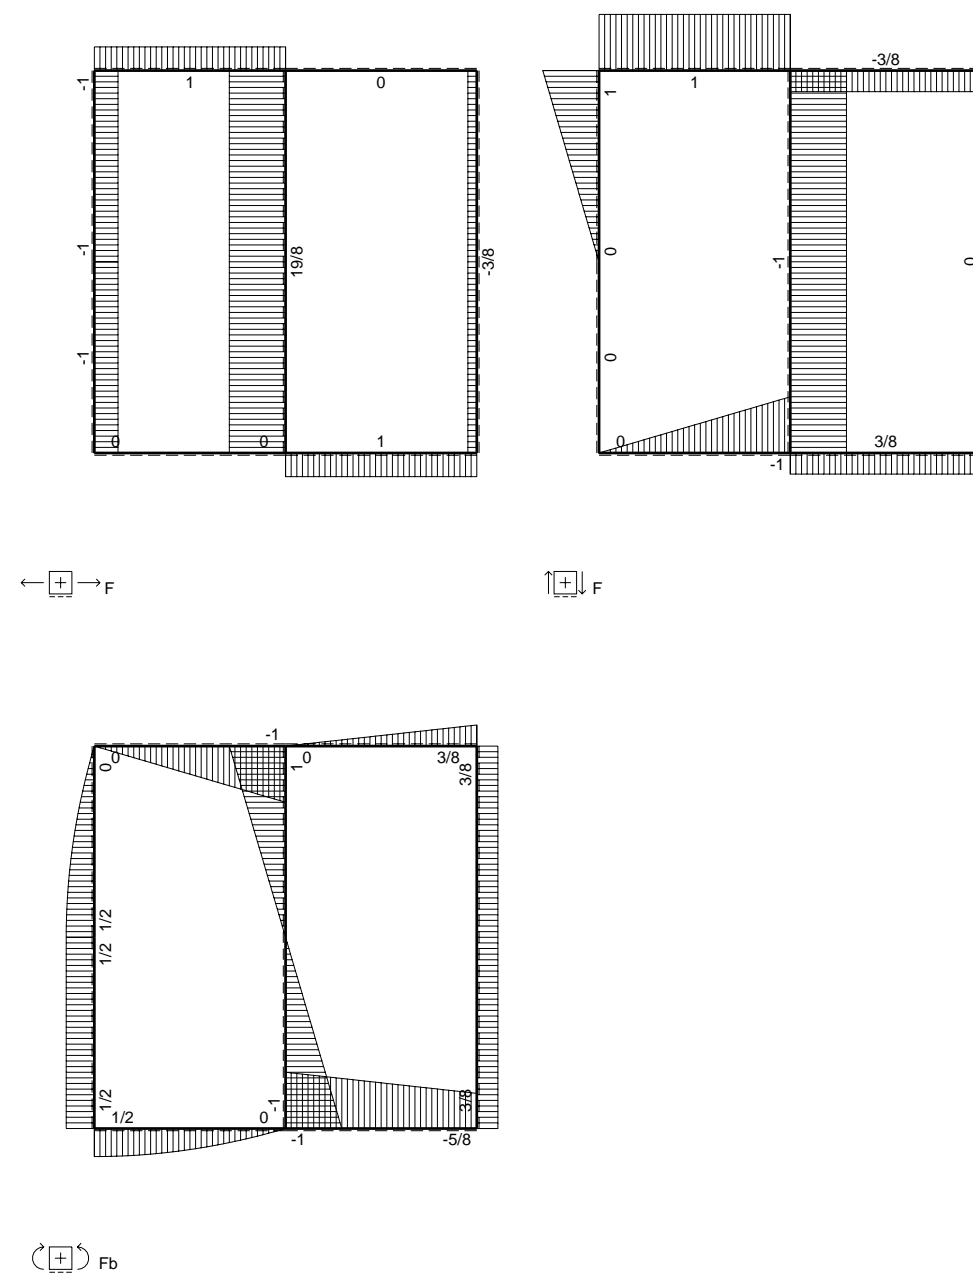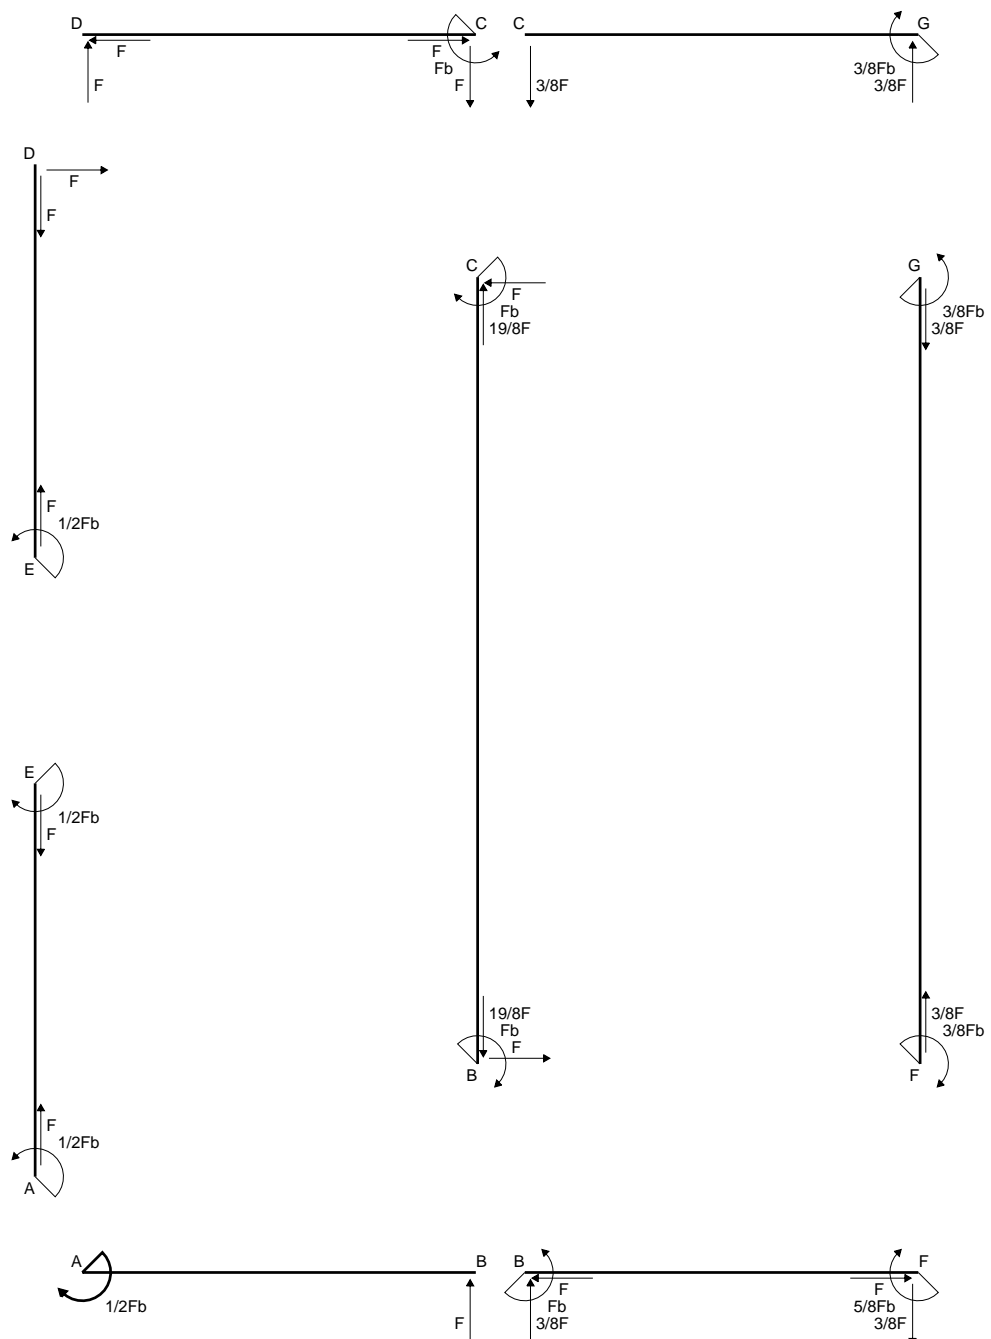

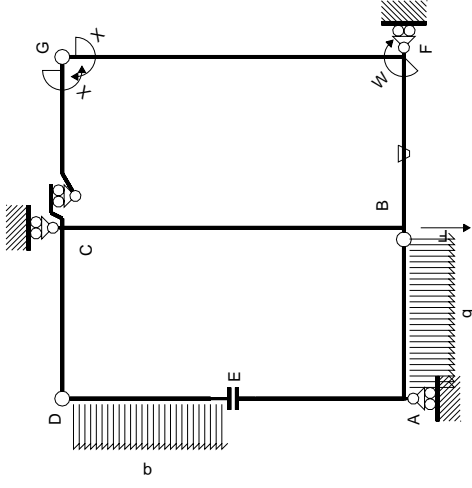


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

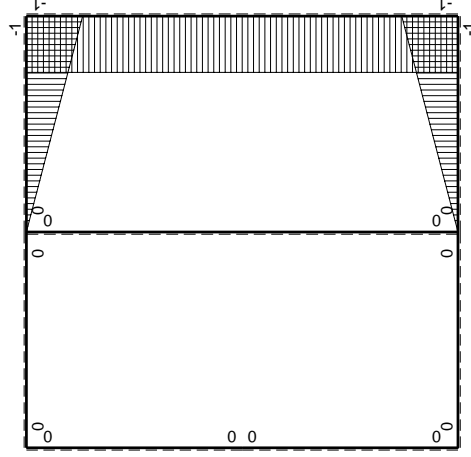

$M_x$  flessione da iperstatica X=1

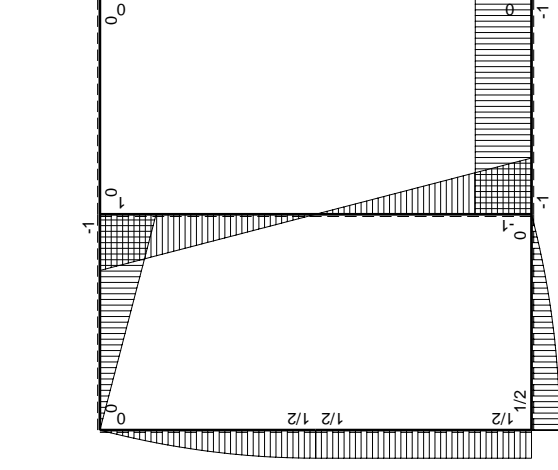

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sub>0</sub> (x) | M <sub>0</sub> (x)        | θ      | M <sub>0</sub> M <sub>0</sub> | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | ∫ M <sub>0</sub> (M <sub>0</sub> /EJ+θ)dx | ∫ M <sub>0</sub> M <sub>x</sub> /EJdx |
|--------|--------------------|---------------------------|--------|-------------------------------|------------------|---------------------------------------|---|---------------------------------------|
| AB b   | 0                  | 1/2Fb-1/2qx <sup>2</sup>  | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| BA b   | 0                  | -Fx+1/2qx <sup>2</sup>    | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| CD b   | 0                  | -Fb+Fx                    | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| DC b   | 0                  | Fx                        | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| DE b   | 0                  | Fx-1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| ED b   | 0                  | -1/2Fb+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| EA b   | 0                  | 1/2Fb                     | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| AE b   | 0                  | -1/2Fb                    | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| BF b   | -x/b               | -Fb                       | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ              | 1/3xb/EJ                              |
| FB b   | 1-x/b              | Fb                        | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                                  | 1/3xb/EJ                              |
| GC b   | -1+x/b             | 0                         | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                                       | 1/3xb/EJ                              |
| CG b   | x/b                | 0                         | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                                       | 2xb/EJ                                |
| FG 2b  | -1                 | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                       | 0                                     |
| GF 2b  | 1                  | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                       | 0                                     |
| CB 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| BC 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0   | 0                                     |
| totali |                    |                           |        |                               |                  |                                       |   | 8/3xb/EJ                              |
|        |                    |                           |        |                               |                  |                                       |   | -3/8Fb                                |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

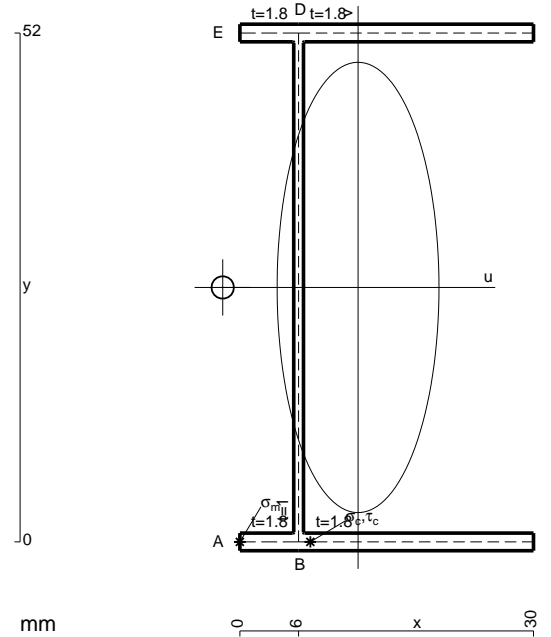

- A = 160. mm<sup>2</sup>
- J<sub>u</sub> = 84725. mm<sup>4</sup>
- J<sub>v</sub> = 10943. mm<sup>4</sup>
- J<sub>t</sub> = 134. mm<sup>4</sup>
- x<sub>o</sub> = -13.83 mm
- x<sub>g</sub> = 12.07 mm
- N = 3254. N
- T<sub>y</sub> = -1370. N
- M<sub>x</sub> = 616500. Nmm
- u<sub>m</sub> = -12.07 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 209.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -6.075 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 209.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 264.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.09 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 254.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 2466. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 504. N/mm<sup>2</sup>





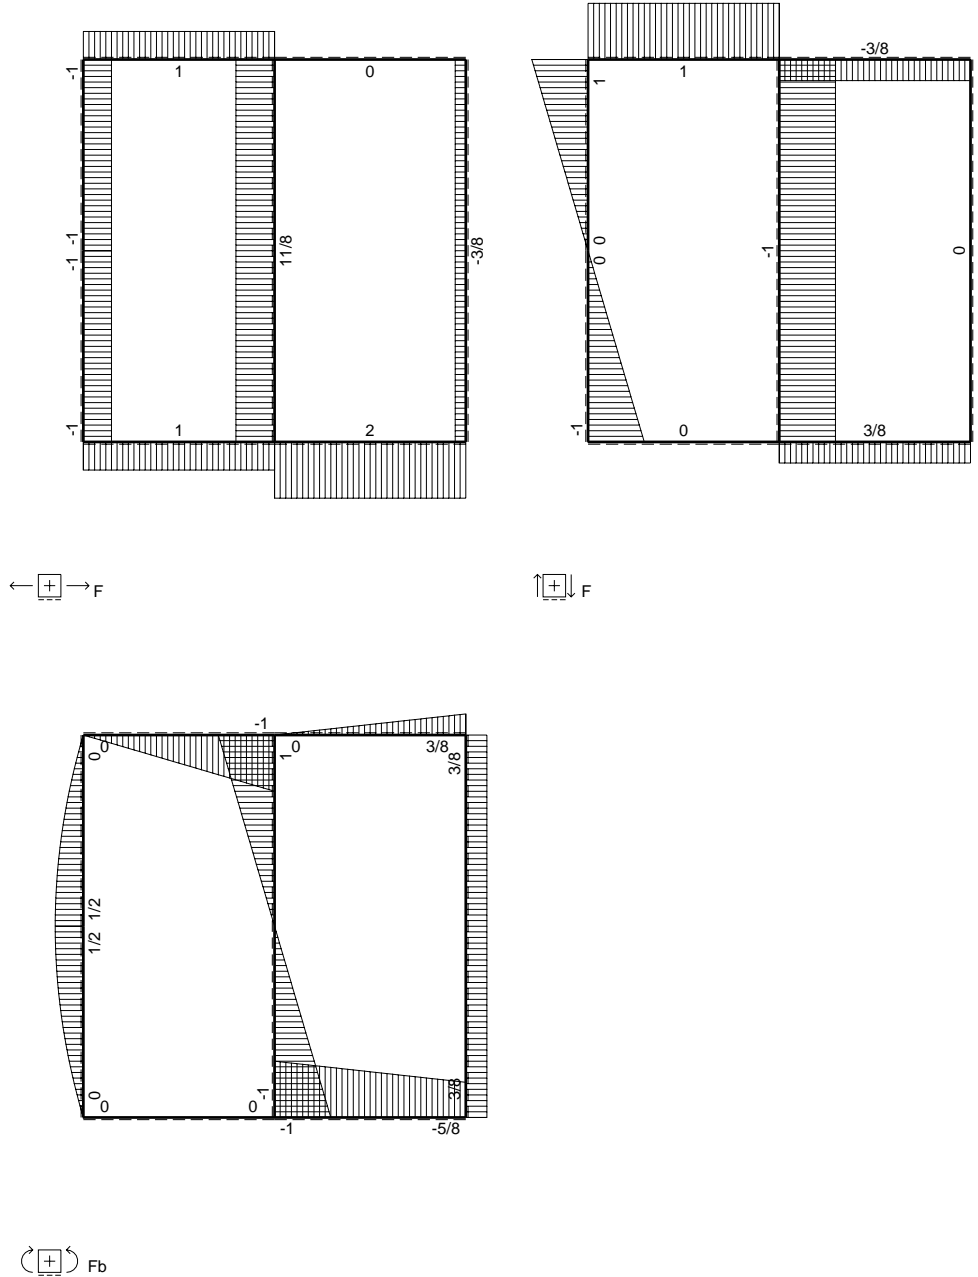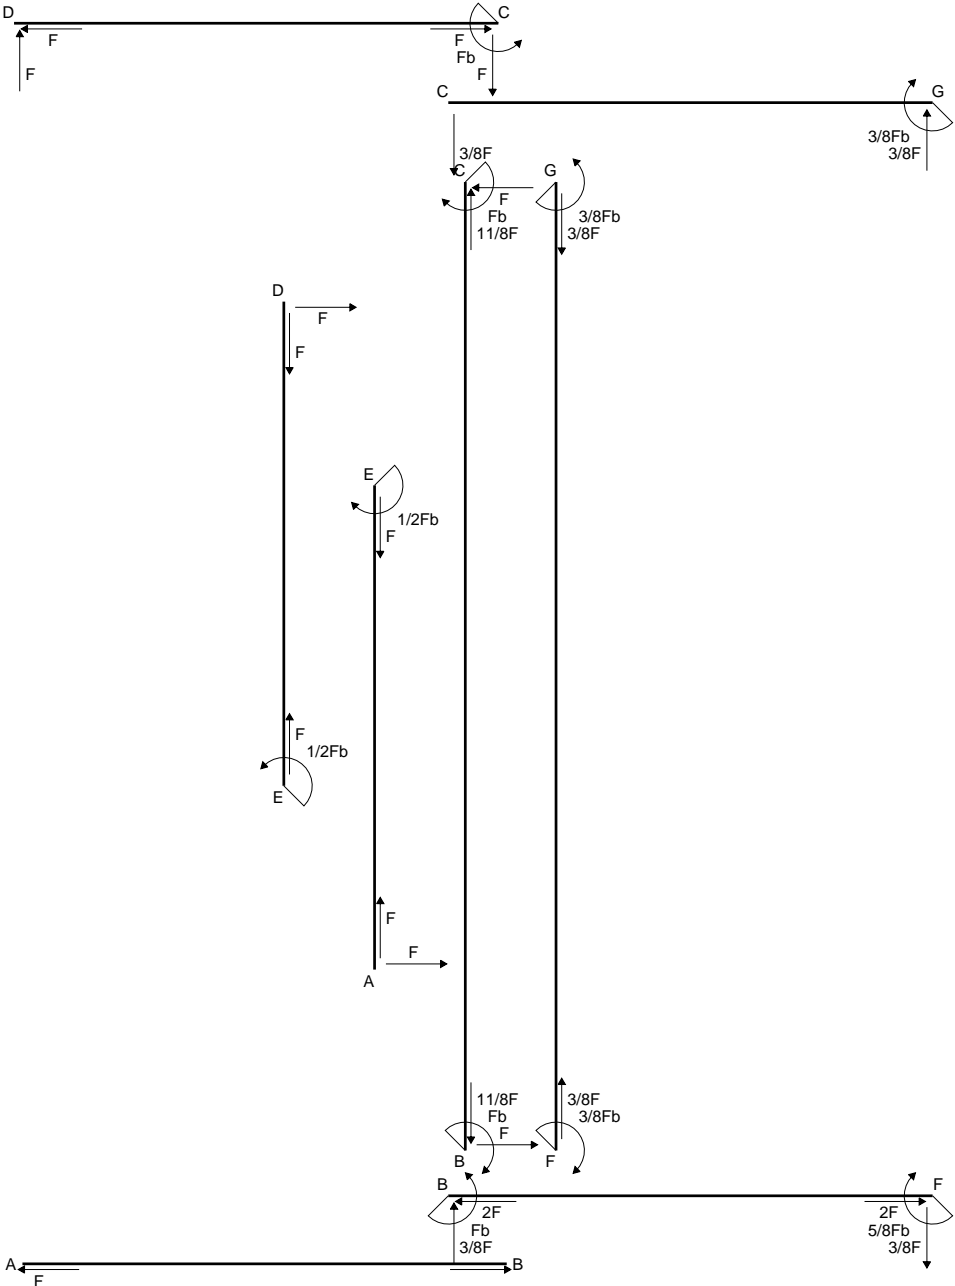

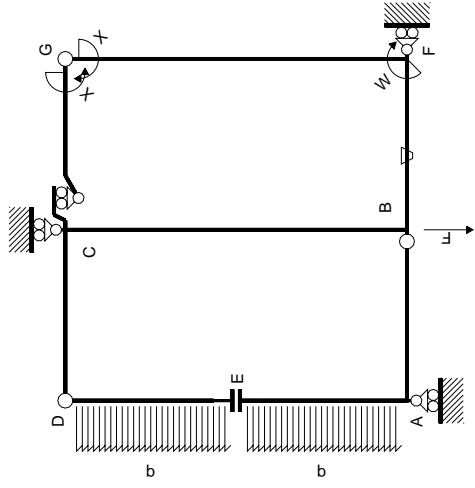

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

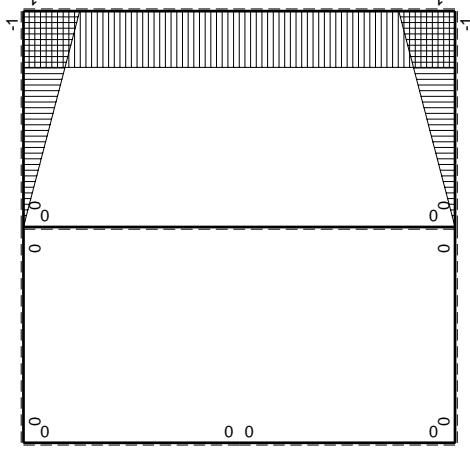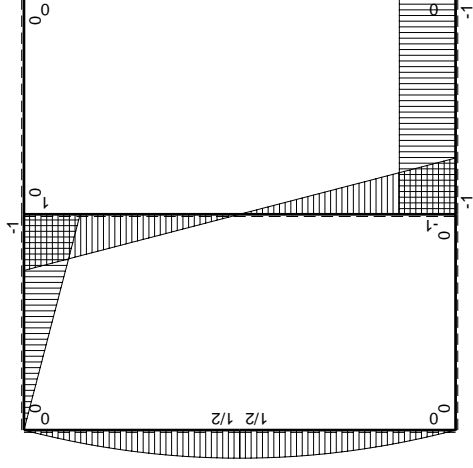

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$                  | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|--------|---------------------------|----------|-----------|--------------|------------------|-----------------------------|----------------------|
| AB b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BA b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| CD b          | 0      | -Fb+Fx                    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DC b          | 0      | Fx                        | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DE b          | 0      | Fx-1/2qx <sup>2</sup>     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| ED b          | 0      | -1/2Fb+1/2qx <sup>2</sup> | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| EA b          | 0      | 1/2Fb-1/2qx <sup>2</sup>  | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| AE b          | 0      | -Fx+1/2qx <sup>2</sup>    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BF b          | -x/b   | -Fb                       | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | 1-x/b  | Fb                        | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | -1+x/b | 0                         | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | x/b    | 0                         | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1     | 0                         | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1      | 0                         | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BC 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| totali        |        |                           |          |           |              |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


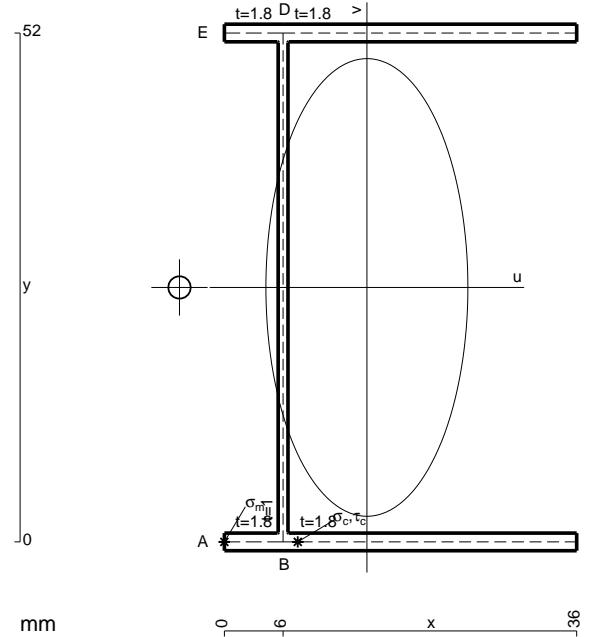


- A = 181.6 mm<sup>2</sup>
- J<sub>u</sub> = 99327. mm<sup>4</sup>
- J<sub>v</sub> = 19341. mm<sup>4</sup>
- J<sub>t</sub> = 157.3 mm<sup>4</sup>
- x<sub>o</sub> = -19.15 mm
- x<sub>g</sub> = 14.56 mm
- N = 2214. N
- T<sub>y</sub> = -1610. N
- M<sub>x</sub> = 788900. Nmm
- u<sub>m</sub> = -14.56 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 218.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -8.564 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 218.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 365.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.64 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 352.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 2898. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 669.6 N/mm<sup>2</sup>






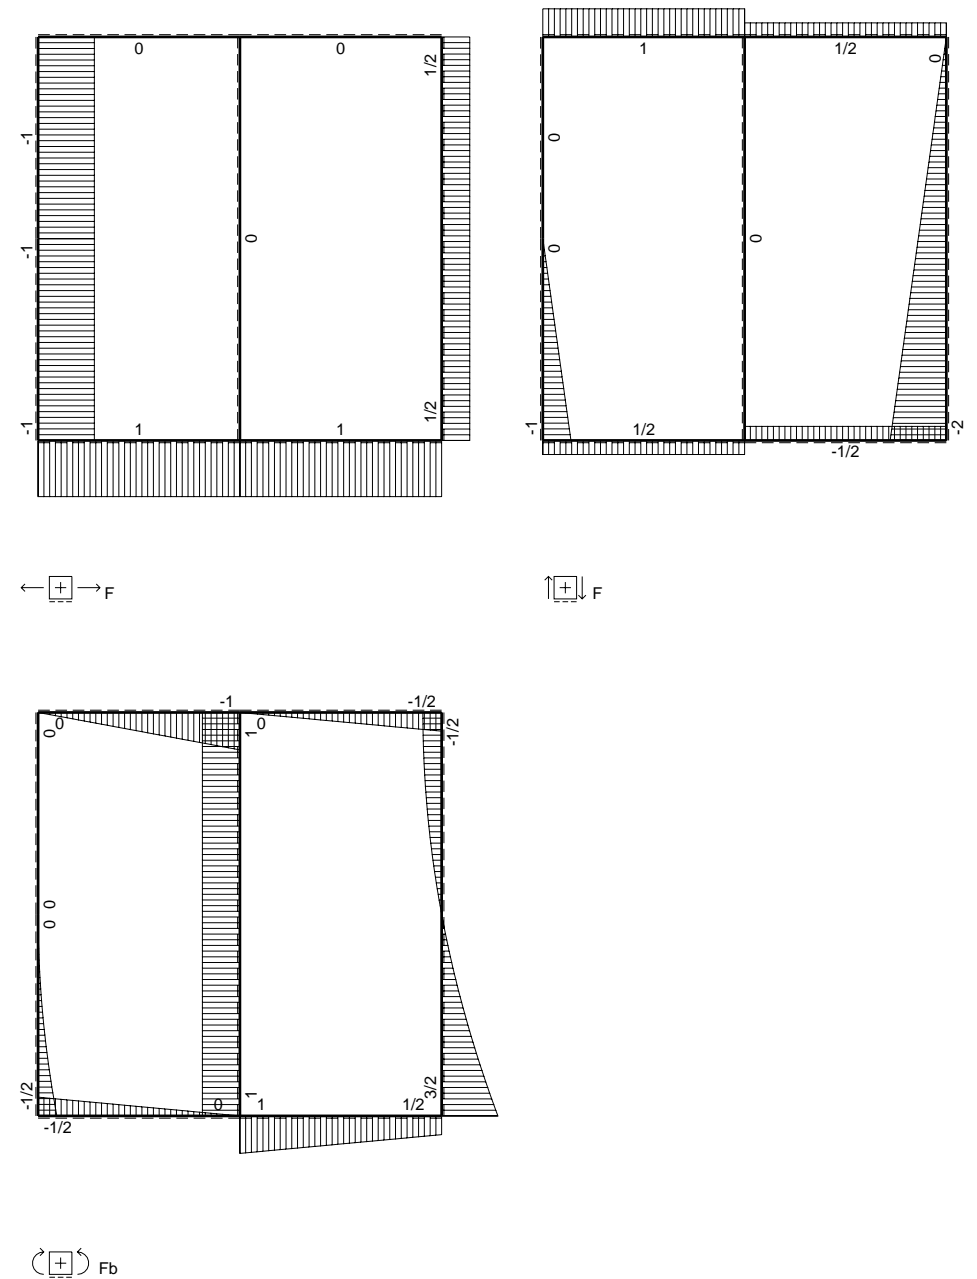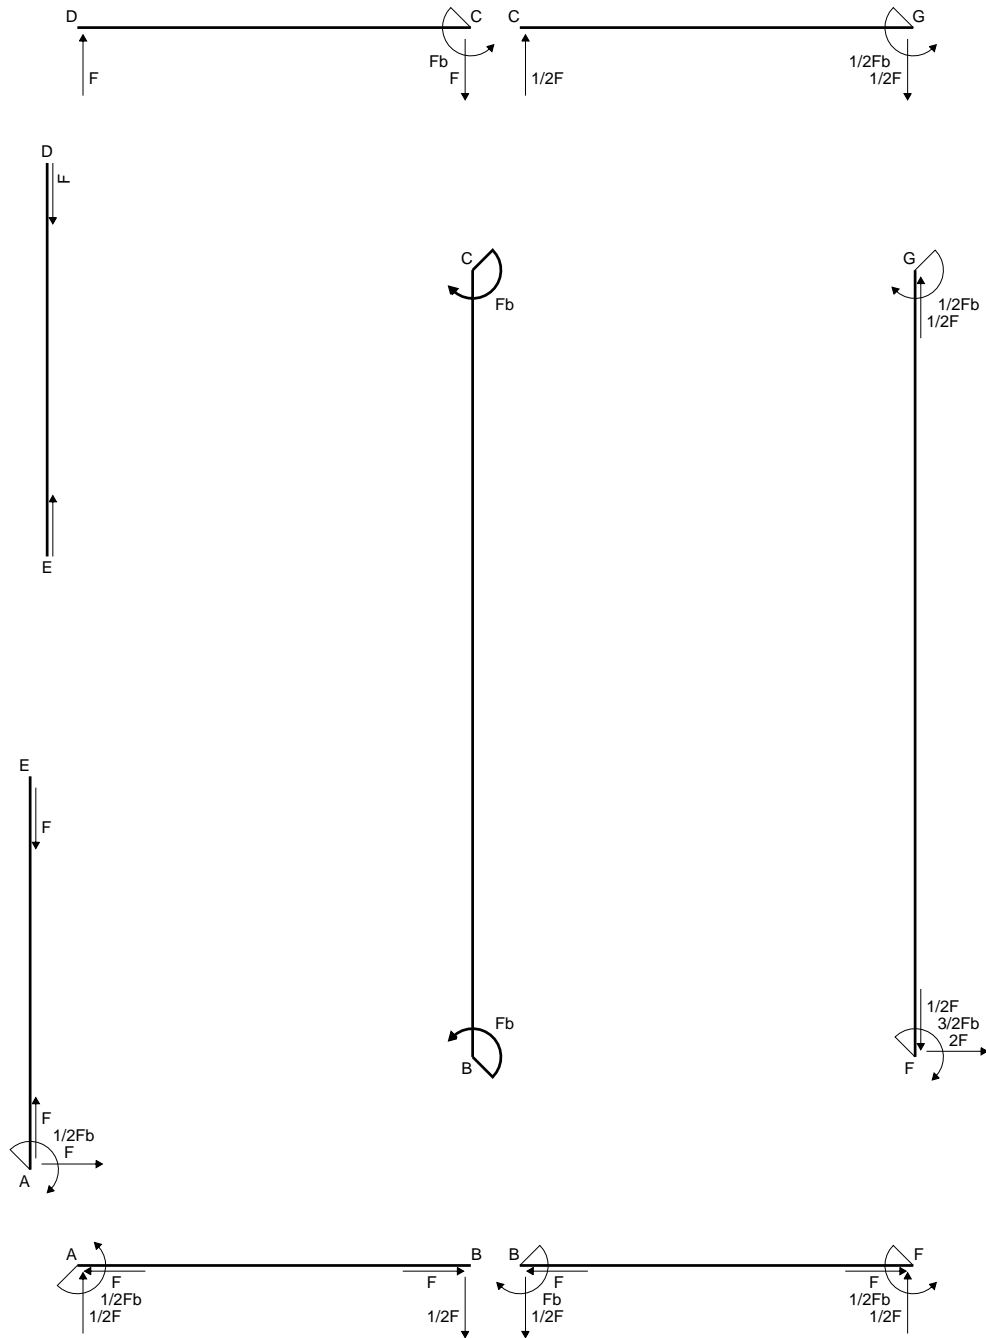

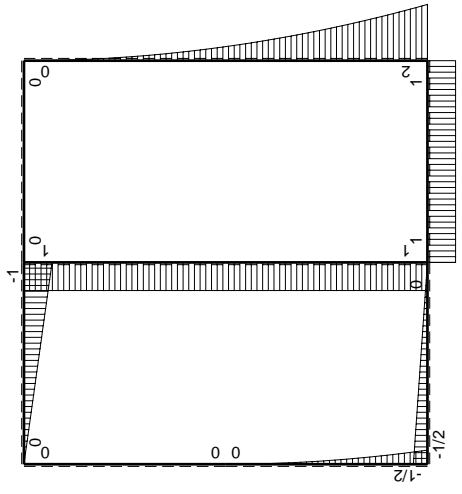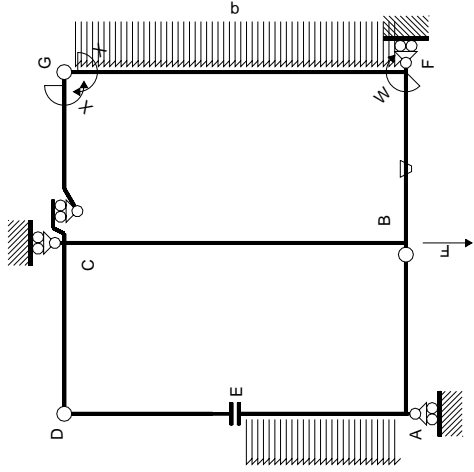

$M_0$  flessione da carichi assegnati

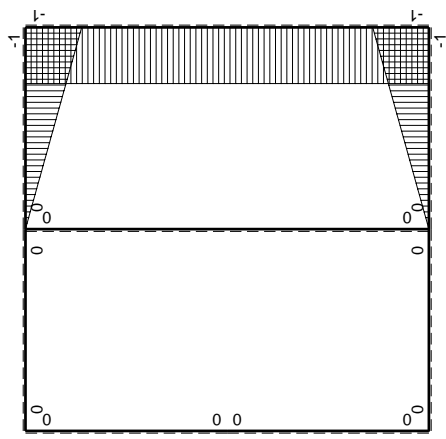

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|----------|------------------------|----------|--------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BA b          | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| CD b          | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| DC b          | 0        | $Fx$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| ED b          | 0        | 0                      | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| EAB           | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BAE b         | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BF b          | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$          | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b          | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0        | $Fb$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BC 2b         | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| totali        |          |                        |          |                          |                 |                    | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

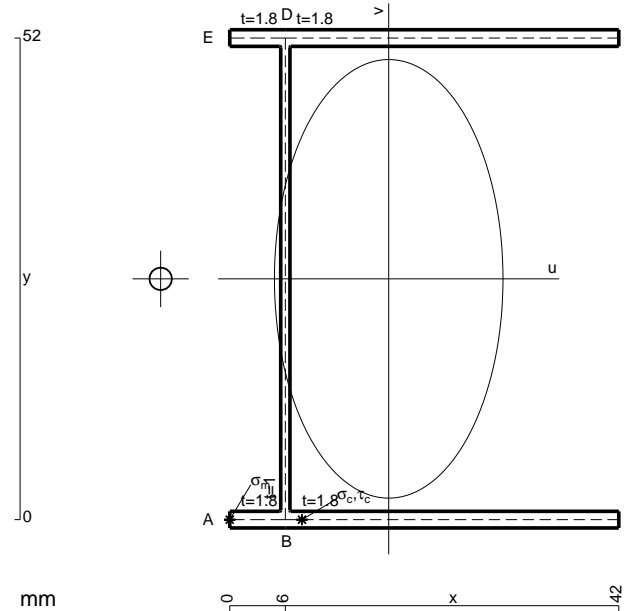

$A = 203.2 \text{ mm}^2$   
 $J_u = 113929. \text{ mm}^4$   
 $J_v = 30932. \text{ mm}^4$   
 $J_t = 180.6 \text{ mm}^4$   
 $x_o = -24.62 \text{ mm}$   
 $x_g = 17.16 \text{ mm}$   
 $T_y = 1900. \text{ N}$   
 $M_x = -1007000. \text{ Nmm}$   
 $u_m = -17.16 \text{ mm}$   
 $v_m = -26. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -229.8 \text{ N/mm}^2$   
 $x_c = 6. \text{ mm}$   
 $u_c = -11.16 \text{ mm}$   
 $v_c = -26. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -229.8 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 481.7 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 15.61 \text{ N/mm}^2$   
 $\tau_o = Tx_o/tJ_t = 466.1 \text{ N/mm}^2$   
 $t_c = 3420. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 865.5 \text{ N/mm}^2$




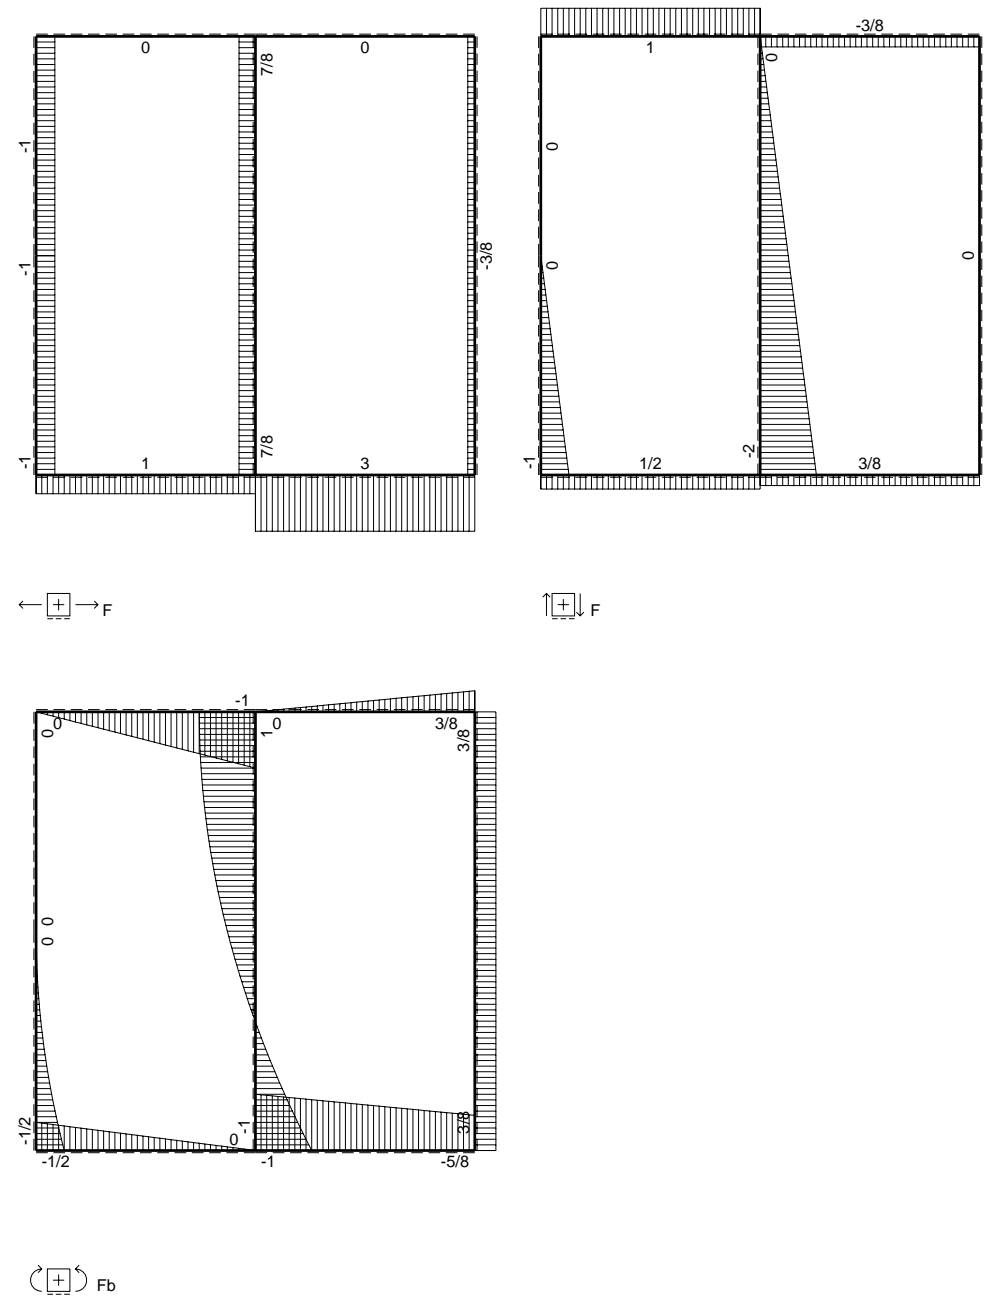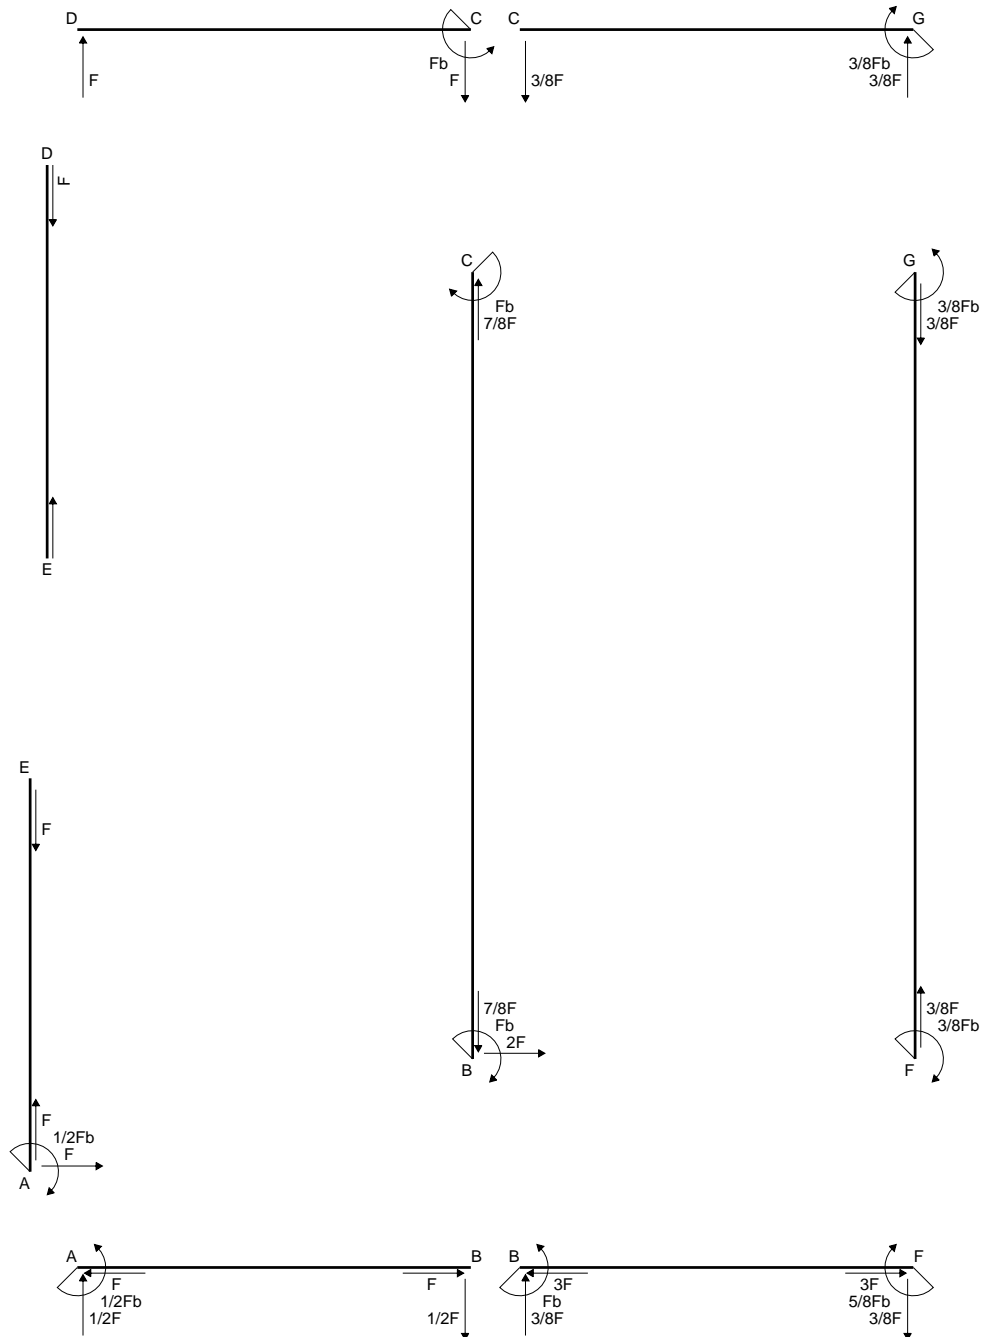

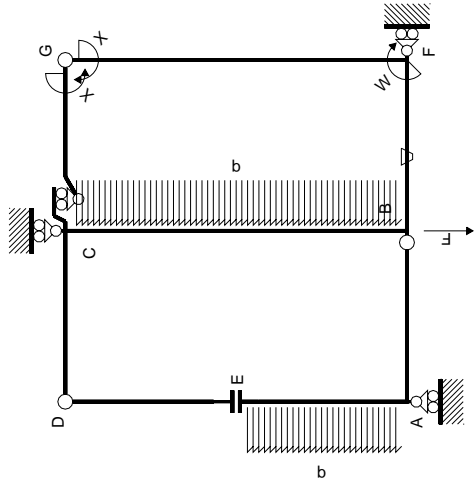

Schema di calcolo iperstatico


$M_0$  flessione da carichi assegnati

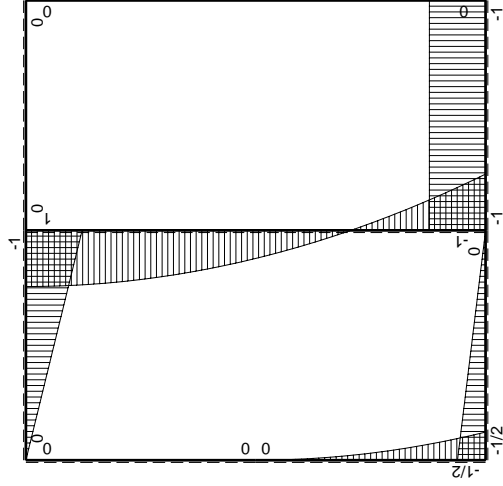

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M^x(x)$ | $M(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB B         | 0        | $-1/2Fb+1/2Fx$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA B         | 0        | $1/2Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD B         | 0        | $-Fb+Fx$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC B         | 0        | $Fx$               | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED B         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EAB          | 0        | $-1/2qx^2$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE B         | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF B         | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB B         | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC B         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG B         | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |
|              |          |                    |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

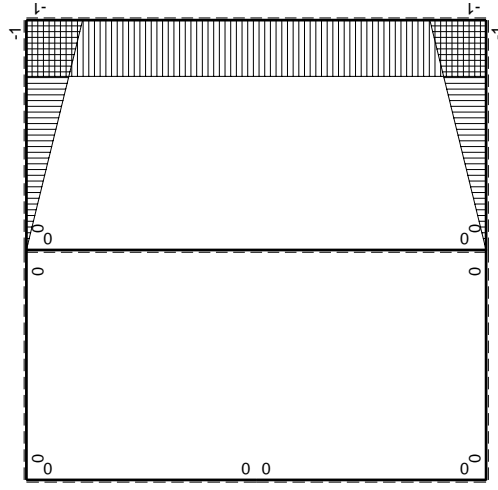

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

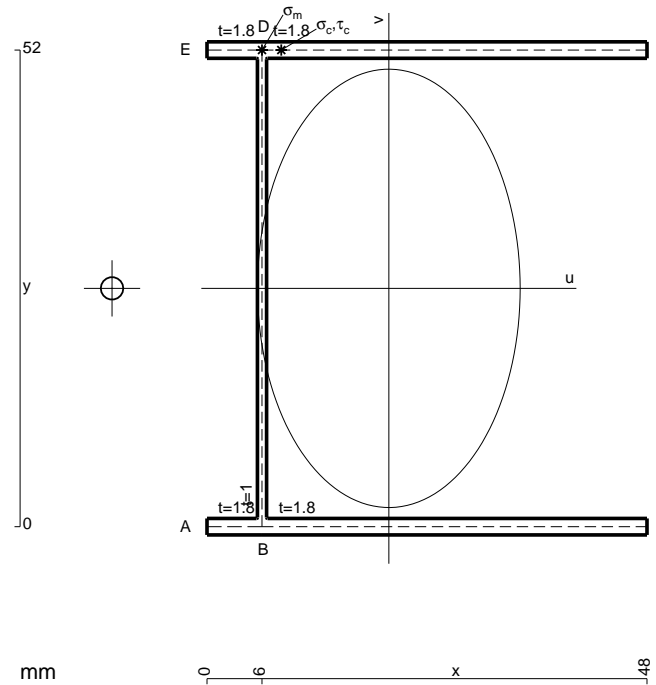

- A = 224.8 mm<sup>2</sup>
- J<sub>u</sub> = 128530. mm<sup>4</sup>
- J<sub>v</sub> = 46128. mm<sup>4</sup>
- J<sub>t</sub> = 204. mm<sup>4</sup>
- X<sub>o</sub> = -30.2 mm
- X<sub>g</sub> = 19.84 mm
- N = 1759. N
- T<sub>y</sub> = -4020. N
- M<sub>x</sub> = -1145700. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = -13.84 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 239.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = -13.84 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 239.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 1105. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 34.15 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 1071. N/mm<sup>2</sup>
- t<sub>c</sub> = 3618. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 1930. N/mm<sup>2</sup>






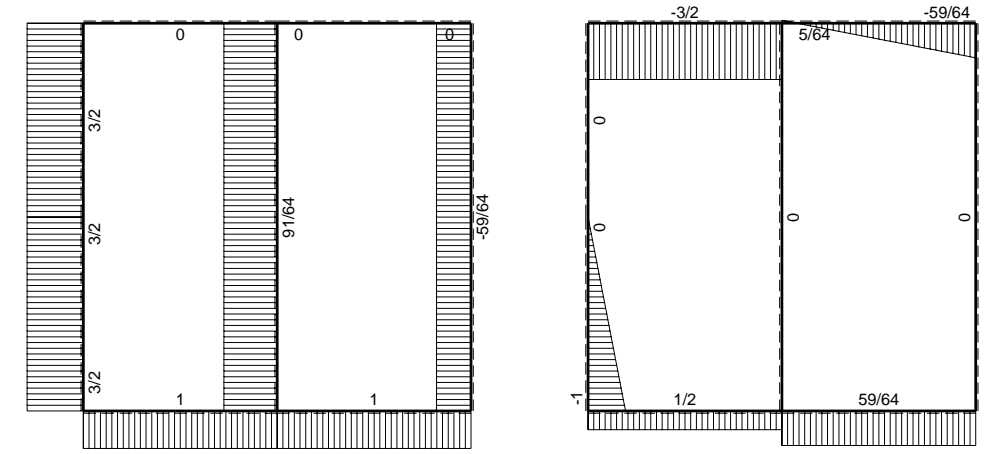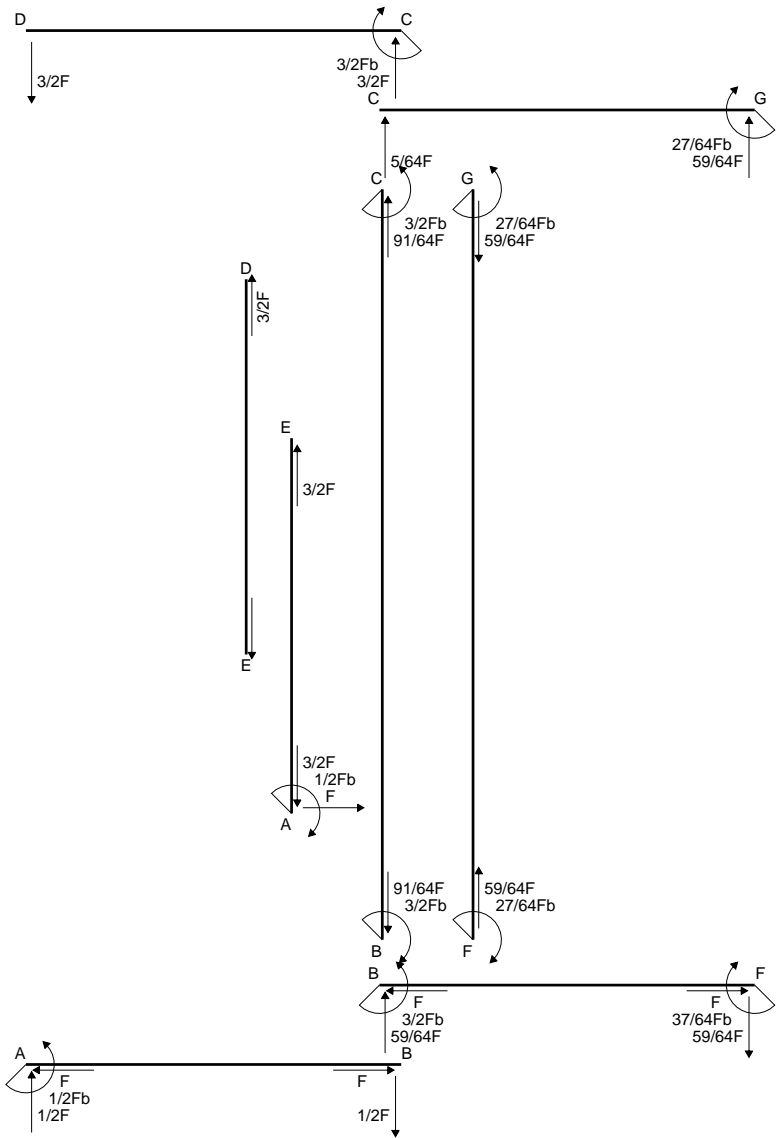


← ⊕ → F


↑ ⊕ ↓ F

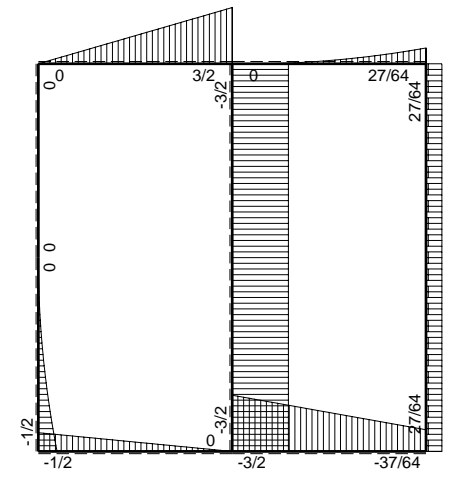


⊕ ⊖ F<sub>b</sub>

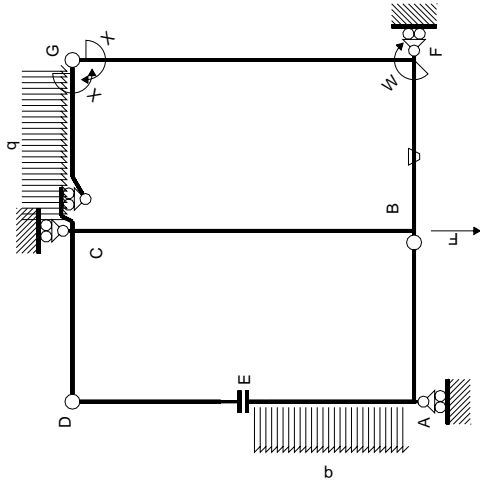

Schema di calcolo iperstatico

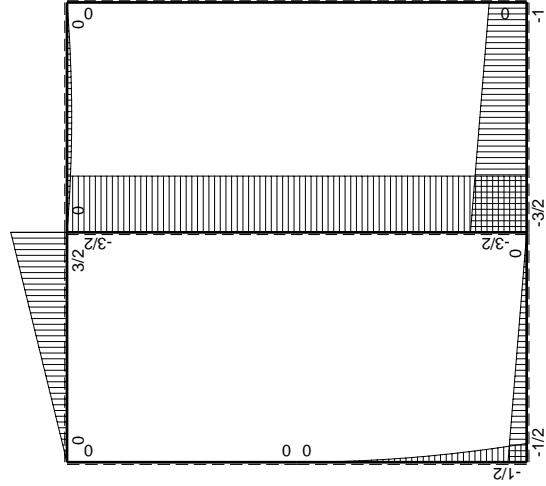

$M_0$  flessione da carichi assegnati

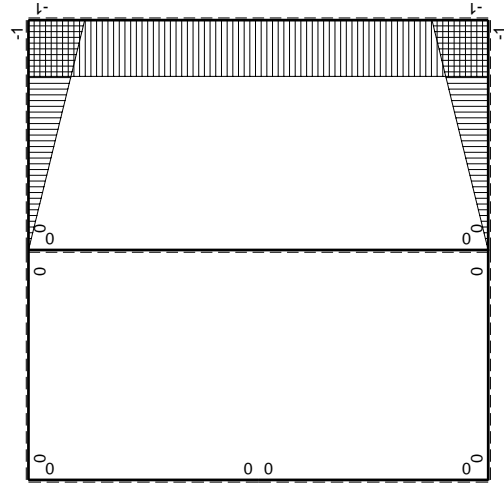

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | Sviluppi di calcolo iperstatica |        |  |                  |                                       |   |
|---|--------------------|---------------------------------|--------|--|------------------|---------------------------------------|---|
| ←   | M <sub>0</sub> (x) | M <sub>0</sub> (x)              | θ      | M <sub>0</sub> M <sub>0</sub>                  | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | ∫ M <sub>0</sub> (M <sub>0</sub> /EJ+θ)dx |
| AB b  | 0                  | -1/2Fb+1/2Fx                    | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BA b  | 0                  | 1/2Fx                           | 0      | 0  | 0                | 0                                     | 0+0                                       |
| CD b  | 0                  | 3/2Fb-3/2Fx                     | 0      | 0  | 0                | 0                                     | 0+0                                       |
| DC b  | 0                  | -3/2Fx                          | 0      | 0  | 0                | 0                                     | 0+0                                       |
| DE b  | 0                  | 0                               | 0      | 0  | 0                | 0                                     | 0+0                                       |
| EA b  | 0                  | -1/2qx <sup>2</sup>             | 0      | 0  | 0                | 0                                     | 0+0                                       |
| AE b  | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup>     | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BF b  | -x/b               | -3/2Fb+1/2Fx                    | -Fb/EJ | 3/2Fx-1/2Fx <sup>2</sup> /b                    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (7/12+1/2)Fb <sup>2</sup> /EJ             |
| FB b  | 1-x/b              | Fb+1/2Fx                        | Fb/EJ  | Fb-1/2Fx-1/2Fx <sup>2</sup> /b                 | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (7/12+1/2)Fb <sup>2</sup> /EJ             |
| GC b  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>       | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ               |
| CG b  | x/b                | 1/2Fx-1/2qx <sup>2</sup>        | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ               |
| FG 2b   | -1                 | 0                               | 0      | 0  | 0                | 1                                     | 0+0                                       |
| GF 2b   | 1                  | 0                               | 0      | 0  | 0                | 1                                     | 0+0                                       |
| CB 2b   | 0                  | -3/2Fb                          | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BC 2b   | 0                  | 3/2Fb                           | 0      | 0  | 0                | 0                                     | 0+0                                       |
| totali  |                    |                                 |        |  |                  |                                       |   |
|   |                    |                                 |        |  |                  |                                       | 9/8Fb <sup>2</sup> /EJ                    |
|   |                    |                                 |        |  |                  |                                       | -27/64Fb                                  |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$



$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

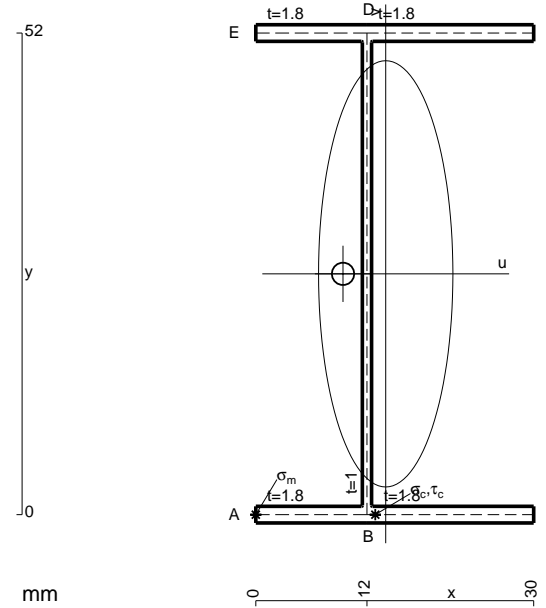


- A = 160. mm<sup>2</sup>
- J<sub>u</sub> = 84725. mm<sup>4</sup>
- J<sub>v</sub> = 8416. mm<sup>4</sup>
- J<sub>t</sub> = 134. mm<sup>4</sup>
- x<sub>o</sub> = -4.61 mm
- x<sub>g</sub> = 14.02 mm
- T<sub>y</sub> = -1065. N
- M<sub>x</sub> = 649650. Nmm
- u<sub>m</sub> = -14.02 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -2.025 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 71.85 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.883 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 65.97 N/mm<sup>2</sup>
- t<sub>c</sub> = 1278. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 235. N/mm<sup>2</sup>



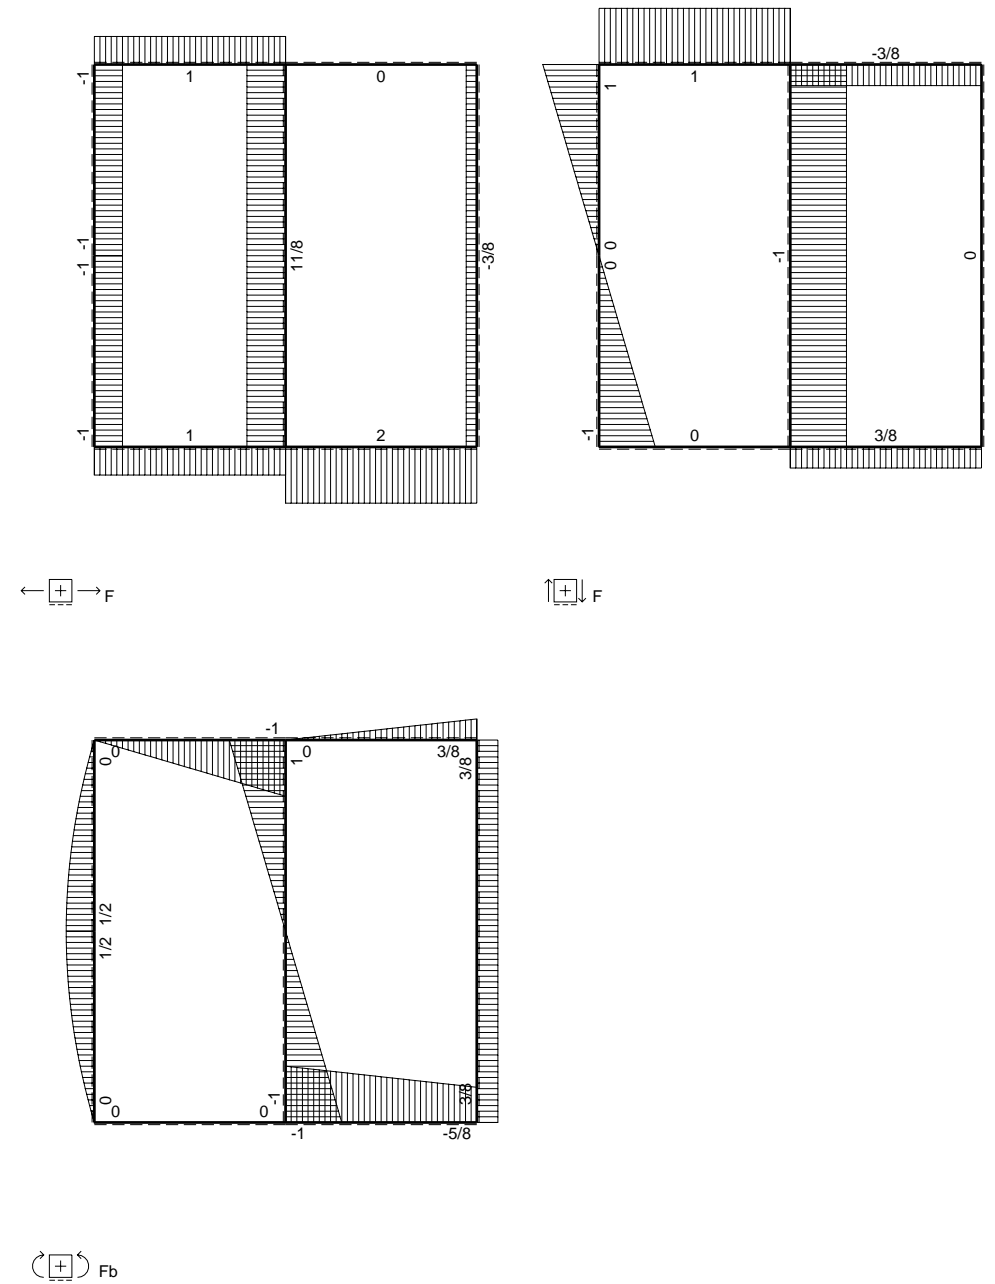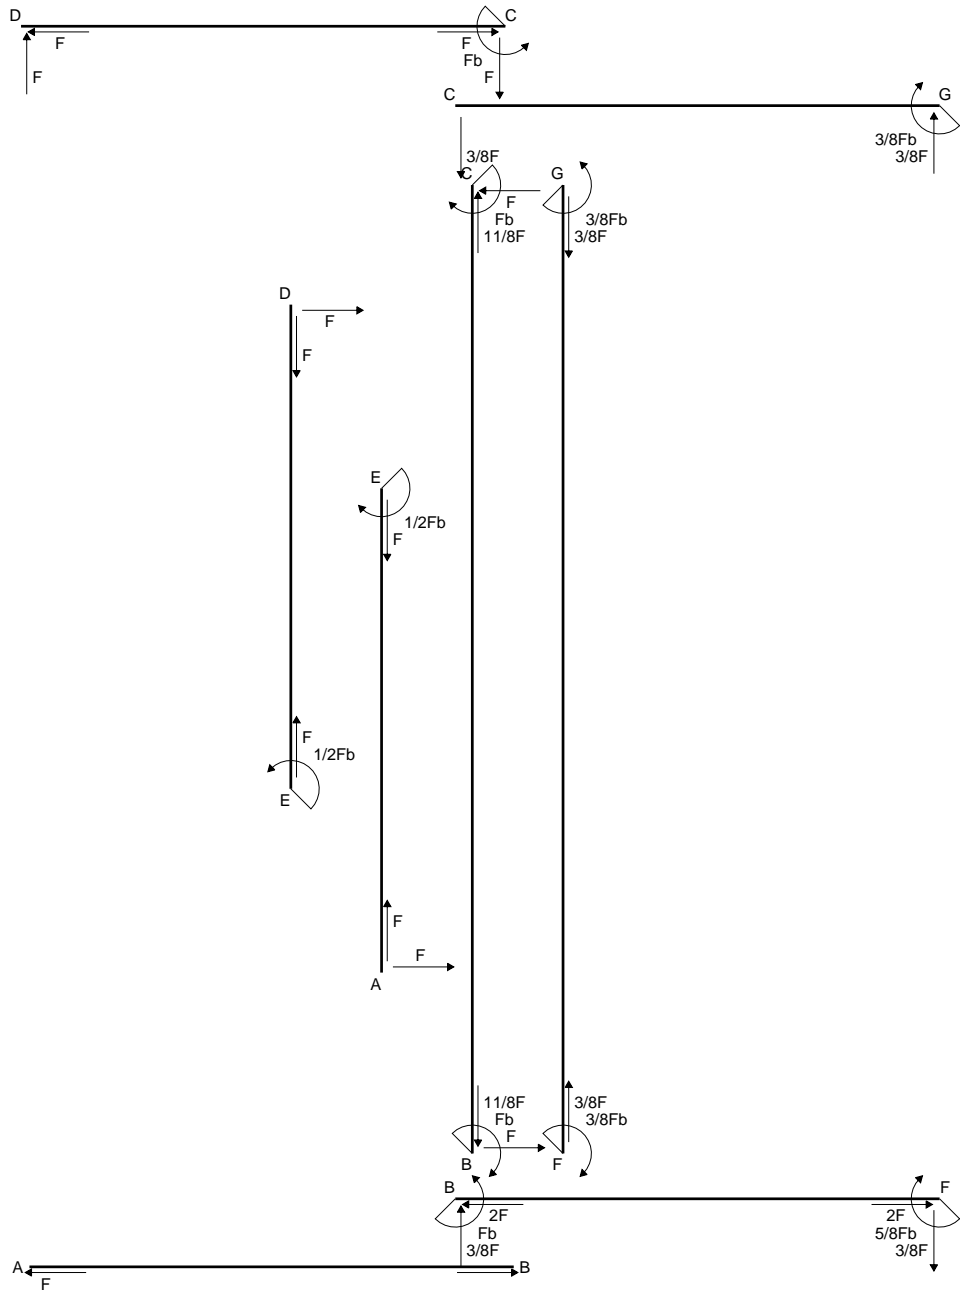


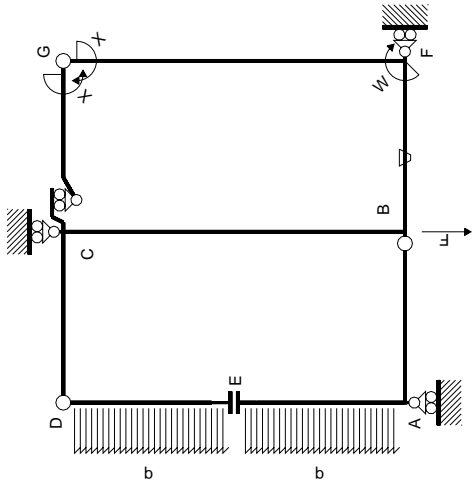

Schema di calcolo iperstatico

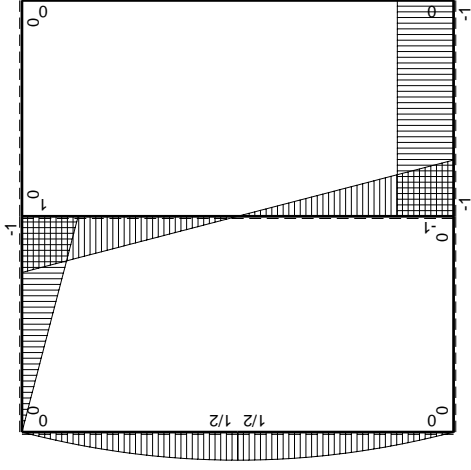

$M_x$  flessione da carichi assegnati

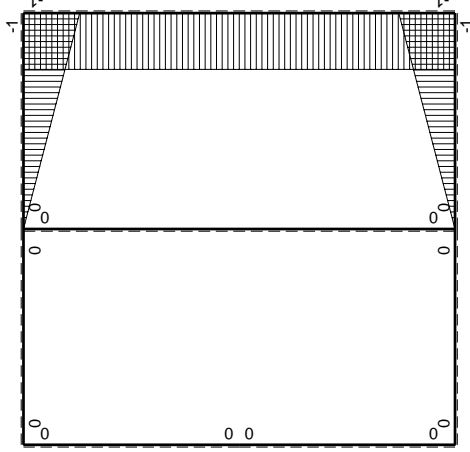

$M_0$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|---------------|--------|------------------|----------|-----------|--------------|------------------|-----------------------------|---------------------|
| AB b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BA b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| CD b          | 0      | -Fb+Fx           | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DC b          | 0      | Fx               | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DE b          | 0      | $Fx-1/2qx^2$     | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| ED b          | 0      | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| EA b          | 0      | $1/2Fb-1/2qx^2$  | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| AE b          | 0      | $-Fx+1/2qx^2$    | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BF b          | -x/b   | -Fb              | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FB b          | 1-x/b  | Fb               | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$          |
| GC b          | -1+x/b | 0                | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$          |
| CG b          | x/b    | 0                | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$          |
| FG 2b         | -1     | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b         | 1      | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BC 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| totali        |        |                  |          |           |              |                  |                             | $8/3xb/EJ$          |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

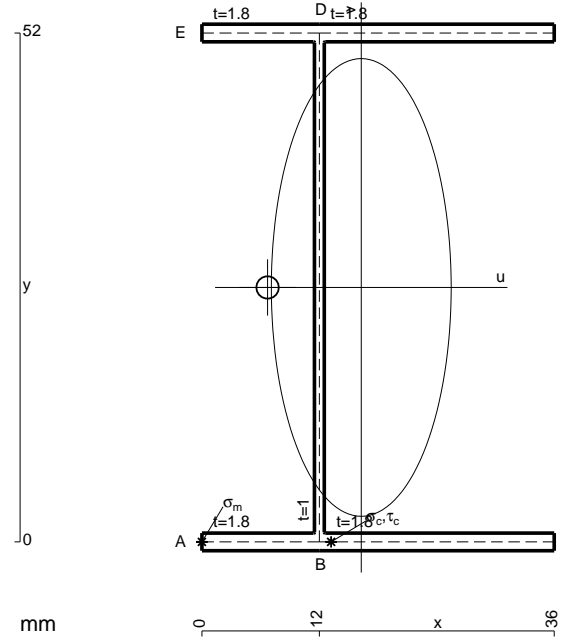

- A = 181.6 mm<sup>2</sup>
- J<sub>u</sub> = 99327. mm<sup>4</sup>
- J<sub>v</sub> = 15333. mm<sup>4</sup>
- J<sub>t</sub> = 157.3 mm<sup>4</sup>
- x<sub>o</sub> = -9.574 mm
- x<sub>g</sub> = 16.28 mm
- N = 1623. N
- T<sub>y</sub> = -1180. N
- M<sub>x</sub> = 767000. Nmm
- u<sub>m</sub> = -16.28 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -4.282 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 136.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.413 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 129.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 2124. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 316.3 N/mm<sup>2</sup>






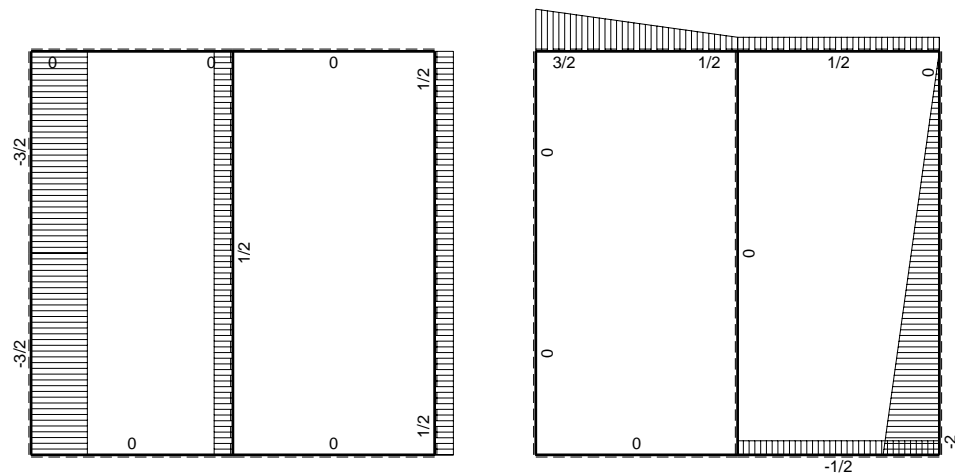
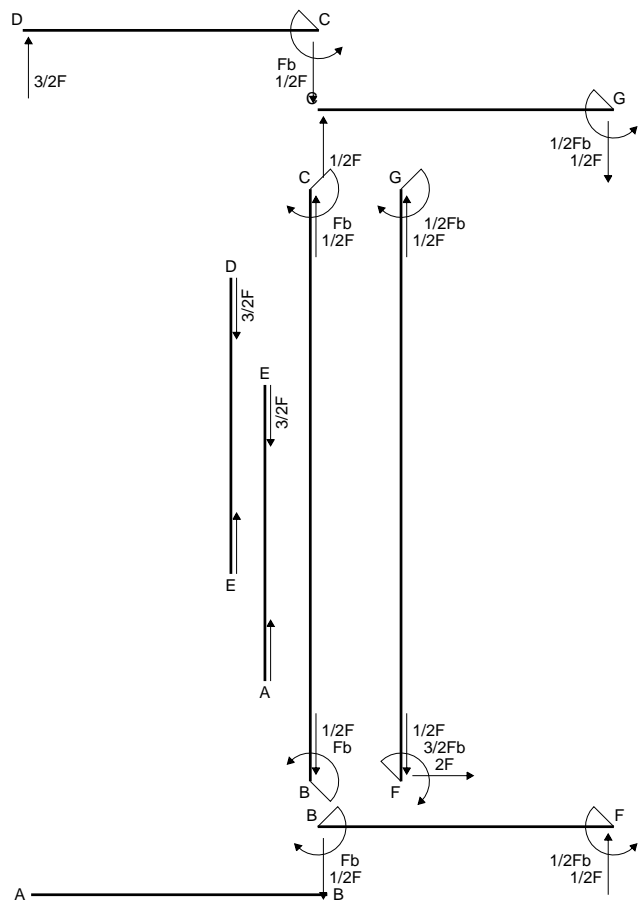


← ⊕ → F


↑ ⊕ ↓ F

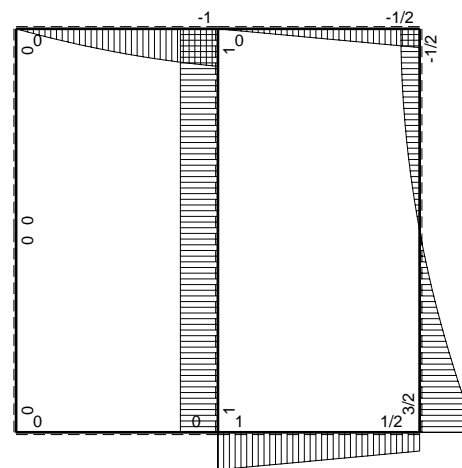

⊕ F<sub>b</sub>

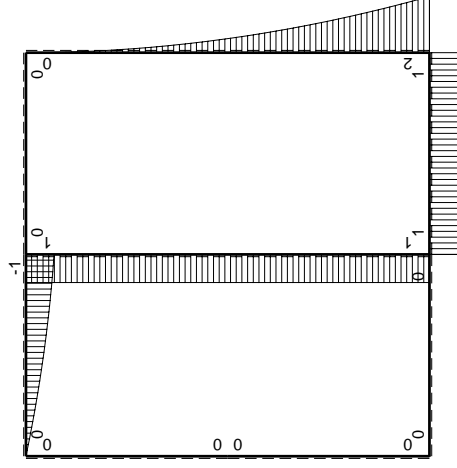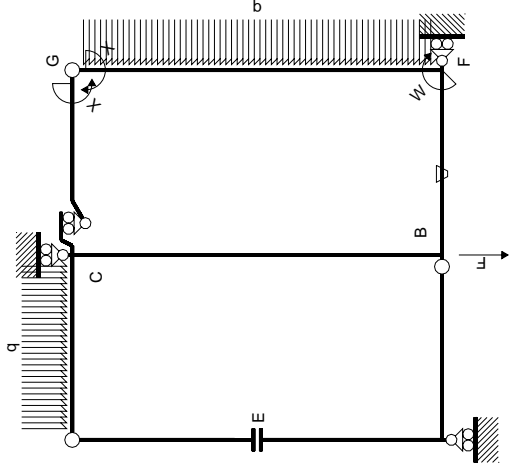

$M_0$  flessione da carichi assegnati

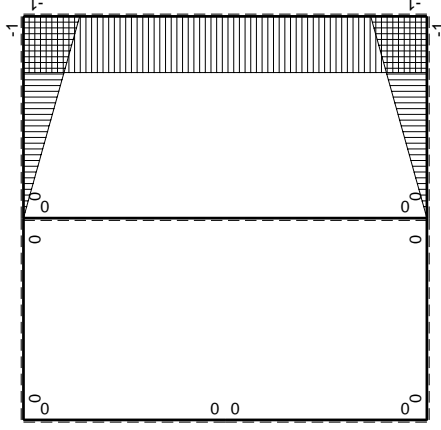

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$           | $M_x(x)$            | $M_0(x)$          | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|------------------------|---------------------|-------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BA b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| CD b                   | $-Fb+1/2Fx+1/2qx^2$ | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DC b                   | 0                   | $3/2Fx-1/2qx^2$   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DE b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| ED b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| EA b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| AE b                   | 0                   | 0                 | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BF b                   | $-x/b$              | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b                   | $1-x/b$             | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b                   | $-1+x/b$            | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b                   | $x/b$               | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b                  | $-1$                | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b                  | 1                   | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b                  | 0                   | Fb                | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BC 2b                  | 0                   | $-Fb$             | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| totali                 |                     |                   |          |                      |               |                  |                             |                      |
| iperstatica $X=W_{gc}$ |                     |                   |          |                      |               |                  |                             |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

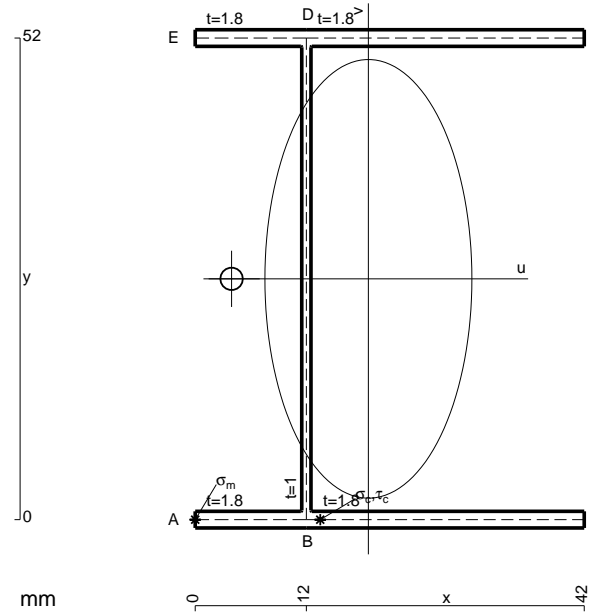


- A = 203.2 mm<sup>2</sup>
- J<sub>u</sub> = 113929. mm<sup>4</sup>
- J<sub>v</sub> = 25361. mm<sup>4</sup>
- J<sub>t</sub> = 180.6 mm<sup>4</sup>
- x<sub>o</sub> = -14.77 mm
- x<sub>g</sub> = 18.7 mm
- T<sub>y</sub> = 2230. N
- M<sub>x</sub> = -961688. Nmm
- u<sub>m</sub> = -18.7 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -219.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -6.697 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -219.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 343.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 15.27 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 328.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 4014. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 634.2 N/mm<sup>2</sup>



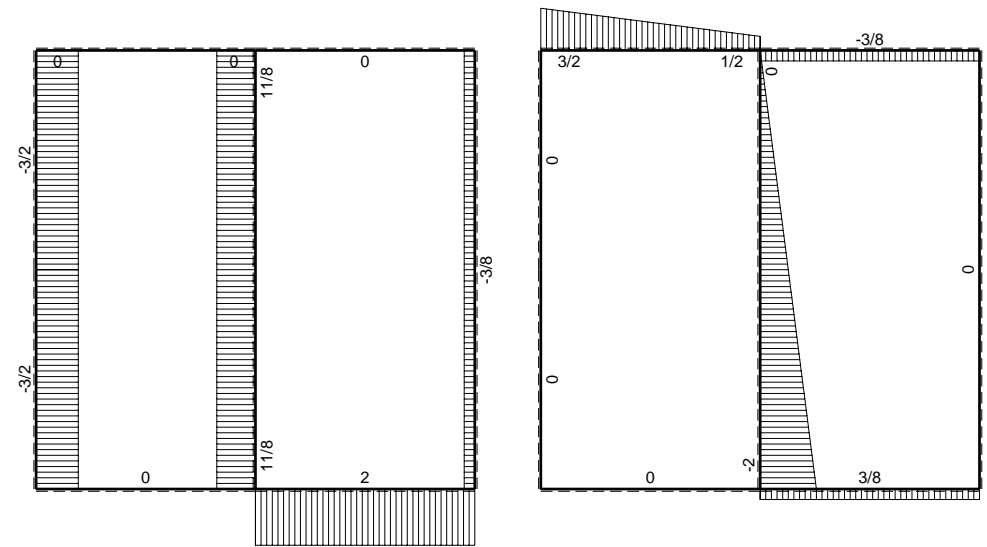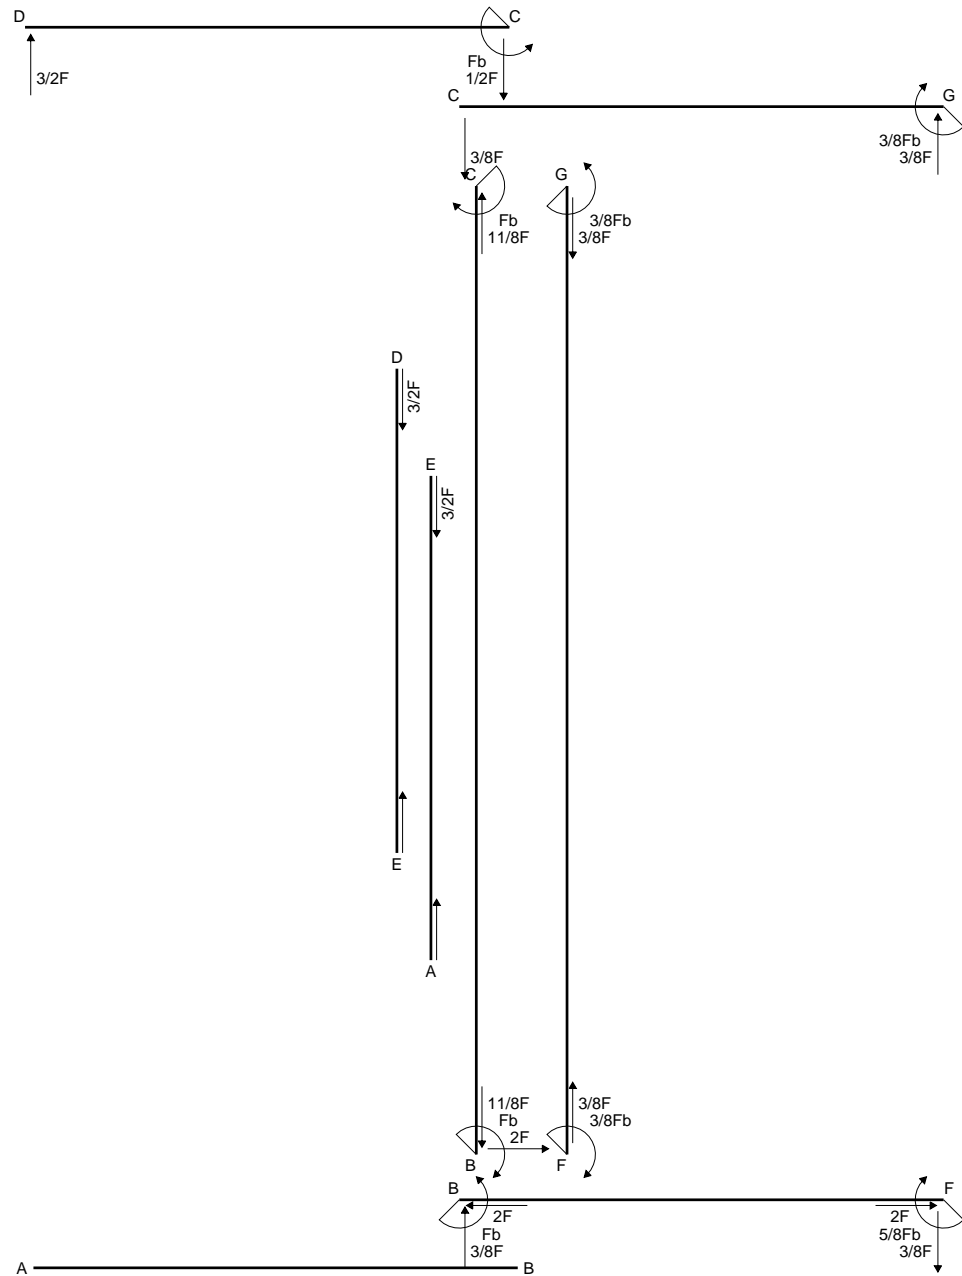


← ⊕ → F


↑ ⊕ ↓ F

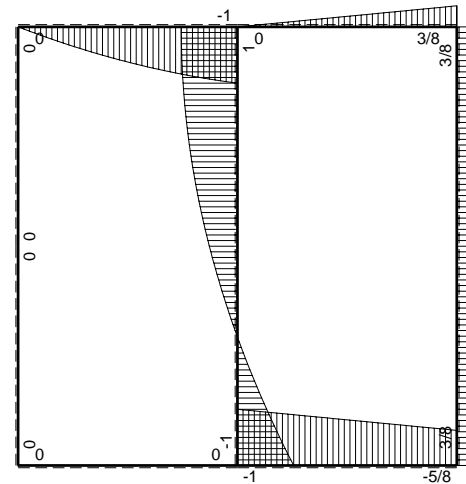


⊕ ⊖ F<sub>b</sub>

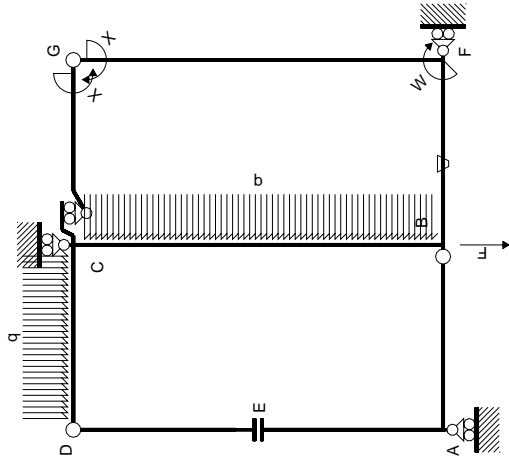

Schema di calcolo iperstatico

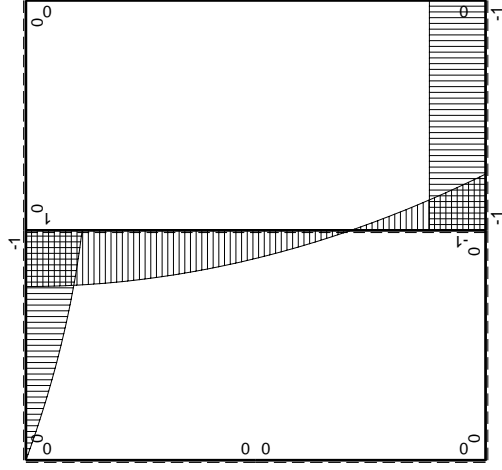

$M_0$  flessione da carichi assegnati

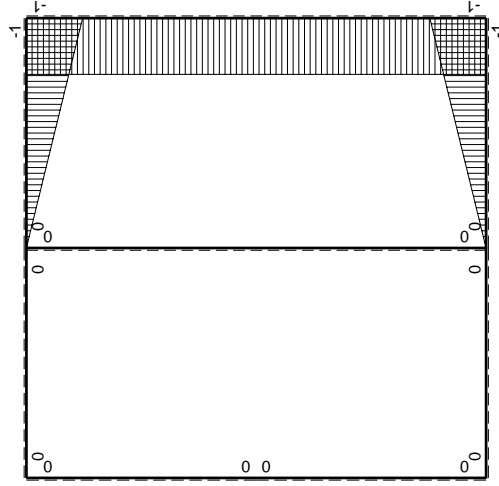

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BA b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DC b          | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| ED b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $Fx^2/b^2$       | $(1/2+1/2)Fb^2/EJ$              | $1/3Xb/EJ$             |
| FBB b         | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3Xb/EJ$             |
| GCB b         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3Xb/EJ$             |
| CG b          | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3Xb/EJ$             |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2Xb/EJ$               |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2Xb/EJ$               |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| totali        |          |                    |          |           |               |                  |                                 | $8/3Xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

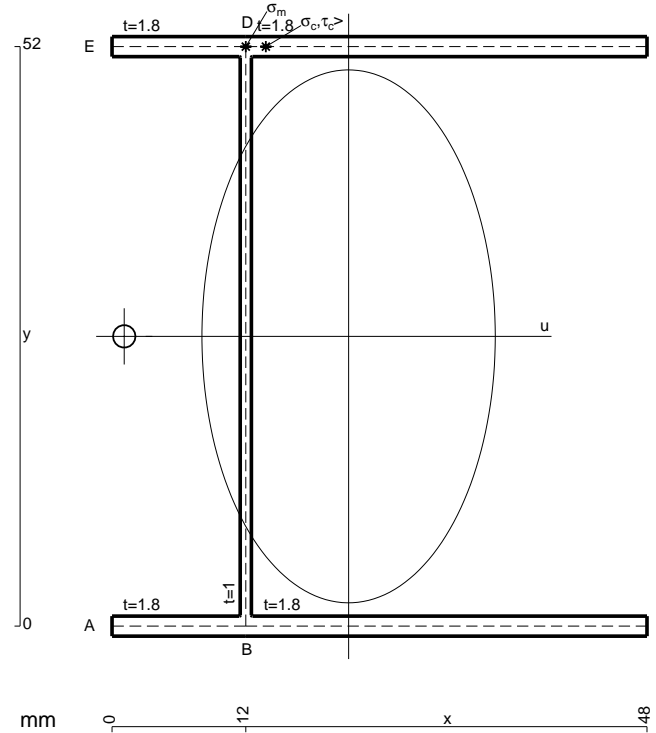


$A = 224.8 \text{ mm}^2$   
 $J_u = 128530. \text{ mm}^4$   
 $J_v = 38934. \text{ mm}^4$   
 $J_t = 204. \text{ mm}^4$   
 $x_o = -20.13 \text{ mm}$   
 $x_g = 21.22 \text{ mm}$   
 $N = 2049. \text{ N}$   
 $T_y = -2980. \text{ N}$   
 $M_x = -1087700. \text{ Nmm}$   
 $x_m = 12. \text{ mm}$   
 $y_m = 52. \text{ mm}$   
 $u_m = -9.224 \text{ mm}$   
 $v_m = 26. \text{ mm}$   
 $\sigma_m = N/A - Mv/J_u = 229.1 \text{ N/mm}^2$   
 $x_c = 12. \text{ mm}$   
 $y_c = 52. \text{ mm}$   
 $u_c = -9.224 \text{ mm}$   
 $v_c = 26. \text{ mm}$   
 $\sigma_c = N/A - Mv/J_u = 229.1 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 551.1 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 21.7 \text{ N/mm}^2$   
 $\tau_o = T_x t/J_t = 529.4 \text{ N/mm}^2$   
 $t_c = 2682. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 981.7 \text{ N/mm}^2$






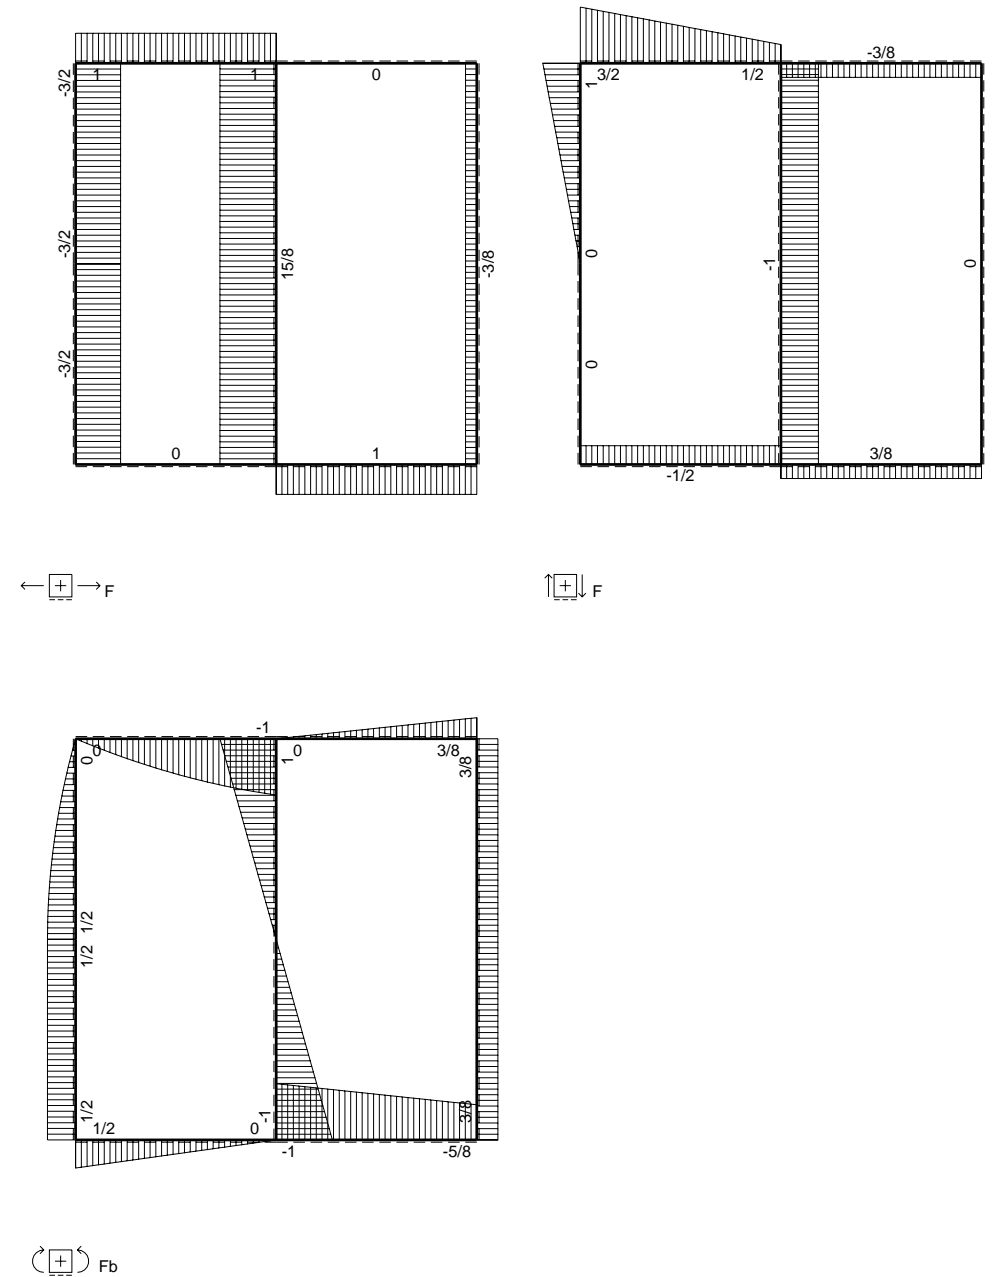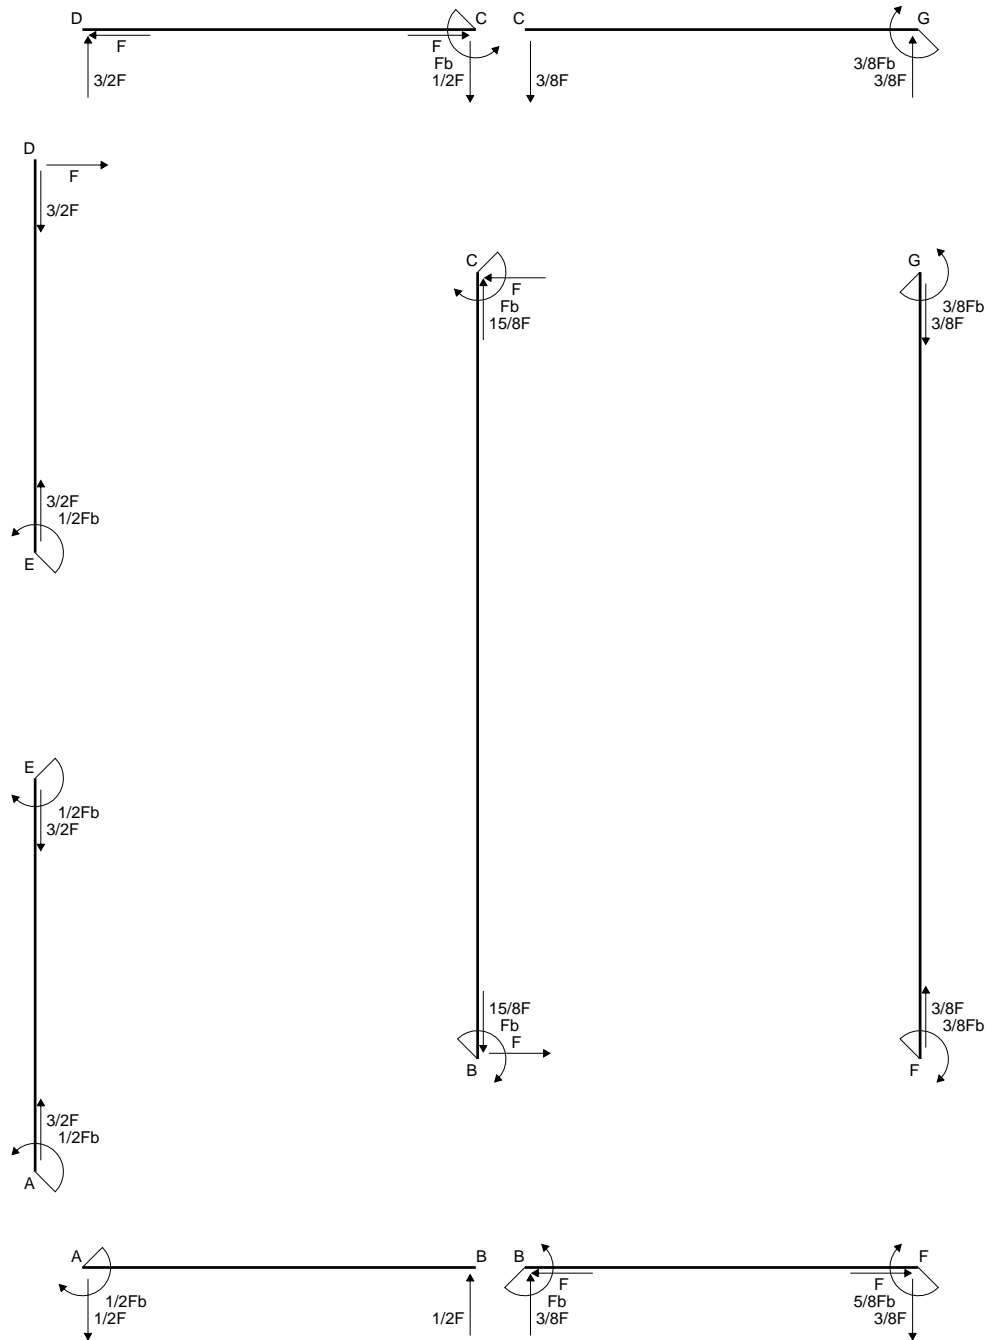

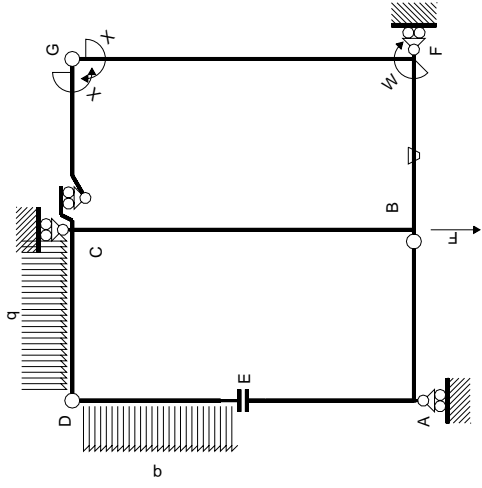

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

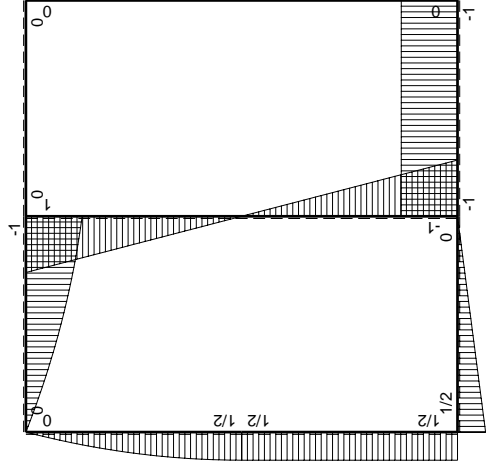


Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$               | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|------------------------|----------|-----------|---------------|--------------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fb - 1/2Fx$        | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx$               | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| CD b         | 0        | $-b + 1/2Fx + 1/2qx^2$ | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| DC b         | 0        | $3/2Fx - 1/2qx^2$      | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| DE b         | 0        | $Fx - 1/2qx^2$         | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| ED b         | 0        | $-1/2Fb + 1/2qx^2$     | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| EA b         | 0        | $1/2Fb$                | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| AE b         | 0        | $-1/2Fb$               | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| BF b         | -x/b     | -Fb                    | -Fb/EJ   | Fx        | Fx/EJ         | $x^2/b^2$          | $(1/2 + 1/2)Fb^2/EJ$            | $1/3xb/EJ$             |
| FBB b        | $1-x/b$  | Fb                     | Fb/EJ    | Fb-Fx     | Fb/EJ - Fx/EJ | $1-2x/b + x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                      | 0        | 0         | 0             | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | x/b      | 0                      | 0        | 0         | 0             | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | 0                      | 0        | 0         | 0             | 1                  | 0+0                             | $2xb/EJ$               |
| GF 2b        | 1        | 0                      | 0        | 0         | 0             | 1                  | 0+0                             | $2xb/EJ$               |
| CB 2b        | 0        | Fb-Fx                  | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| BC 2b        | 0        | Fb-Fx                  | 0        | 0         | 0             | 0                  | 0+0                             | 0                      |
| totali       |          |                        |          |           |               |                    |                                 | $Fb^2/EJ$              |
|              |          |                        |          |           |               |                    |                                 | $8/3xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

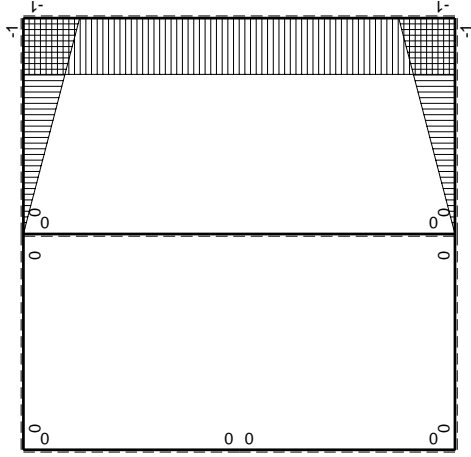

$M_x$  flessione da iperstatica  $X=1$

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$





$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

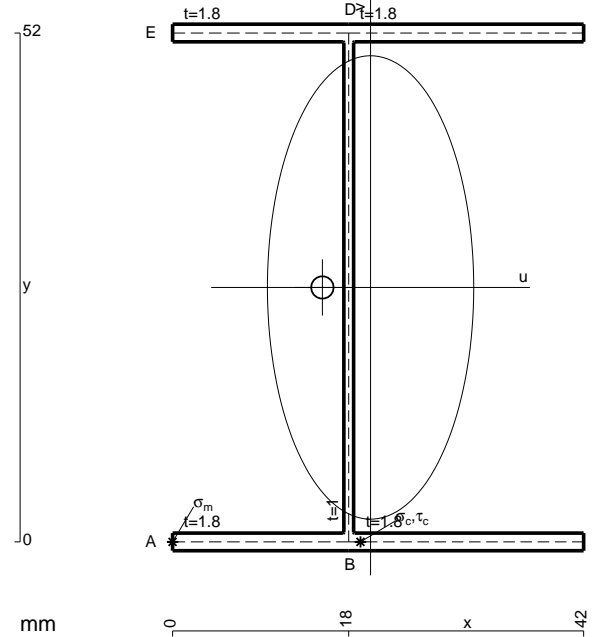


- A = 203.2 mm<sup>2</sup>
- J<sub>u</sub> = 113929. mm<sup>4</sup>
- J<sub>v</sub> = 22575. mm<sup>4</sup>
- J<sub>t</sub> = 180.6 mm<sup>4</sup>
- x<sub>o</sub> = -4.924 mm
- x<sub>g</sub> = 20.23 mm
- N = 2419. N
- T<sub>y</sub> = -1290. N
- M<sub>x</sub> = 993300. Nmm
- u<sub>m</sub> = -20.23 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 238.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -2.232 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 238.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 70.36 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.065 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 63.29 N/mm<sup>2</sup>
- t<sub>c</sub> = 2322. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 267.9 N/mm<sup>2</sup>



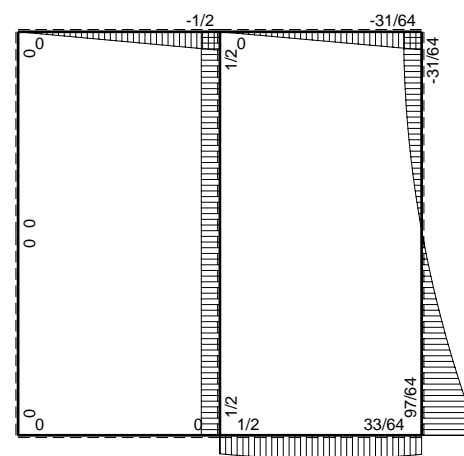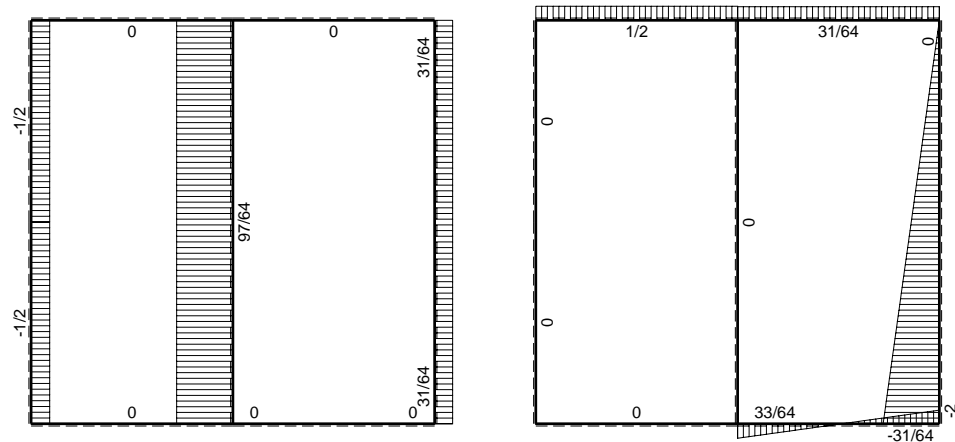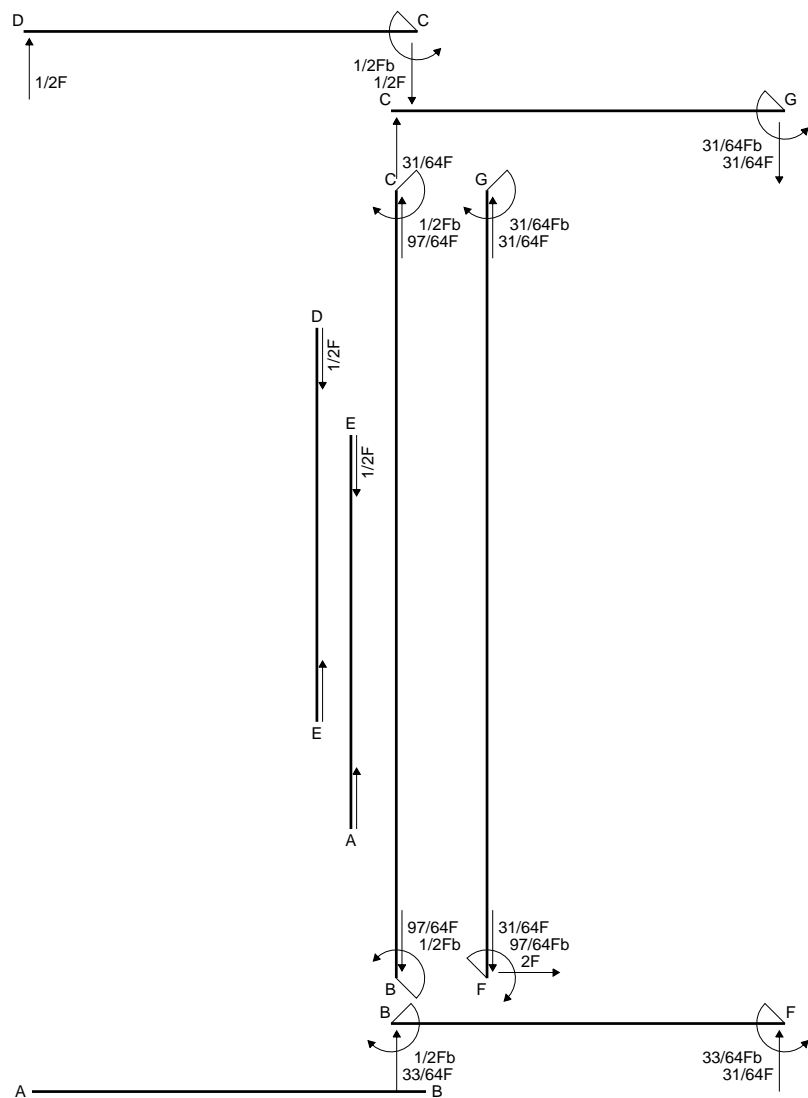

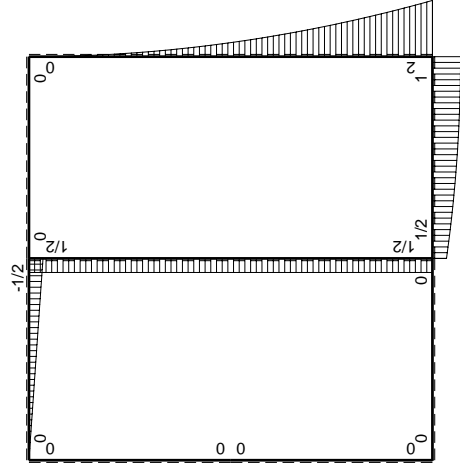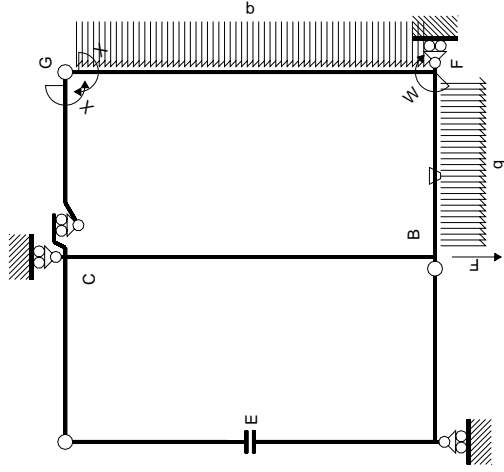

$M_0$  flessione da carichi assegnati

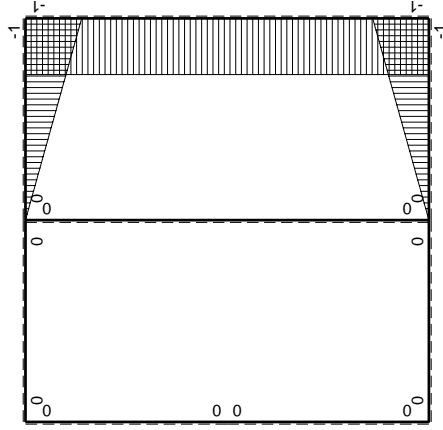

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$               | $\theta$ | $M^x M_0$                          | $M^x \theta$    | $M^x M_x$          | $\int M^x (M^0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ |
|---------------|----------|------------------------|----------|------------------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| BA b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| CD b          | 0        | $-1/2Fx + 1/2Fx$       | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| DC b          | 0        | $1/2Fx$                | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| DE b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| EA b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| AE b          | 0        | 0                      | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| BF b          | $-x/b$   | $1/2Fb + Fx - 1/2qx^2$ | $-Fb/EJ$ | $-1/2Fx - Fx^2/b + 1/2qx^3/b$      | $Fx/EJ$         | $x^2/b^2$          | $(-1/11/24 + 1/2)Fb^2/EJ$       | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb + 1/2qx^2$        | $Fb/EJ$  | $-Fb + Fx + 1/2Fx^2/b - 1/2qx^3/b$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                      | 0        | 0                                  | 0               | $1-2x/b + x^2/b^2$ | 0                               | $1/3xb/EJ$            |
| CG b          | $x/b$    | 0                      | 0        | 0                                  | 0               | $x^2/b^2$          | 0                               | $1/3xb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$           | 0               | 1                  | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$                       | 0               | 1                  | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| CB 2b         | 0        | $1/2Fb$                | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| BC 2b         | 0        | $-1/2Fb$               | 0        | 0                                  | 0               | 0                  | 0                               | 0                     |
| totali        |          |                        |          |                                    |                 |                    | $-31/24Fb^2/EJ$                 | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

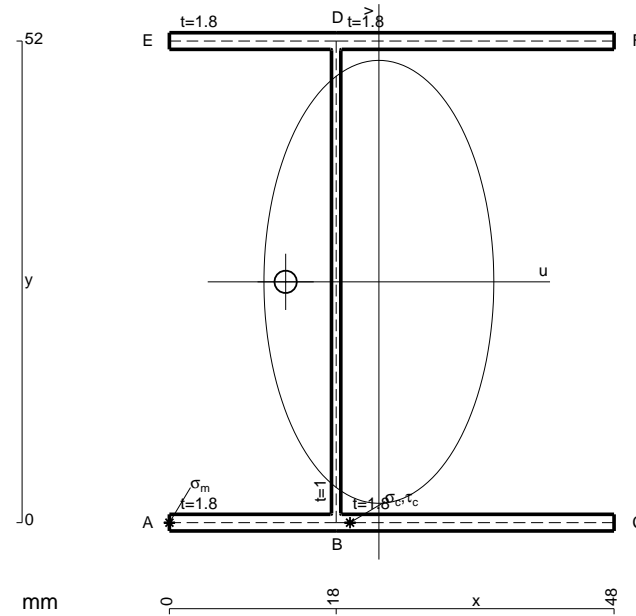

- A = 224.8 mm<sup>2</sup>
- J<sub>u</sub> = 128530. mm<sup>4</sup>
- J<sub>v</sub> = 34617. mm<sup>4</sup>
- J<sub>t</sub> = 204. mm<sup>4</sup>
- x<sub>o</sub> = -10.07 mm
- x<sub>g</sub> = 22.61 mm
- T<sub>y</sub> = 2410. N
- M<sub>x</sub> = -988100. Nmm
- u<sub>m</sub> = -22.61 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -4.612 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 228.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 14.63 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t / J<sub>t</sub> = 214.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 8676. mm
- σ<sub>o</sub> = √σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup> = 443.7 N/mm<sup>2</sup>






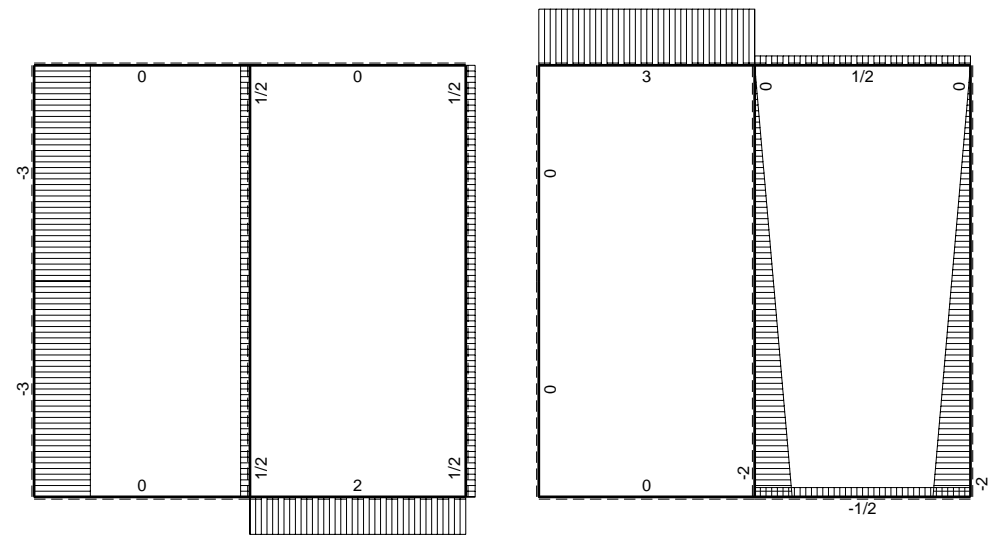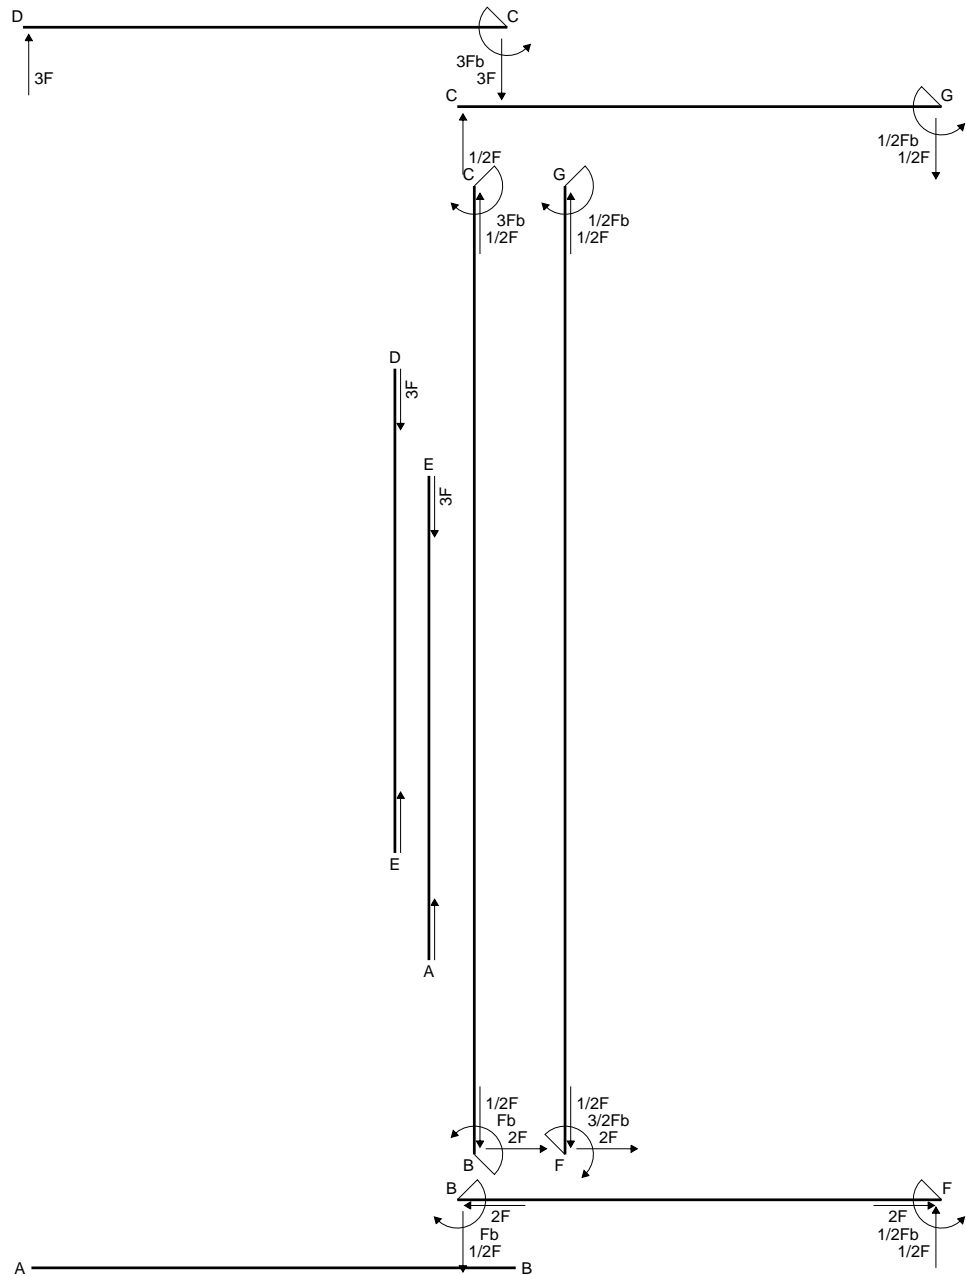


← ⊕ → F


↑ ⊕ ↓ F

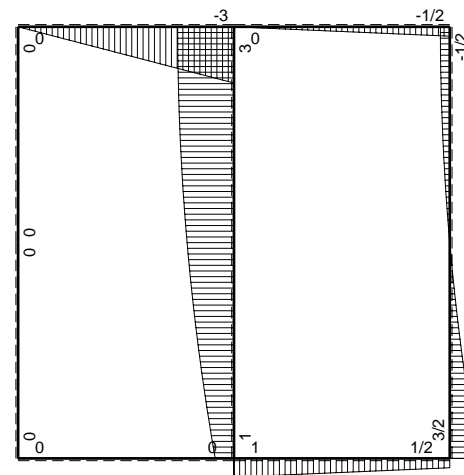

⊕ ⊖ Fb

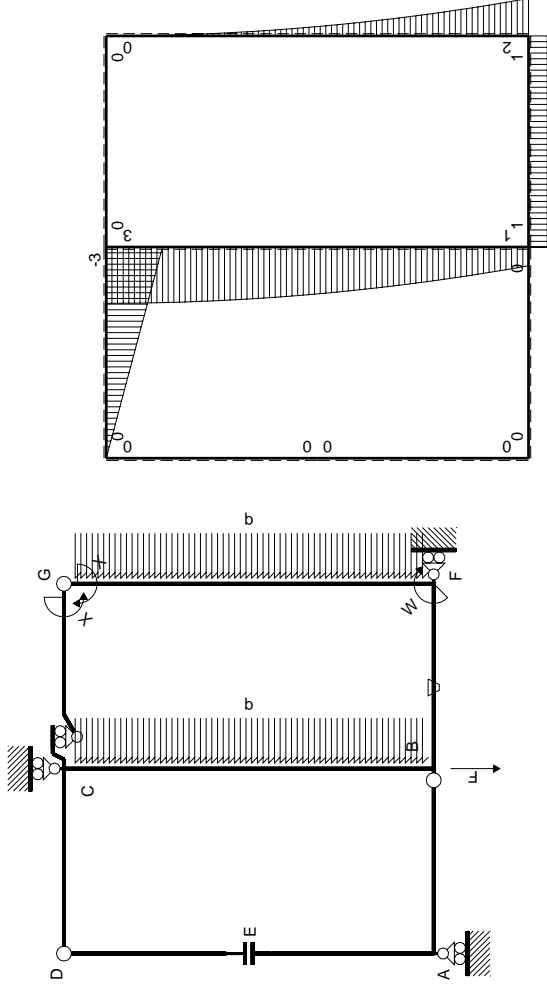

$M_0$  flessione da carichi assegnati

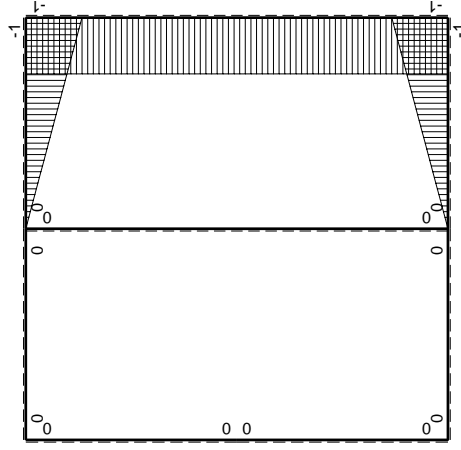

$M_x$  flessione da iperstatica X=1

| ←      |          | $M^x(x)$                      | $M^0(x)$ | $\theta$       | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x/EJ dx$ |
|--------|----------|-------------------------------|----------|----------------|----------------------|--------------|------------------|---------------------------------|----------------------|
| AB b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| BA b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| CD b   | 0        | $-3Fb+3Fx$                    | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| DC b   | 0        | $3Fx$                         | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| DE b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| ED b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| EA b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| AE b   | 0        | 0                             | 0        | 0              | 0                    | 0            | 0                | 0                               | 0                    |
| BF b   | $-x/b$   | Fb                            | $-Fb/EJ$ | $-F/EJ$        | $-Fx$                | $Fx/EJ$      | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$           |
| FB b   | $1-x/b$  | $-Fb$                         | Fb/EJ    | $-Fb/EJ-Fx/EJ$ | $-Fb+Fx$             | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$           |
| GC b   | $-1+x/b$ | 0                             | 0        | 0              | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$           |
| CG b   | $x/b$    | 0                             | 0        | 0              | 0                    | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$           |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$             | 0        | 0              | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$             |
| GF 2b  | 1        | $-1/2qx^2$                    | 0        | 0              | $-1/2Fx^2/b$         | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$             |
| CB 2b  | 0        | $3Fb-1/2qx^2$                 | 0        | 0              | 0                    | 0            | 0                | 0+0                             | 0                    |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$             | 0        | 0              | 0                    | 0            | 0                | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$           |
| totali |          |                               |          |                |                      |              |                  |                                 |                      |
|        |          | iperstatica X=W <sub>gc</sub> |          |                |                      |              |                  |                                 |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

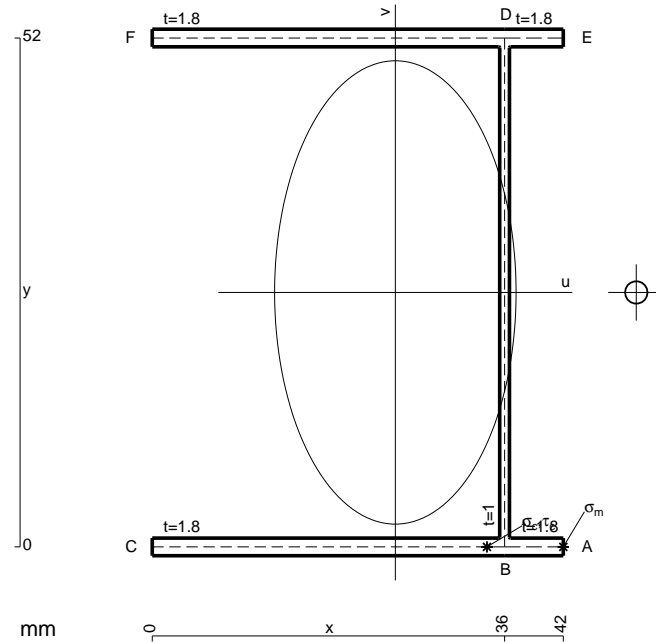


- A = 203.2 mm<sup>2</sup>
- J<sub>u</sub> = 113929. mm<sup>4</sup>
- J<sub>v</sub> = 30932. mm<sup>4</sup>
- J<sub>t</sub> = 180.6 mm<sup>4</sup>
- x<sub>o</sub> = 24.62 mm
- x<sub>g</sub> = 24.84 mm
- T<sub>y</sub> = 2040. N
- M<sub>x</sub> = -918000. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 17.16 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 11.16 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 517.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 16.76 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 500.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 1224. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 920. N/mm<sup>2</sup>



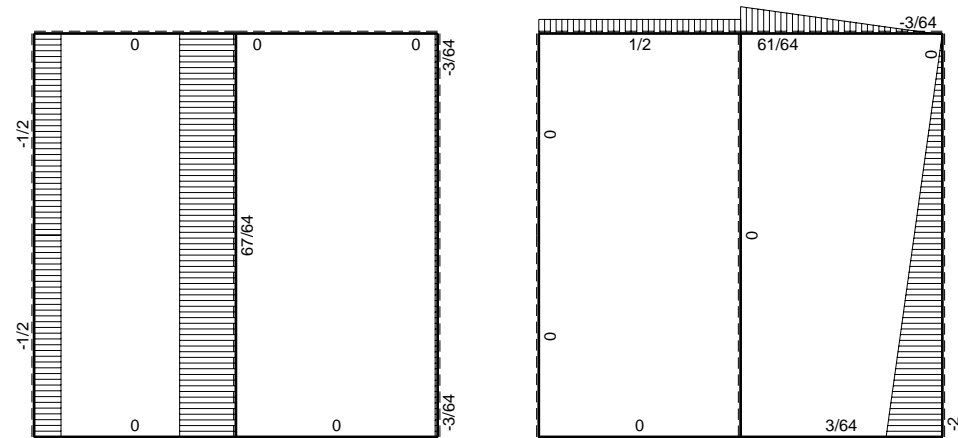
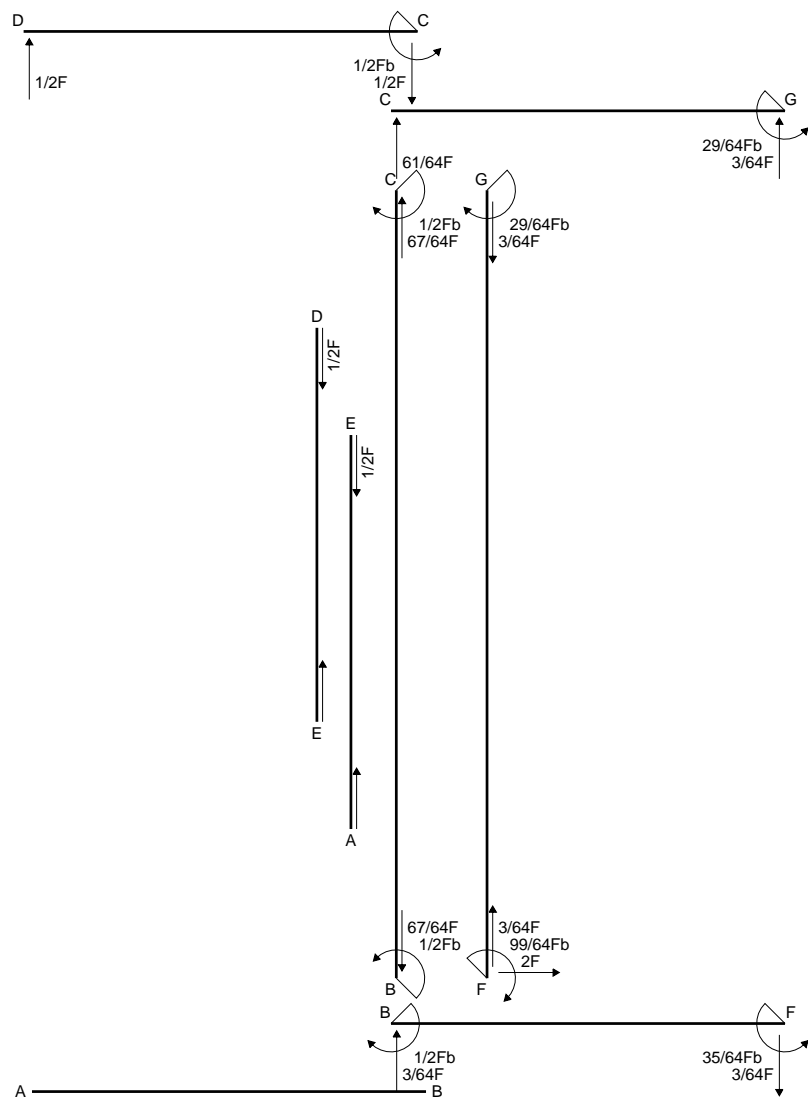


← ⊕ → F


↑ ⊕ ↓ F

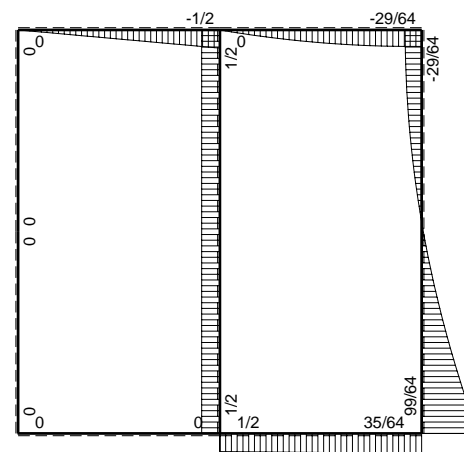

⊕ F<sub>b</sub>

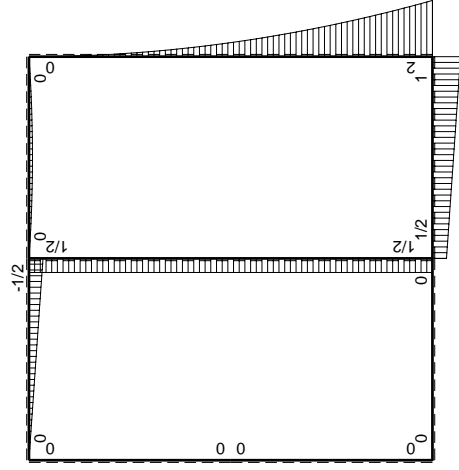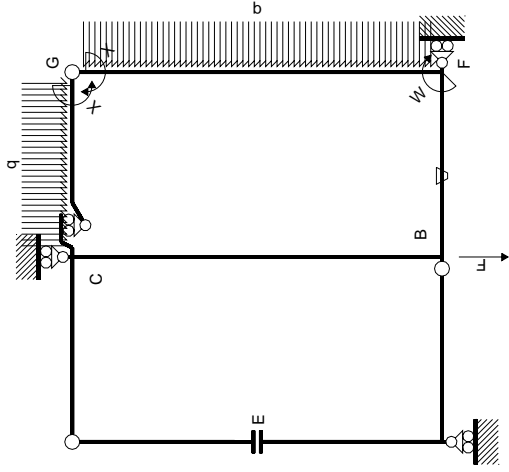

$M_0$  flessione da carichi assegnati

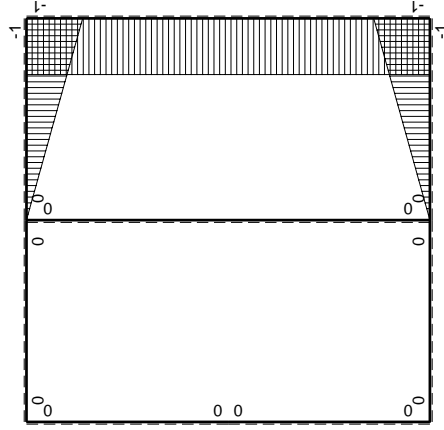

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M_x(x)$ | $M_0(x)$          | $\theta$ | $M_x M_0$                | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|-------------------|----------|--------------------------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-1/2Fb+1/2Fx$    | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $1/2Fx$           | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $1/2Fb+1/2Fx$     | $-Fb/EJ$ | $-1/2Fx-1/2Fx^2/b$       | $Fx/EJ$       | $x^2/b^2$        | $(-5/12+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| FB b         | $1-x/b$  | $-Fb+1/2Fx$       | $Fb/EJ$  | $-Fb+3/2Fx-1/2Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | $-1/2Fx+1/2qx^2$  | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| CG b         | $x/b$    | $1/2Fx-1/2qx^2$   | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| FG 2b        | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$     | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b        | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$             | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b        | 0        | $1/2Fb$           | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $-1/2Fb$          | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                   |          |                          |               |                  | $-29/24Fb^2/EJ$             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x\theta} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x\theta} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


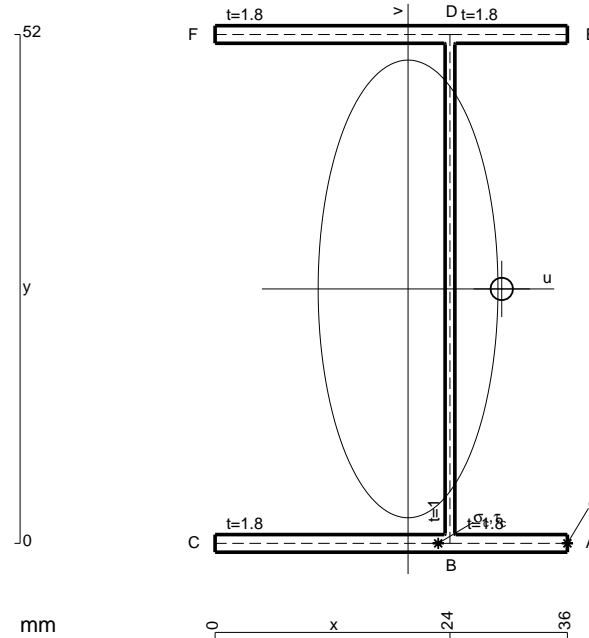


- A = 181.6 mm<sup>2</sup>
- J<sub>u</sub> = 99327. mm<sup>4</sup>
- J<sub>v</sub> = 15333. mm<sup>4</sup>
- J<sub>t</sub> = 157.3 mm<sup>4</sup>
- x<sub>o</sub> = 9.574 mm
- x<sub>g</sub> = 19.72 mm
- T<sub>y</sub> = 1715. N
- M<sub>x</sub> = -840350. Nmm
- x<sub>m</sub> = 36. mm
- u<sub>m</sub> = 16.28 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -220. N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 4.282 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -220. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 198.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.77 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 187.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 6174. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 408.4 N/mm<sup>2</sup>






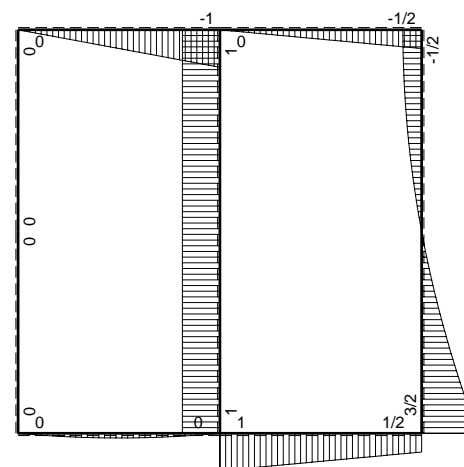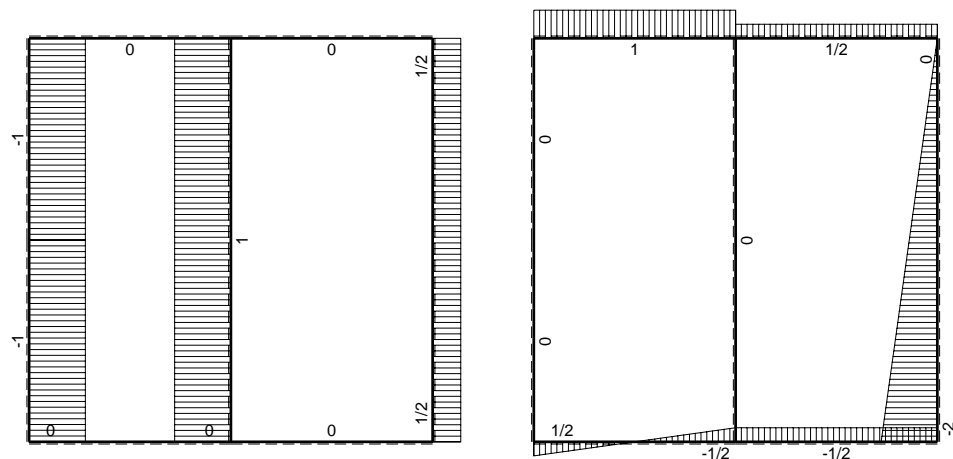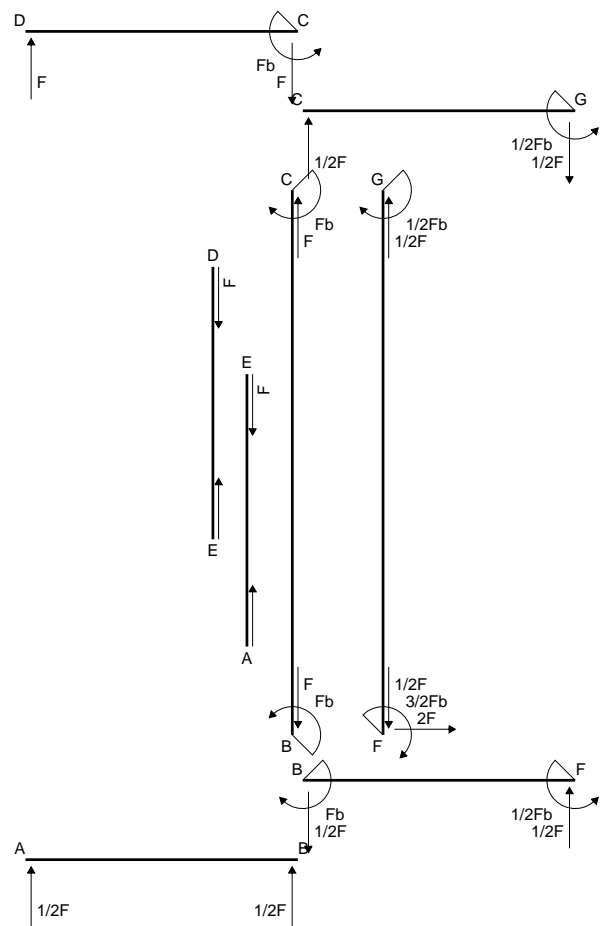

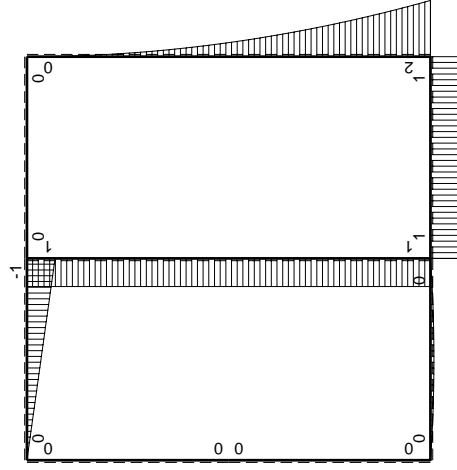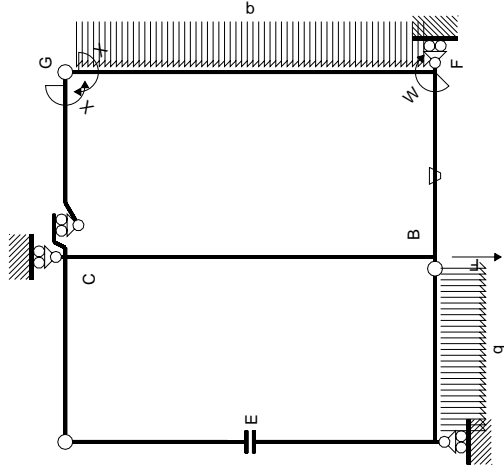

$M_0$  flessione da carichi assegnati

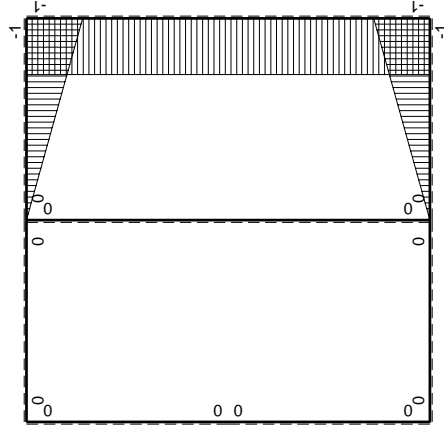

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^0(x)$ | $M^0(x)$              | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|----------|-----------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-----------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$     | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$    | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| CD b          | 0        | $-b + Fx$             | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| DC b          | 0        | $Fx$                  | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| DE b          | 0        | 0                     | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| ED b          | 0        | 0                     | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| EA b          | 0        | 0                     | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| AE b          | 0        | 0                     | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BF b          | $-x/b$   | $Fb$                  | $-b/EJ$  | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                 | $Fb/EJ$  | $-b + Fx$                | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                     | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b          | $x/b$    | 0                     | 0        | 0                        | 0               | $x^2/b^2$            | 0+0                             | $1/3xb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$ | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$            | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0        | $Fb$                  | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BC 2b         | 0        | $-Fb$                 | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| totali        |          |                       |          |                          |                 |                      | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

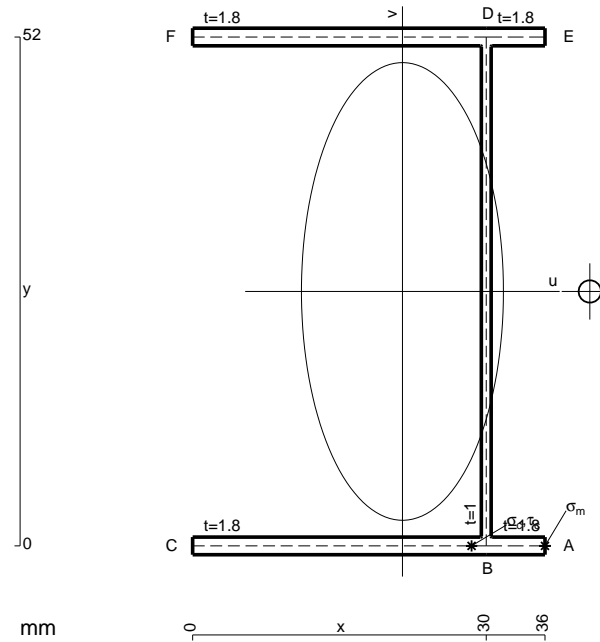

$$A = 181.6 \text{ mm}^2$$

$$J_u = 99327. \text{ mm}^4$$

$$J_v = 19341. \text{ mm}^4$$

$$J_t = 157.3 \text{ mm}^4$$

$$x_o = 19.15 \text{ mm}$$

$$x_g = 21.44 \text{ mm}$$

$$T_y = 1650. \text{ N}$$

$$M_x = -874500. \text{ Nmm}$$

$$x_m = 36. \text{ mm}$$

$$u_m = 14.56 \text{ mm}$$

$$v_m = -26. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -228.9 \text{ N/mm}^2$$

$$x_c = 30. \text{ mm}$$

$$u_c = 8.564 \text{ mm}$$

$$v_c = -26. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -228.9 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 374.5 \text{ N/mm}^2$$



$$\tau_g = TS/tJ_u = 12.96 \text{ N/mm}^2$$



$$\tau_o = Tx_o t/J_t = 361.5 \text{ N/mm}^2$$

$$t_c = 2970. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 687.9 \text{ N/mm}^2$$



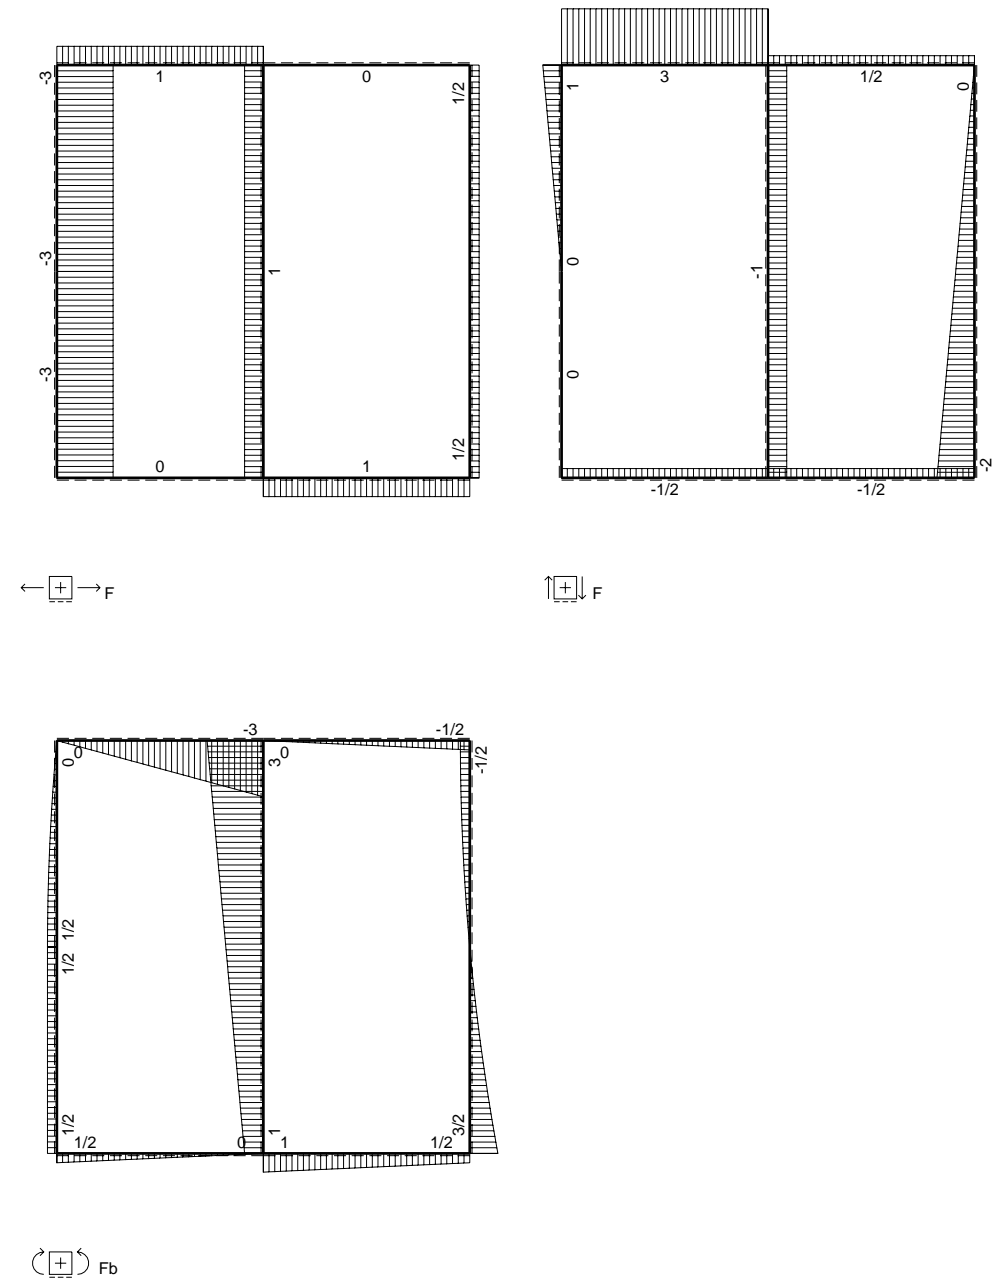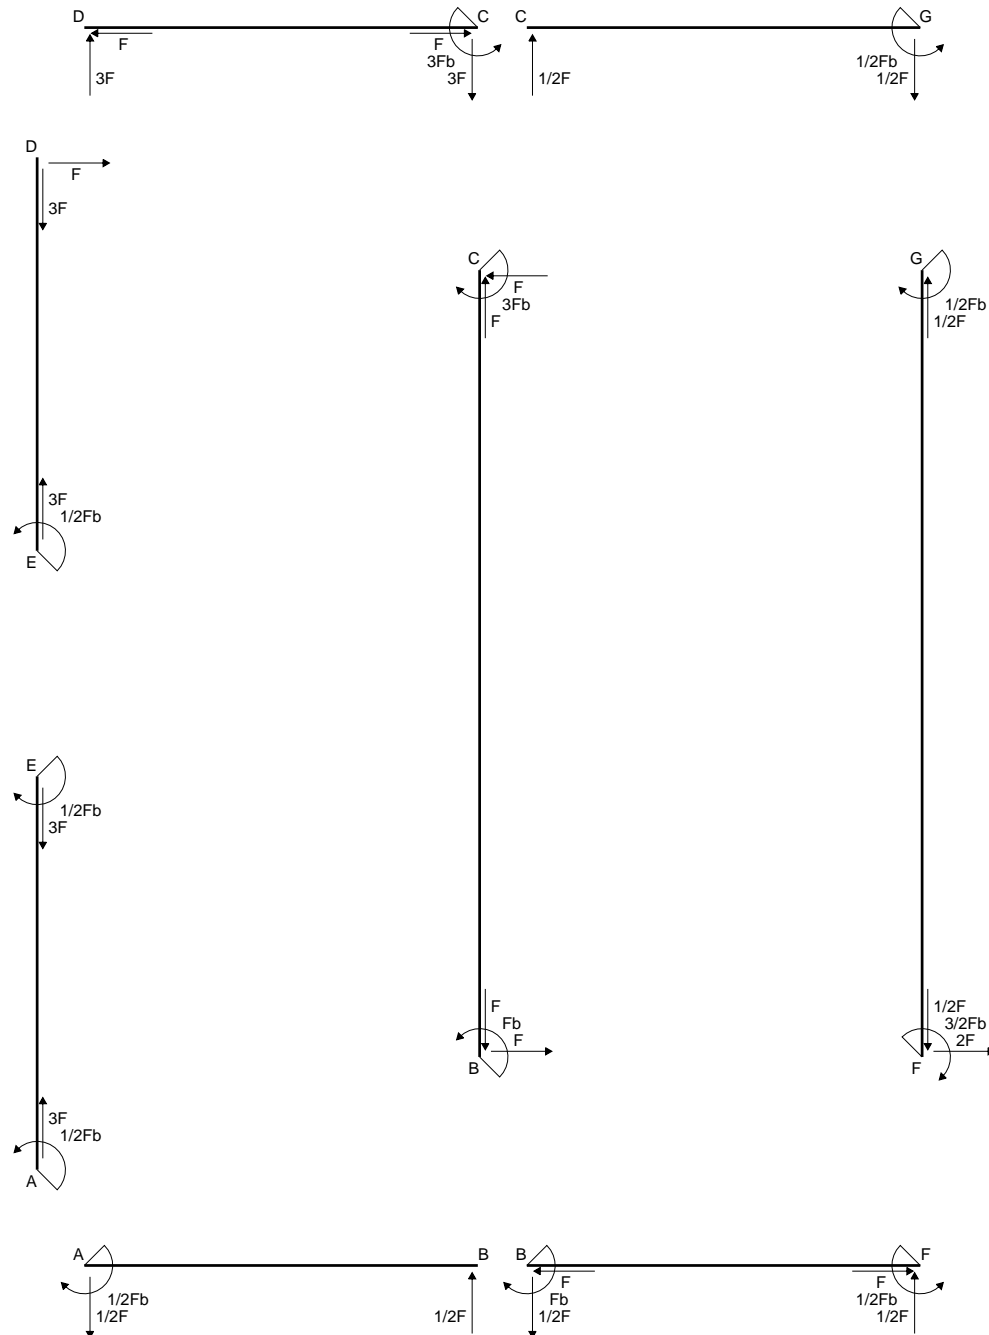

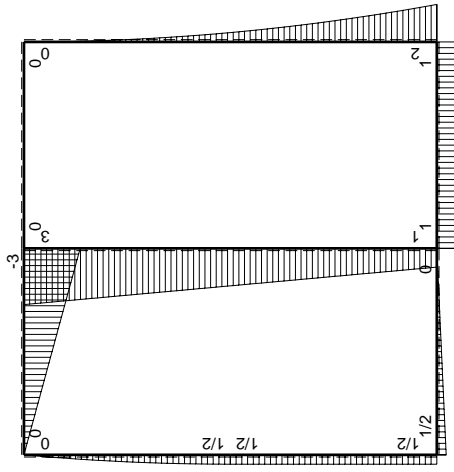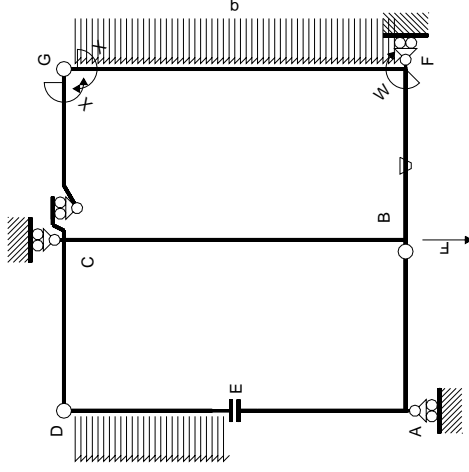

$M_0$  flessione da carichi assegnati

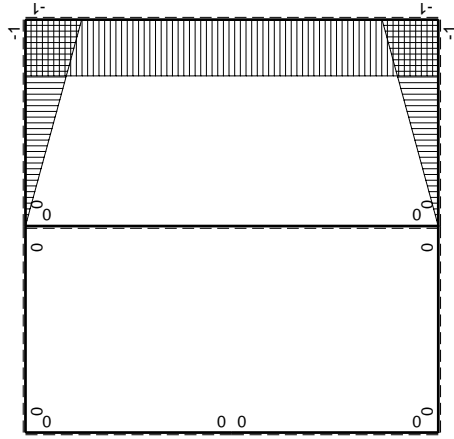

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^y(x)$              | $\theta$ | $M^x M_0$                | $M^y \theta$    | $M^x M_x$            | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^y M_x / EJ dx$ |
|---------------|----------|-----------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fb - 1/2Fx$       | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| BA b          | 0        | $-1/2Fx$              | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| DC b          | 0        | $3Fx$                 | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| DE b          | 0        | $Fx - 1/2qx^2$        | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| ED b          | 0        | $-1/2Fb + 1/2qx^2$    | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| EA b          | 0        | $1/2Fb$               | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| AE b          | 0        | $-1/2Fb$              | 0        | 0                        | 0               | 0                    | 0                               | 0                      |
| BF b          | $-x/b$   | $Fb$                  | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $-1/2 + 1/2 Fb^2/EJ$            | $1/3 Fb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                 | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $-1/2 + 1/2 Fb^2/EJ$            | $1/3 Fb/EJ$            |
| GC b          | $-1+x/b$ | 0                     | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3 Fb/EJ$            |
| CG b          | $x/b$    | 0                     | 0        | 0                        | 0               | $x^2/b^2$            | 0+0                             | $1/3 Fb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$ | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0) Fb^2/EJ$            | $2 Fb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$            | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0) Fb^2/EJ$            | $2 Fb/EJ$              |
| CB 2b         | 0        | $3Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0+0                             | 0                      |
| BC 2b         | 0        | $-Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0+0                             | 0                      |
| totali        |          |                       |          |                          |                 |                      | $-4/3 Fb^2/EJ$                  | $8/3 Fb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

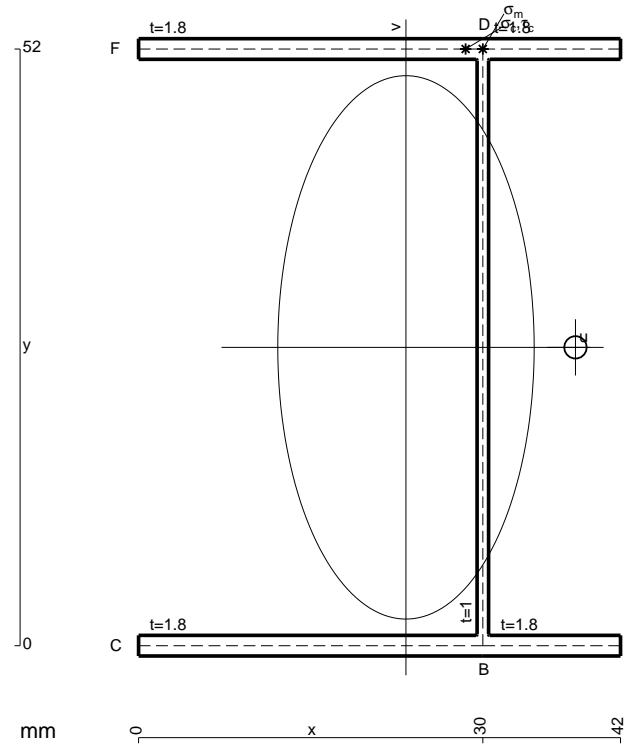



- A = 203.2 mm<sup>2</sup>
- J<sub>u</sub> = 113929. mm<sup>4</sup>
- J<sub>v</sub> = 25361. mm<sup>4</sup>
- J<sub>t</sub> = 180.6 mm<sup>4</sup>
- x<sub>o</sub> = 14.77 mm
- x<sub>g</sub> = 23.3 mm
- N = 600. N
- T<sub>y</sub> = 1800. N
- M<sub>x</sub> = -1026000. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 6.697 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 237.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 6.697 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 237.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 277.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.32 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 265. N/mm<sup>2</sup>
- t<sub>c</sub> = 1080. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 535.6 N/mm<sup>2</sup>






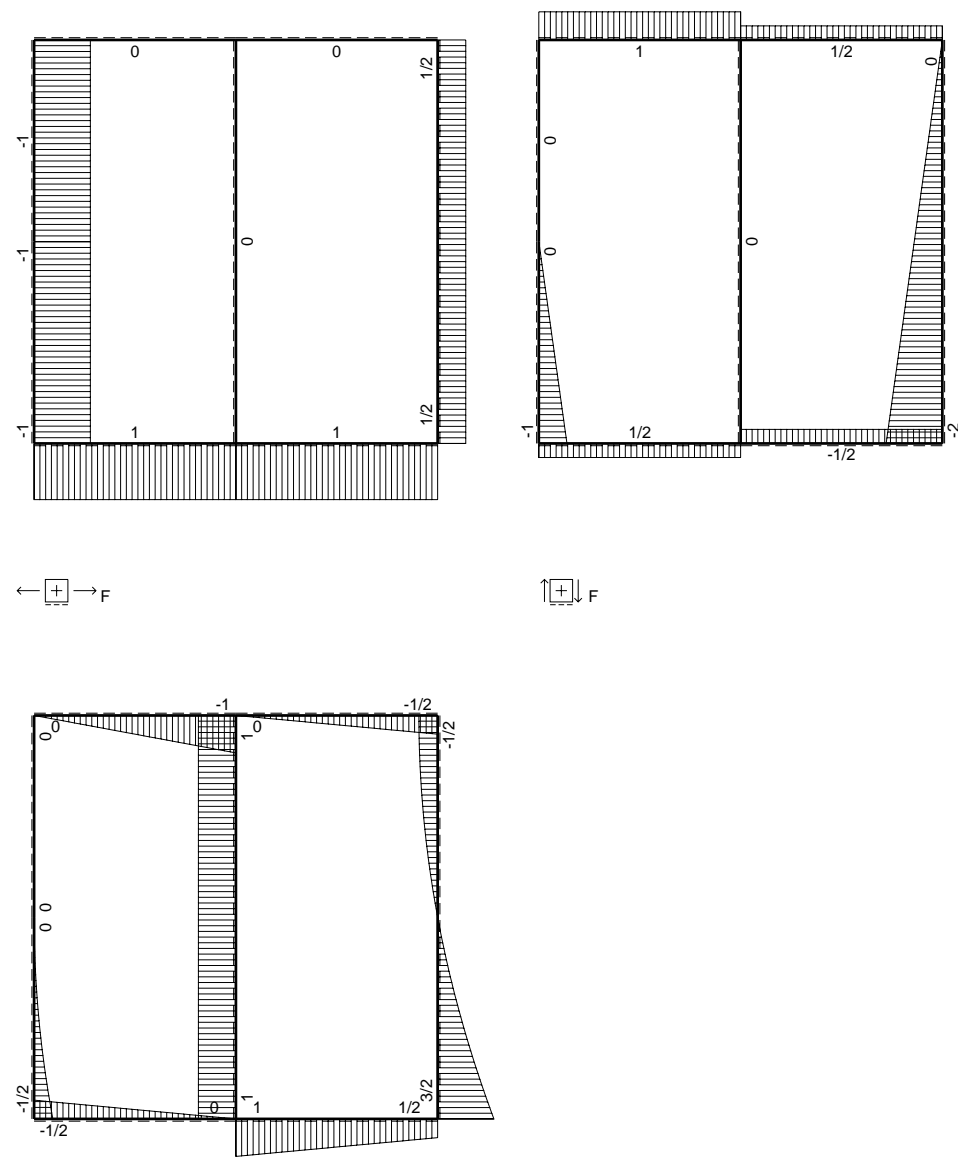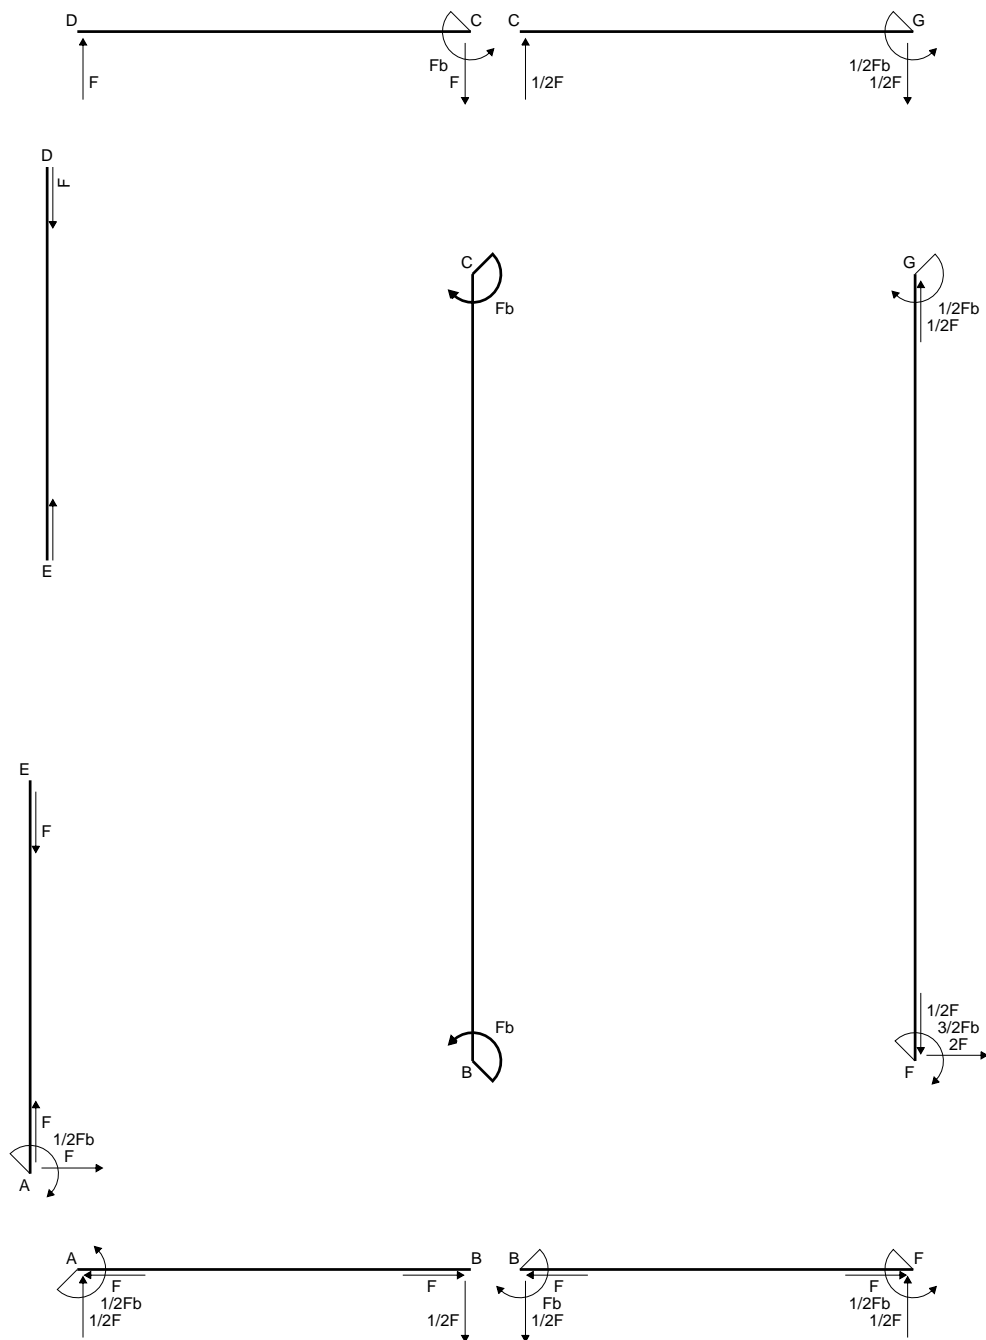

⊕ Fb

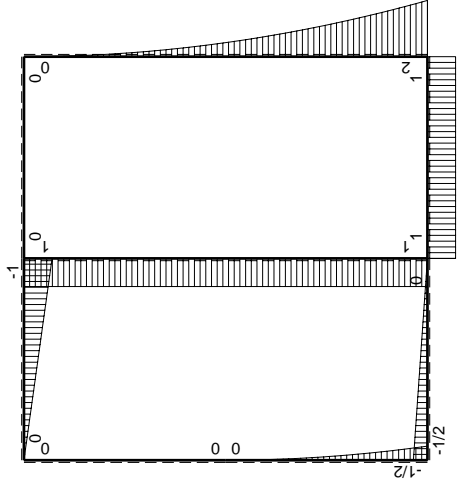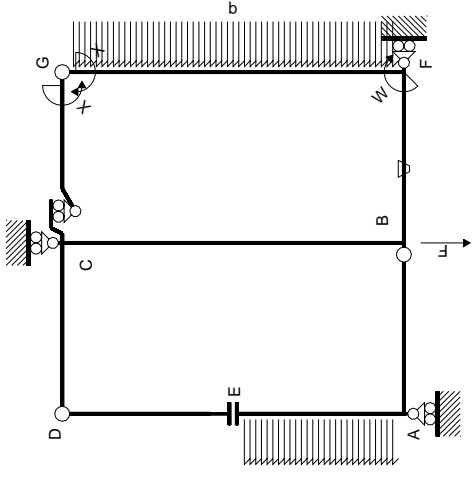

$M_0$  flessione da carichi assegnati

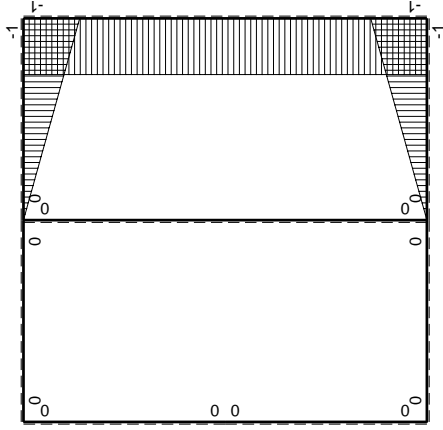

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |        | $M_x(x)$                    |        | $M_0(x)$                       | $\theta$                       | $M_x M_0$   | $M_x \theta$     | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$    |          |
|--|--------|-----------------------------|--------|--------------------------------|--------------------------------|-------------|------------------|------------------|-----------------------------|-------------------------|----------|
| AB b   | 0      | -1/2Fb+1/2Fx                | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| BA b   | 0      | 1/2Fx                       | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| CD b   | 0      | -Fb+Fx                      | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| DC b   | 0      | Fx                          | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| DE b   | 0      | 0                           | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| ED b   | 0      | 0                           | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| EAB  | 0      | -1/2qx <sup>2</sup>         | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| AE b   | 0      | 1/2Fb-Fx+1/2qx <sup>2</sup> | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| BF b   | -x/b   | Fb                          | -Fb/EJ | -Fx/EJ                         | -Fx                            | Fx/EJ       | $x^2/b^2$        | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ                |          |
| FB b   | 1-x/b  | -Fb                         | Fb/EJ  | -Fb+Fx                         | -Fx                            | Fb/EJ-Fx/EJ | $1-2x/b+x^2/b^2$ | $1-2x/b+x^2/b^2$ | $(-4/3+0)Fb^2/EJ$           | 1/3xb/EJ                |          |
| GC b   | -1+x/b | 0                           | 0      | 0                              | 0                              | 0           | $1-2x/b+x^2/b^2$ | $x^2/b^2$        | 0+0                         | 1/3xb/EJ                |          |
| CG b   | x/b    | 0                           | 0      | 0                              | 0                              | 0           | $x^2/b^2$        | $x^2/b^2$        | 0+0                         | 1/3xb/EJ                |          |
| FG 2b  | -1     | 2Fb-2Fx+1/2qx <sup>2</sup>  | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0           | 0                | 0                | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ                  |          |
| GF 2b  | 1      | -1/2qx <sup>2</sup>         | 0      | -1/2Fx <sup>2</sup> /b         | -1/2Fx <sup>2</sup> /b         | 0           | 0                | 0                | 0+0                         | 0                       |          |
| CB 2b  | 0      | Fb                          | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| BC 2b  | 0      | -Fb                         | 0      | 0                              | 0                              | 0           | 0                | 0                | 0+0                         | 0                       |          |
| totali   |        |                             |        |                                |                                |             |                  |                  |                             | -4/3Fb <sup>2</sup> /EJ | 8/3xb/EJ |
|  |        |                             |        |                                |                                |             |                  |                  |                             | iperstatica $X=W_{gc}$  |          |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

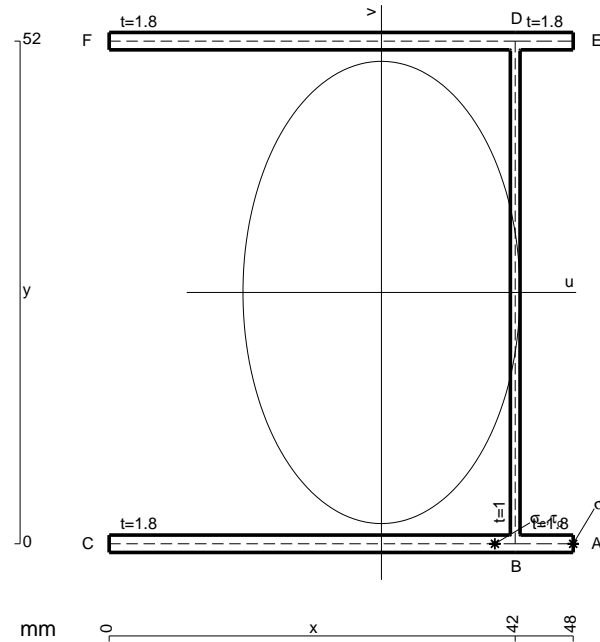


- A = 224.8 mm<sup>2</sup>
- J<sub>u</sub> = 128530. mm<sup>4</sup>
- J<sub>v</sub> = 46128. mm<sup>4</sup>
- J<sub>t</sub> = 204. mm<sup>4</sup>
- x<sub>o</sub> = 30.2 mm
- x<sub>g</sub> = 28.16 mm
- T<sub>y</sub> = 1620. N
- M<sub>x</sub> = -988200. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 19.84 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- u<sub>c</sub> = 13.84 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 445.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.76 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 431.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 2916. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 797.1 N/mm<sup>2</sup>



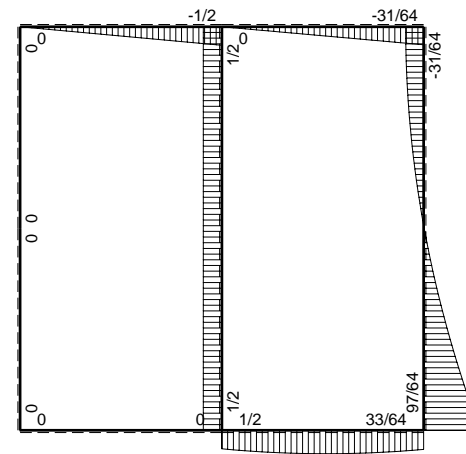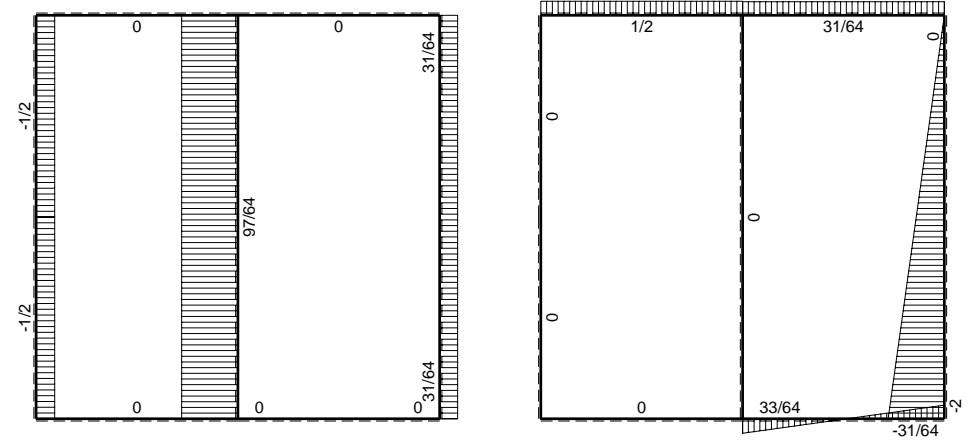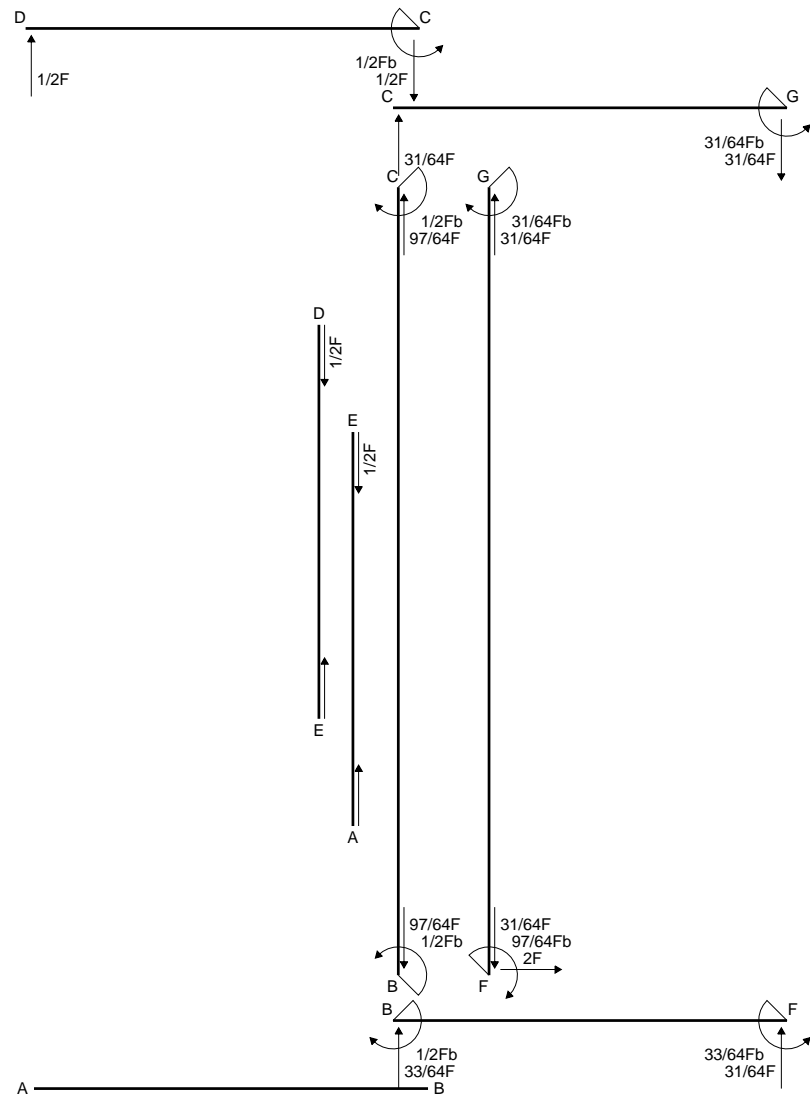

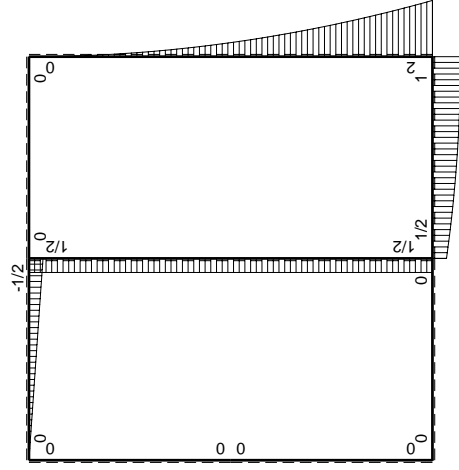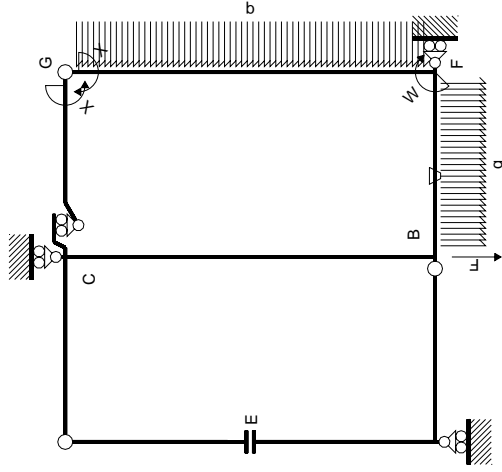

$M_0$  flessione da carichi assegnati

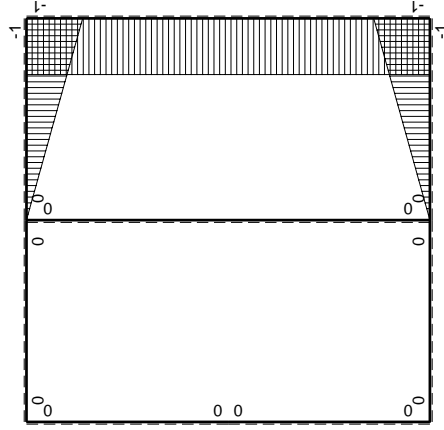

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sup>gc</sup> |                    | iperstatica X=W <sup>gc</sup> |        |  |                  |                                       |                                  |                     |          |
|---|--------------------|-------------------------------|--------|--|------------------|---------------------------------------|----------------------------------|---------------------|----------|
| ←   | M <sup>x</sup> (x) | M <sup>0</sup> (x)            | θ      | M <sup>x</sup> M <sub>0</sub>                      | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>         | $\int M_x(M_0/EJ+\theta)dx$      | $\int M_x M_x/EJdx$ |          |
| AB B  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| BA B  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| CD B  | 0                  | -1/2Fx+1/2Fx                  | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| DC B  | 0                  | 1/2Fx                         | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| DE B  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| EA B  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| AE B  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| BF B  | -x/b               | 1/2Fb+Fx-1/2qx <sup>2</sup>   | -Fb/EJ | -1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (-1/1/24+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ            | 1/3xb/EJ |
| FB B  | 1-x/b              | -Fb+1/2qx <sup>2</sup>        | Fb/EJ  | -Fb+Fx+1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | -1/1/24+1/2)Fb <sup>2</sup> /EJ  | 1/3xb/EJ            | 1/3xb/EJ |
| GC B  | -1+x/b             | 0                             | 0      | 0  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                              | 1/3xb/EJ            | 1/3xb/EJ |
| CG B  | x/b                | 0                             | 0      | 0  | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                              | 1/3xb/EJ            | 1/3xb/EJ |
| FG 2b   | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup>    | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                     | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ              | 2xb/EJ   |
| GF 2b   | 1                  | -1/2qx <sup>2</sup>           | 0      | -1/2Fx <sup>2</sup> /b                             | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ              | 2xb/EJ   |
| CB 2b   | 0                  | 1/2Fb                         | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| BC 2b   | 0                  | -1/2Fb                        | 0      | 0  | 0                | 0                                     | 0+0                              | 0                   | 0        |
| totali  |                    |                               |        |  |                  |                                       |                                  |                     |          |
|   |                    |                               |        |  |                  |                                       | -31/24Fb <sup>2</sup> /EJ        | 8/3xb/EJ            | 31/64Fb  |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

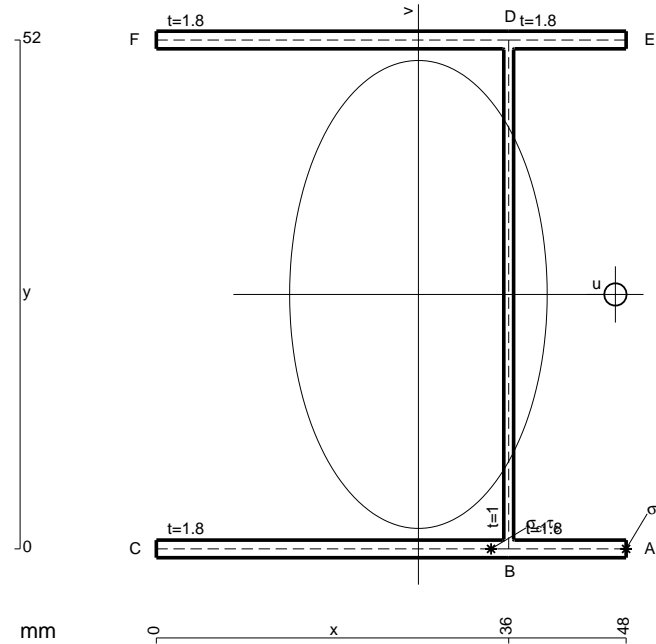


- A = 224.8 mm<sup>2</sup>
- J<sub>u</sub> = 128530. mm<sup>4</sup>
- J<sub>v</sub> = 38934. mm<sup>4</sup>
- J<sub>t</sub> = 204. mm<sup>4</sup>
- x<sub>o</sub> = 20.13 mm
- x<sub>g</sub> = 26.78 mm
- T<sub>y</sub> = 1595. N
- M<sub>x</sub> = -1036750. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 21.22 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.224 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 295. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.62 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 283.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 5742. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 552.3 N/mm<sup>2</sup>






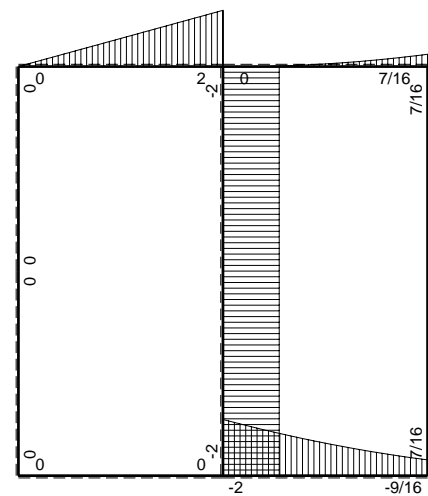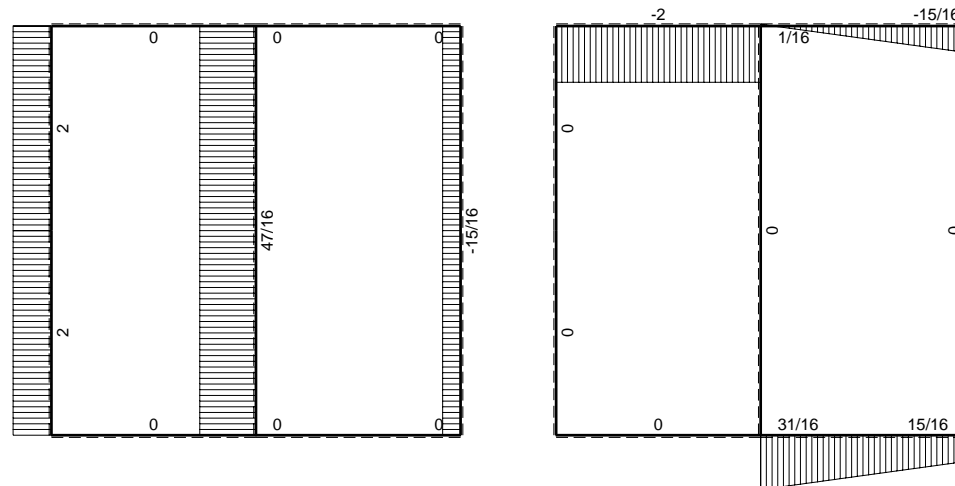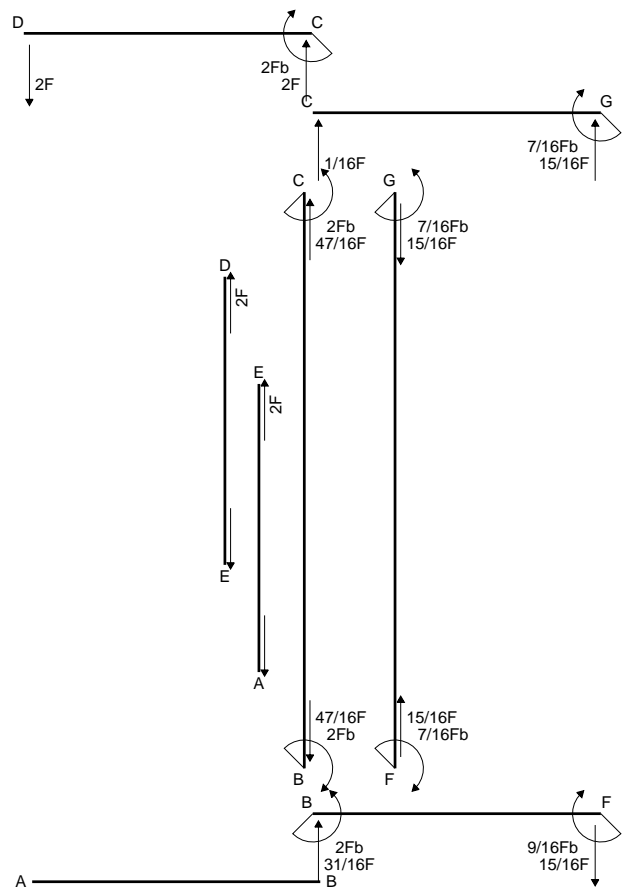

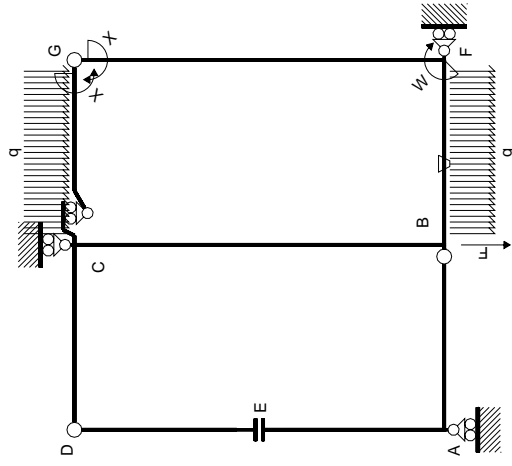

Schema di calcolo iperstatico

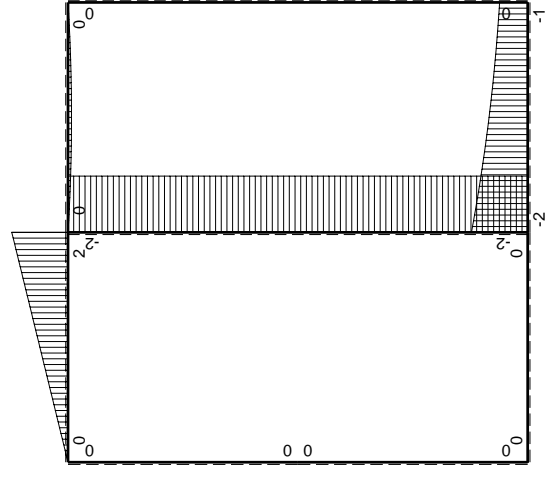


$M_0$  flessione da carichi assegnati

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ | totali       |                    |
|---------------|----------|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|----------------------|--------------|--------------------|
|               |          |                      |          |                           |               |                  |                             |                      | $M^x(x)$     | $M^0(x)$           |
| AB B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| BA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| CD B          | 0        | $2Fb-2Fx$            | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| DC B          | 0        | $-2Fx$               | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| DE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| EA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| AE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| BF B          | $-x/b$   | $-2Fb+3/2Fx-1/2qx^2$ | $-Fb/EJ$ | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          | $1/3xb/EJ$           | $1-x/b$      | $Fb+1/2Fx+1/2qx^2$ |
| FB B          | $1-x/b$  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           | $-1+x/b$     | $-1/2Fx+1/2qx^2$   |
| GC B          | $-1+x/b$ | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           | $-1+x/b$     | $-1/2Fx+1/2qx^2$   |
| CG B          | $x/b$    | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx-Fx^2/b-1/2qx^3/b$  | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           | $x/b$        | $1/2Fx-1/2qx^2$    |
| FG 2b         | -1       | 0                    | 0        | 0                         | 0             | 1                | 0                           | $2xb/EJ$             | 0            | 0                  |
| GF 2b         | 1        | 0                    | 0        | 0                         | 0             | 1                | 0                           | 0                    | 0            | 0                  |
| CB 2b         | 0        | $-2Fb$               | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| BC 2b         | 0        | $2Fb$                | 0        | 0                         | 0             | 0                | 0                           | 0                    | 0            | 0                  |
| totali        |          |                      |          |                           |               |                  |                             | $8/3xb/EJ$           | $7/6Fb^2/EJ$ | $-7/16Fb$          |

Sviluppi di calcolo iperstatica

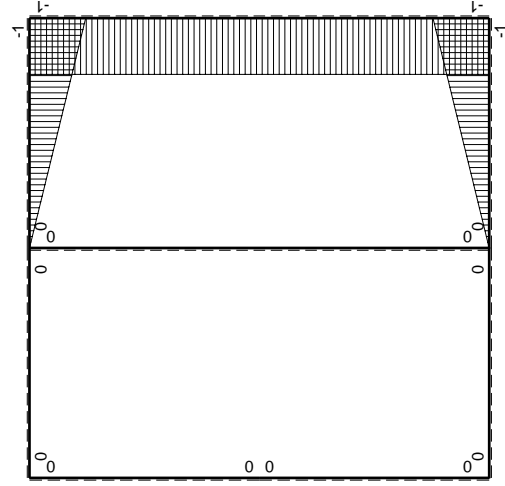

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

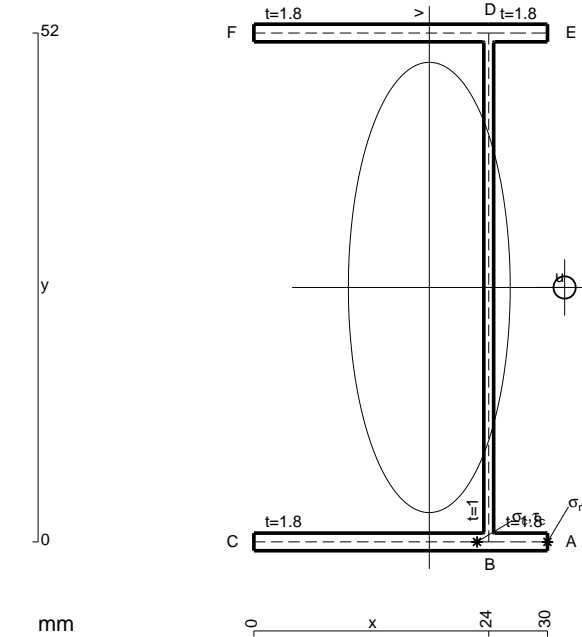

$$A = 160. \text{ mm}^2$$

$$J_u = 84725. \text{ mm}^4$$

$$J_v = 10943. \text{ mm}^4$$

$$J_t = 134. \text{ mm}^4$$

$$x_o = 13.83 \text{ mm}$$

$$x_g = 17.92 \text{ mm}$$

$$T_y = -1020. \text{ N}$$

$$M_x = 703800. \text{ Nmm}$$

$$x_m = 30. \text{ mm}$$

$$u_m = 12.07 \text{ mm}$$

$$v_m = -26. \text{ mm}$$

$$\sigma_m = -Mv/J_u = 216. \text{ N/mm}^2$$

$$x_c = 24. \text{ mm}$$

$$u_c = 6.075 \text{ mm}$$

$$v_c = -26. \text{ mm}$$

$$\sigma_c = -Mv/J_u = 216. \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 197. \text{ N/mm}^2$$



$$\tau_g = TS/tJ_u = 7.512 \text{ N/mm}^2$$



$$\tau_o = Tx_o t/J_t = 189.5 \text{ N/mm}^2$$

$$t_c = 918. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 403.9 \text{ N/mm}^2$$



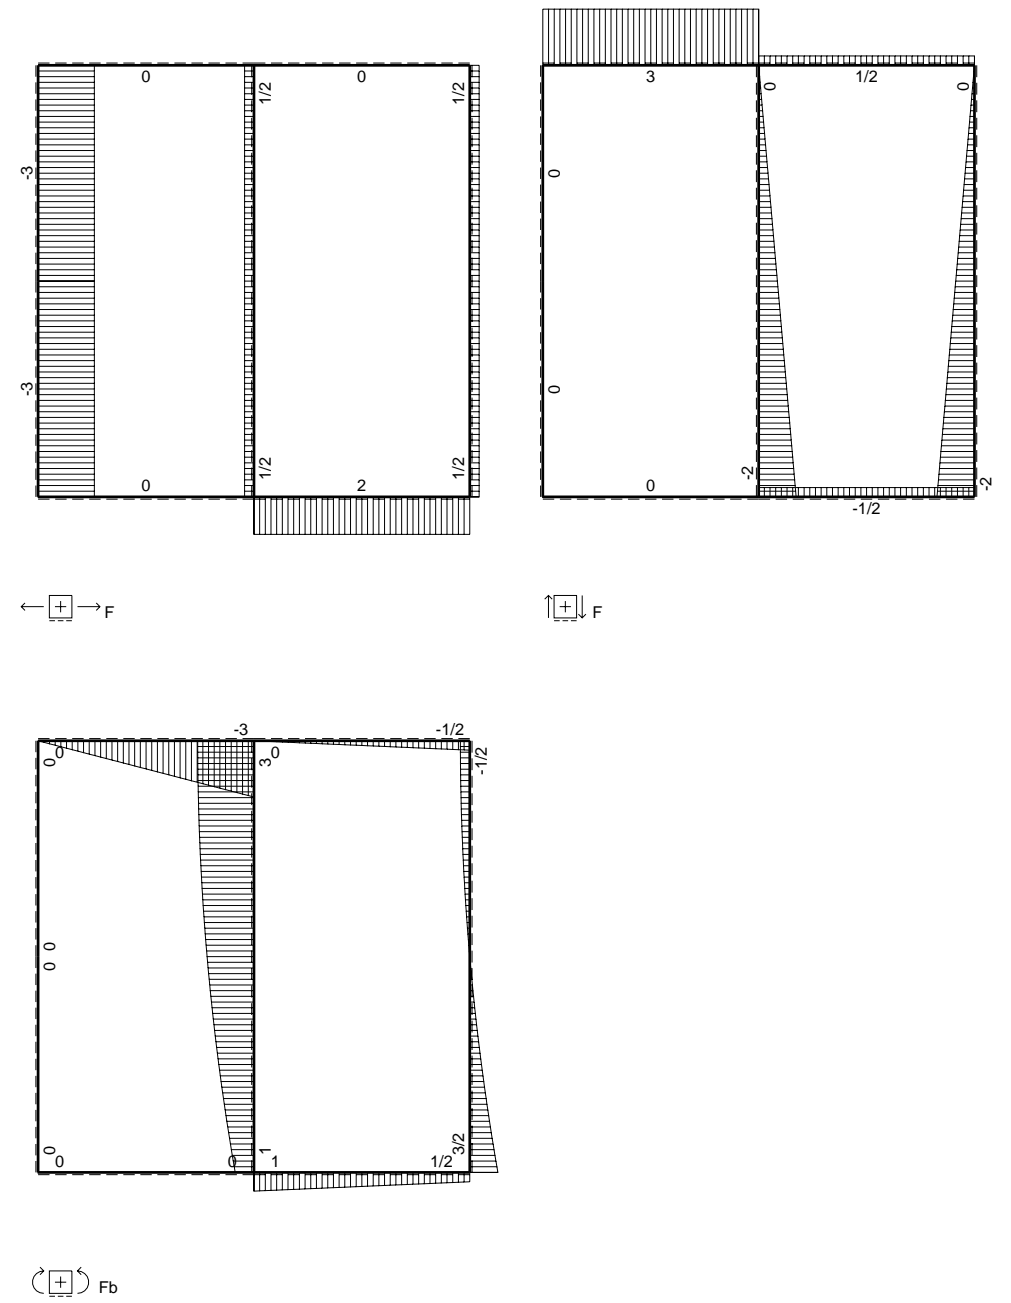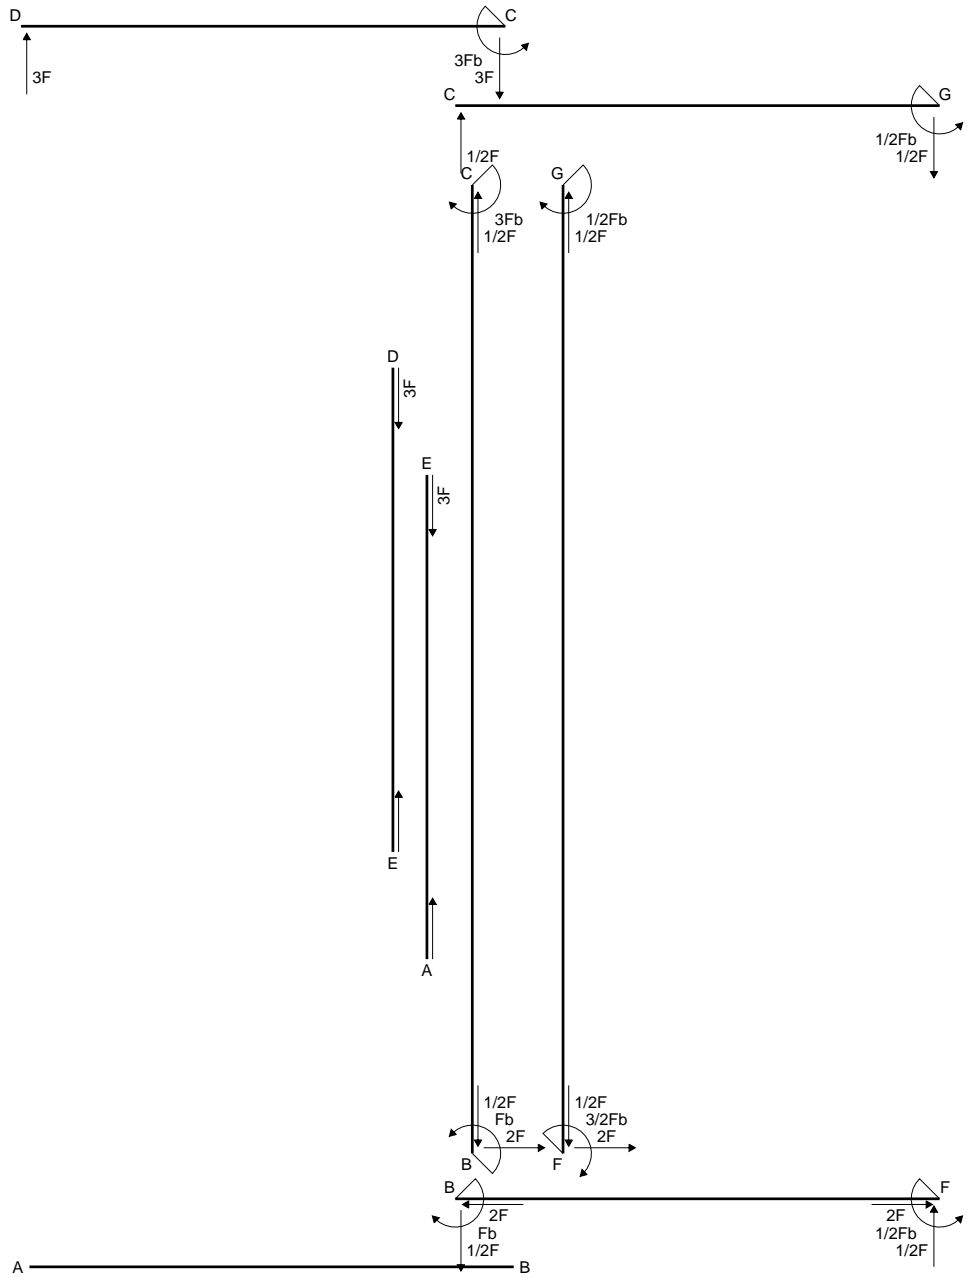

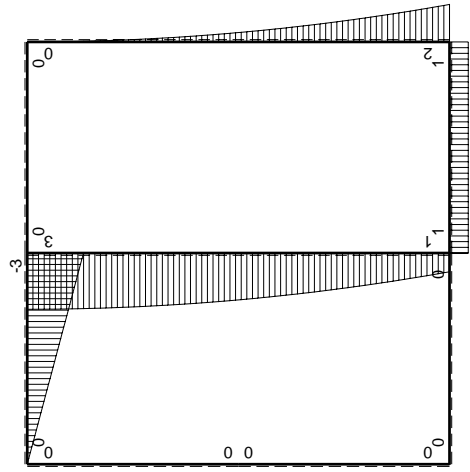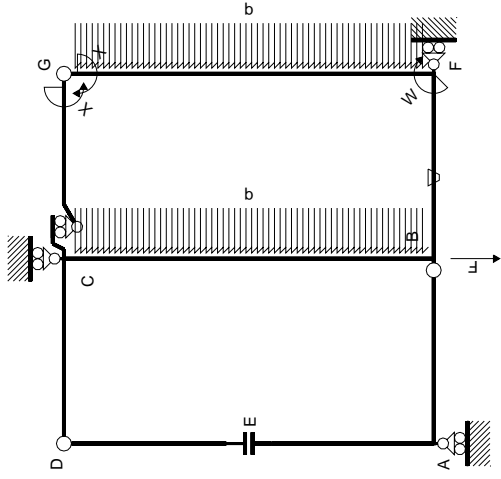

$M_0$  flessione da carichi assegnati

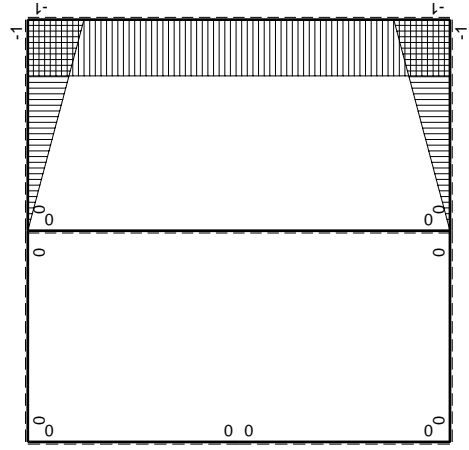

$M_x$  flessione da iperstatica  $X=1$

| ←      | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ | iperstatica $X=W_{gc}$ |            |
|--------|----------|-------------------|----------|----------------------|--------------|------------------|---------------------------------|-----------------------|------------------------|------------|
|        |          |                   |          |                      |              |                  |                                 |                       | totali                 |            |
| AB b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| CD b   | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| DC b   | 0        | $3Fx$             | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| DE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| ED b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| EA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| AE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BF b   | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$      | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            | 0                      | 0          |
| FB b   | $1-x/b$  | $-Fb$             | Fb/EJ    | $-Fb+Fx$             | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            | 0                      | 0          |
| GC b   | $-1+x/b$ | 0                 | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0                               | 0                     | 0                      | 0          |
| CG b   | $x/b$    | 0                 | 0        | 0                    | 0            | $x^2/b^2$        | 0                               | 0                     | 0                      | 0          |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              | 0                      | 0          |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                | 0                               | 0                     | 0                      | 0          |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                | 0                               | 0                     | 0                      | 0          |
| totali |          |                   |          |                      |              |                  |                                 |                       | $-4/3Fb^2/EJ$          | $8/3xb/EJ$ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

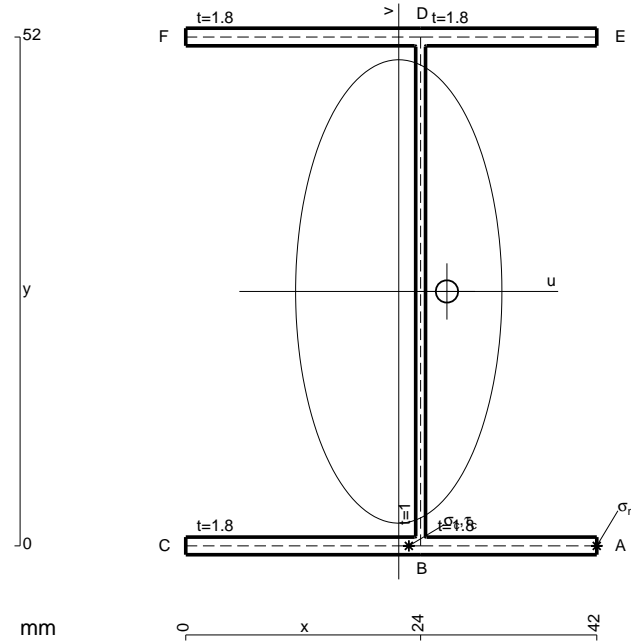


- A = 203.2 mm<sup>2</sup>
- J<sub>u</sub> = 113929. mm<sup>4</sup>
- J<sub>v</sub> = 22575. mm<sup>4</sup>
- J<sub>t</sub> = 180.6 mm<sup>4</sup>
- x<sub>o</sub> = 4.924 mm
- x<sub>g</sub> = 21.77 mm
- T<sub>y</sub> = 1380. N
- M<sub>x</sub> = -1007400. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 20.23 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 2.232 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 75.27 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.558 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 67.71 N/mm<sup>2</sup>
- t<sub>c</sub> = 828. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 264.3 N/mm<sup>2</sup>






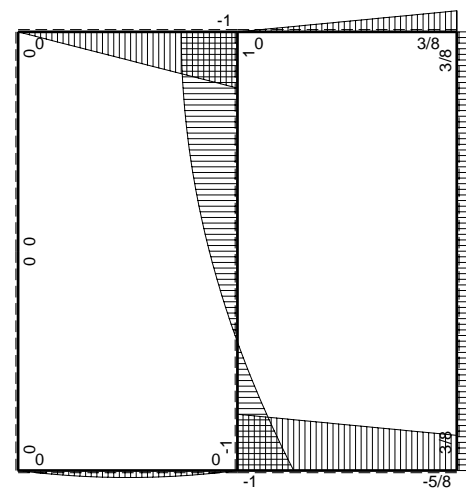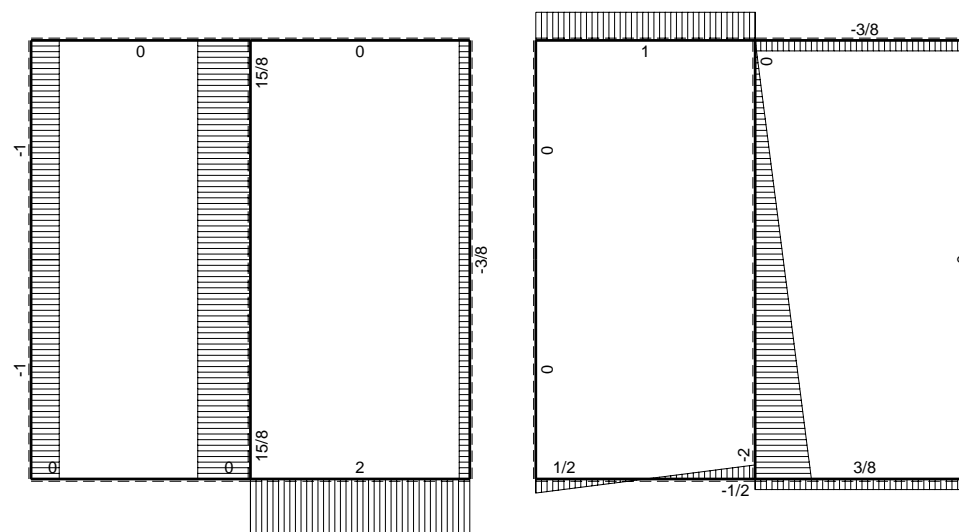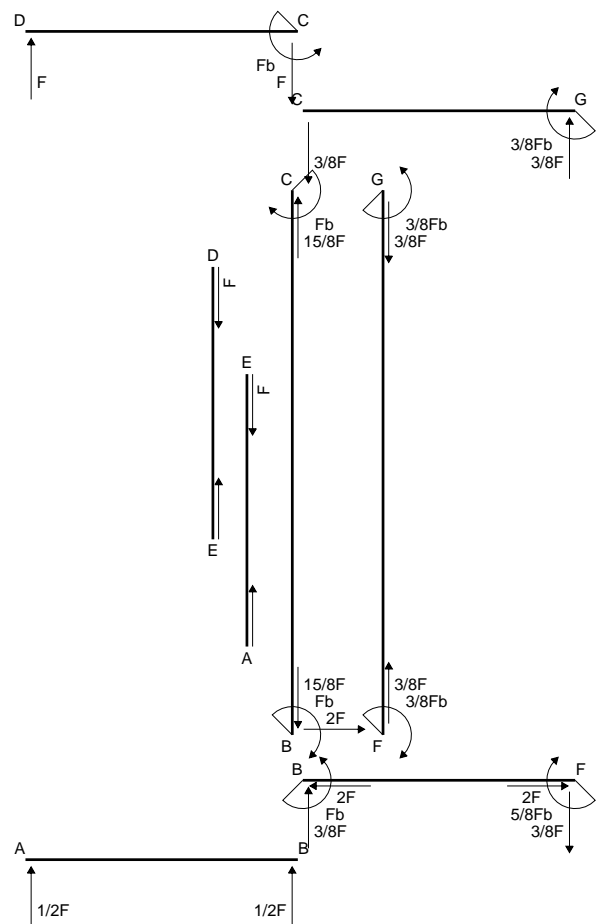


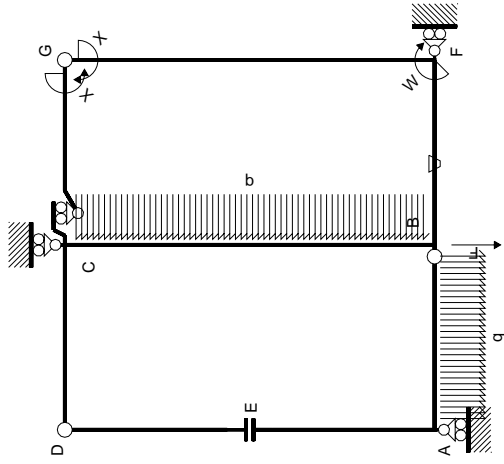

Schema di calcolo iperstatico

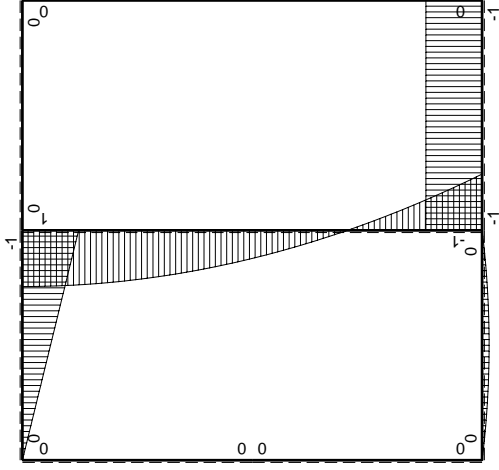

$M_0$  flessione da carichi assegnati

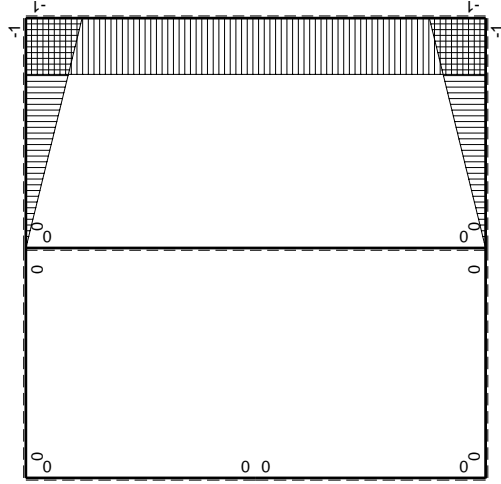

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

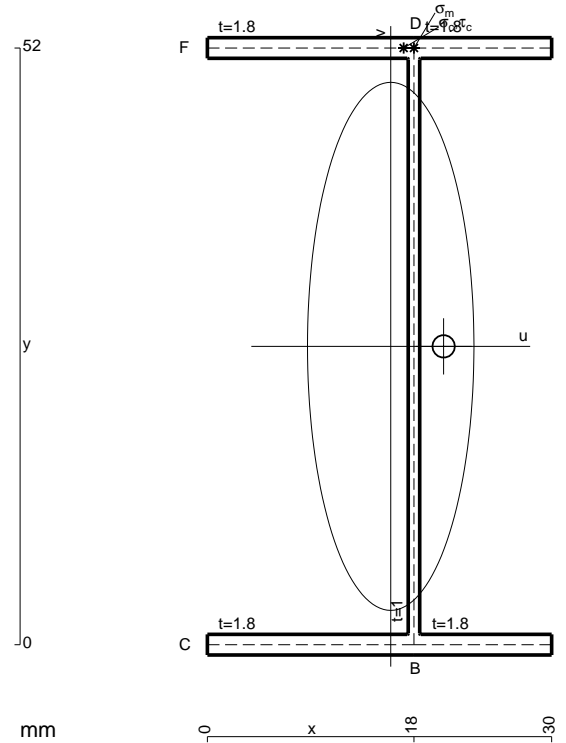


- A = 160. mm<sup>2</sup>
- J<sub>u</sub> = 84725. mm<sup>4</sup>
- J<sub>v</sub> = 8416. mm<sup>4</sup>
- J<sub>t</sub> = 134. mm<sup>4</sup>
- x<sub>o</sub> = 4.61 mm
- x<sub>g</sub> = 15.98 mm
- N = 1800. N
- T<sub>y</sub> = -1920. N
- M<sub>x</sub> = -739200. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 2.025 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 238.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 2.025 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 238.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 129.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.61 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>t/J<sub>t</sub> = 118.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1728. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 327.1 N/mm<sup>2</sup>



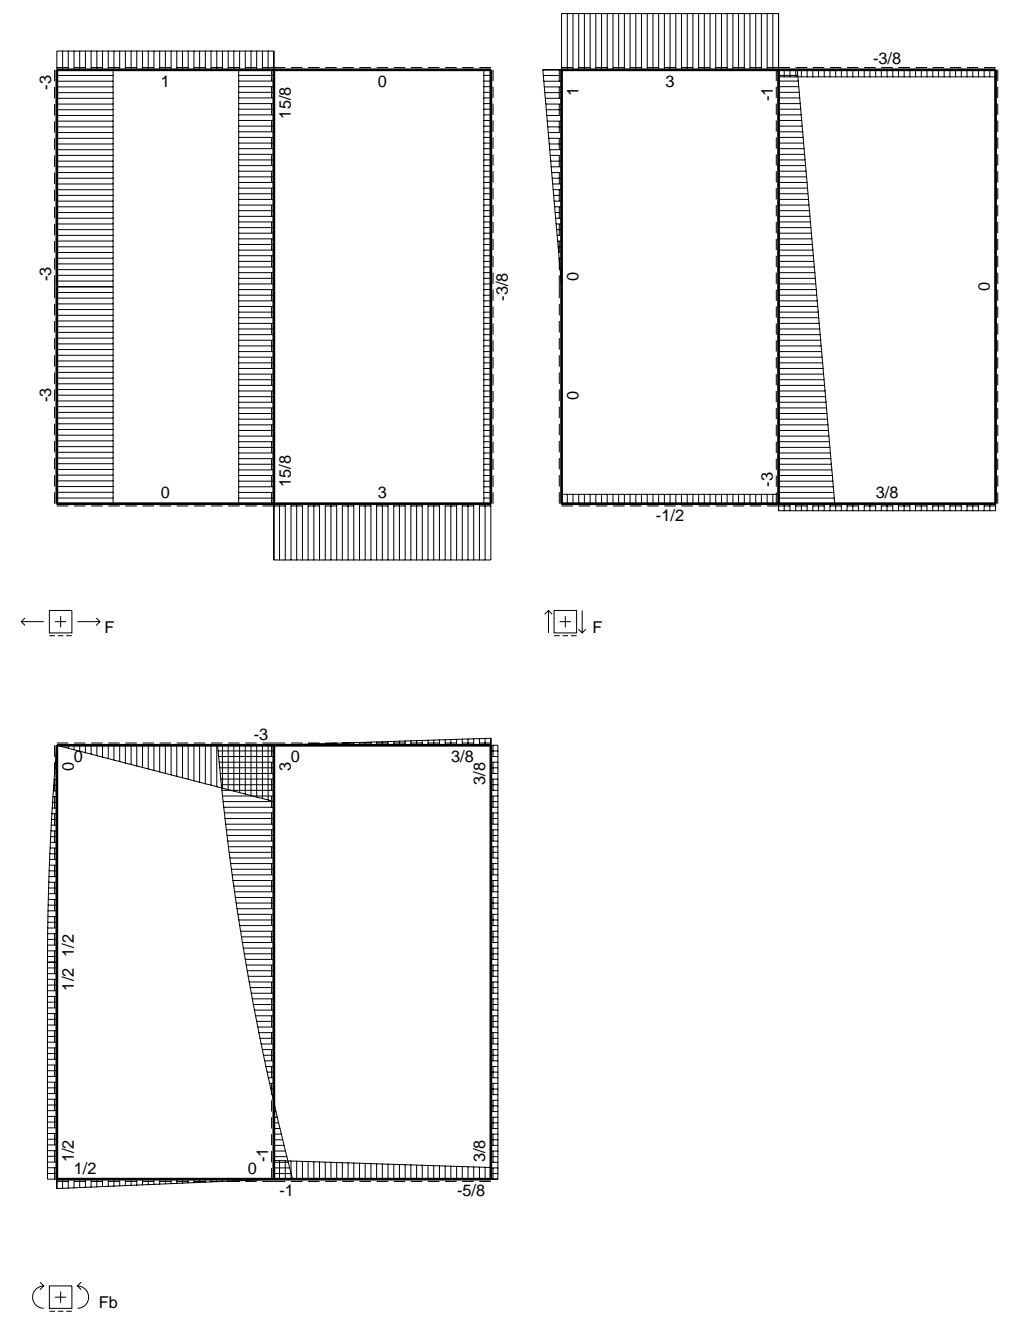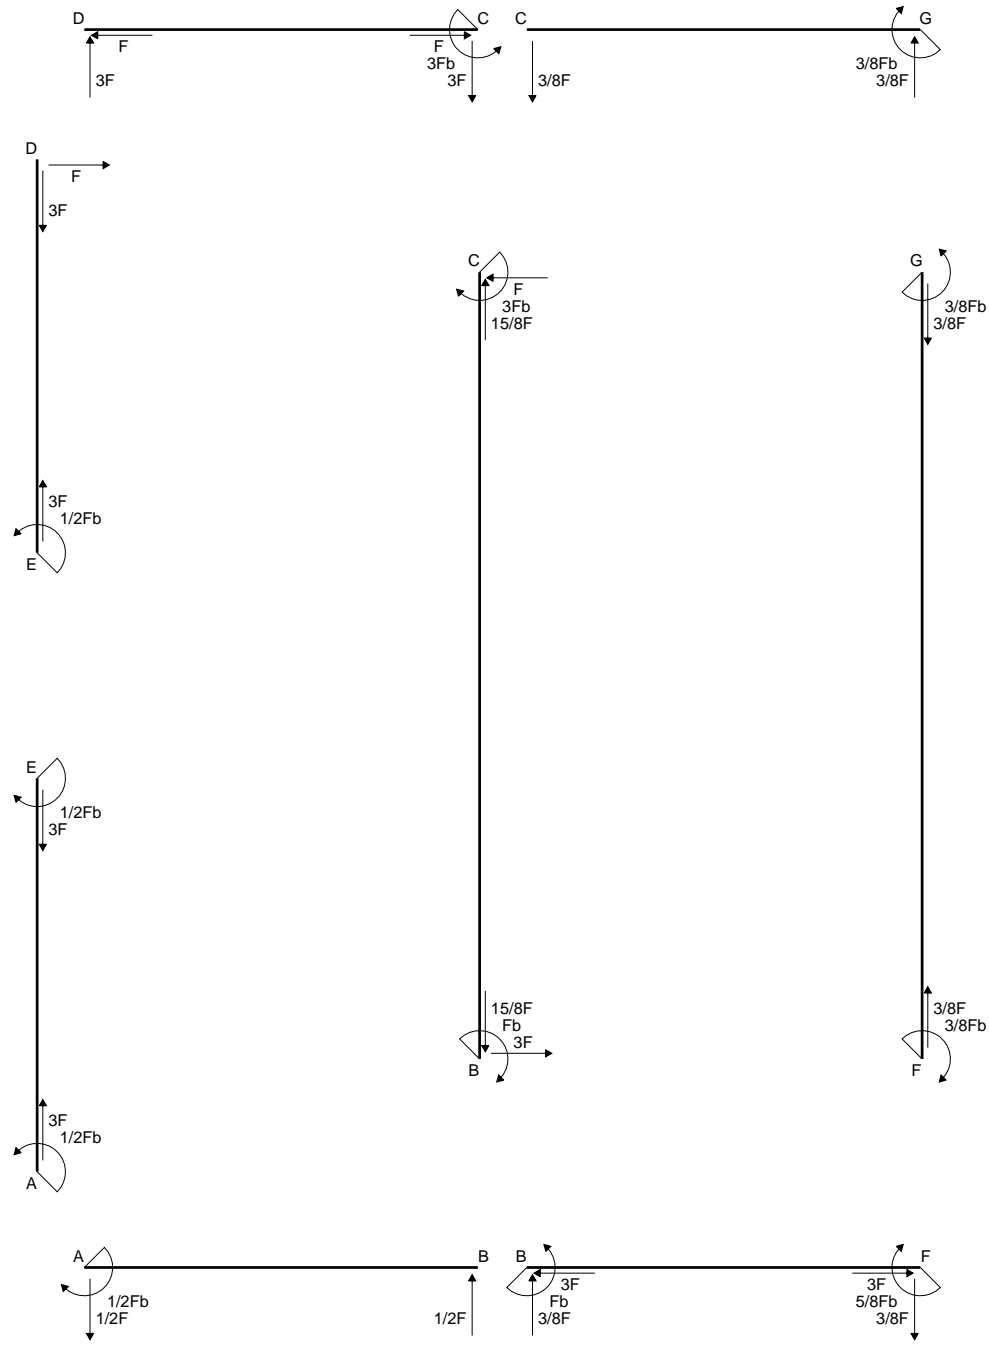


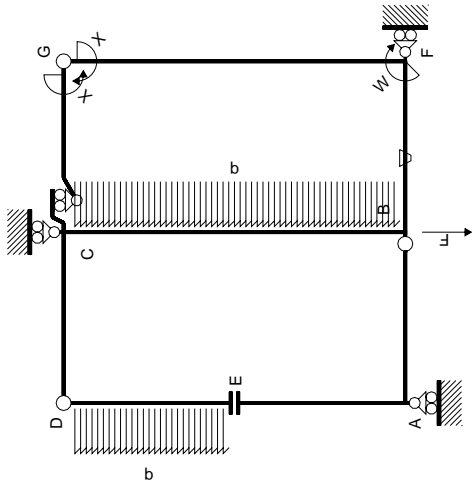

Schema di calcolo iperstatico

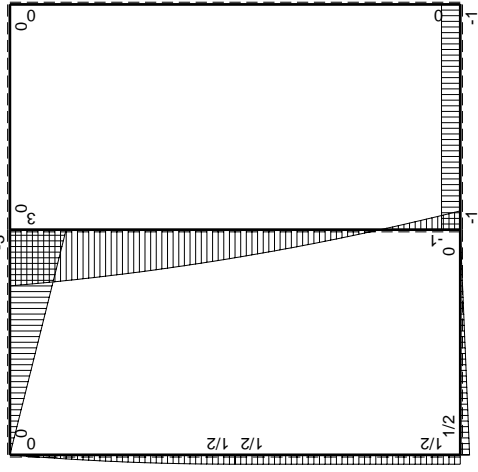

$M_0$  flessione da carichi assegnati

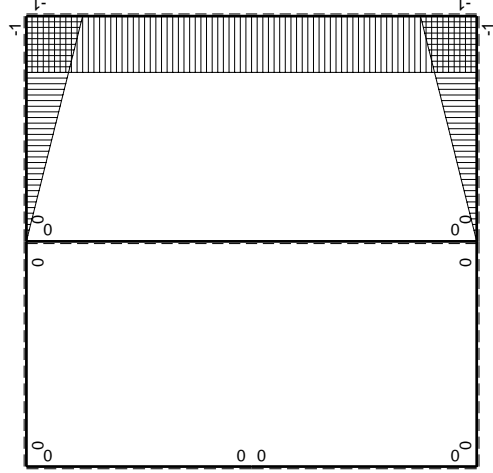

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$              | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|-----------------------|----------|-----------|-----------------|----------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 Fb - 1/2 Fx$     | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 Fx$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DC b          | 0        | $3Fx$                 | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DE b          | 0        | $Fx - 1/2 qx^2$       | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 Fb + 1/2 qx^2$  | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| EA b          | 0        | $1/2 Fb$              | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 Fb$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$            | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b/EJ$           |
| FB b          | $1-x/b$  | $Fb$                  | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/2 + 1/2 Fb^2/EJ$             | $1/3 x b/EJ$           |
| GC b          | $-1+x/b$ | 0                     | 0        | 0         | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3 x b/EJ$           |
| CG b          | $x/b$    | 0                     | 0        | 0         | 0               | $x^2/b^2$            | 0+0                             | $1/3 x b/EJ$           |
| FG 2b         | -1       | 0                     | 0        | 0         | 0               | 1                    | 0+0                             | $2x b/EJ$              |
| GF 2b         | 1        | 0                     | 0        | 0         | 0               | 1                    | 0+0                             | $2x b/EJ$              |
| CB 2b         | 0        | $3Fb - Fx - 1/2 qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 3Fx + 1/2 qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| totali        |          |                       |          |           |                 |                      |                                 | $8/3 x b/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

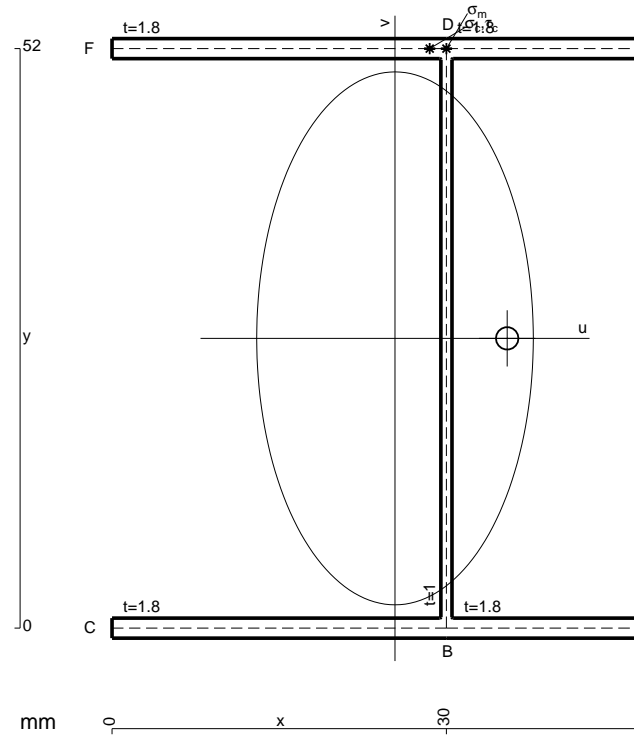


- A = 224.8 mm<sup>2</sup>
- J<sub>u</sub> = 128530. mm<sup>4</sup>
- J<sub>v</sub> = 34617. mm<sup>4</sup>
- J<sub>t</sub> = 204. mm<sup>4</sup>
- x<sub>o</sub> = 10.07 mm
- x<sub>g</sub> = 25.39 mm
- N = 780. N
- T<sub>y</sub> = 2340. N
- M<sub>x</sub> = -959400. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 4.612 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 197.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 4.612 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 197.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 222.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 14.2 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 207.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1404. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 432.4 N/mm<sup>2</sup>






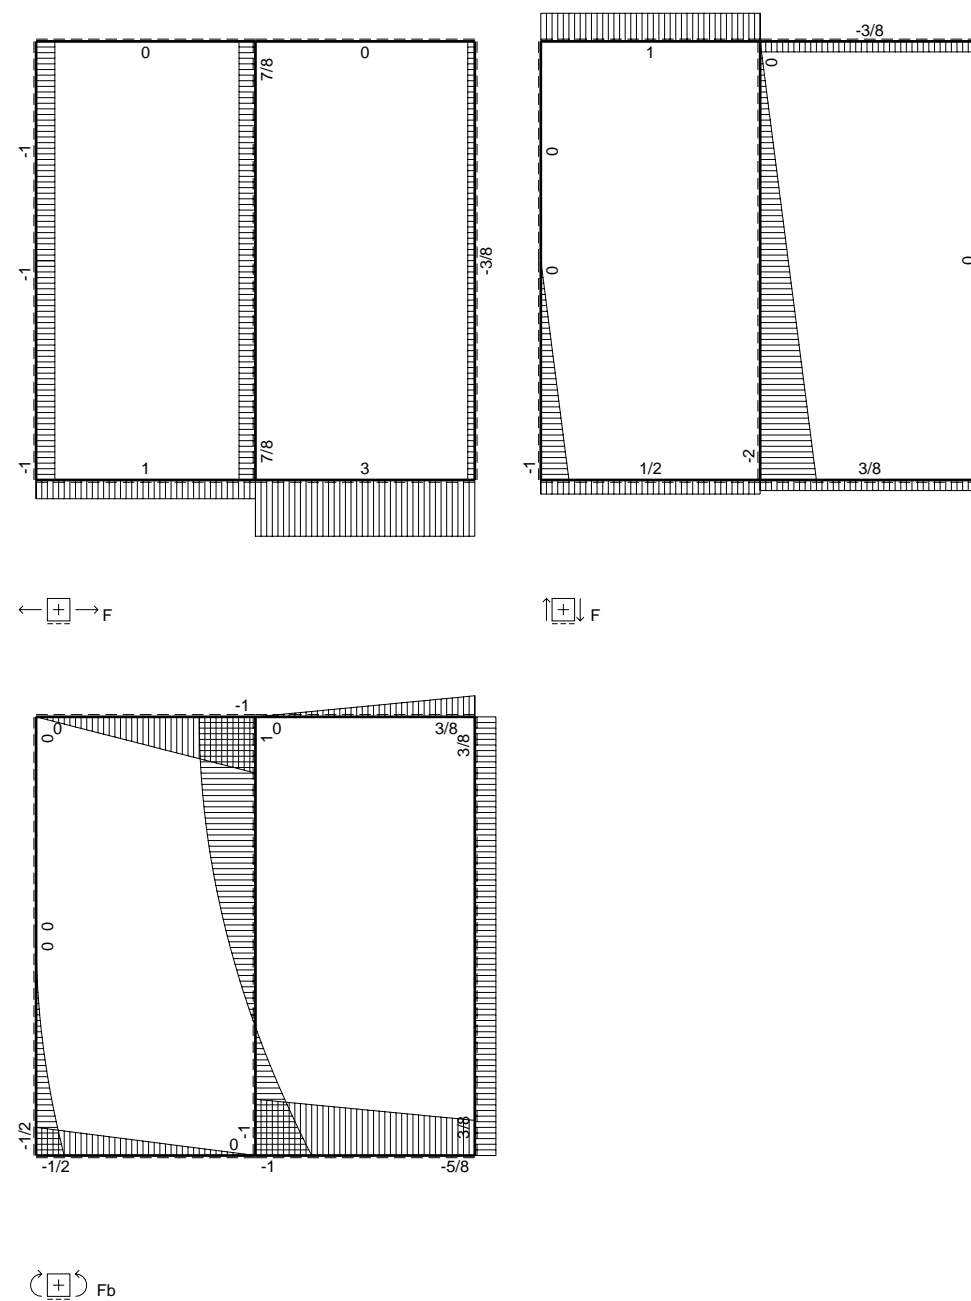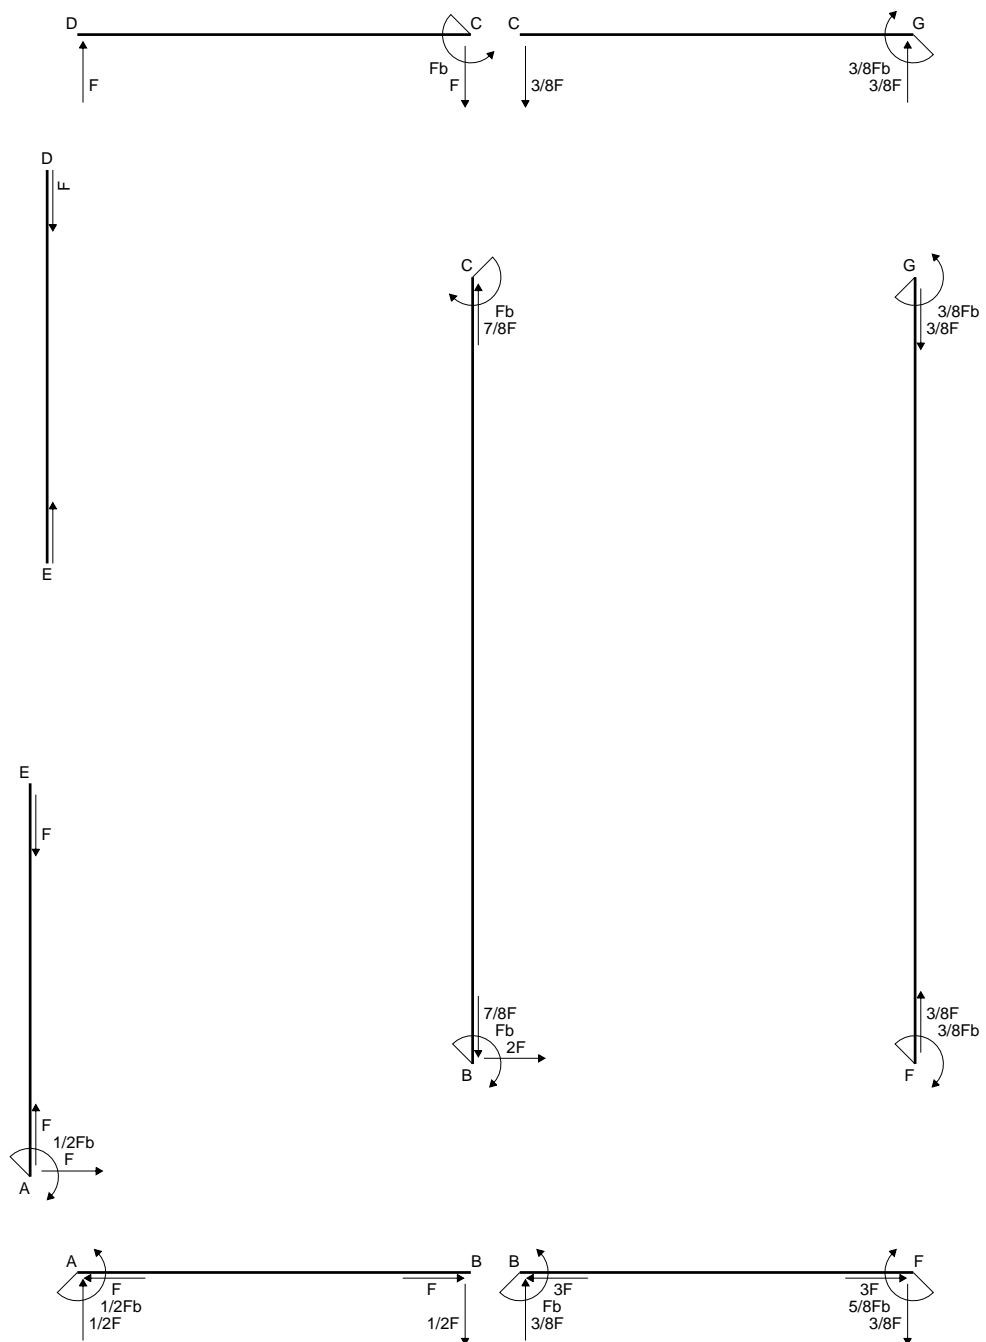

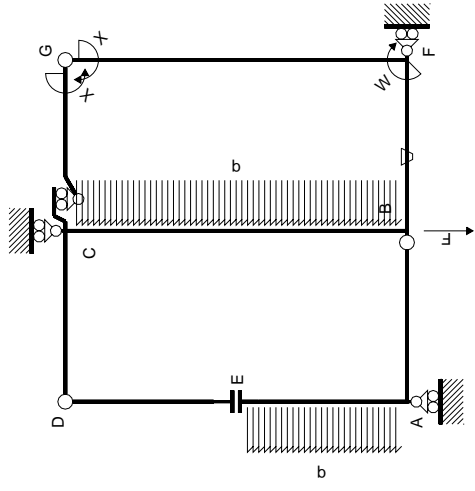

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

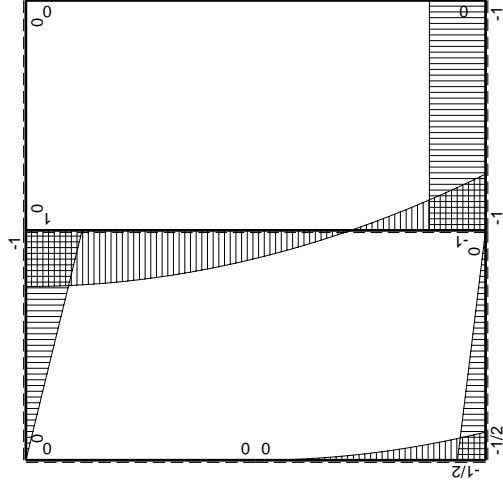

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$     | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|---------------|-----------------------------|----------------------|
| AB B          | 0        | $-1/2Fb+1/2Fx$     | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| BA B          | 0        | $1/2Fx$            | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| CD B          | 0        | $-Fb+Fx$           | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| DC B          | 0        | $Fx$               | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| DE B          | 0        | 0                  | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| EA B          | 0        | $-1/2qx^2$         | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| AE B          | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| BF B          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $Fb/EJ-Fx/EJ$ | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB B          | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$            | $1/3xb/EJ$           |
| GC B          | $-1+x/b$ | 0                  | 0        | 0         | 0             | 0             | $1-2x/b+x^2/b^2$            | $1/3xb/EJ$           |
| CG B          | $x/b$    | 0                  | 0        | 0         | 0             | 0             | $x^2/b^2$                   | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 0             | 1                           | $2xb/EJ$             |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 0             | 1                           | $2xb/EJ$             |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0             | 0+0                         | 0                    |
| totali        |          |                    |          |           |               |               |                             | $8/3xb/EJ$           |
|               |          |                    |          |           |               |               |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$





$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

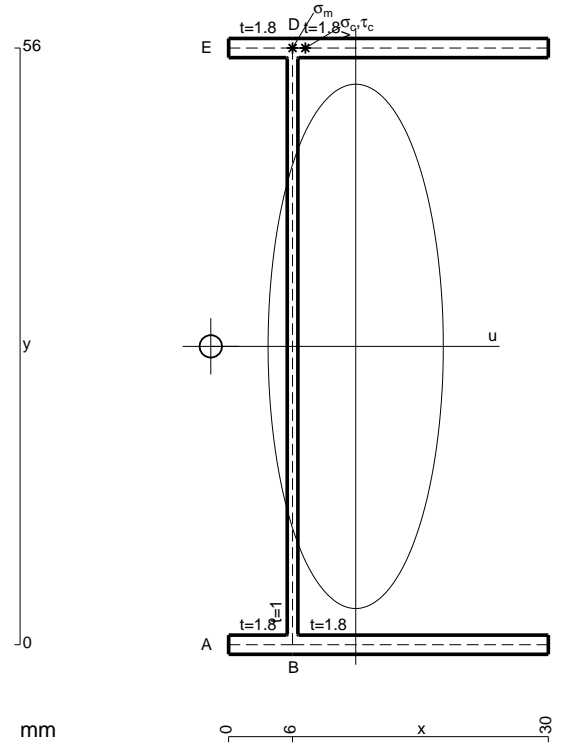


- A = 164. mm<sup>2</sup>
- J<sub>u</sub> = 99307. mm<sup>4</sup>
- J<sub>v</sub> = 11087. mm<sup>4</sup>
- J<sub>t</sub> = 135.3 mm<sup>4</sup>
- x<sub>o</sub> = -13.6 mm
- x<sub>g</sub> = 11.93 mm
- N = 1304. N
- T<sub>y</sub> = -2980. N
- M<sub>x</sub> = -715200. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -5.927 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 209.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -5.927 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 209.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 559.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 20.17 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 539.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 2682. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 991.2 N/mm<sup>2</sup>



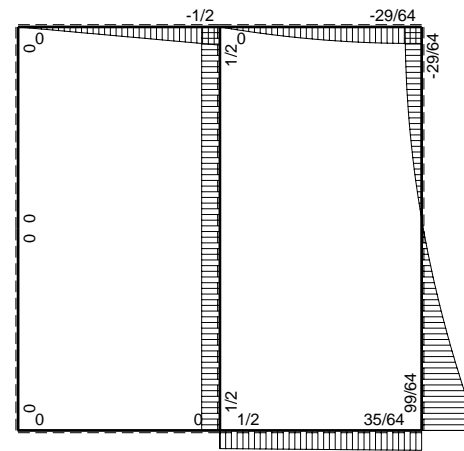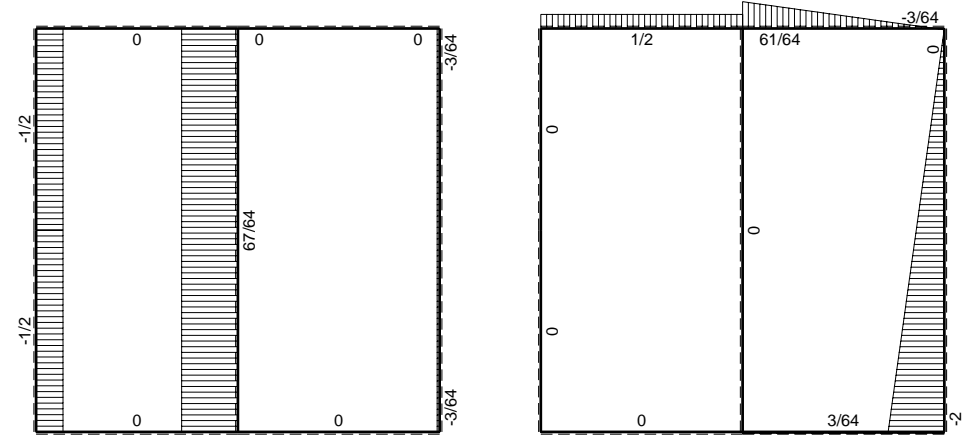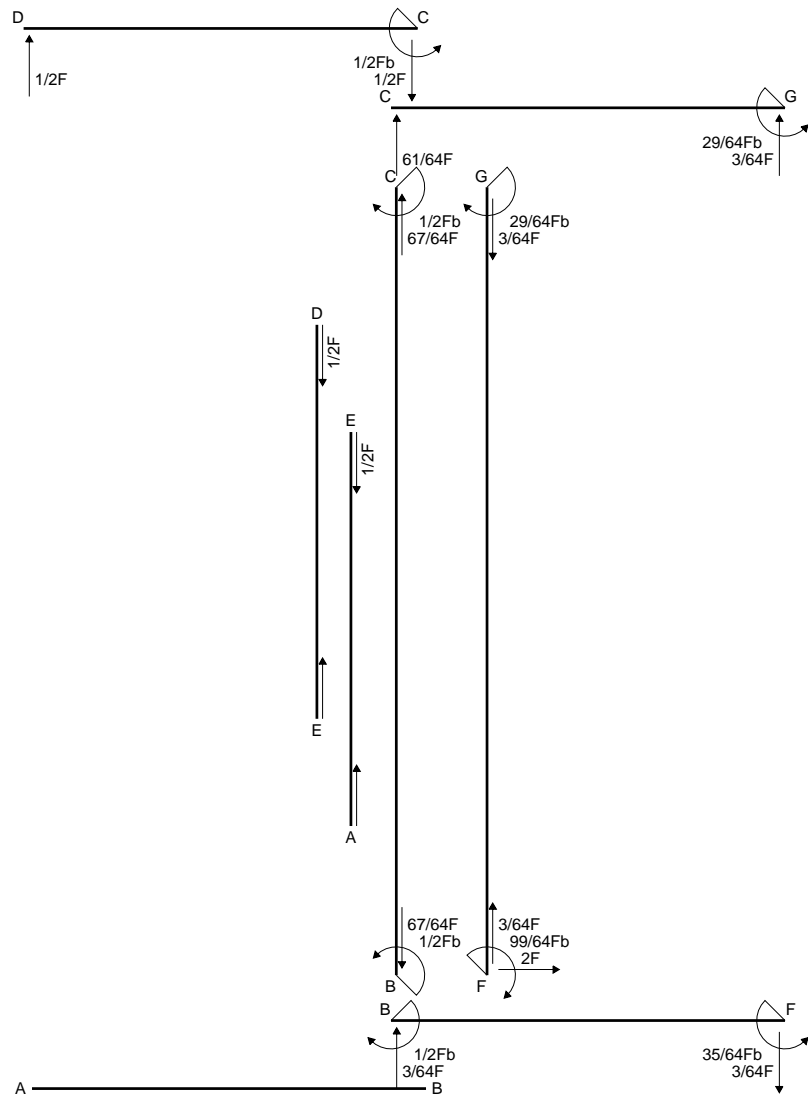

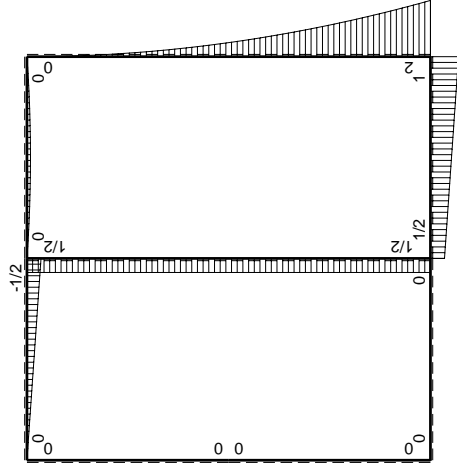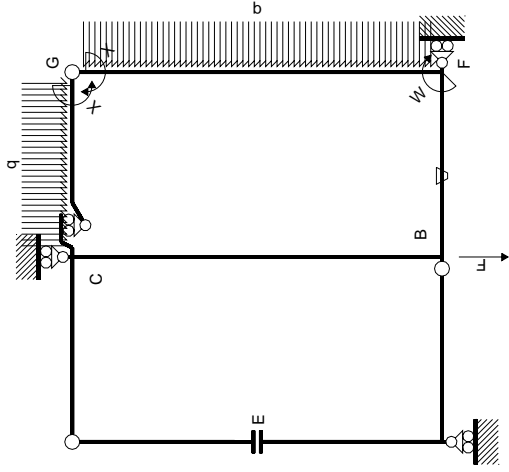

$M_0$  flessione da carichi assegnati

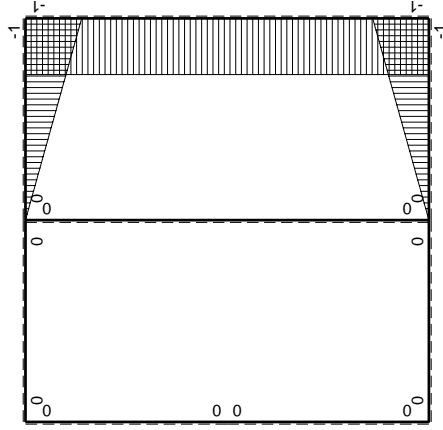

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M_x(x)$ | $M_0(x)$                   | $\theta$ | $M_x M_0$                                      | $M_x \theta$ | $M_x M_x$                             | $\int M_x (M_0/EJ + \theta) dx$ | $\int X M_x M_x / E J dx$ |
|--------------|----------|----------------------------|----------|--|--------------|---------------------------------------|---------------------------------|---------------------------|
| AB b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| BA b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| CD b         | 0        | -1/2Fb+1/2Fx               | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| DC b         | 0        | 1/2Fx                      | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| DE b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| EA b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| AE b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| BF b         | -x/b     | 1/2Fb+1/2Fx                | -Fb/EJ   | -1/2Fx-1/2Fx <sup>2</sup> /b                   | Fx/EJ        | x <sup>2</sup> /b <sup>2</sup>        | (-5/12+1/2)Fb <sup>2</sup> /EJ  | 1/3Xb/EJ                  |
| FB b         | 1-x/b    | -Fb+1/2Fx                  | Fb/EJ    | -Fb+3/2Fx-1/2Fx <sup>2</sup> /b                | Fb/EJ-Fx/EJ  | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-5/12+1/2)Fb <sup>2</sup> /EJ  | 1/3Xb/EJ                  |
| GC b         | -1+x/b   | -1/2Fx+1/2qx <sup>2</sup>  | 0        | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0            | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ     | 1/3Xb/EJ                  |
| CG b         | x/b      | 1/2Fx-1/2qx <sup>2</sup>   | 0        | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0            | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ     | 1/3Xb/EJ                  |
| FG 2b        | -1       | 2Fb-2Fx+1/2qx <sup>2</sup> | 0        | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                 | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ     | 2Xb/EJ                    |
| GF 2b        | 1        | -1/2qx <sup>2</sup>        | 0        | -1/2Fx <sup>2</sup> /b                         | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ     | 2Xb/EJ                    |
| CB 2b        | 0        | 1/2Fb                      | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| BC 2b        | 0        | -1/2Fb                     | 0        | 0  | 0            | 0                                     | 0+0                             | 0                         |
| totali       |          |                            |          |  |              |                                       | -29/24Fb <sup>2</sup> /EJ       | 8/3Xb/EJ                  |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

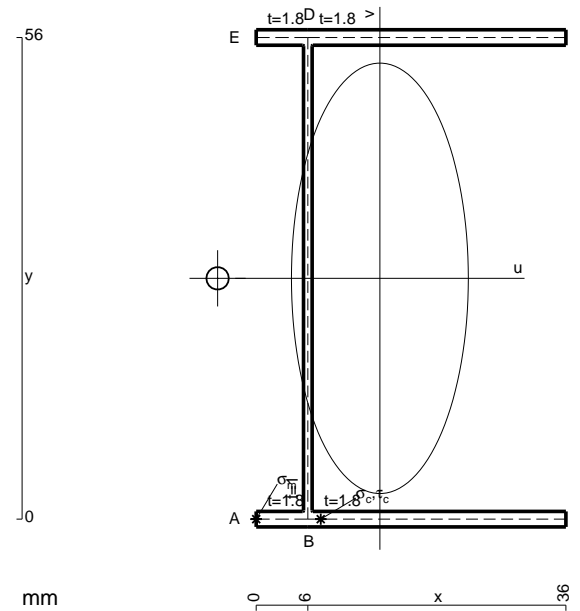

$$A = 185.6 \text{ mm}^2$$

$$J_u = 116241. \text{ mm}^4$$

$$J_v = 19628. \text{ mm}^4$$

$$J_t = 158.6 \text{ mm}^4$$

$$x_o = -18.87 \text{ mm}$$

$$x_g = 14.38 \text{ mm}$$

$$T_y = 1755. \text{ N}$$

$$M_x = -912600. \text{ Nmm}$$

$$u_m = -14.38 \text{ mm}$$

$$v_m = -28. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -219.8 \text{ N/mm}^2$$

$$x_c = 6. \text{ mm}$$

$$u_c = -8.379 \text{ mm}$$

$$v_c = -28. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -219.8 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 388.4 \text{ N/mm}^2$$

$$\tau_g = TS'/tJ_u = 12.68 \text{ N/mm}^2$$





$$\tau_o = Tx_o/tJ_t = 375.7 \text{ N/mm}^2$$


$$t_c = 6318. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 707.8 \text{ N/mm}^2$$






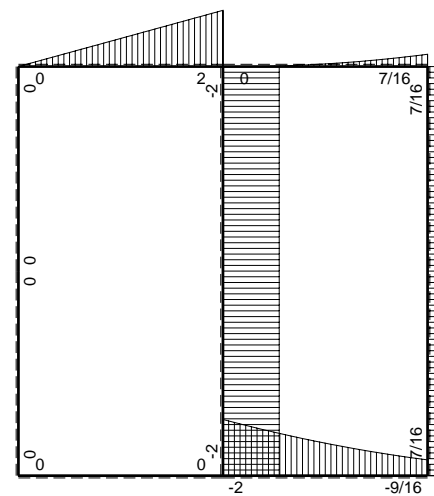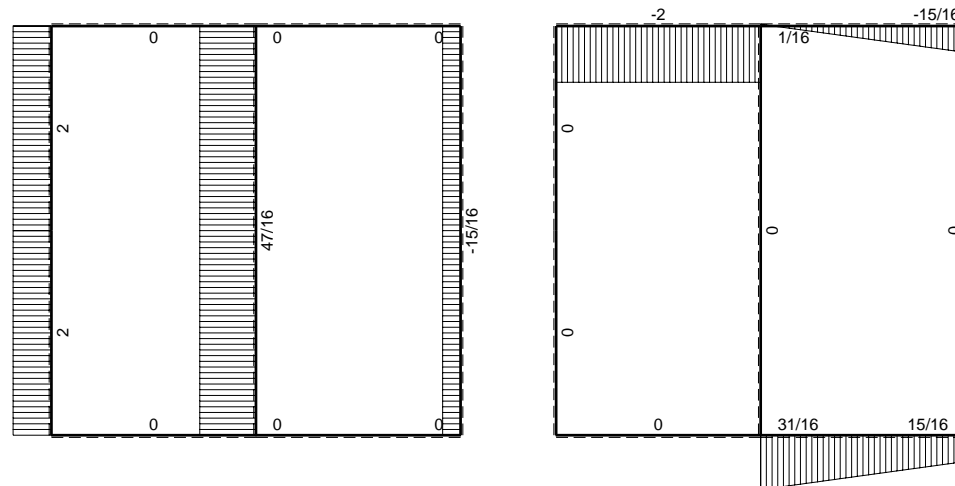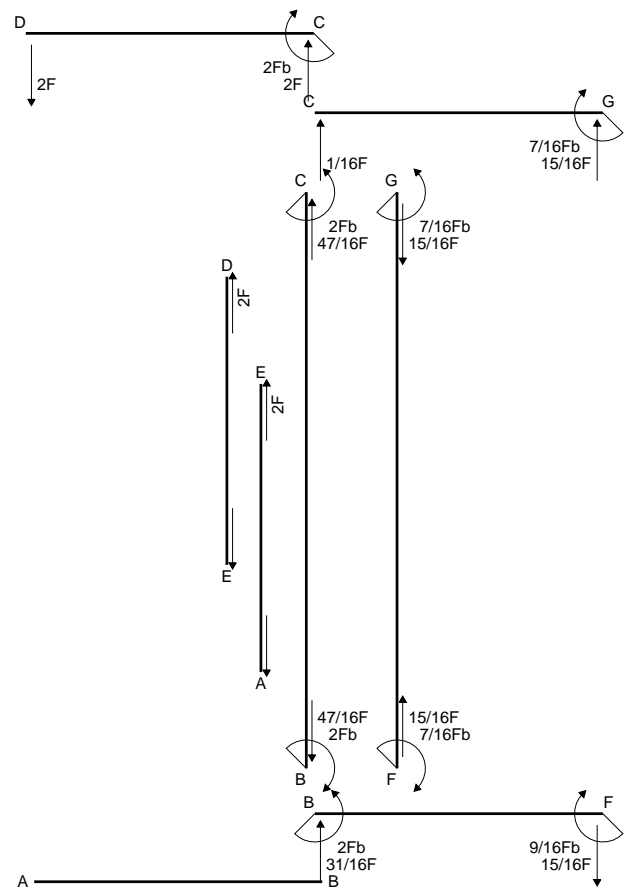


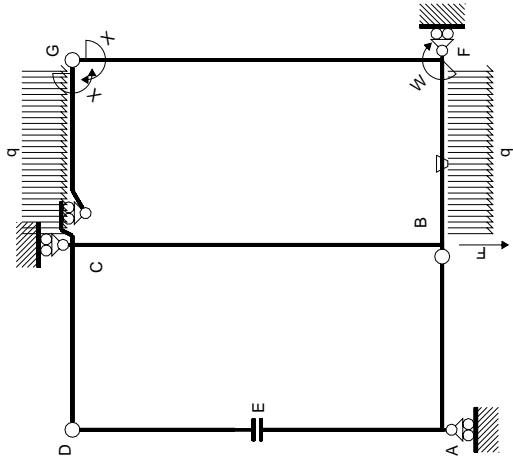

Schema di calcolo iperstatico

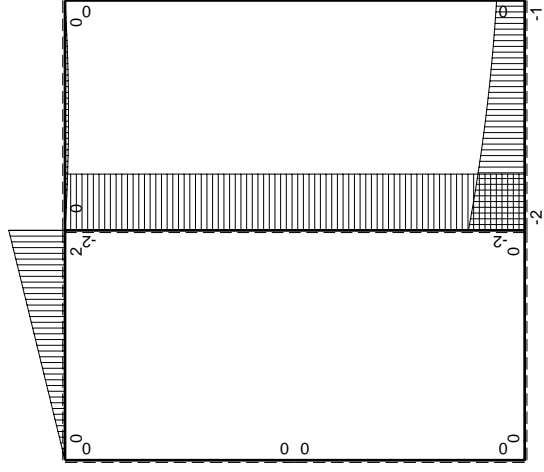

$M_0$  flessione da carichi assegnati

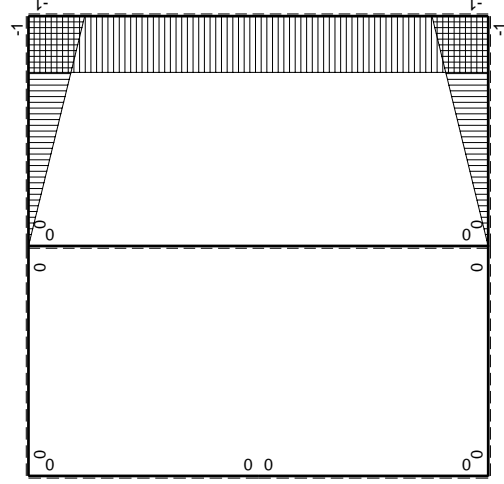

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>x</sup> (x) | M <sup>o</sup> (x)            | θ      | M <sup>x</sup> M <sup>o</sup>                   | M <sup>x</sup> θ | M <sup>x</sup> M <sup>x</sup>         | $\int M_x(M_o/EJ+\theta)dx$  | $\int M_x M_x/EJdx$           |
|--------|--------------------|-------------------------------|--------|---|------------------|---------------------------------------|------------------------------|-------------------------------|
| AB B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| BA B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| CD B   | 0                  | 2Fb-2Fx                       | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| DC B   | 0                  | -2Fx                          | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| DE B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| EA B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| AE B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| BF B   | -x/b               | -2Fb+3/2Fx-1/2qx <sup>2</sup> | -Fb/EJ | 2Fx-3/2Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (5/8+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ                      |
| FB B   | 1-x/b              | Fb+1/2Fx+1/2qx <sup>2</sup>   | Fb/EJ  | Fb-1/2Fx-1/2qx <sup>3</sup> /b                  | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ  | 1/3xb/EJ                      |
| GC B   | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ  | 1/3xb/EJ                      |
| CG B   | x/b                | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b     | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ  | 1/3xb/EJ                      |
| FG 2b  | -1                 | 0                             | 0      | 0   | 0                | 1                                     | 0+0                          | 2xb/EJ                        |
| GF 2b  | 1                  | 0                             | 0      | 0   | 0                | 1                                     | 0+0                          | 2xb/EJ                        |
| CB 2b  | 0                  | -2Fb                          | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| BC 2b  | 0                  | 2Fb                           | 0      | 0   | 0                | 0                                     | 0+0                          | 0                             |
| totali |                    |                               |        |   |                  |                                       |                              |                               |
|        |                    |                               |        |   |                  |                                       |                              | iperstatica X=W <sub>gc</sub> |
|        |                    |                               |        |   |                  |                                       |                              | 8/3xb/EJ                      |
|        |                    |                               |        |   |                  |                                       |                              | -7/16Fb                       |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$



$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

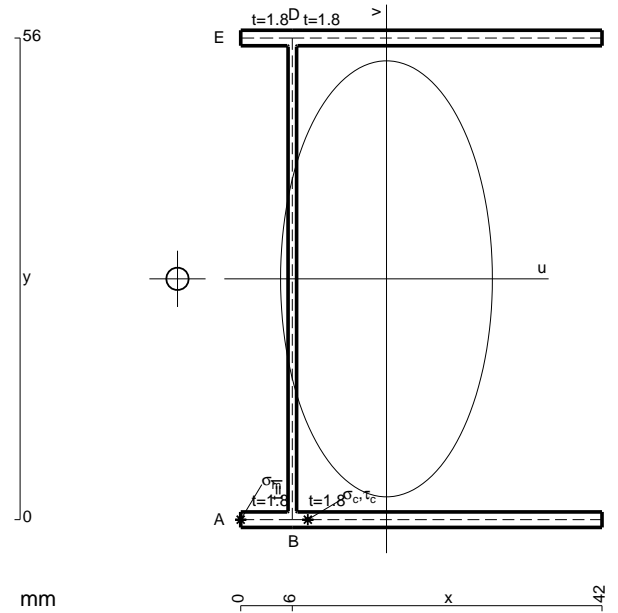


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 31421. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = -24.3 mm
- x<sub>g</sub> = 16.95 mm
- T<sub>y</sub> = -1900. N
- M<sub>x</sub> = 1083000. Nmm
- u<sub>m</sub> = -16.95 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 227.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -10.95 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 227.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 471.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/tJ<sub>u</sub> = 14.38 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 456.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 1710. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 847.1 N/mm<sup>2</sup>



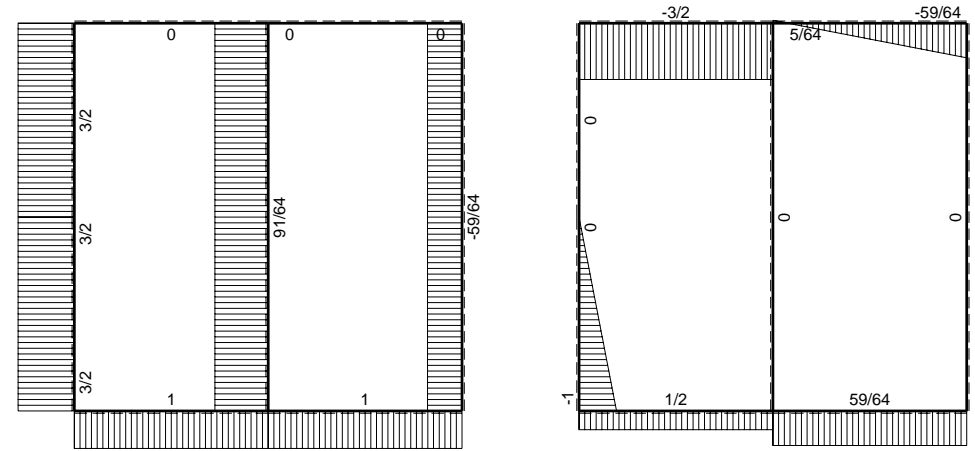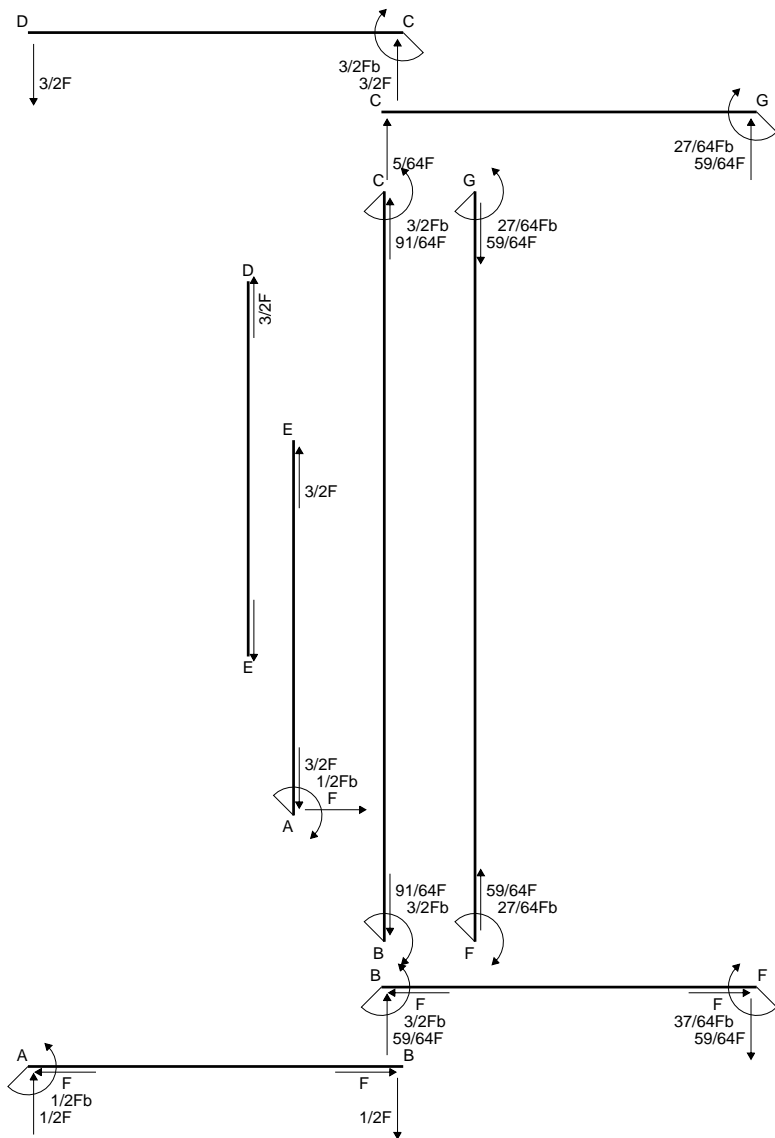


← ⊕ → F


↑ ⊕ ↓ F

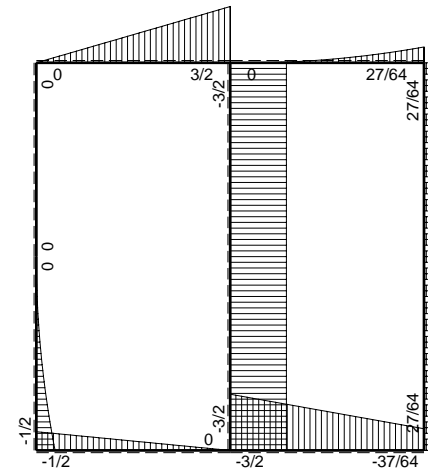


⊕ ⊖ F<sub>b</sub>

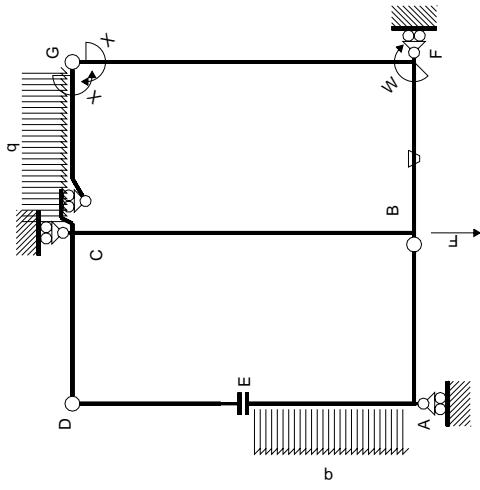

Schema di calcolo iperstatico

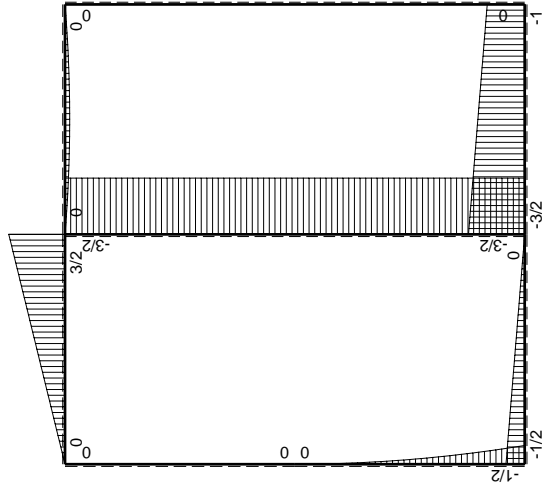

$M_0$  flessione da carichi assegnati

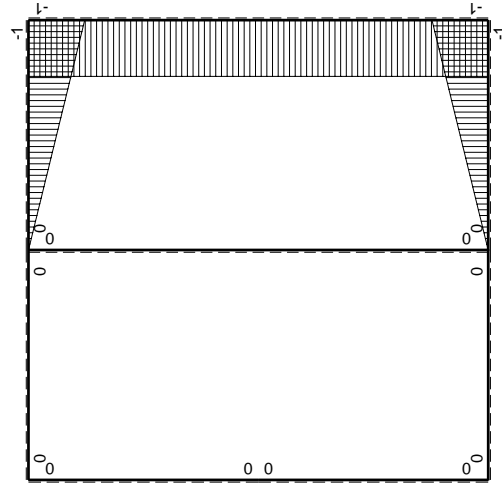

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M_x(x)$ | $M_0(x)$                    | $\theta$  | $M_x M_0$                         | $M_x \theta$      | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int X M_x M_x / E J dx$ |
|--------------|----------|-----------------------------|-----------|-----------------------------------|-------------------|----------------------|---------------------------------|---------------------------|
| AB b         | 0        | $-1/2 F b + 1/2 F x$        | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| BA b         | 0        | $1/2 F x$                   | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| CD b         | 0        | $3/2 F b - 3/2 F x$         | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| DC b         | 0        | $-3/2 F x$                  | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| DE b         | 0        | 0                           | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| EA b         | 0        | $-1/2 q x^2$                | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| AE b         | 0        | $1/2 F b - F x + 1/2 q x^2$ | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| BF b         | $-x/b$   | $-3/2 F b + 1/2 F x$        | $-F b/EJ$ | $3/2 F x - 1/2 F x^2/b$           | $F x/EJ$          | $x^2/b^2$            | $(7/12 + 1/2) F b^2/EJ$         | $1/3 X b/EJ$              |
| FB b         | $1-x/b$  | $F b + 1/2 F x$             | $F b/EJ$  | $F b - 1/2 F x - 1/2 F x^2/b$     | $F b/EJ - F x/EJ$ | $1 - 2x/b + x^2/b^2$ | $(7/12 + 1/2) F b^2/EJ$         | $1/3 X b/EJ$              |
| GC b         | $-1+x/b$ | $-1/2 F x + 1/2 q x^2$      | 0         | $1/2 F x - F x^2/b + 1/2 q x^3/b$ | 0                 | $1 - 2x/b + x^2/b^2$ | $(1/24 + 0) F b^2/EJ$           | $1/3 X b/EJ$              |
| CG b         | $x/b$    | $1/2 F x - 1/2 q x^2$       | 0         | $1/2 F x^2/b - 1/2 q x^3/b$       | 0                 | $x^2/b^2$            | $(1/24 + 0) F b^2/EJ$           | $1/3 X b/EJ$              |
| FG 2b        | -1       | 0                           | 0         | 0                                 | 0                 | 1                    | 0+0                             | $2 X b/EJ$                |
| GF 2b        | 1        | 0                           | 0         | 0                                 | 0                 | 1                    | 0+0                             | $2 X b/EJ$                |
| CB 2b        | 0        | $-3/2 F b$                  | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| BC 2b        | 0        | $3/2 F b$                   | 0         | 0                                 | 0                 | 0                    | 0+0                             | 0                         |
| totali       |          |                             |           |                                   |                   |                      | $9/8 F b^2/EJ$                  | $8/3 X b/EJ$              |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

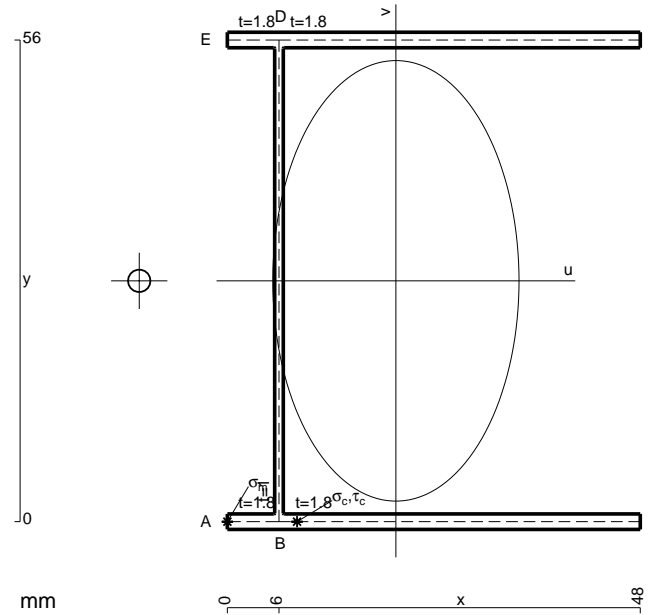

- A = 228.8 mm<sup>2</sup>
- J<sub>u</sub> = 150110. mm<sup>4</sup>
- J<sub>v</sub> = 46881. mm<sup>4</sup>
- J<sub>t</sub> = 205.3 mm<sup>4</sup>
- x<sub>o</sub> = -29.84 mm
- x<sub>g</sub> = 19.59 mm
- T<sub>y</sub> = -2100. N
- M<sub>x</sub> = 1281000. Nmm
- u<sub>m</sub> = -19.59 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 238.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -13.59 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 238.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 565.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS'/J<sub>u</sub> = 16.45 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> / J<sub>t</sub> = 549.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 2520. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 1009. N/mm<sup>2</sup>






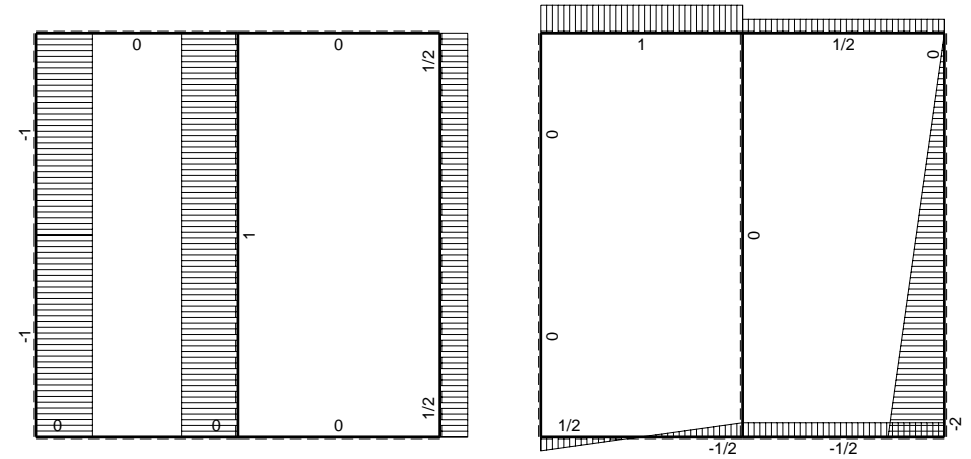
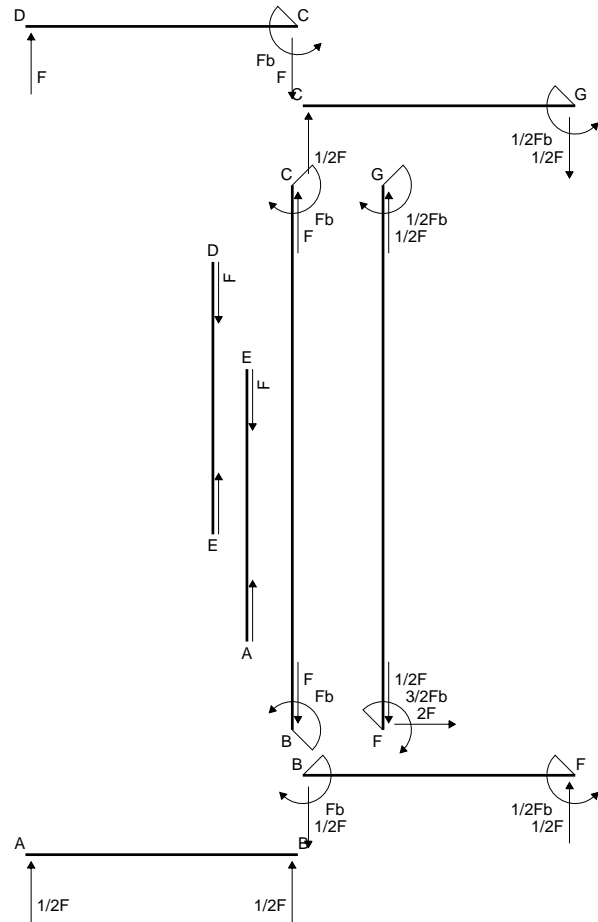


← ⊕ → F


↑ ⊕ ↓ F

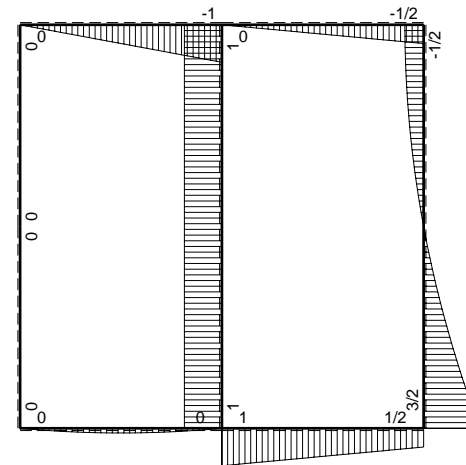

⊕ ⊖ F<sub>b</sub>

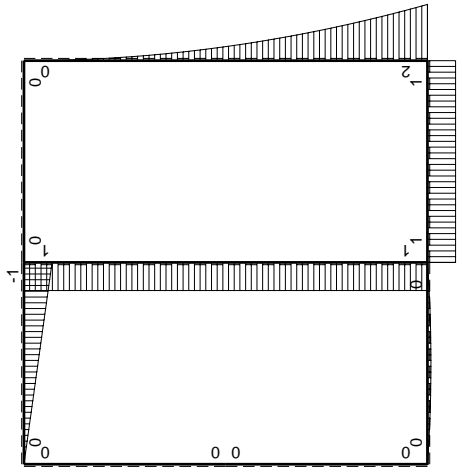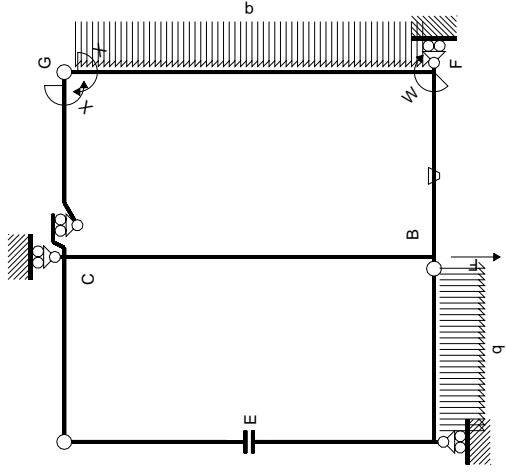

$M_0$  flessione da carichi assegnati

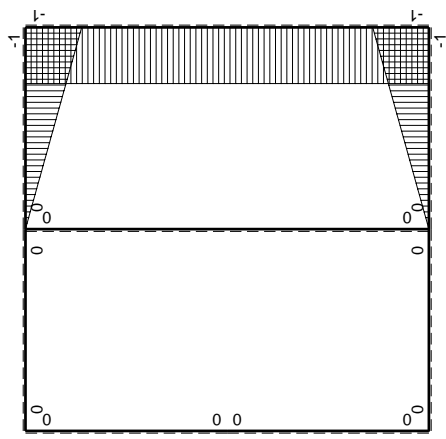

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |        | M <sup>0</sup> (x)            |        | M <sup>x</sup> (x)             |             | M <sup>0</sup> θ                      |                               | M <sup>x</sup> θ |     | M <sup>x</sup> M <sub>x</sub> |   | ∫M <sup>x</sup> (M <sub>0</sub> /EJ+θ)dx |   | ∫M <sup>x</sup> M <sub>x</sub> /EJdx |   |
|---|--------|-------------------------------|--------|--------------------------------|-------------|---------------------------------------|-------------------------------|------------------|-----|-------------------------------|---|--|---|--------------------------------------|---|
| AB b  | 0      | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| BA b  | 0      | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| CD b  | 0      | -b+Fx                         | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| DC b  | 0      | Fx                            | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| DE b  | 0      | 0                             | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| ED b  | 0      | 0                             | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| EA b  | 0      | 0                             | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| AE b  | 0      | 0                             | 0      | 0                              | 0           | 0                                     | 0                             | 0                | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| BF b  | -x/b   | Fb                            | -Fb/EJ | -Fx                            | Fx/EJ       | x <sup>2</sup> /b <sup>2</sup>        | -1/2+1/2)Fb <sup>2</sup> /EJ  | 1/3xb/EJ         | 0+0 | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| FB b  | 1-x/b  | -Fb                           | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-1/2+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ         | 0+0 | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| GC b  | -1+x/b | 0                             | 0      | 0                              | 0           | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                           | 1/3xb/EJ         | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| CG b  | x/b    | 0                             | 0      | 0                              | 0           | x <sup>2</sup> /b <sup>2</sup>        | 0+0                           | 1/3xb/EJ         | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| FG 2b   | -1     | 2Fb-2Fx+1/2qx <sup>2</sup>    | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0           | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ   | 2Xb/EJ           | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| GF 2b   | 1      | -1/2qx <sup>2</sup>           | 0      | -1/2Fx <sup>2</sup> /b         | 0           | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ   | 2Xb/EJ           | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| CB 2b   | 0      | Fb                            | 0      | 0                              | 0           | 0                                     | 0+0                           | 8/3Xb/EJ         | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| BC 2b   | 0      | -Fb                           | 0      | 0                              | 0           | 0                                     | 0+0                           | 8/3Xb/EJ         | 0   | 0                             | 0 | 0  | 0 | 0                                    | 0 |
| totali  |        |                               |        |                                |             |                                       |                               |                  |     |                               |   |  |   |                                      |   |
|   |        | iperstatica X=W <sub>gc</sub> |        |                                |             |                                       |                               |                  |     |                               |   |  |   |                                      |   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

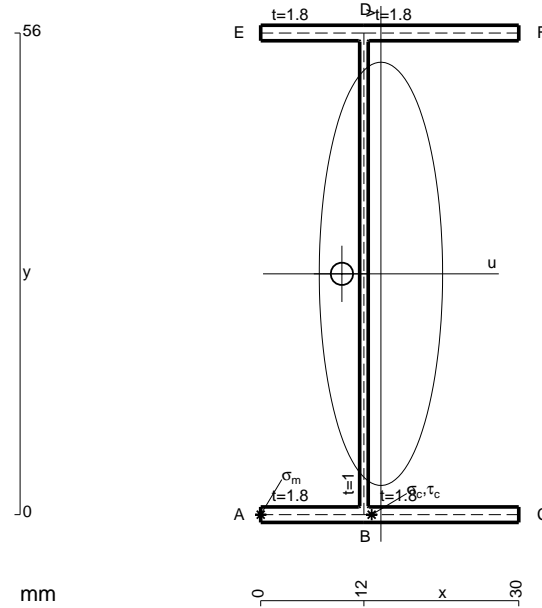

$$A = 164. \text{ mm}^2$$

$$J_u = 99307. \text{ mm}^4$$

$$J_v = 8432. \text{ mm}^4$$

$$J_t = 135.3 \text{ mm}^4$$

$$x_o = -4.534 \text{ mm}$$

$$x_g = 13.98 \text{ mm}$$

$$T_y = 1070. \text{ N}$$

$$M_x = -706200. \text{ Nmm}$$

$$u_m = -13.98 \text{ mm}$$

$$v_m = -28. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -199.1 \text{ N/mm}^2$$

$$x_c = 12. \text{ mm}$$

$$u_c = -1.976 \text{ mm}$$

$$v_c = -28. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -199.1 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 69.96 \text{ N/mm}^2$$





$$\tau_g = TS/tJ_u = 5.43 \text{ N/mm}^2$$


$$\tau_o = T x_o t/J_t = 64.53 \text{ N/mm}^2$$

$$t_c = 1926. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 233.1 \text{ N/mm}^2$$



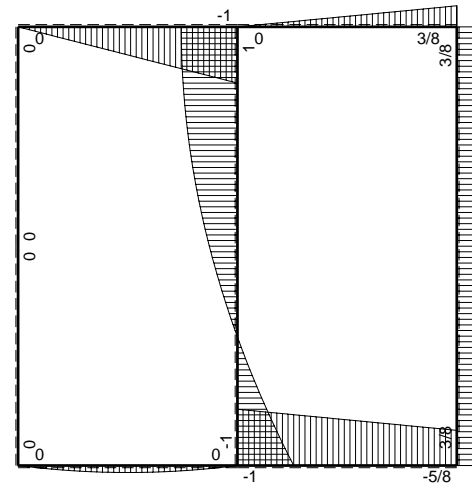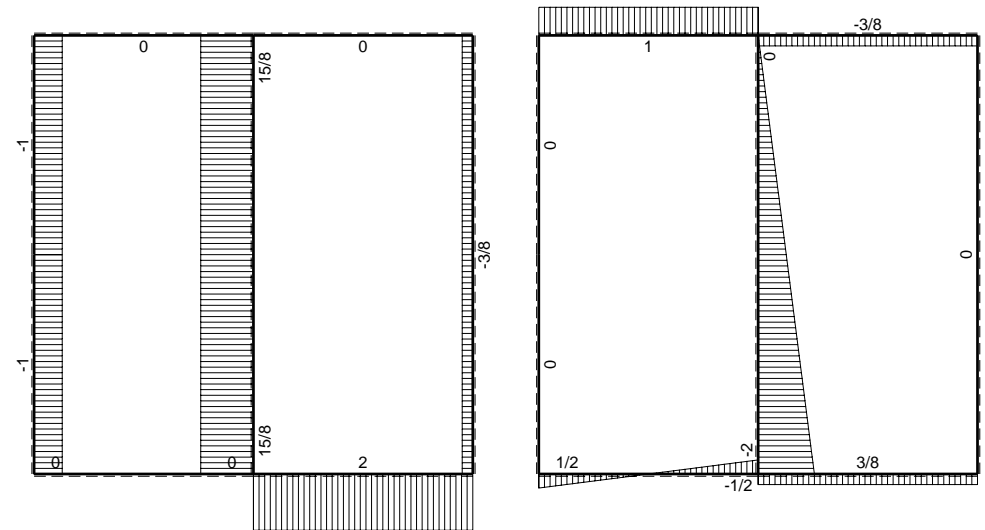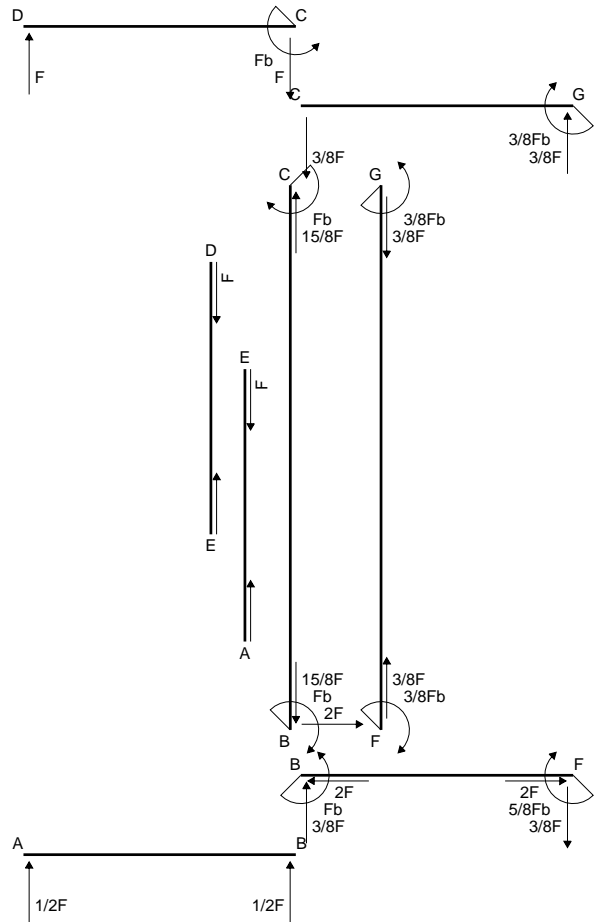


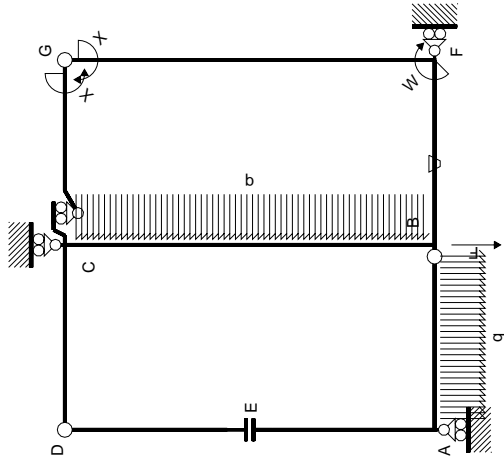

Schema di calcolo iperstatico

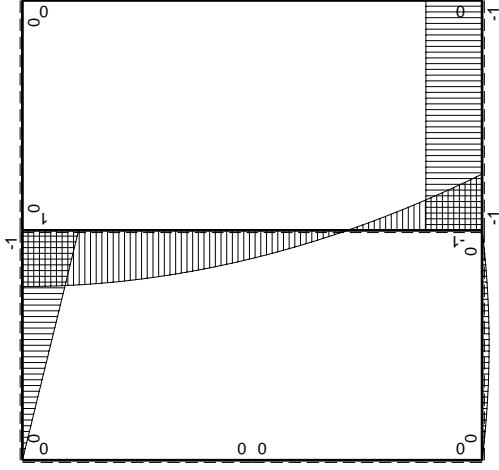

$M_0$  flessione da carichi assegnati

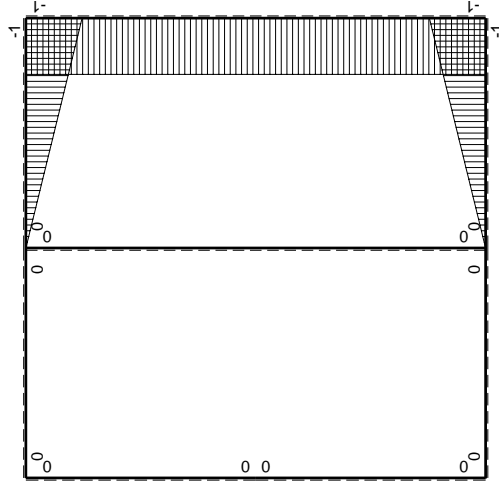

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|---------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |               |                  |                                 | $8/3xb/EJ$             |
|               |          |                      |          |           |               |                  |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

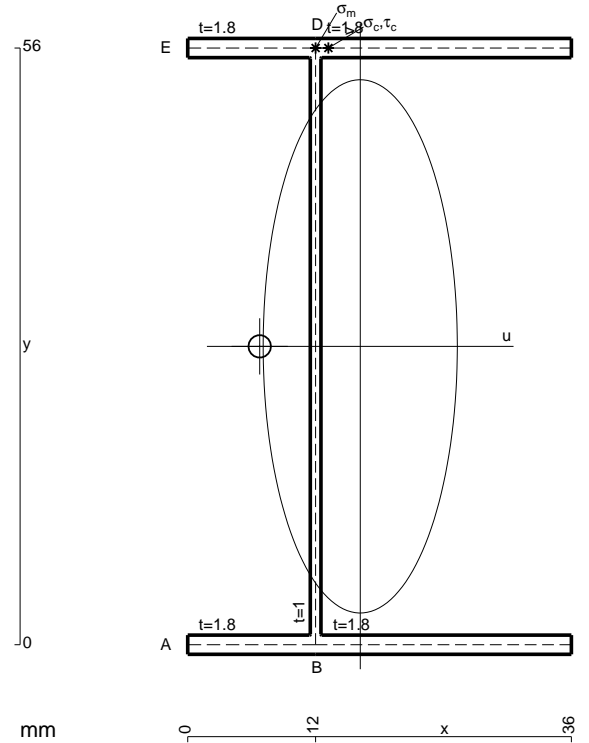


- A = 185.6 mm<sup>2</sup>
- J<sub>u</sub> = 116241. mm<sup>4</sup>
- J<sub>v</sub> = 15405. mm<sup>4</sup>
- J<sub>t</sub> = 158.6 mm<sup>4</sup>
- x<sub>o</sub> = -9.434 mm
- x<sub>g</sub> = 16.19 mm
- N = 2194. N
- T<sub>y</sub> = -2340. N
- M<sub>x</sub> = -819000. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -4.19 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 209.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -4.19 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 209.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 264. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.53 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>t/J<sub>t</sub> = 250.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 2106. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 502.8 N/mm<sup>2</sup>






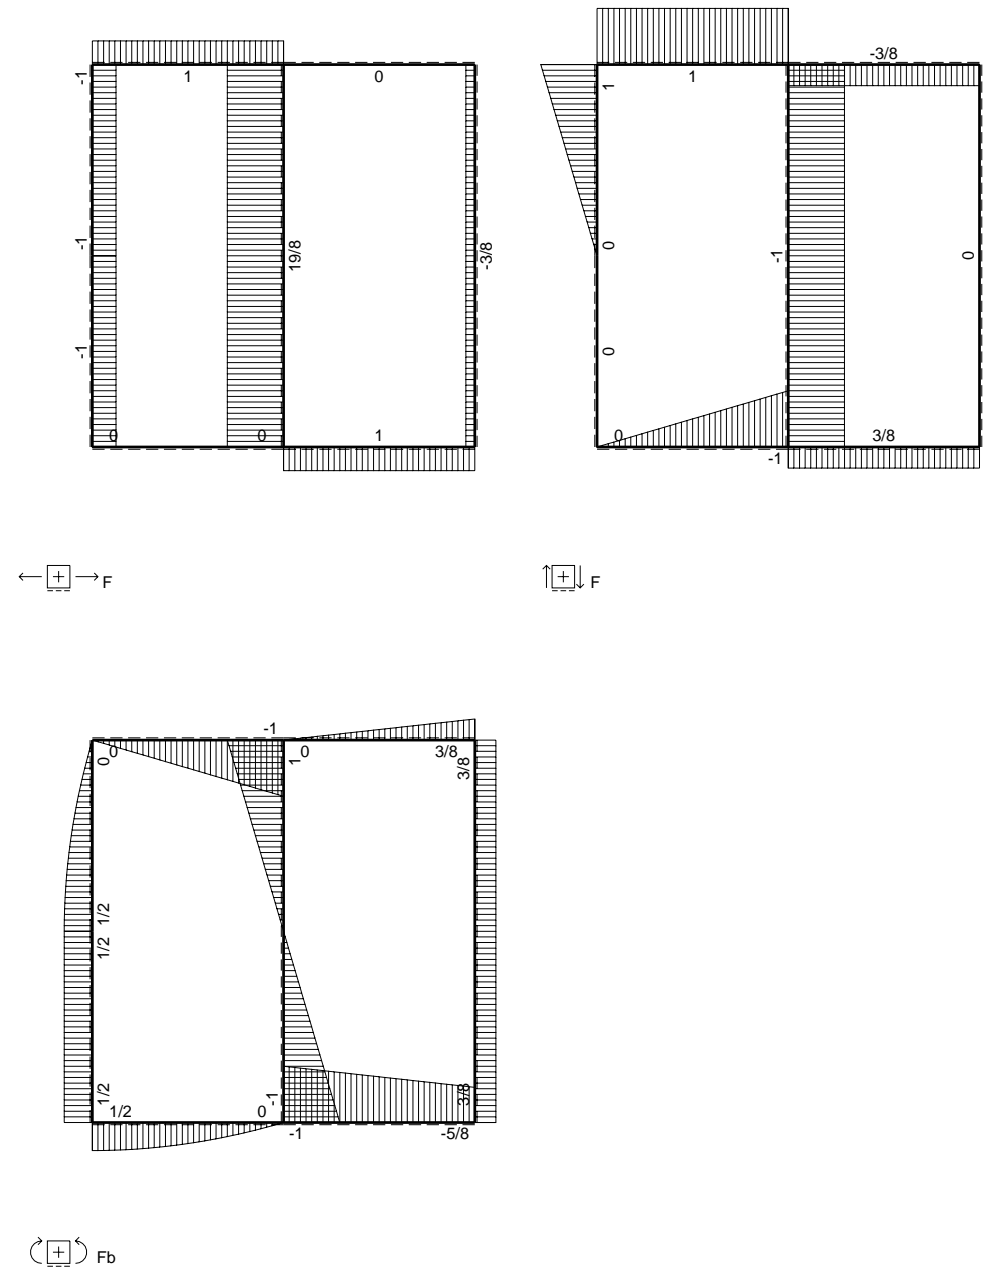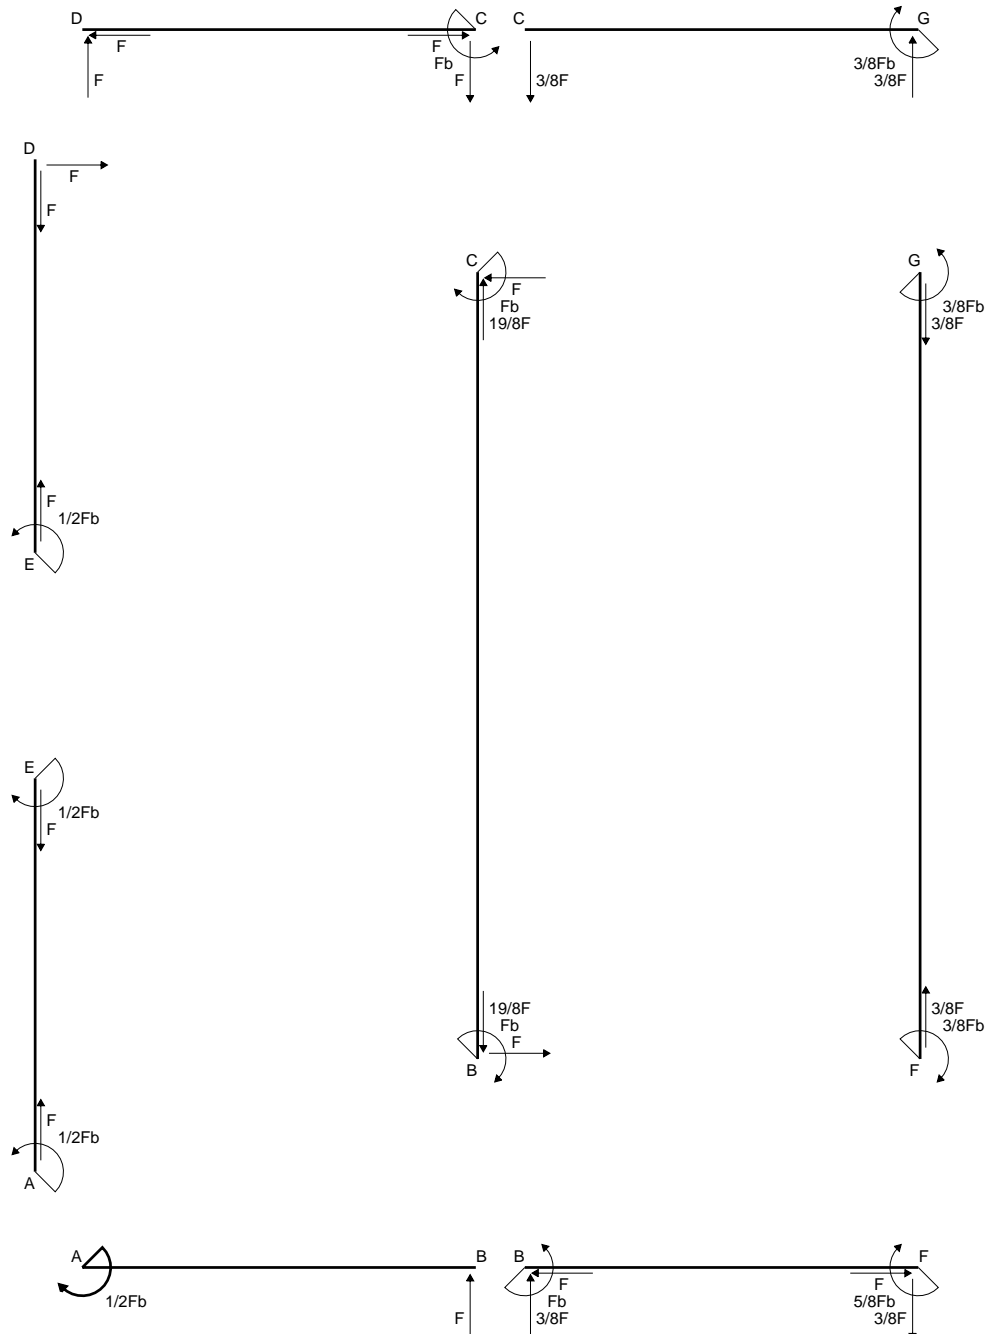


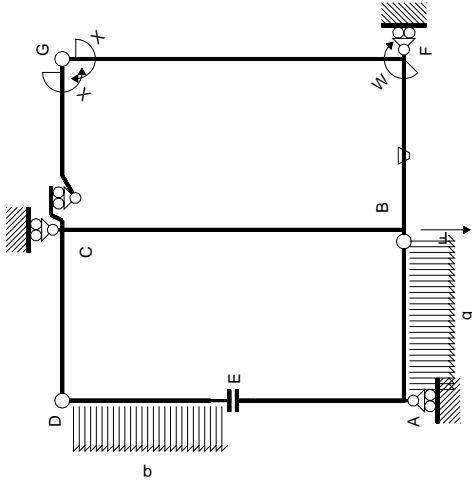

Schema di calcolo iperstatico

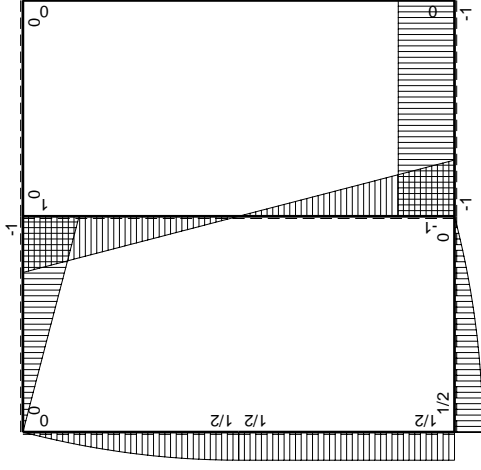

$M_0$  flessione da carichi assegnati

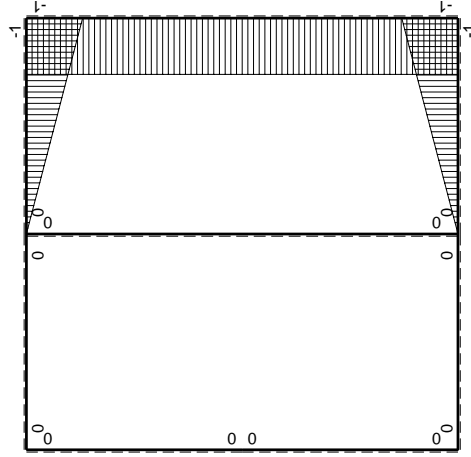

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$           | $M_0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|------------------|----------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | $1/2Fb-1/2qx^2$  | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | $-Fx+1/2qx^2$    | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | $-Fb+Fx$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | $Fx$             | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | $Fx-1/2qx^2$     | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | $-1/2Fb+1/2qx^2$ | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | $1/2Fb$          | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | $-1/2Fb$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$           | $-Fb$    | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb^2/EJ$         |
| FB b          | $1-x/b$          | $Fb$     | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb^2/EJ$         |
| GC b          | $-1+x/b$         | 0        | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb^2/EJ$         |
| CG b          | $x/b$            | 0        | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb^2/EJ$         |
| FG 2b         | -1               | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb^2/EJ$           |
| GF 2b         | 1                | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb^2/EJ$           |
| CB 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |                  |          |          |           |               |                  |                             | $Fb^2/EJ$            |
|               |                  |          |          |           |               |                  |                             | $8/3xb^2/EJ$         |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

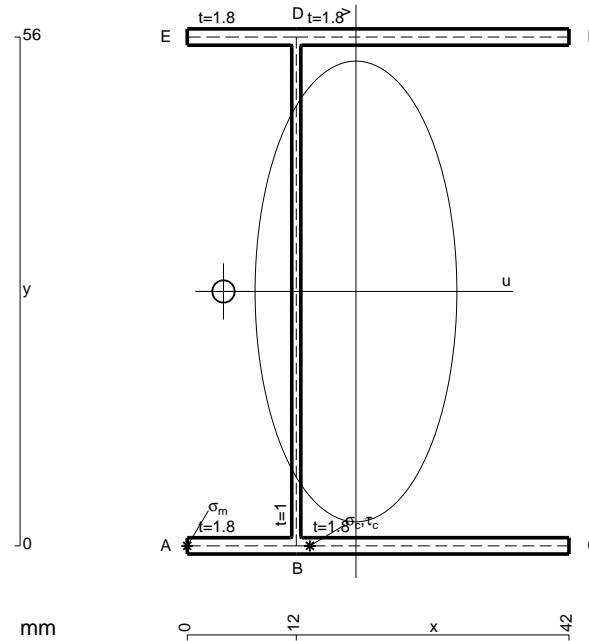


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 25537. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = -14.58 mm
- x<sub>g</sub> = 18.57 mm
- N = 3111. N
- T<sub>y</sub> = -1310. N
- M<sub>x</sub> = 969400. Nmm
- u<sub>m</sub> = -18.57 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 218.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -6.568 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 218.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 197.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 8.263 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 188.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 2358. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 405.6 N/mm<sup>2</sup>



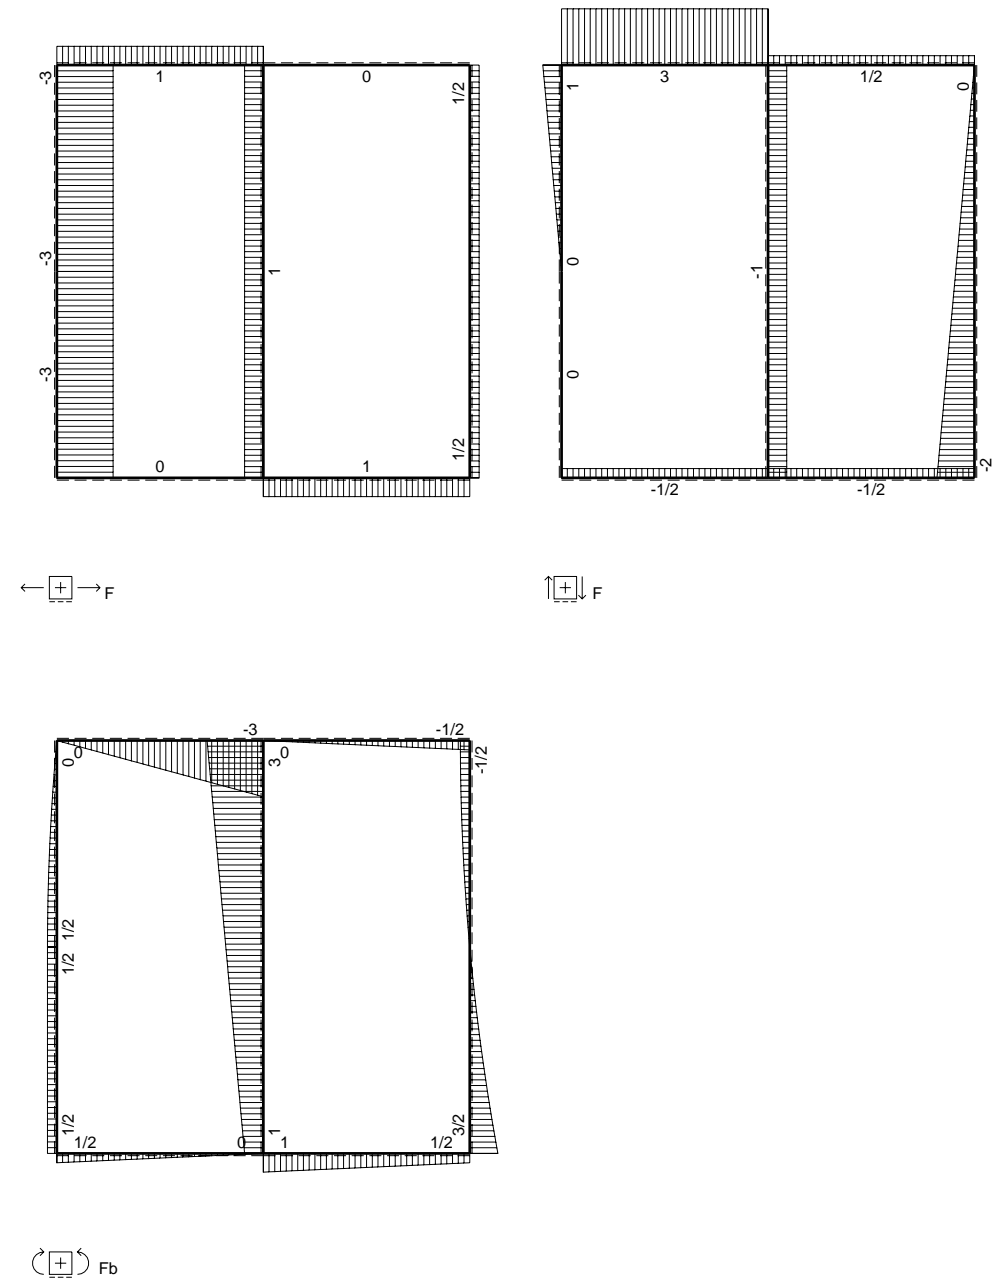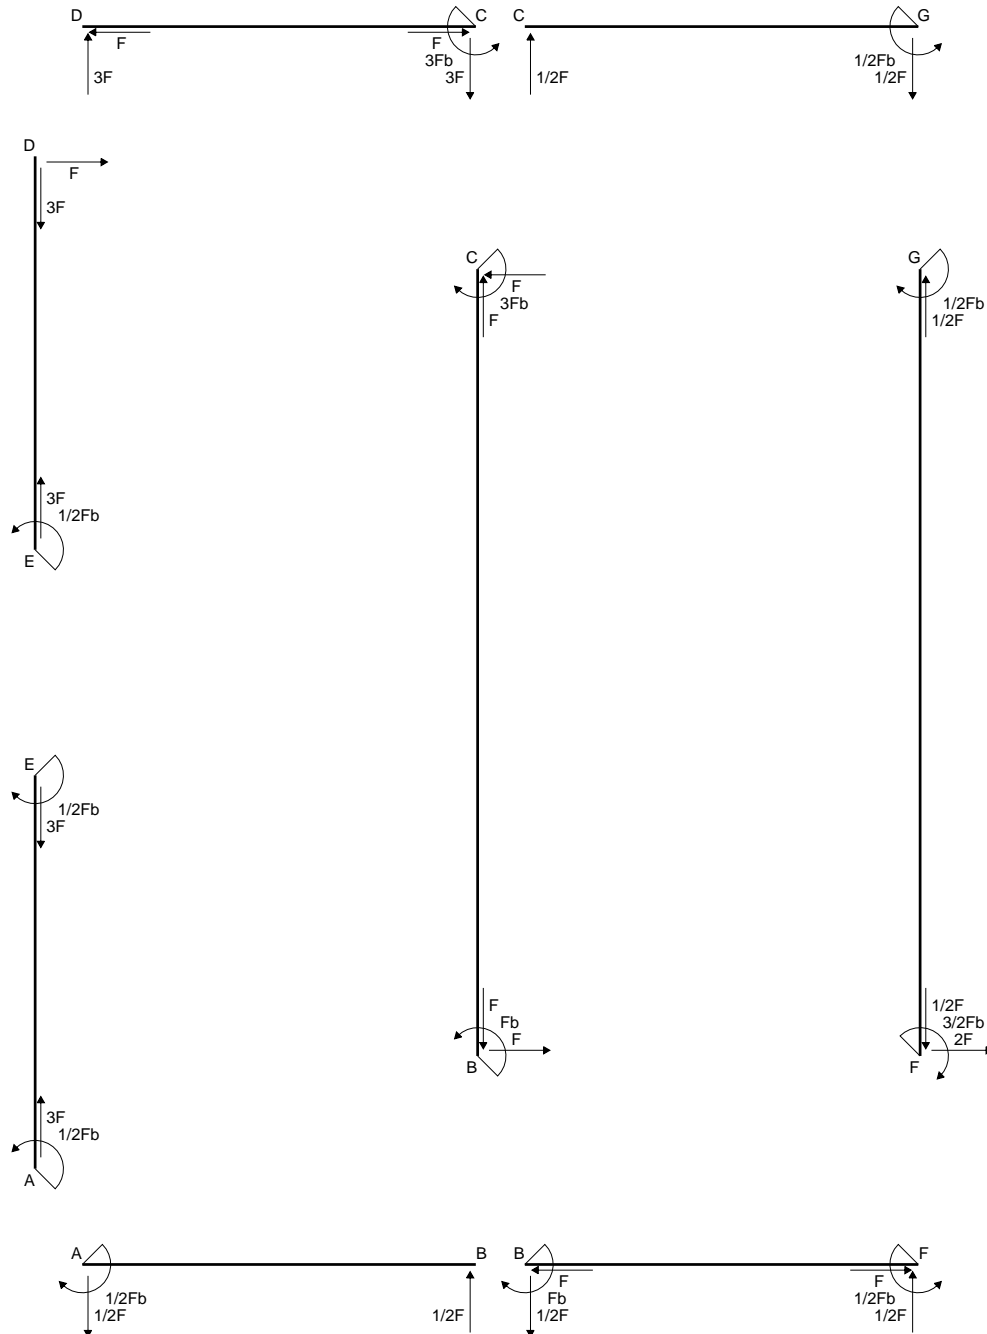

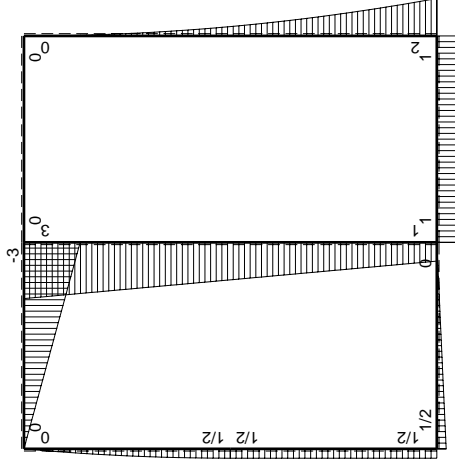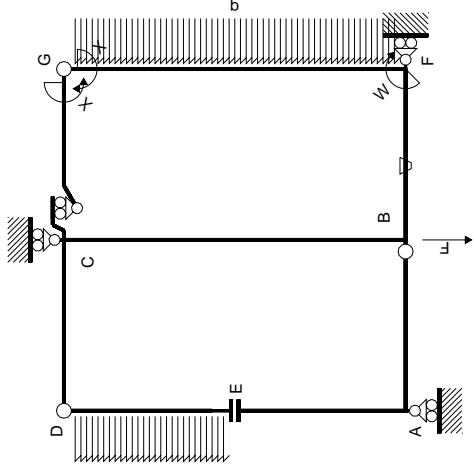

$M_0$  flessione da carichi assegnati

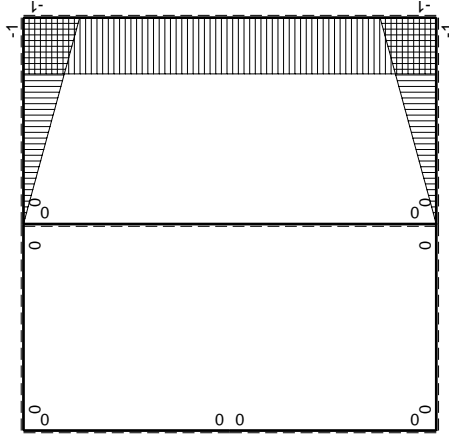

$M_x$  flessione da iperstatica X=1

| ←      | $M^0(x)$ | $\theta$ | $M_x^0$                        | $M_x^0 \theta$ | $M_x^0$          | $\int M_x^0(M^0/EJ+\theta)dx$ | $\int M_x^0 M^0/EJ dx$ | iperstatica X=W <sub>gc</sub> |                              |
|--------|----------|----------|--------------------------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|------------------------------|
|        |          |          |                                |                |                  |                               |                        | totali                        |                              |
| AB b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | 1/2Fb-1/2Fx                   | 0                            |
| BA b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | -1/2Fx                        | 0                            |
| CD b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | -3Fb+3Fx                      | 0                            |
| DC b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | 3Fx                           | 0                            |
| DE b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | Fx-1/2qx <sup>2</sup>         | 0                            |
| ED b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | -1/2Fb+1/2qx <sup>2</sup>     | 0                            |
| EA b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | 1/2Fb                         | 0                            |
| AE b   | 0        | 0        | 0                              | 0              | 0                | 0                             | 0                      | -1/2Fb                        | 0                            |
| BF b   | -x/b     | -Fb/EJ   | -Fx/EJ                         | Fx/EJ          | $x^2/b^2$        | $x^2/b^2$                     | $x^2/b^2$              | -Fb                           | -1/2+1/2)Fb <sup>2</sup> /EJ |
| FB b   | 1-x/b    | Fb/EJ    | -Fb+Fx                         | Fb/EJ-Fx/EJ    | $1-2x/b+x^2/b^2$ | $1-2x/b+x^2/b^2$              | 0                      | -1/2Fx <sup>2</sup> /b        | (-4/3+0)Fb <sup>2</sup> /EJ  |
| GC b   | -1+x/b   | 0        | 0                              | 0              | 0                | 0                             | 0                      | 0                             | 0+0                          |
| CG b   | x/b      | 0        | 0                              | 0              | 0                | 0                             | 0                      | 0                             | 0+0                          |
| FG 2b  | -1       | 0        | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0              | 1                | 1                             | 0                      | -1/2Fx <sup>2</sup> /b        | 2Xb/EJ                       |
| GF 2b  | 1        | 0        | -1/2qx <sup>2</sup>            | 0              | 0                | 0                             | 0                      | 0                             | 0+0                          |
| CB 2b  | 0        | 0        | 3Fb-Fx                         | 0              | 0                | 0                             | 0                      | 0                             | 0                            |
| BC 2b  | 0        | 0        | -Fb-Fx                         | 0              | 0                | 0                             | 0                      | 0                             | 0                            |
| totali |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |
|        |          |          |                                |                |                  |                               |                        |                               |                              |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

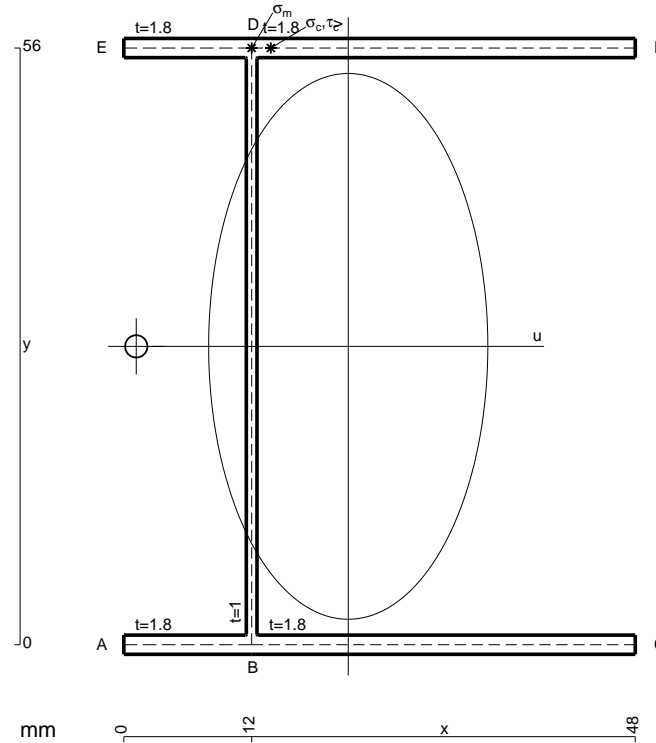


- A = 228.8 mm<sup>2</sup>
- J<sub>u</sub> = 150110. mm<sup>4</sup>
- J<sub>v</sub> = 39268. mm<sup>4</sup>
- J<sub>t</sub> = 205.3 mm<sup>4</sup>
- x<sub>o</sub> = -19.89 mm
- x<sub>g</sub> = 21.06 mm
- N = 510. N
- T<sub>y</sub> = 1530. N
- M<sub>x</sub> = -1208700. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -9.063 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 227.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -9.063 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 227.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 277.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.27 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 266.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 918. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 531.3 N/mm<sup>2</sup>






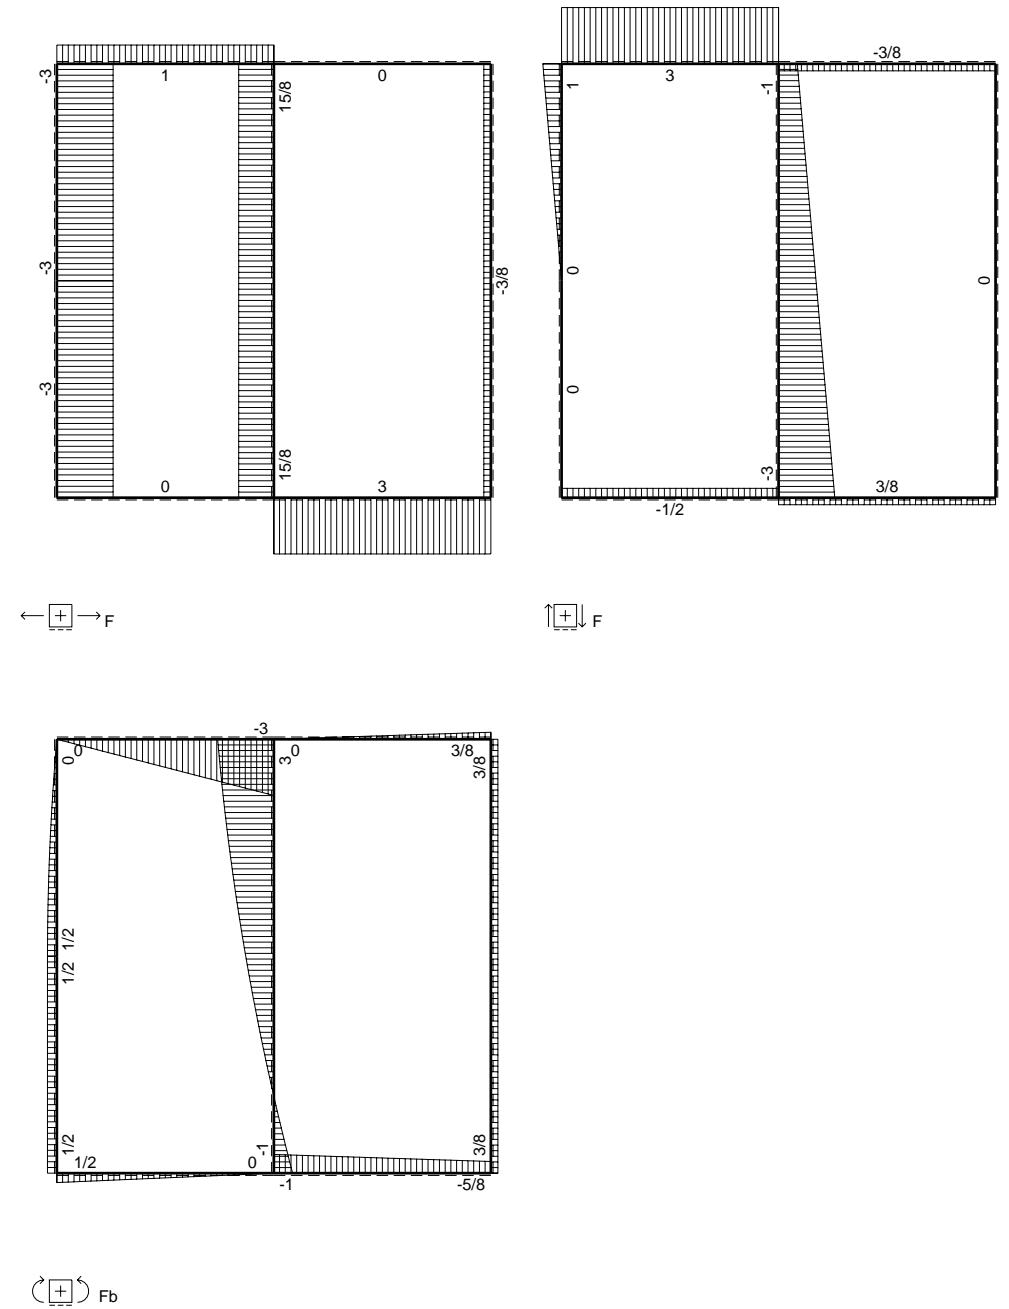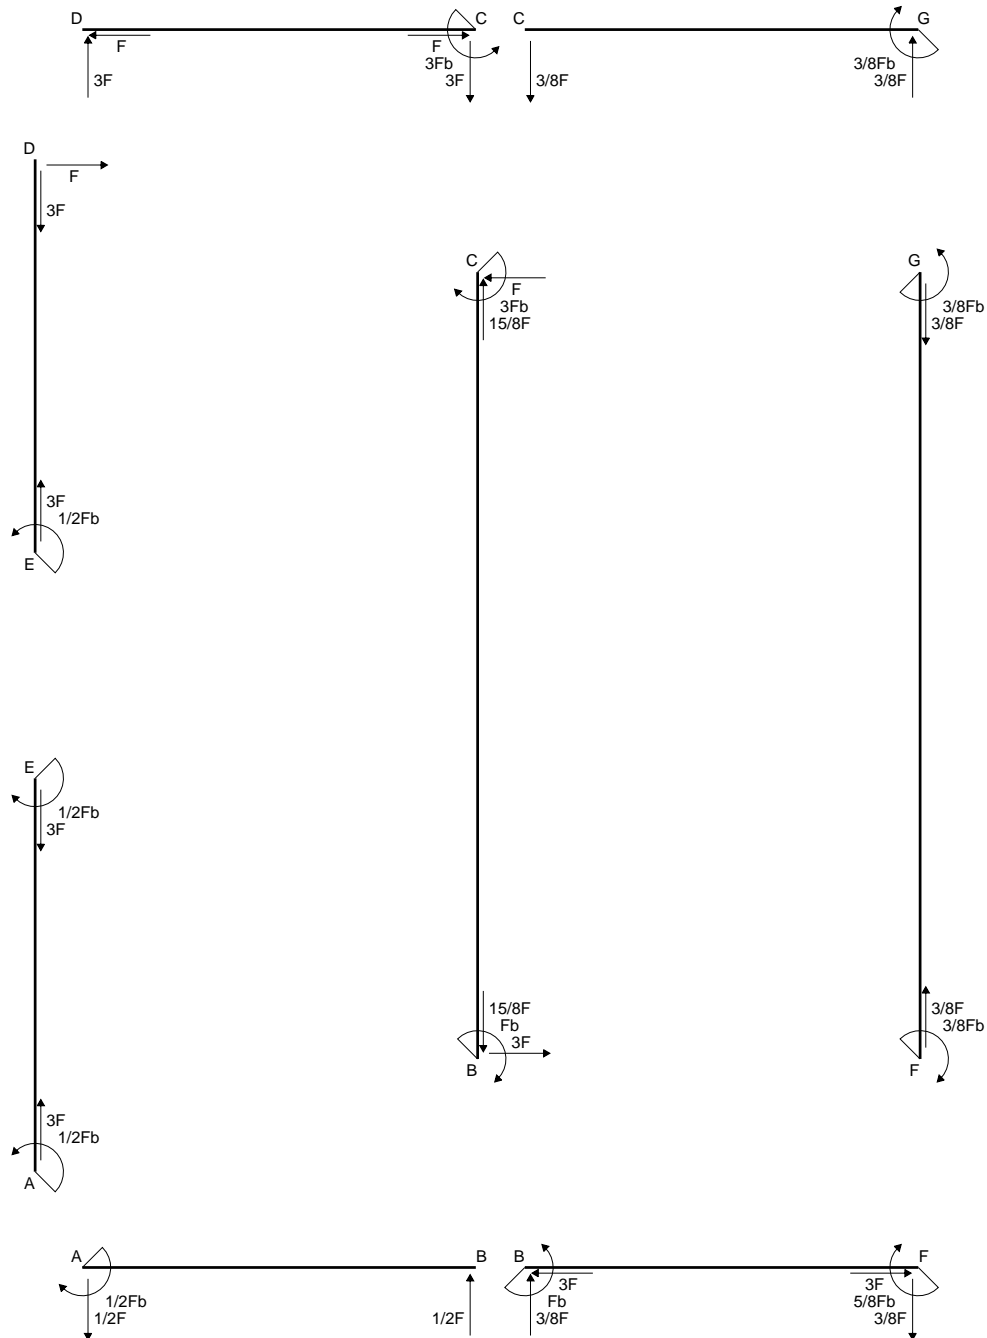

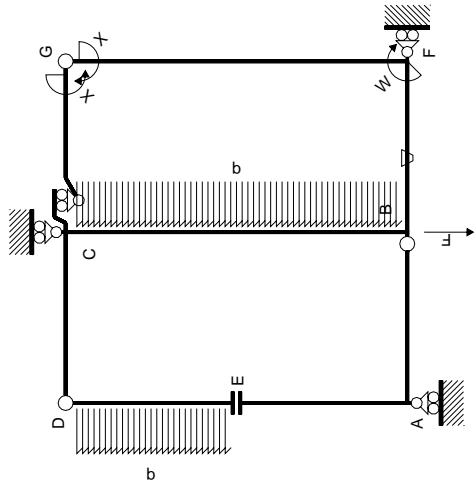

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

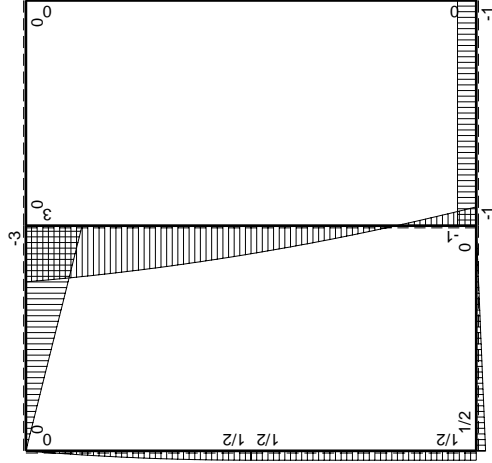


Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | $1/2Fb-1/2Fx$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | 0        | $-1/2Fx$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | 0        | $-3Fb+3Fx$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | 0        | $3Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | 0        | $Fx-1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | 0        | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | 0        | $1/2Fb$          | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | 0        | $-1/2Fb$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$   | $-Fb$            | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $Fb/EJ-Fx/EJ$    | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $Fb$             | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                | 0        | 0         | 0             | 0                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                | 0        | 0         | 0             | 0                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $3Fb-Fx-1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-3Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                  |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

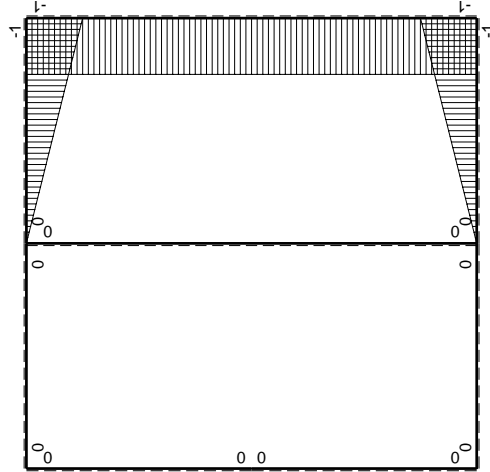

$M_x$  flessione da iperstatica  $X=1$

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

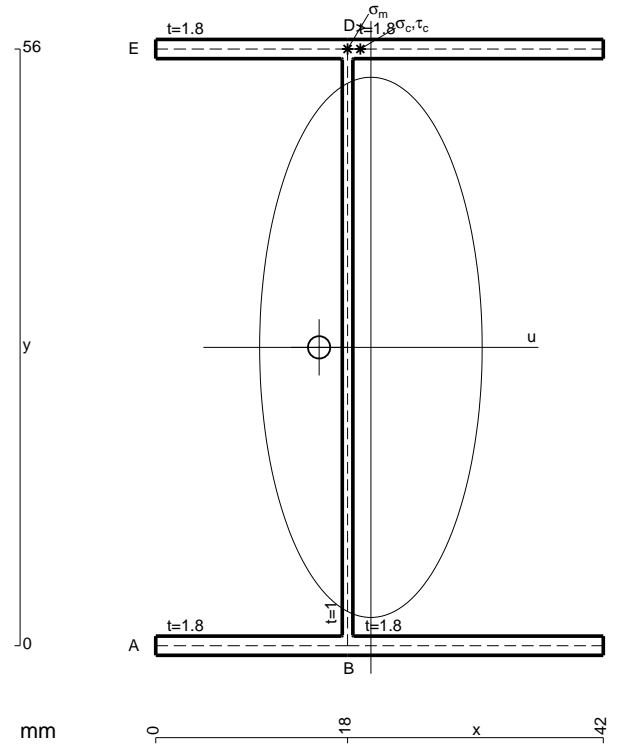


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 22594. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = -4.86 mm
- x<sub>g</sub> = 20.19 mm
- N = 450. N
- T<sub>y</sub> = 1350. N
- M<sub>x</sub> = -1120500. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -2.189 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 237.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -2.189 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 237.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 71.71 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.812 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 64.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 810. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 268.2 N/mm<sup>2</sup>



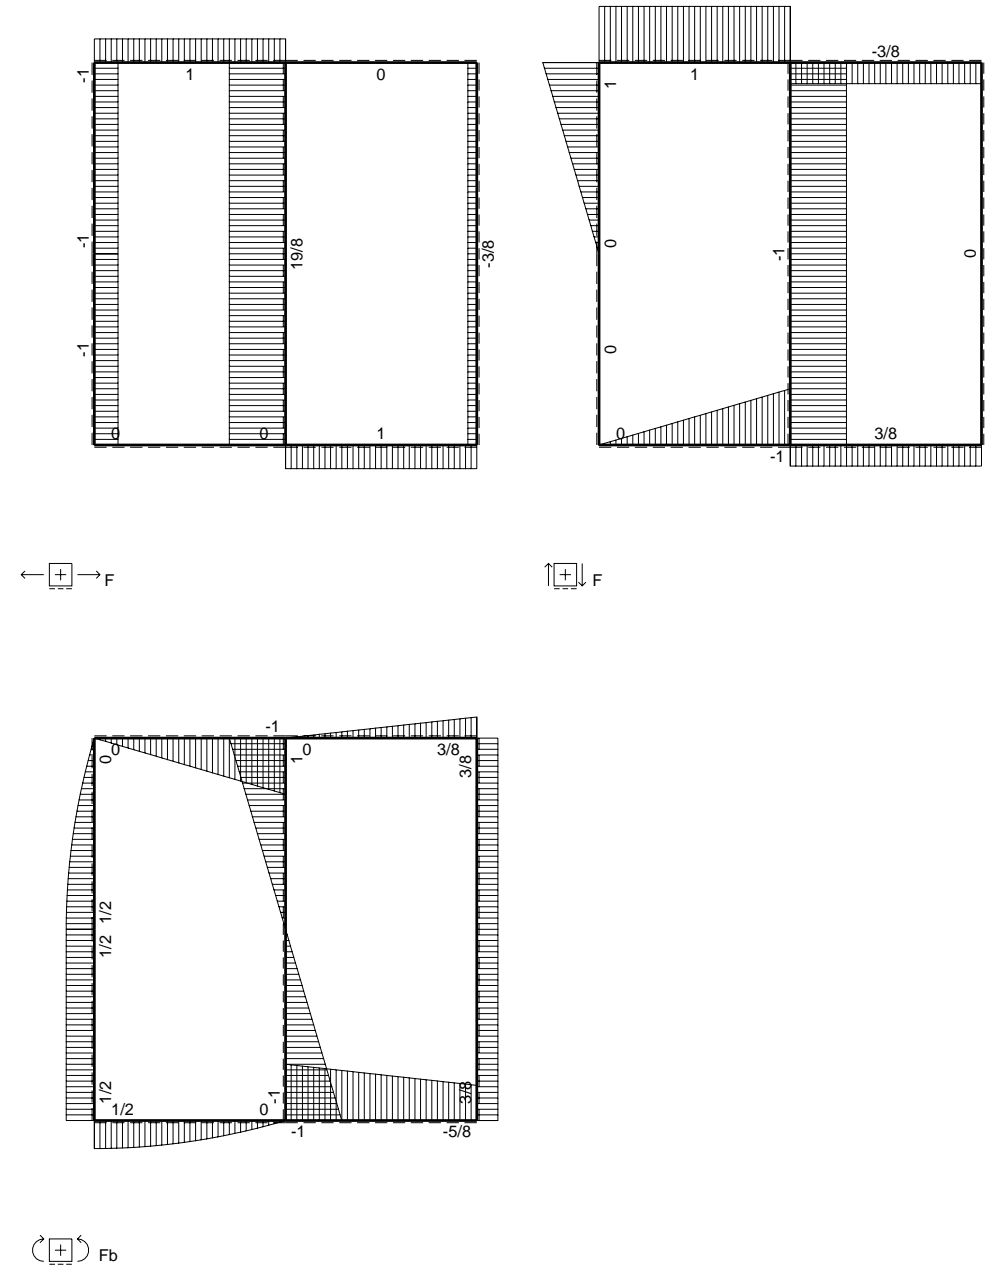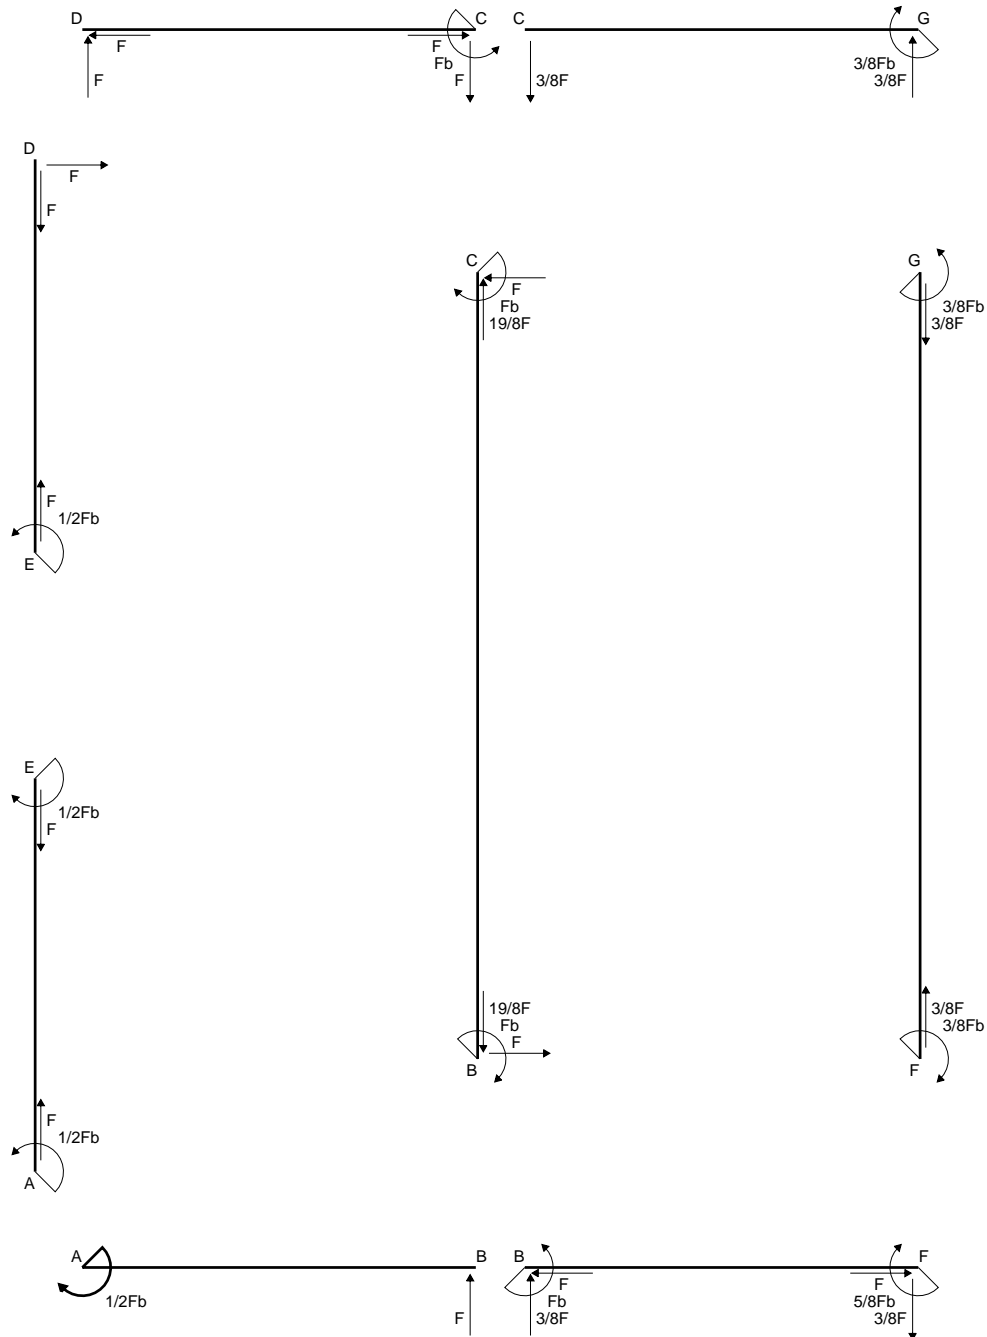


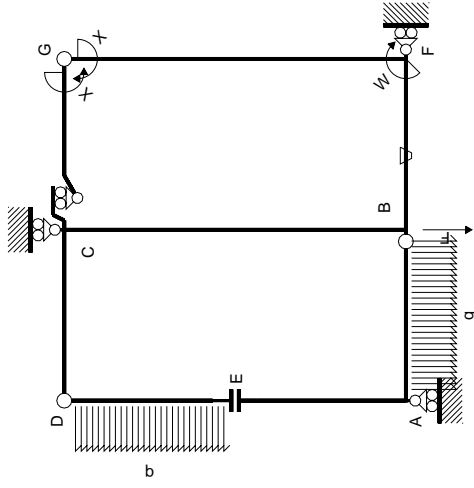

Schema di calcolo iperstatico

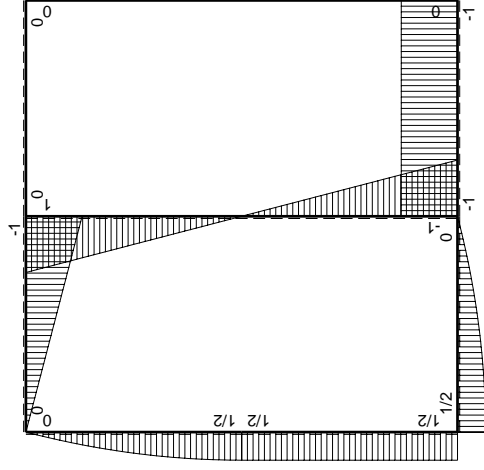

$M_0$  flessione da carichi assegnati

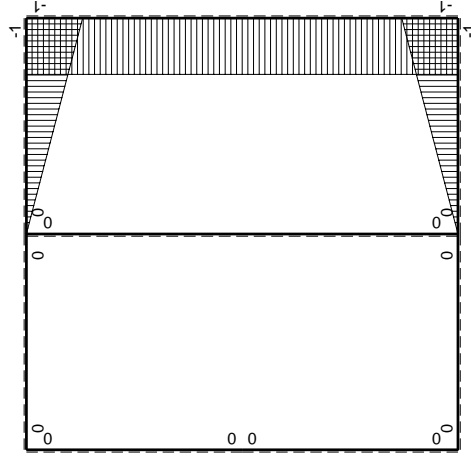

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$ | $\theta$ | $M_x M_0$       | $M_x \theta$       | $M_x M_x$             | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / Edx$ |
|---------------|-----------------------|----------|----------|-----------------|--------------------|-----------------------|---------------------------------|----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| BA b          | $-Fb + 1/2 q x^2$     | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| CD b          | $-Fb + Fx$            | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| DC b          | $Fx$                  | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| DE b          | $Fx - 1/2 q x^2$      | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| EA b          | $1/2 Fb$              | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| AE b          | $-1/2 Fb$             | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| BF b          | $-Fb$                 | $-Fb/EJ$ | $Fx$     | $Fx/EJ$         | $x^2/b^2$          | $(1/2 + 1/2) Fb^2/EJ$ | $1/3 Xb/EJ$                     | 0                    |
| FB b          | $1-x/b$               | $Fb/EJ$  | $Fb-Fx$  | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/3 Xb/EJ$           | $1/3 Xb/EJ$                     | 0                    |
| GC b          | $-1+x/b$              | 0        | 0        | 0               | 0                  | $1-2x/b + x^2/b^2$    | 0+0                             | $1/3 Xb/EJ$          |
| CG b          | $x/b$                 | 0        | 0        | 0               | 0                  | $x^2/b^2$             | 0+0                             | $1/3 Xb/EJ$          |
| FG 2b         | -1                    | 0        | 0        | 0               | 0                  | 1                     | 0+0                             | $2Xb/EJ$             |
| GF 2b         | 1                     | 0        | 0        | 0               | 0                  | 1                     | 0+0                             | $2Xb/EJ$             |
| CB 2b         | $Fb-Fx$               | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| BC 2b         | $Fb-Fx$               | 0        | 0        | 0               | 0                  | 0                     | 0+0                             | 0                    |
| totali        |                       |          |          |                 |                    |                       |                                 | $8/3 Xb/EJ$          |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

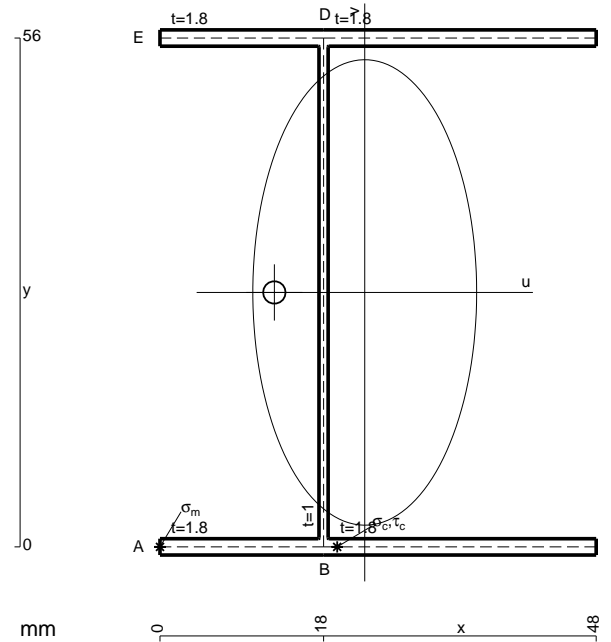


- A = 228.8 mm<sup>2</sup>
- J<sub>u</sub> = 150110. mm<sup>4</sup>
- J<sub>v</sub> = 34700. mm<sup>4</sup>
- J<sub>t</sub> = 205.3 mm<sup>4</sup>
- x<sub>o</sub> = -9.947 mm
- x<sub>g</sub> = 22.53 mm
- N = 5130. N
- T<sub>y</sub> = -2160. N
- M<sub>x</sub> = 950400. Nmm
- u<sub>m</sub> = -22.53 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -4.531 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 200.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.09 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 188.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 3888. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 400.5 N/mm<sup>2</sup>






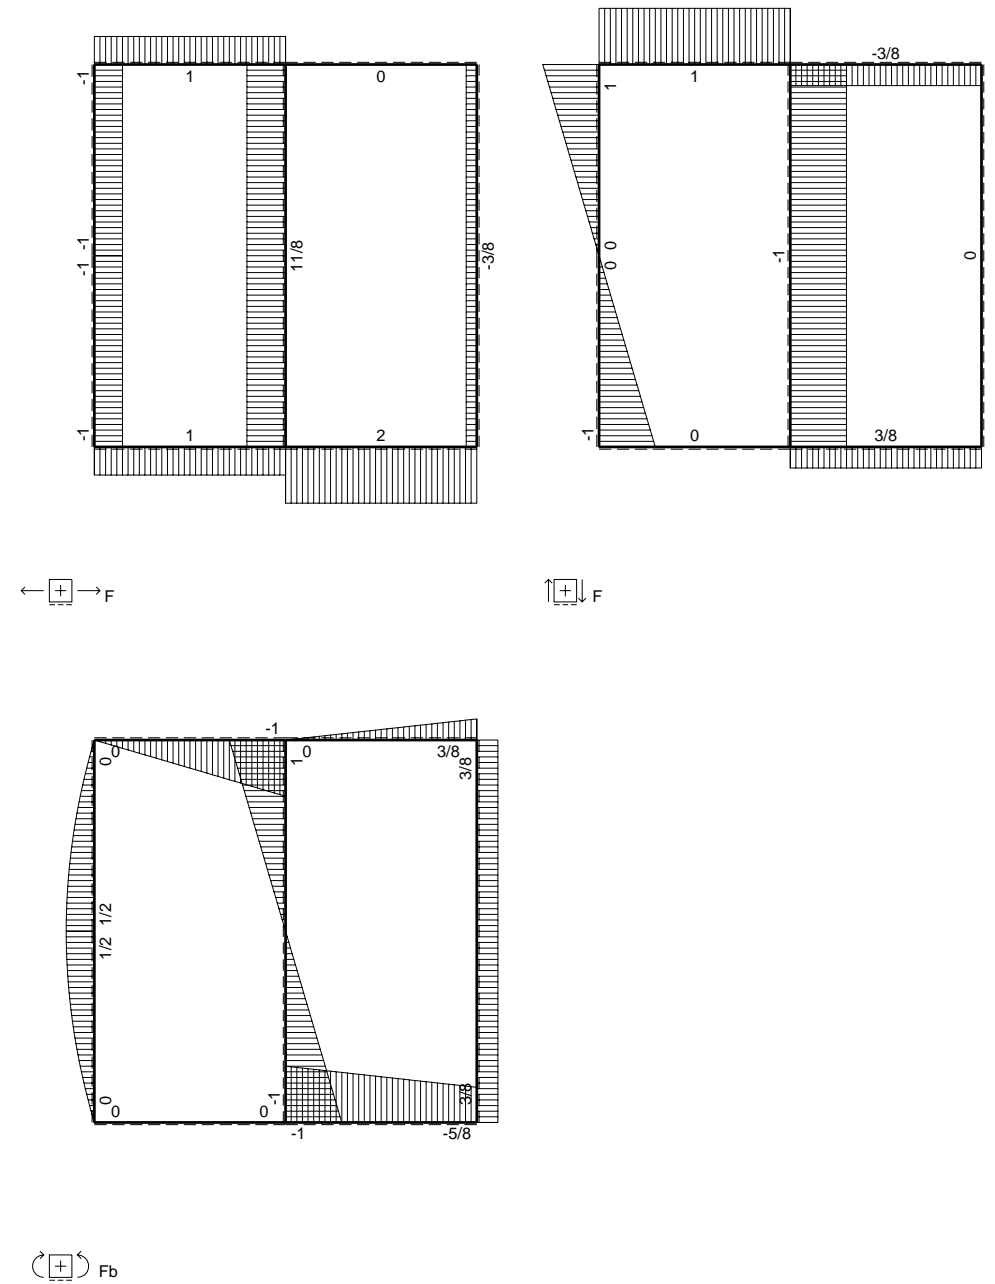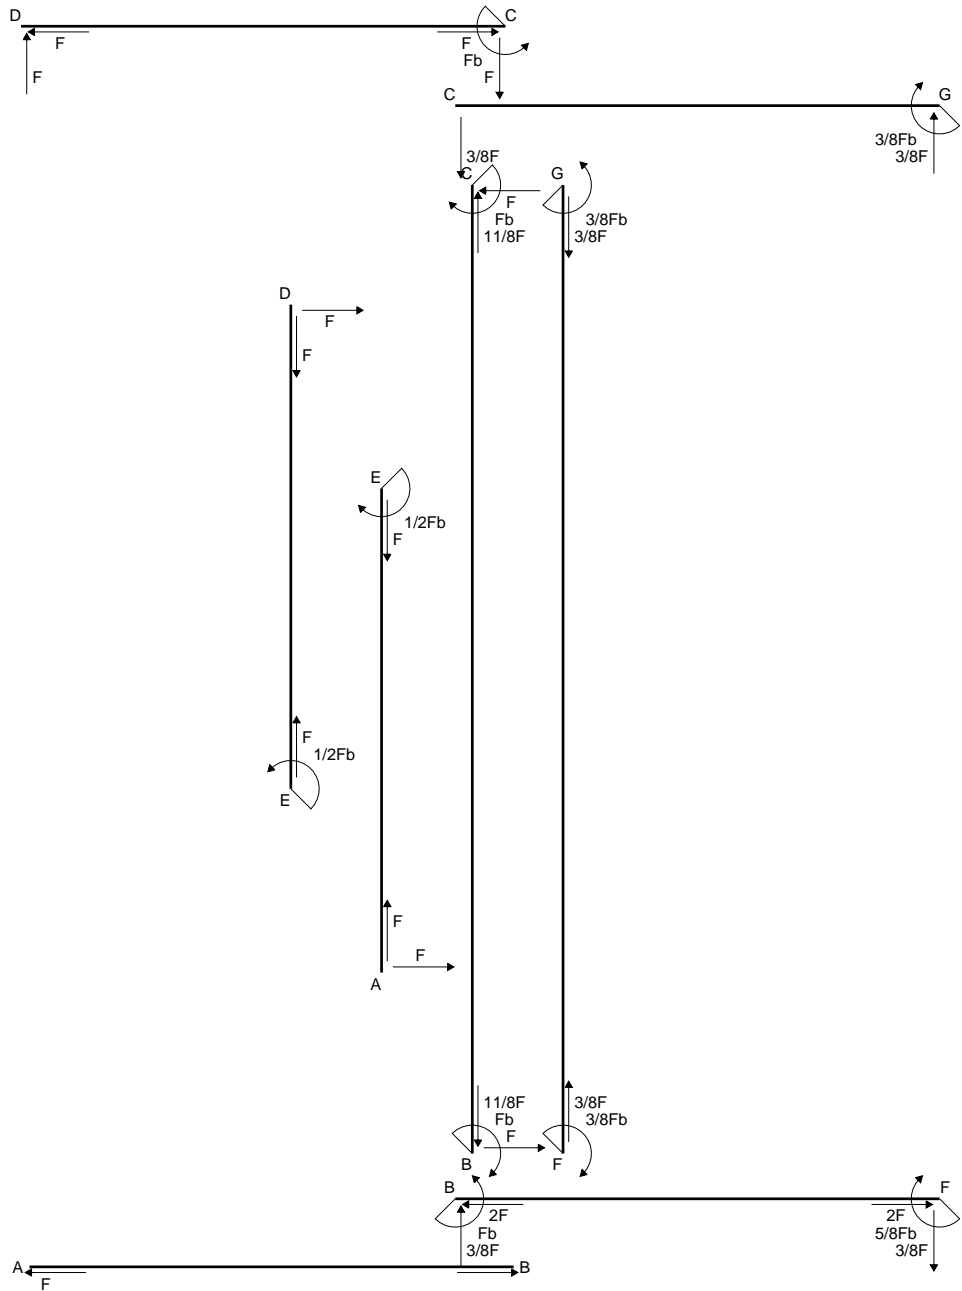


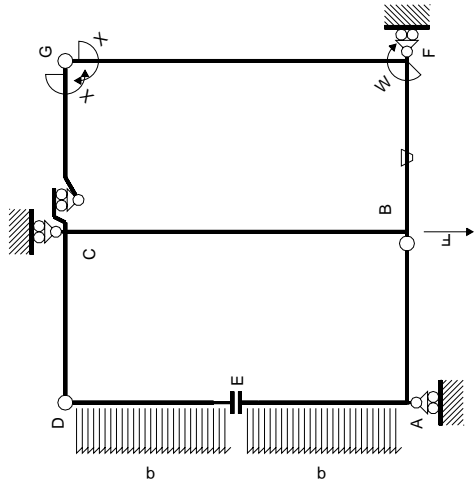

Schema di calcolo iperstatico

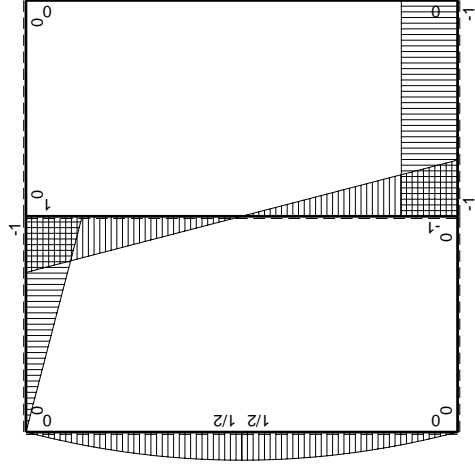

$M_0$  flessione da carichi assegnati

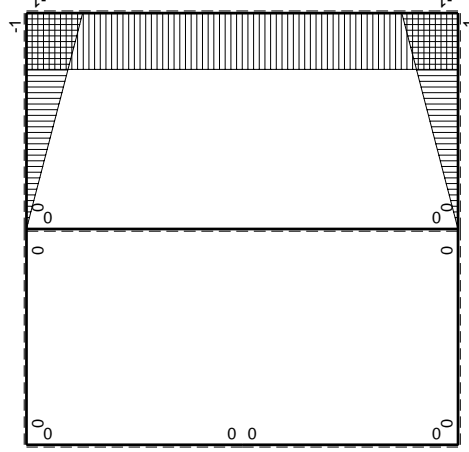

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>x</sup> (x) | M <sub>0</sub> (x)        | θ      | M <sub>0</sub> M <sub>0</sub> | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | ∫M <sub>0</sub> (M <sub>0</sub> /EJ+θ)dx | ∫M <sub>0</sub> M <sub>x</sub> /EJdx |
|--------|--------------------|---------------------------|--------|-------------------------------|------------------|---------------------------------------|--|--------------------------------------|
| AB b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| BA b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| CD b   | 0                  | -Fb+Fx                    | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| DC b   | 0                  | Fx                        | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| DE b   | 0                  | Fx-1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| ED b   | 0                  | -1/2Fb+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| EA b   | 0                  | 1/2Fb-1/2qx <sup>2</sup>  | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| AE b   | 0                  | -Fx+1/2qx <sup>2</sup>    | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| BF b   | -x/b               | -Fb                       | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ             | 1/3xb/EJ                             |
| FB b   | 1-x/b              | Fb                        | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                                 | 1/3xb/EJ                             |
| GC b   | -1+x/b             | 0                         | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                                      | 1/3xb/EJ                             |
| CG b   | x/b                | 0                         | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                                      | 2xb/EJ                               |
| FG 2b  | -1                 | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                      | 0                                    |
| GF 2b  | 1                  | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                      | 0                                    |
| CB 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| BC 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 8/3xb/EJ                             |
| totali |                    |                           |        |                               |                  |                                       |  |                                      |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


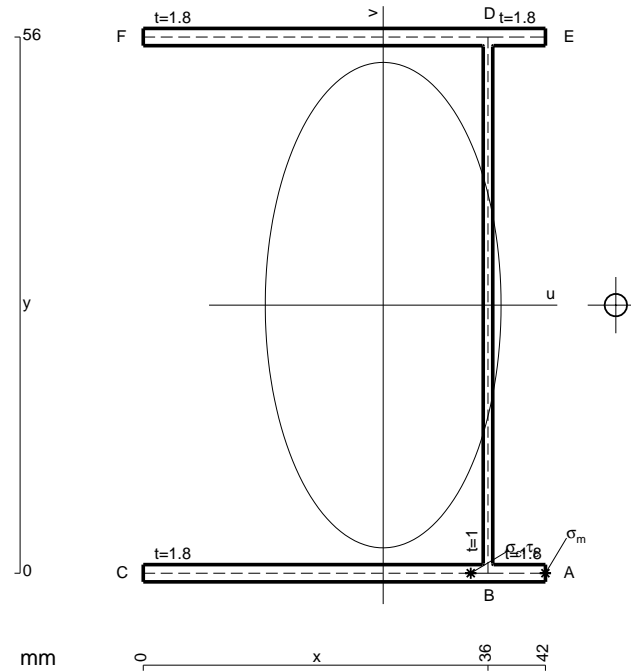


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 31421. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = 24.3 mm
- x<sub>g</sub> = 25.05 mm
- N = 2681. N
- T<sub>y</sub> = -1950. N
- M<sub>x</sub> = 936000. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 16.95 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 10.95 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 483.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 14.76 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 468.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 3510. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 863.2 N/mm<sup>2</sup>




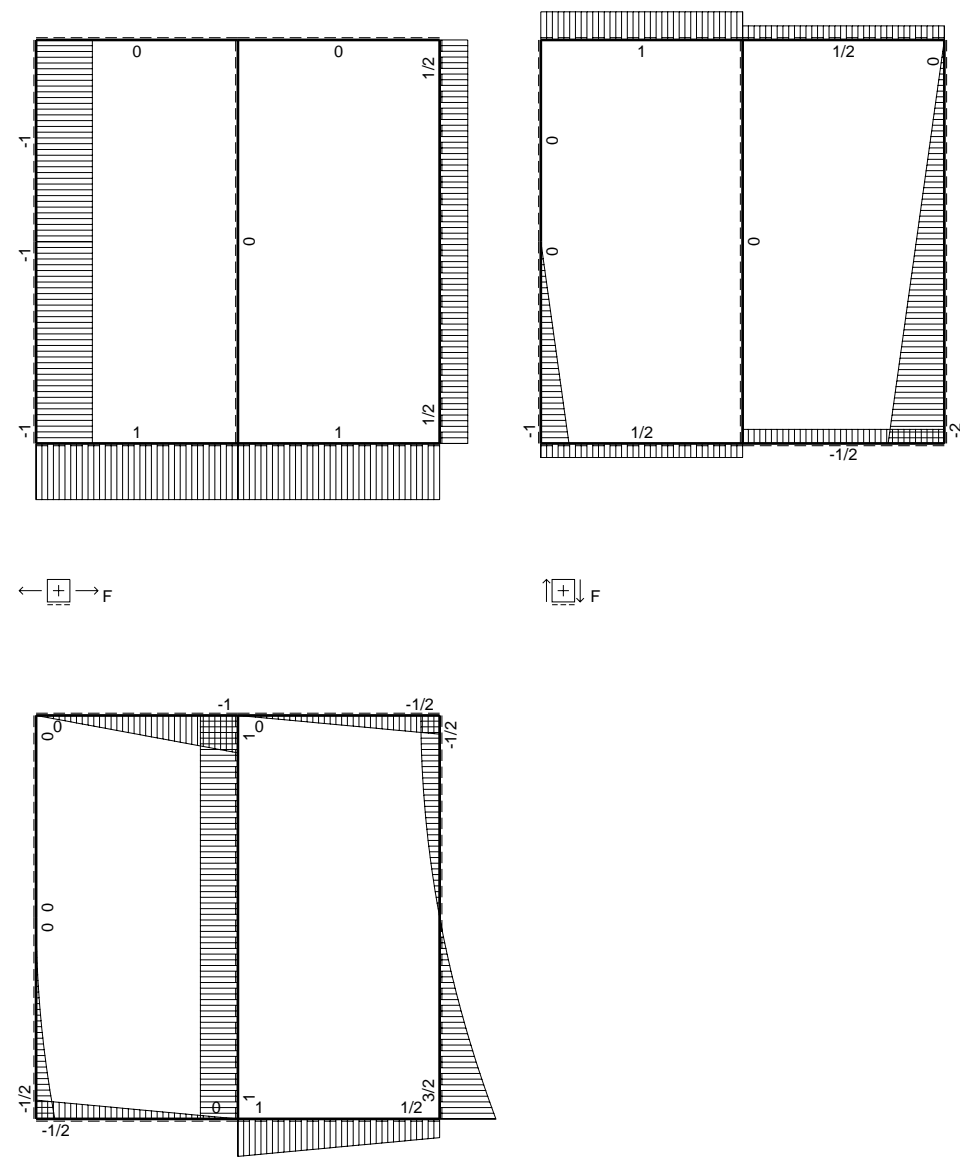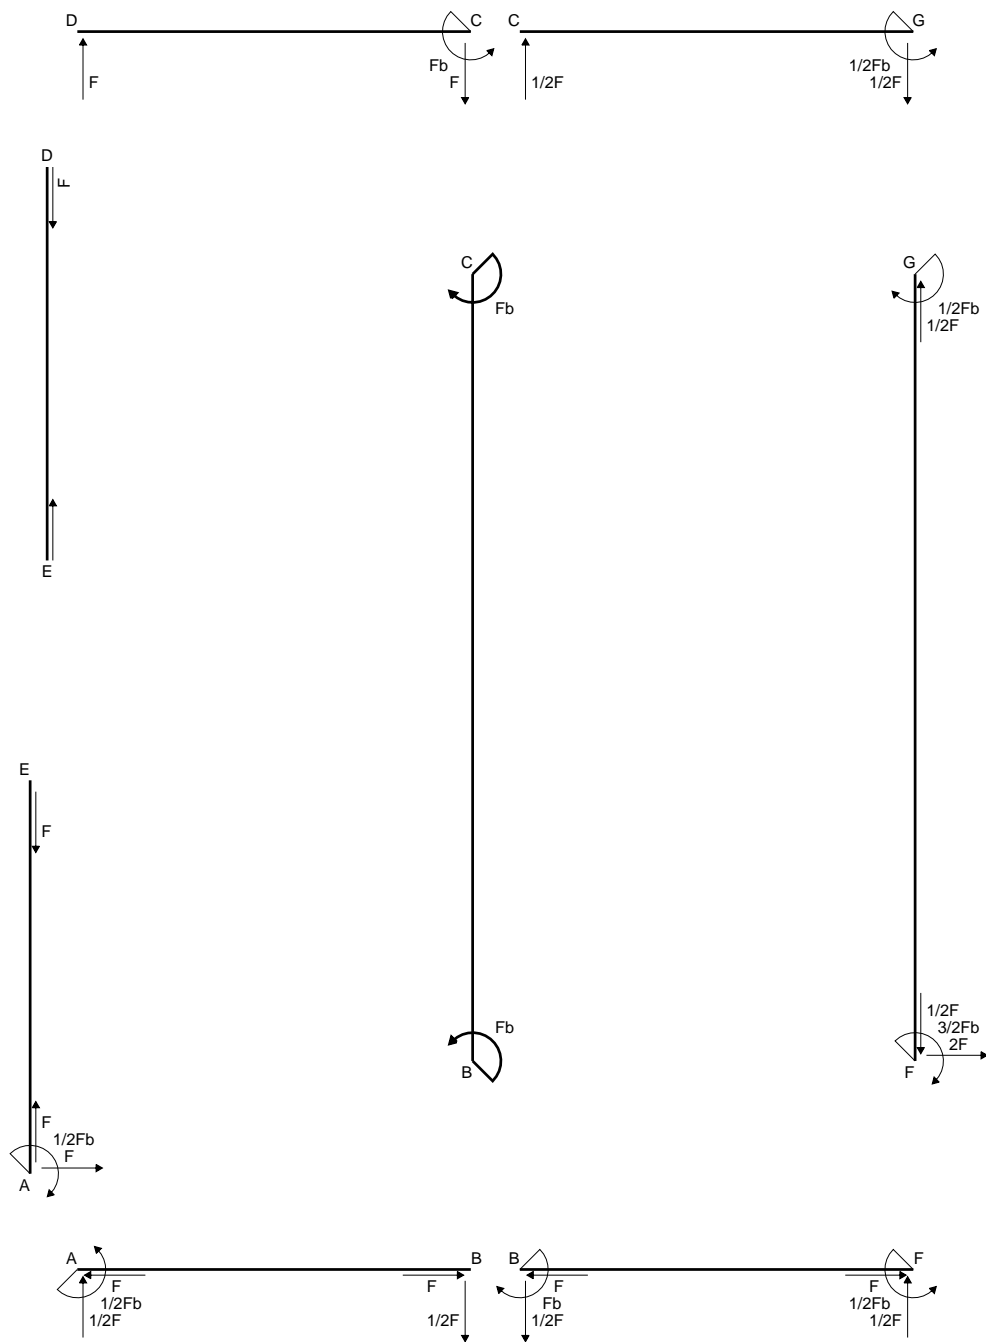

⊕ F<sub>b</sub>

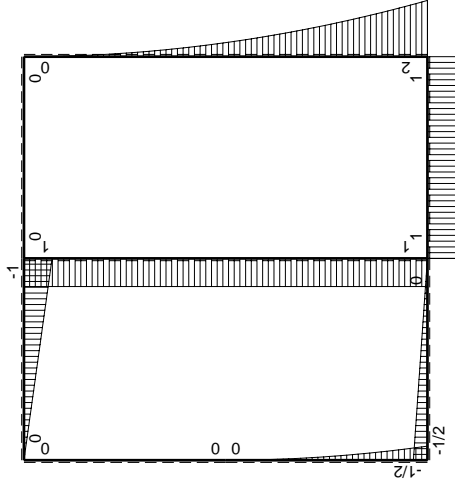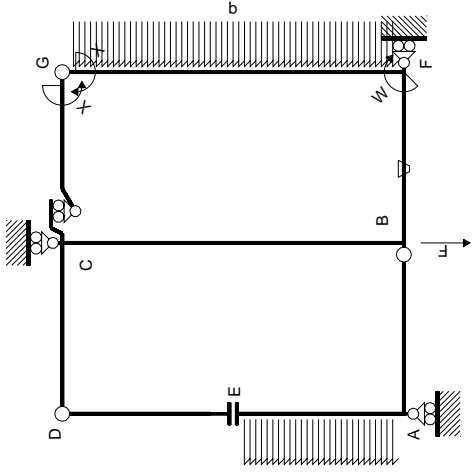

$M_0$  flessione da carichi assegnati

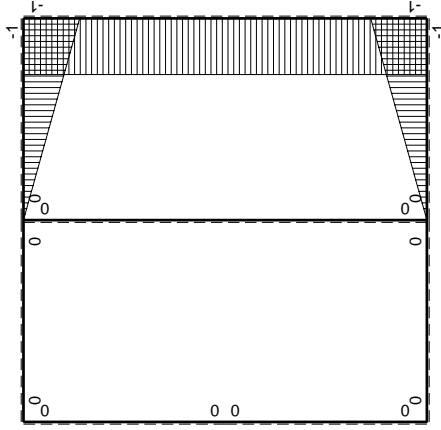

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|--------------|----------|------------------------|----------|--------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b         | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| BA b         | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| CD b         | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| DC b         | 0        | $Fx$                   | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| ED b         | 0        | 0                      | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| EAB          | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| BAE          | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| BF b         | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$          | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b         | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $-1/2 + 1/2)Fb^2/EJ$            | $1/3xb/EJ$            |
| GC b         | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1-2x/b + x^2/b^2$ | 0                               | $1/3xb/EJ$            |
| CG b         | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$          | 0                               | $1/3xb/EJ$            |
| FG 2b        | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b        | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b        | 0        | $Fb$                   | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| BC 2b        | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                  | 0                               | 0                     |
| totali       |          |                        |          |                          |                 |                    | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

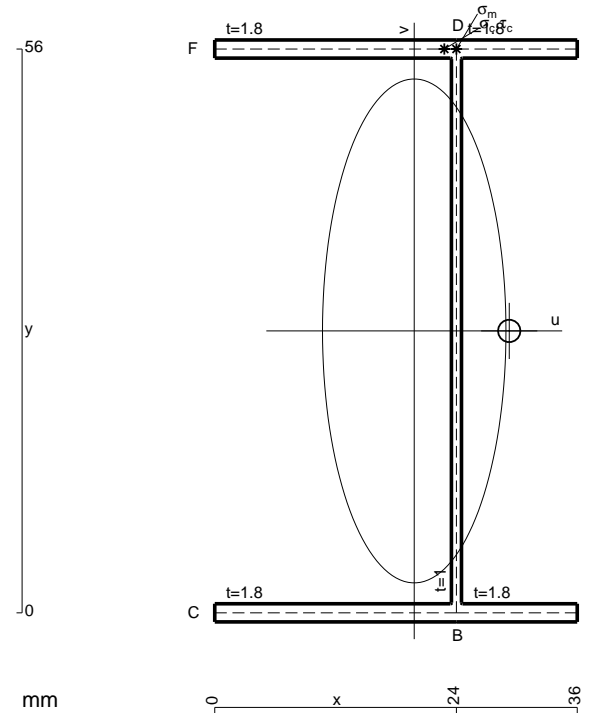

$$A = 185.6 \text{ mm}^2$$

$$J_u = 116241. \text{ mm}^4$$

$$J_v = 15405. \text{ mm}^4$$

$$J_t = 158.6 \text{ mm}^4$$

$$x_o = 9.434 \text{ mm}$$

$$x_g = 19.81 \text{ mm}$$

$$T_y = 1750. \text{ N}$$

$$M_x = -910000. \text{ Nmm}$$

$$x_m = 24. \text{ mm}$$

$$y_m = 56. \text{ mm}$$

$$u_m = 4.19 \text{ mm}$$

$$v_m = 28. \text{ mm}$$

$$\sigma_m = -Mv/J_u = 219.2 \text{ N/mm}^2$$

$$x_c = 24. \text{ mm}$$

$$y_c = 56. \text{ mm}$$

$$u_c = 4.19 \text{ mm}$$

$$v_c = 28. \text{ mm}$$

$$\sigma_c = -Mv/J_u = 219.2 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 197.5 \text{ N/mm}^2$$

$$\tau_g = TS'/tJ_u = 10.12 \text{ N/mm}^2$$



$$\tau_o = Tx_o/tJ_t = 187.3 \text{ N/mm}^2$$

$$t_c = 3150. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 406.2 \text{ N/mm}^2$$





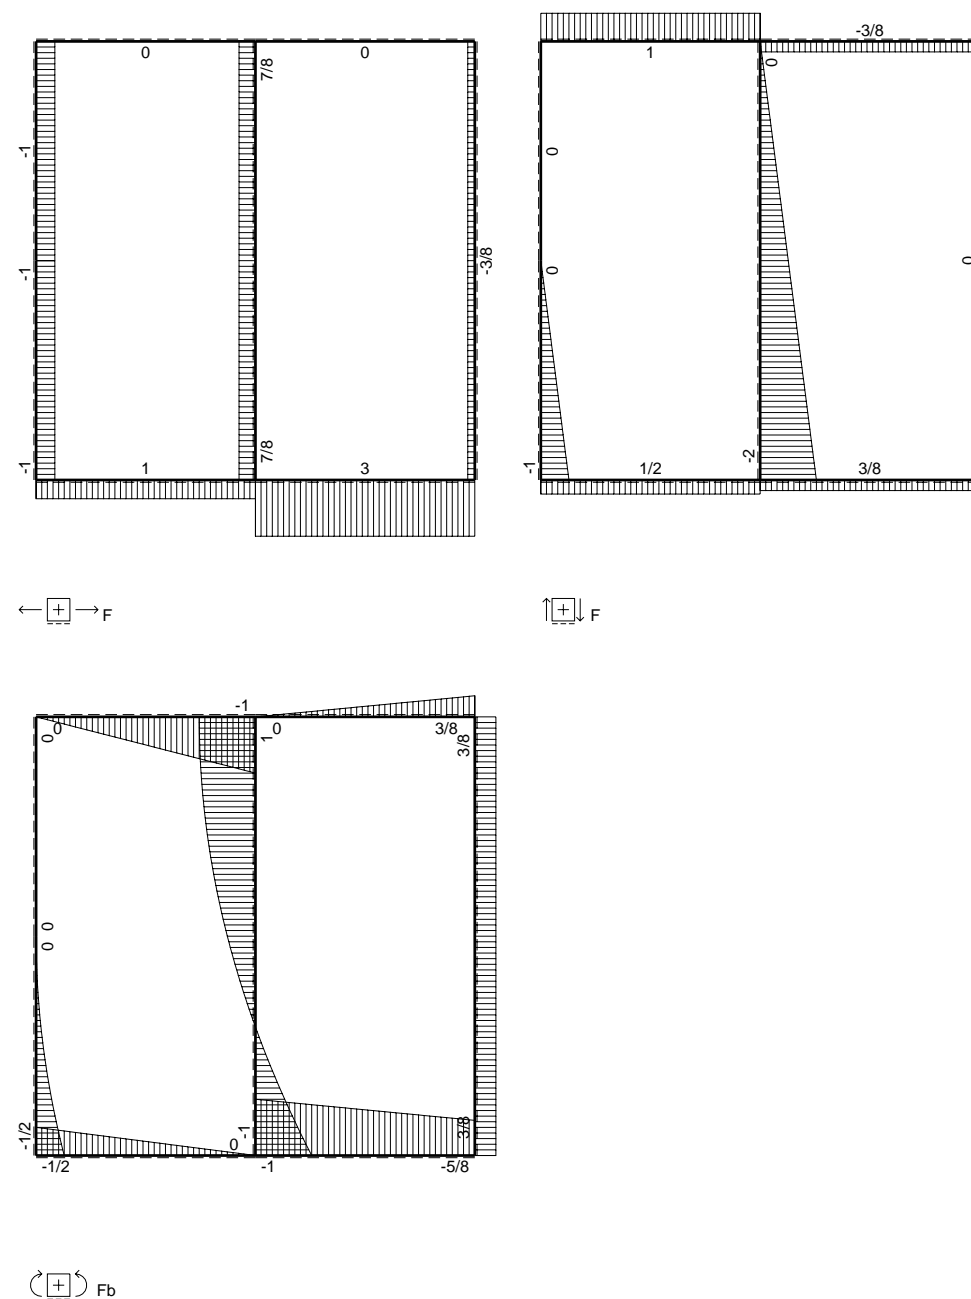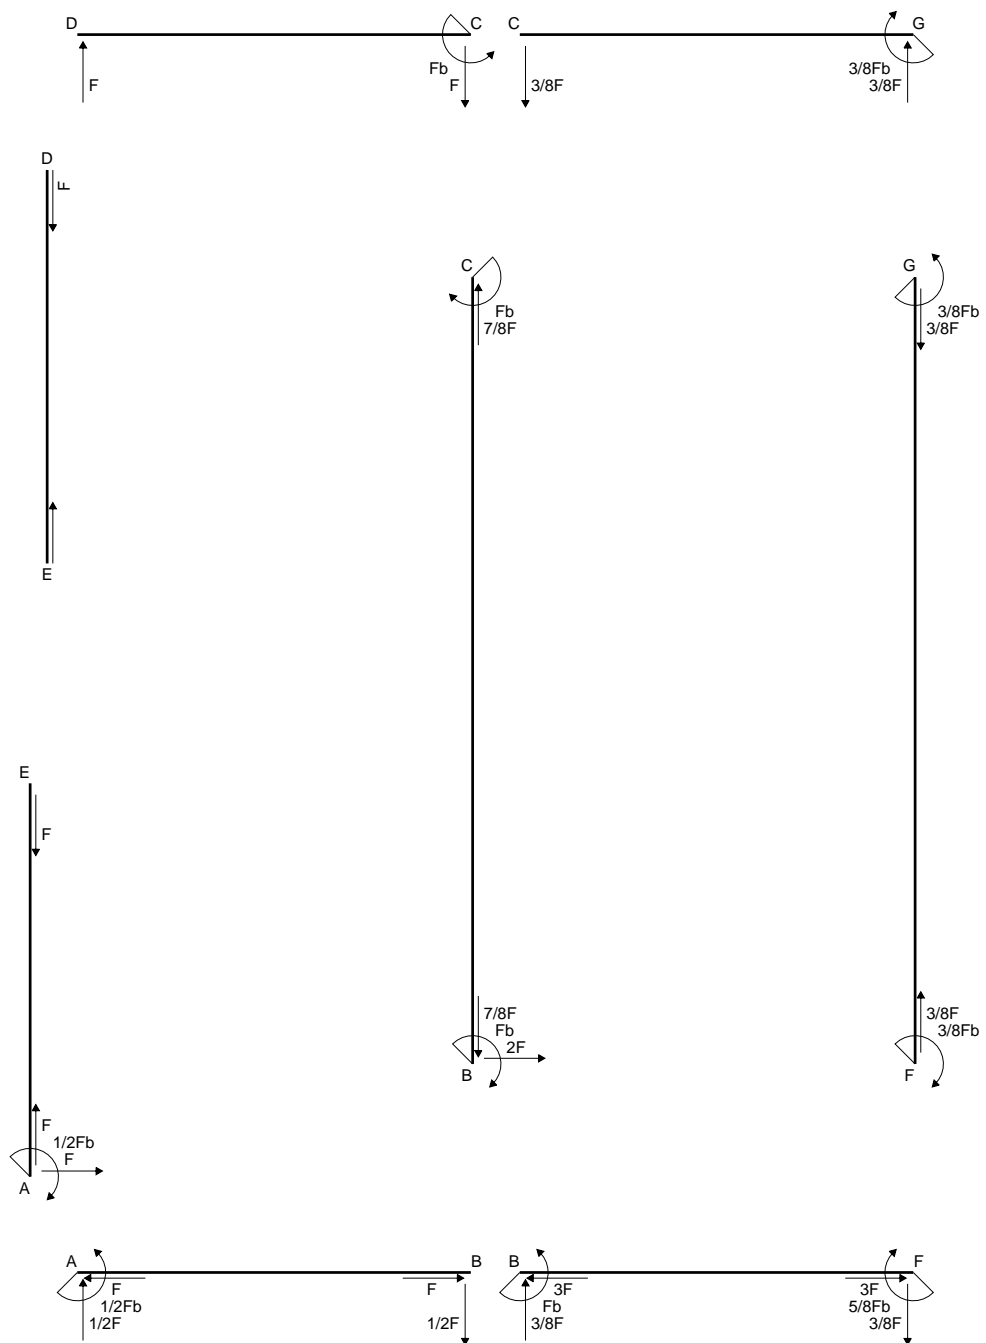



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$






$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

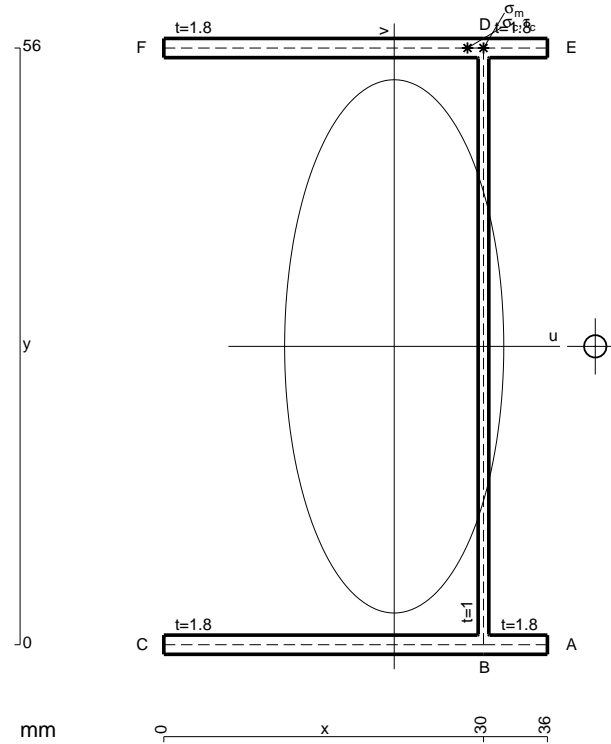


- A = 185.6 mm<sup>2</sup>
- J<sub>u</sub> = 116241. mm<sup>4</sup>
- J<sub>v</sub> = 19628. mm<sup>4</sup>
- J<sub>t</sub> = 158.6 mm<sup>4</sup>
- x<sub>o</sub> = 18.87 mm
- x<sub>g</sub> = 21.62 mm
- N = 1409. N
- T<sub>y</sub> = -3220. N
- M<sub>x</sub> = -917700. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 8.379 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 228.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 8.379 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 228.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 712.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 23.27 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>t/J<sub>t</sub> = 689.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 2898. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 1255. N/mm<sup>2</sup>



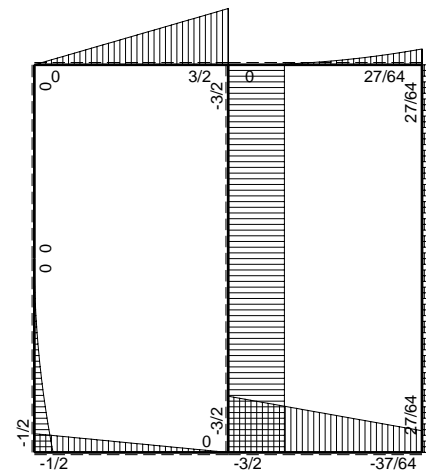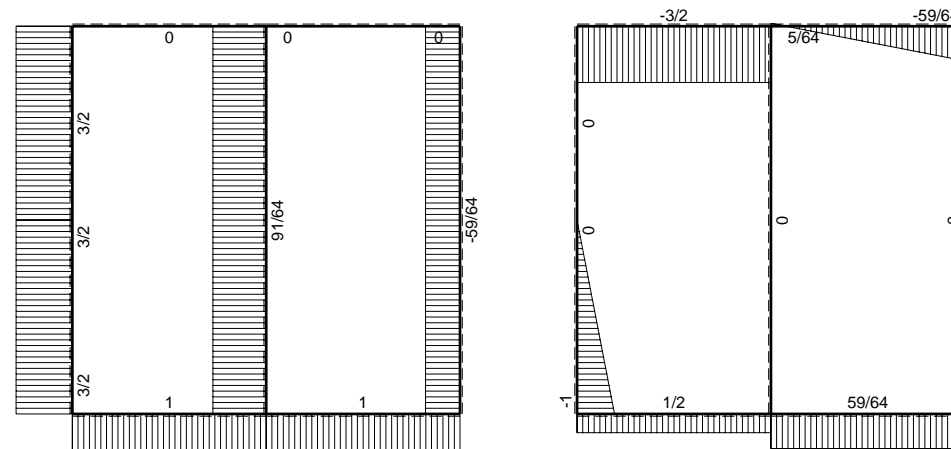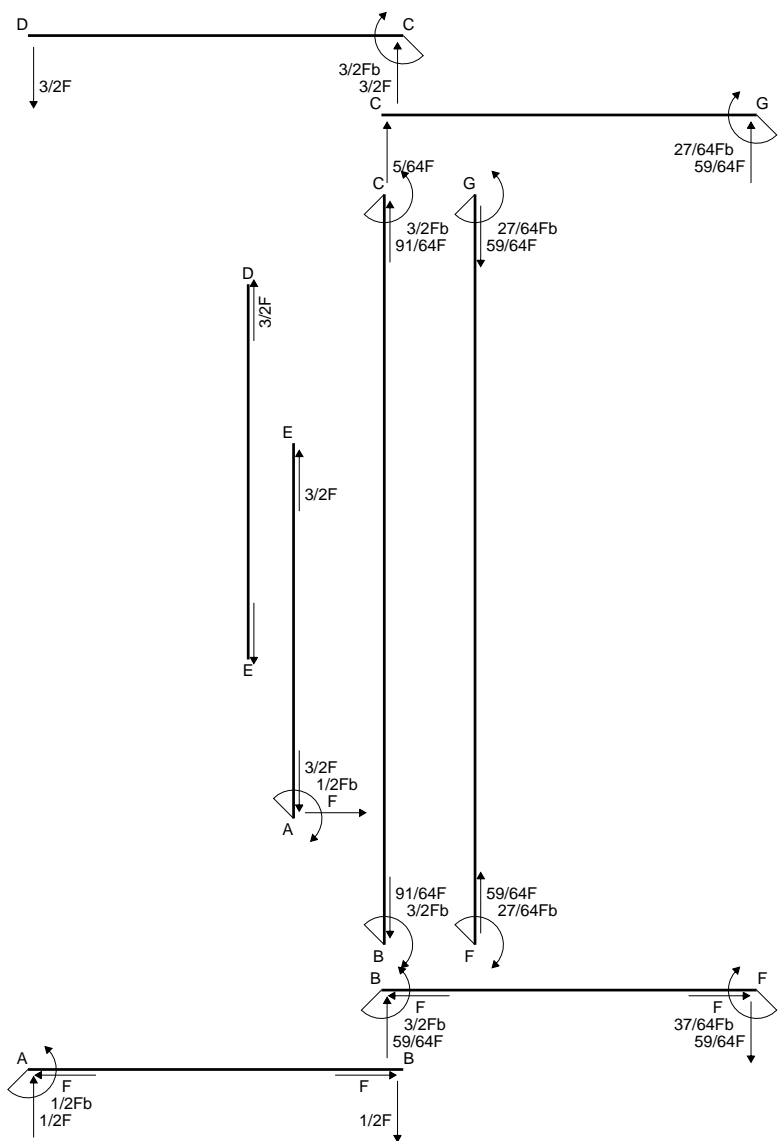


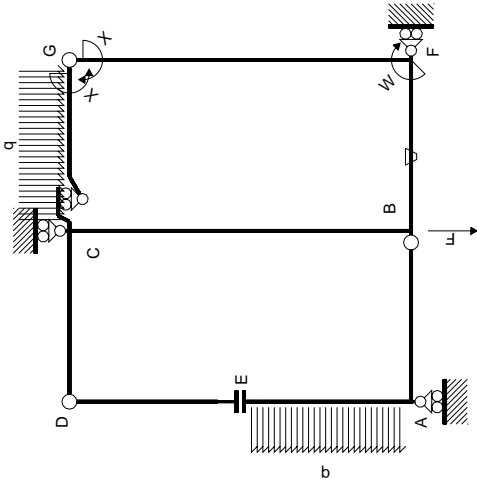

Schema di calcolo iperstatico

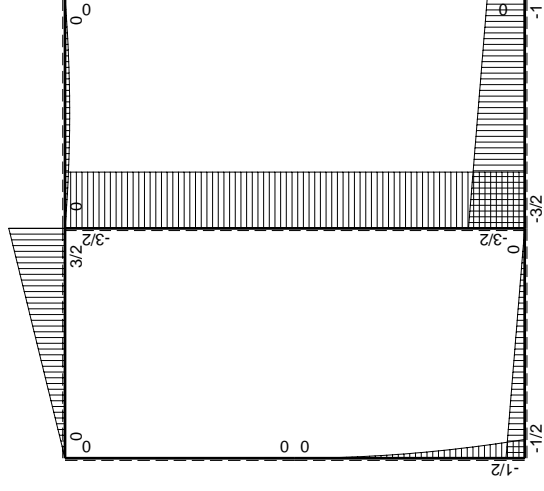

M<sub>0</sub> flessione da carichi assegnati



M<sub>x</sub> flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    |                             |        |  |                  |                                       |  |                                       |        |                        |                           |          |
|---|--------------------|-----------------------------|--------|--|------------------|---------------------------------------|--|---------------------------------------|--------|------------------------|---------------------------|----------|
| ←   | M <sub>0</sub> (x) | M <sub>0</sub> (x)          | θ      | M <sub>x</sub> M <sub>0</sub>                  | M <sub>x</sub> θ | M <sub>x</sub> M <sub>x</sub>         | ∫M <sub>x</sub> (M <sub>0</sub> /EJ+θ)dx | ∫XM <sub>x</sub> M <sub>0</sub> /EJdx | AB B   | BA B                   | CD B                      | DE B     |
|   |                    |                             |        |  |                  |                                       |  |                                       |        |                        |                           |          |
| AB B  | 0                  | -1/2Fb+1/2Fx                | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| BA B  | 0                  | 1/2Fx                       | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| CD B  | 0                  | 3/2Fb-3/2Fx                 | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| DC B  | 0                  | -3/2Fx                      | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| DE B  | 0                  | 0                           | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| EA B  | 0                  | -1/2qx <sup>2</sup>         | 0      | 0  | 0                | 0                                     | 0  | 0                                     | 0      | 0                      | 0                         | 0        |
| EB A  | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup> | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | 0      | 0                      | 0                         | 0        |
| FB B  | -x/b               | -3/2Fb+1/2Fx                | -Fb/EJ | 3/2Fx-1/2Fx <sup>2</sup> /b                    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (7/12+1/2)Fb <sup>2</sup> /EJ            | 1/3Xb/EJ                              | BF B   | -x/b                   | -3/2Fb+1/2Fx              | -Fb/EJ   |
| FB B  | 1-x/b              | Fb+1/2Fx                    | Fb/EJ  | Fb-1/2Fx-1/2Fx <sup>2</sup> /b                 | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3Xb/EJ                                 | 1/3Xb/EJ                              | GC B   | -1+x/b                 | -1/2Fx+1/2qx <sup>2</sup> | 0        |
| GC B  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>   | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ              | 1/3Xb/EJ                              | CG B   | x/b                    | 1/2Fx-1/2qx <sup>2</sup>  | 0        |
| CG B  | x/b                | 1/2Fx-1/2qx <sup>2</sup>    | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0                | x <sup>2</sup> /b <sup>2</sup>        | 1/3Xb/EJ                                 | 2Xb/EJ                                | FG B   | -1                     | 0                         | 0        |
| FG B  | -1                 | 0                           | 0      | 0  | 0                | 1                                     | 0+0                                      | 2Xb/EJ                                | GF B   | 1                      | 0                         | 0        |
| GF B  | 1                  | 0                           | 0      | 0  | 0                | 1                                     | 0+0                                      | 0                                     | CB B   | 0                      | -3/2Fb                    | 0        |
| CB B  | 0                  | -3/2Fb                      | 0      | 0  | 0                | 0                                     | 0+0                                      | 0                                     | BC B   | 0                      | 3/2Fb                     | 0        |
| BC B  | 0                  | 3/2Fb                       | 0      | 0  | 0                | 0                                     | 0+0                                      | 8/3Xb/EJ                              | totali | 9/8Fb <sup>2</sup> /EJ | -27/64Fb                  | 8/3Xb/EJ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

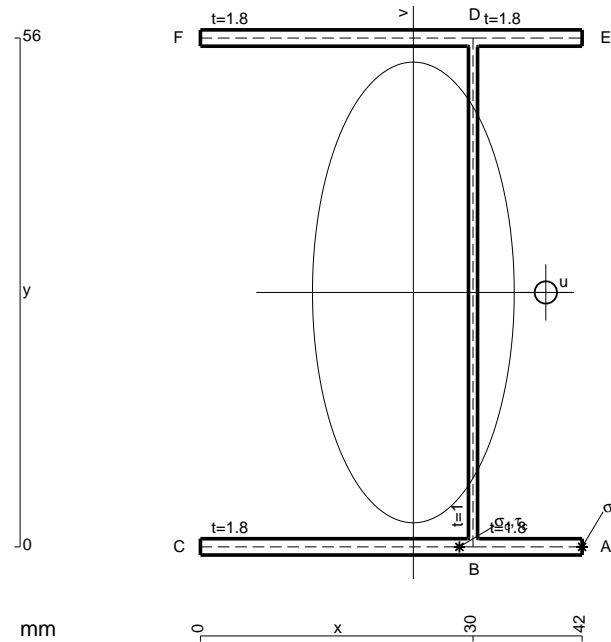


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 25537. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = 14.58 mm
- x<sub>g</sub> = 23.43 mm
- T<sub>y</sub> = -1860. N
- M<sub>x</sub> = 1134600. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 18.57 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 238.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 6.568 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 238.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 280. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.73 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 268.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 2232. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 540.4 N/mm<sup>2</sup>






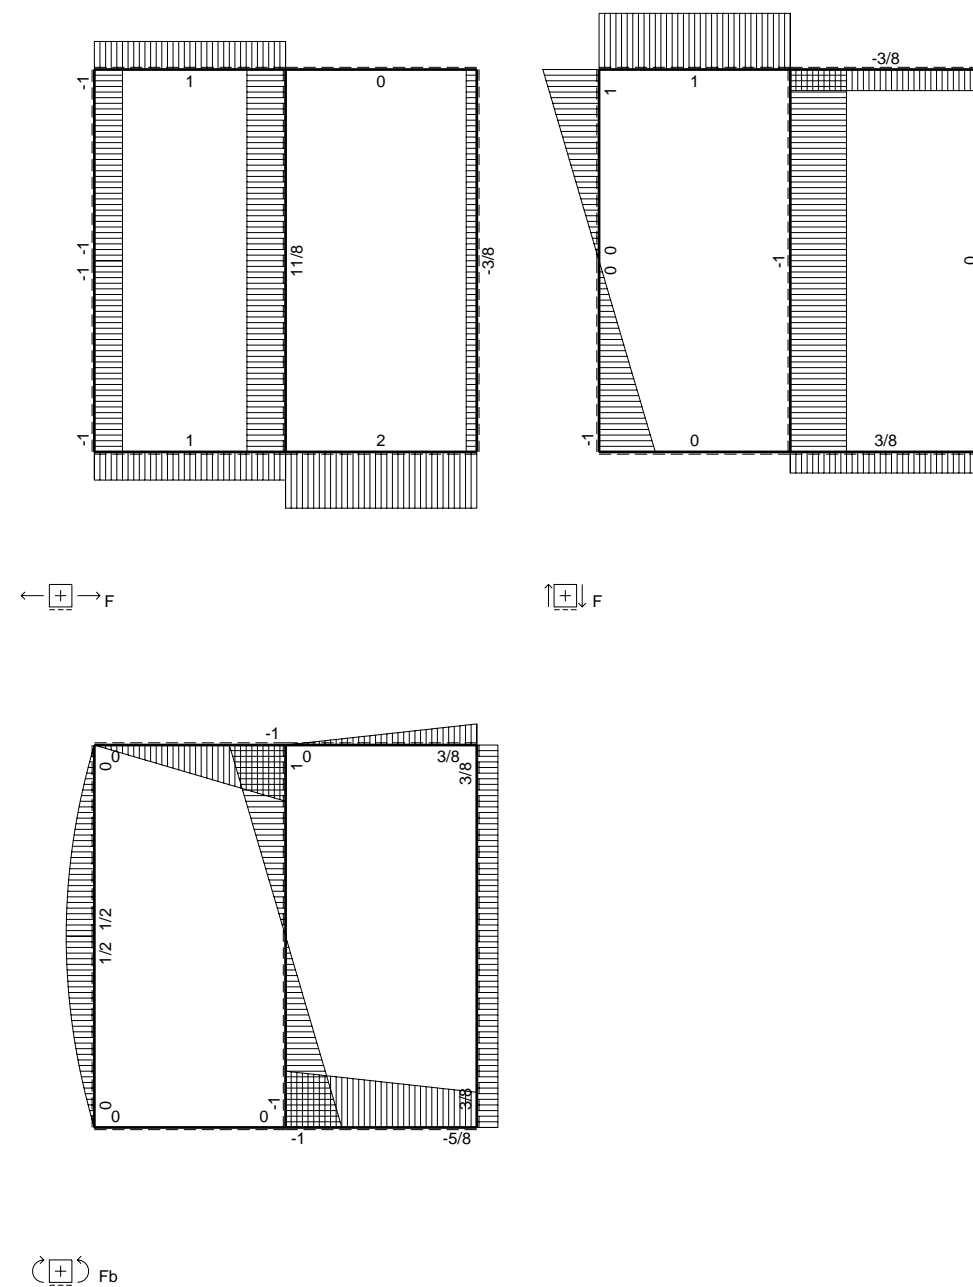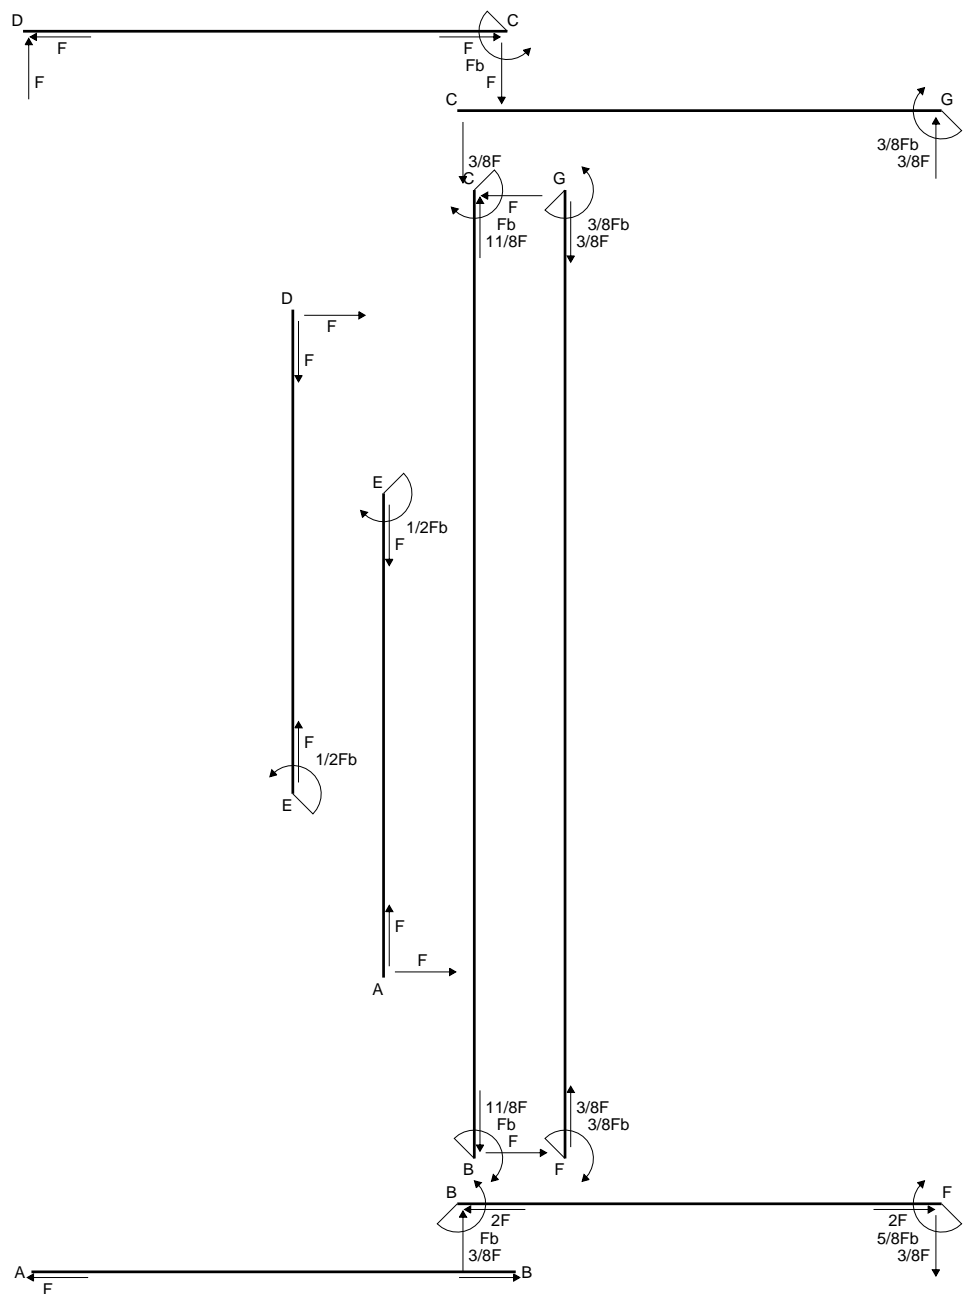


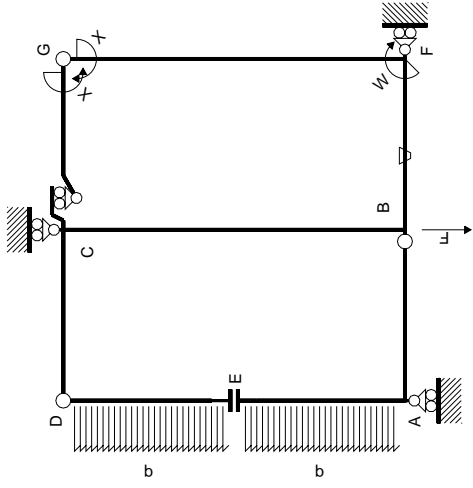

Schema di calcolo iperstatico

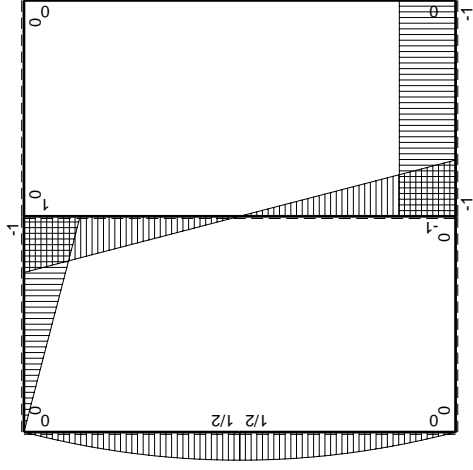

$M_0$  flessione da carichi assegnati

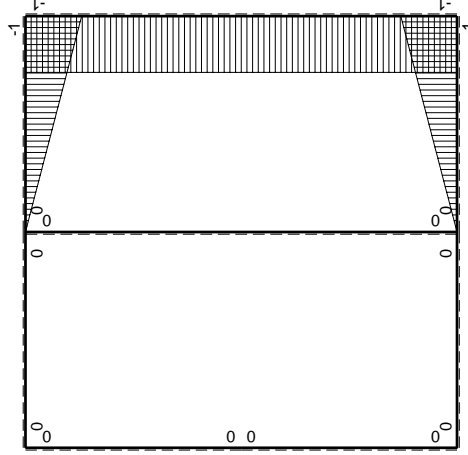

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| →      | M <sub>0</sub> (x) | M <sub>0</sub> (x)        | θ      | M <sub>0</sub> M <sub>0</sub> | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | ∫M <sub>0</sub> (M <sub>0</sub> /EJ+θ)dx | ∫M <sub>0</sub> M <sub>x</sub> /EJdx |
|--------|--------------------|---------------------------|--------|-------------------------------|------------------|---------------------------------------|--|--------------------------------------|
| AB b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| BA b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| CD b   | 0                  | -Fb+Fx                    | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| DC b   | 0                  | Fx                        | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| DE b   | 0                  | Fx-1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| ED b   | 0                  | -1/2Fb+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| EA b   | 0                  | 1/2Fb-1/2qx <sup>2</sup>  | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| AE b   | 0                  | -Fx+1/2qx <sup>2</sup>    | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| BF b   | -x/b               | -Fb                       | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ             | 1/3xb/EJ                             |
| FB b   | 1-x/b              | Fb                        | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                                 | 1/3xb/EJ                             |
| GC b   | -1+x/b             | 0                         | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                                      | 1/3xb/EJ                             |
| CG b   | x/b                | 0                         | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                                      | 2xb/EJ                               |
| FG 2b  | -1                 | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                      | 0                                    |
| GF 2b  | 1                  | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                                      | 0                                    |
| CB 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 8/3xb/EJ                             |
| BC 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                                      | 0                                    |
| totali |                    |                           |        |                               |                  |                                       |  |                                      |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$






$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

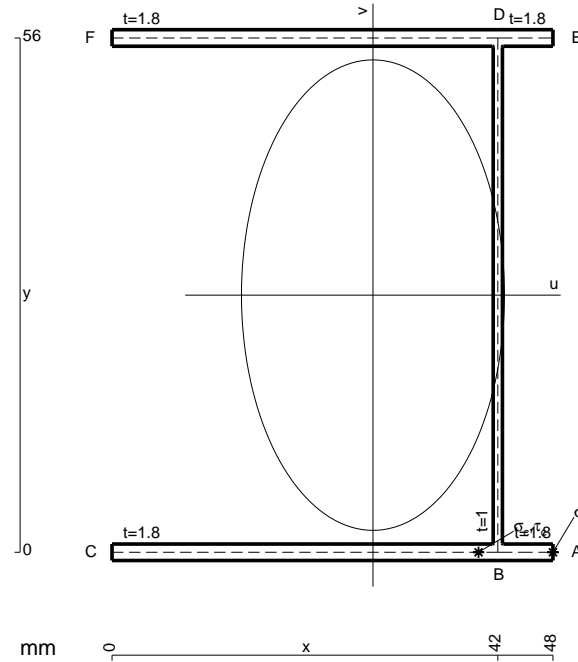


- A = 228.8 mm<sup>2</sup>
- J<sub>u</sub> = 150110. mm<sup>4</sup>
- J<sub>v</sub> = 46881. mm<sup>4</sup>
- J<sub>t</sub> = 205.3 mm<sup>4</sup>
- x<sub>o</sub> = 29.84 mm
- x<sub>g</sub> = 28.41 mm
- N = 2118. N
- T<sub>y</sub> = -1540. N
- M<sub>x</sub> = 1016400. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 19.59 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- u<sub>c</sub> = 13.59 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 415. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.06 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 402.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 2772. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 745.8 N/mm<sup>2</sup>



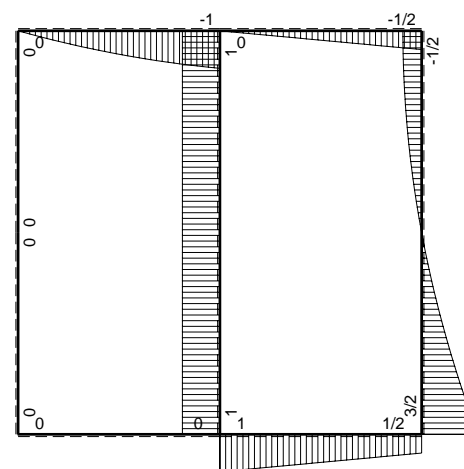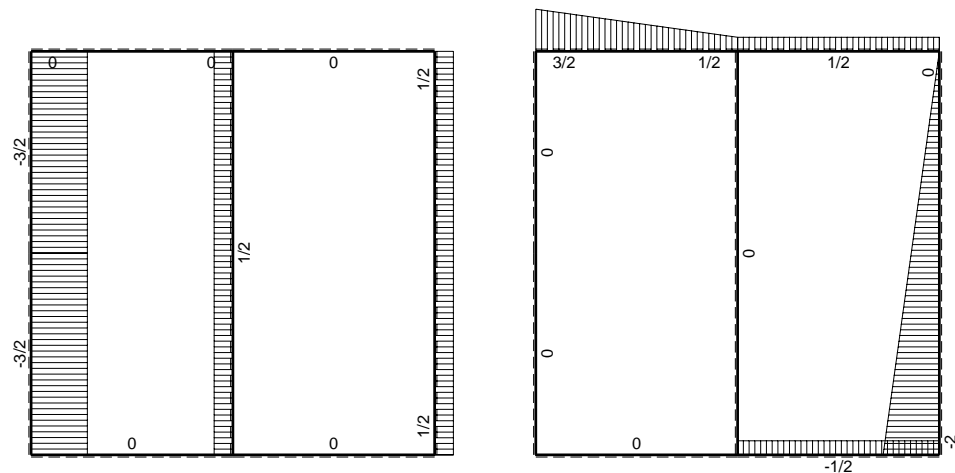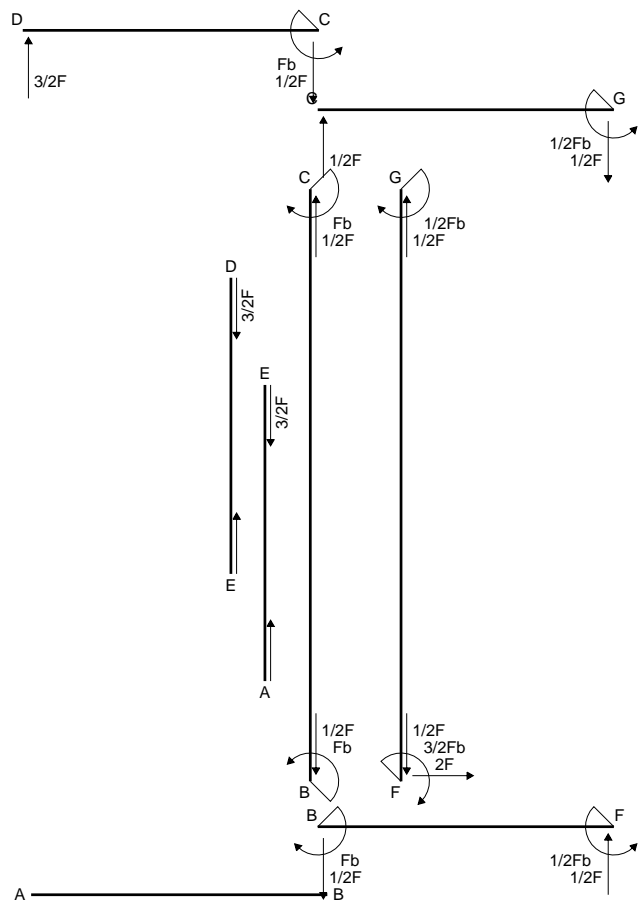

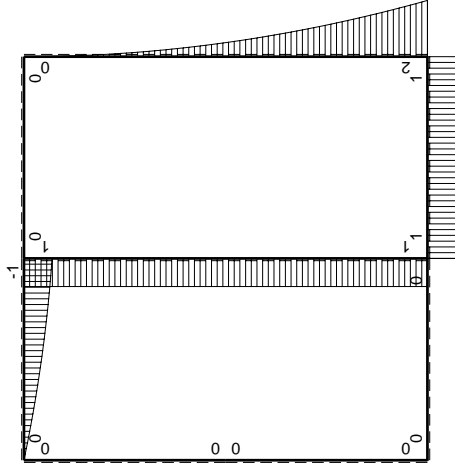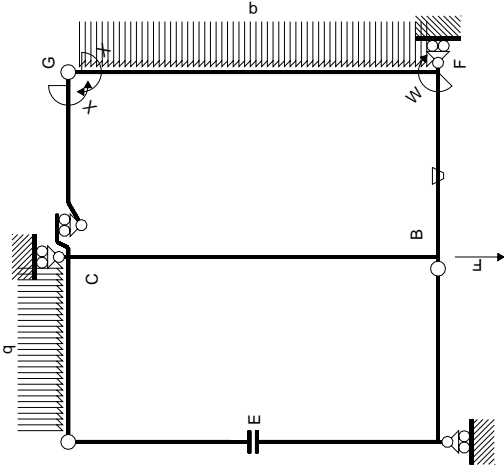

$M_0$  flessione da carichi assegnati

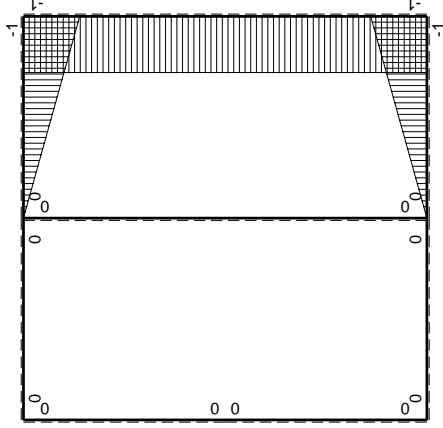

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$           | $M_x(x)$   | $M_0(x)$                | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E J dx$ |
|------------------------|------------|-------------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-------------------------|
| AB b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| BA b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| CD b                   | 0          | $-Fb + 1/2Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| DC b                   | 0          | $3/2Fx - 1/2qx^2$       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| DE b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| ED b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| EA b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| AE b                   | 0          | 0                       | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| BF b                   | $-x/b$     | Fb                      | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$              |
| FB b                   | $1-x/b$    | $-Fb$                   | Fb/EJ    | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$              |
| GC b                   | $-1 + x/b$ | 0                       | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0                               | $1/3xb/EJ$              |
| CG b                   | $x/b$      | 0                       | 0        | 0                        | 0               | $x^2/b^2$            | 0                               | $1/3xb/EJ$              |
| FG 2b                  | -1         | $2Fb - 2Fx + 1/2qx^2$   | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$                |
| GF 2b                  | 1          | $-1/2qx^2$              | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$                |
| CB 2b                  | 0          | Fb                      | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| BC 2b                  | 0          | $-Fb$                   | 0        | 0                        | 0               | 0                    | 0                               | 0                       |
| totali                 |            |                         |          |                          |                 |                      |                                 | 8/3xb/EJ                |
| iperstatica $X=W_{gc}$ |            |                         |          |                          |                 |                      |                                 | 1/2Fb                   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

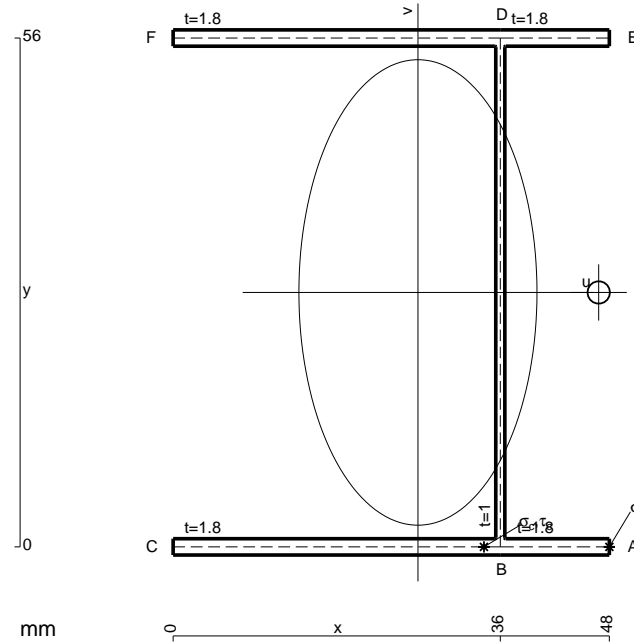

- A = 228.8 mm<sup>2</sup>
- J<sub>u</sub> = 150110. mm<sup>4</sup>
- J<sub>v</sub> = 39268. mm<sup>4</sup>
- J<sub>t</sub> = 205.3 mm<sup>4</sup>
- x<sub>o</sub> = 19.89 mm
- x<sub>g</sub> = 26.94 mm
- T<sub>y</sub> = 2570. N
- M<sub>x</sub> = -1124380. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 21.06 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.063 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 465.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 17.26 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 448.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 4626. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 833.1 N/mm<sup>2</sup>






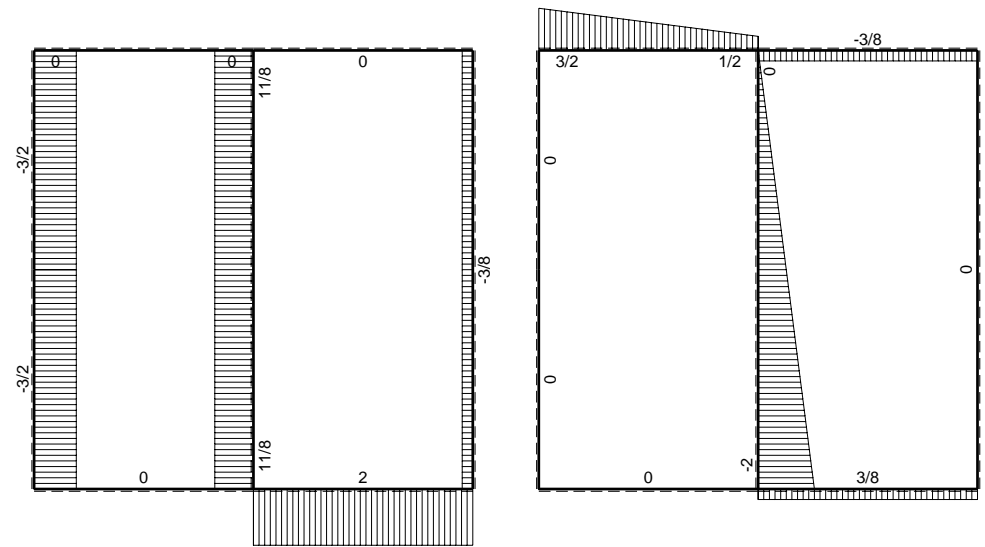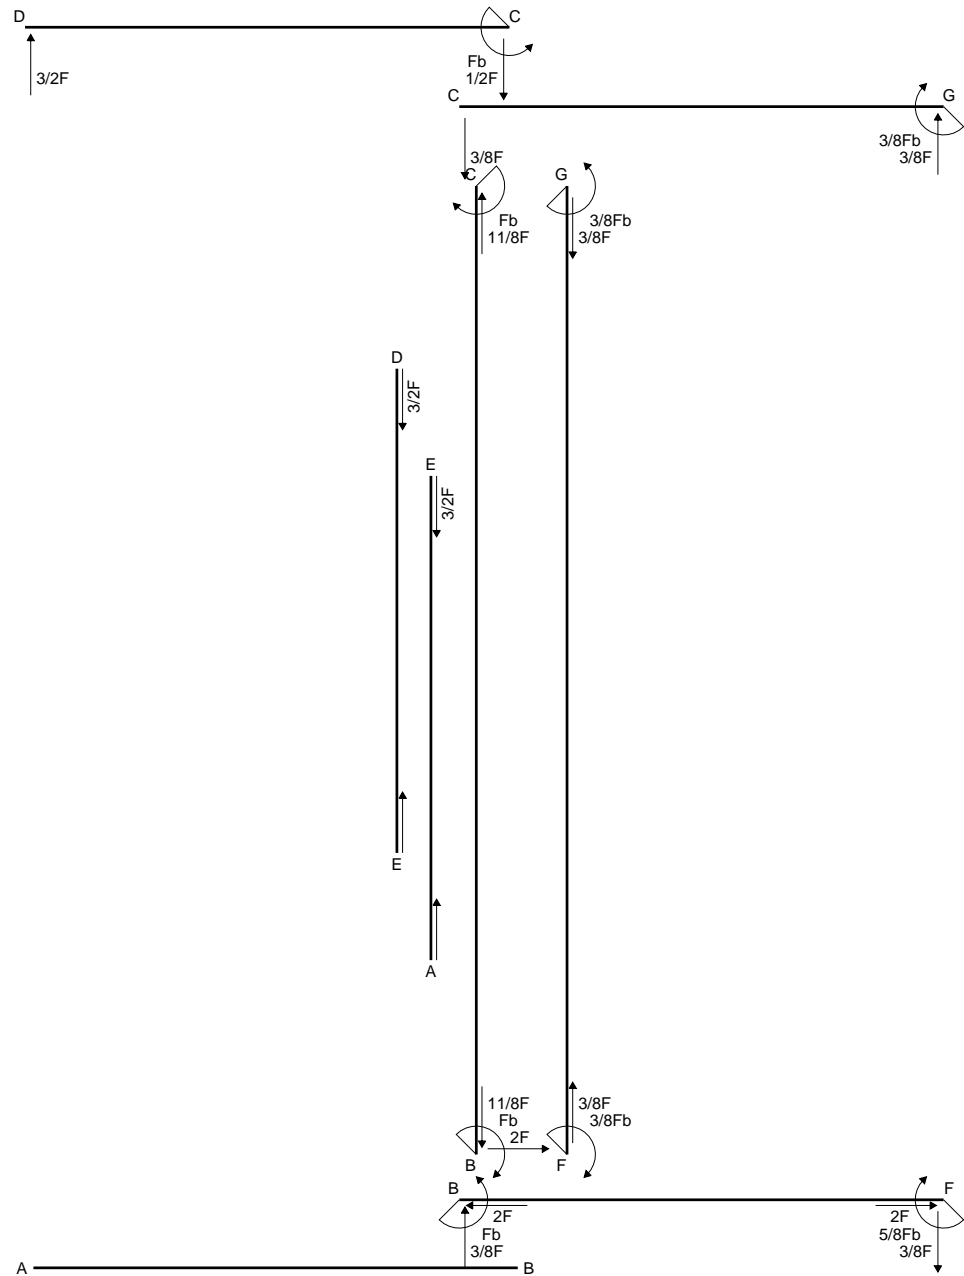


← ⊕ → F

↑ ⊕ ↓ F

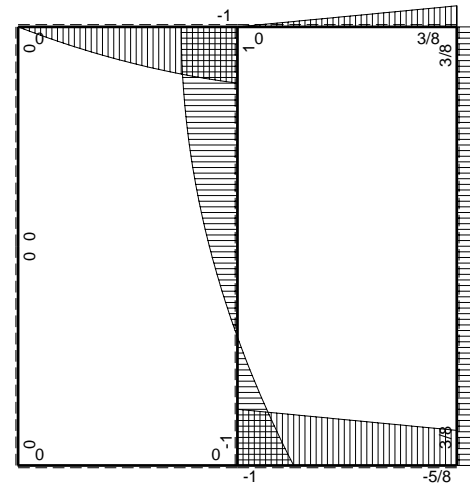


⊕ ⊖ F<sub>b</sub>

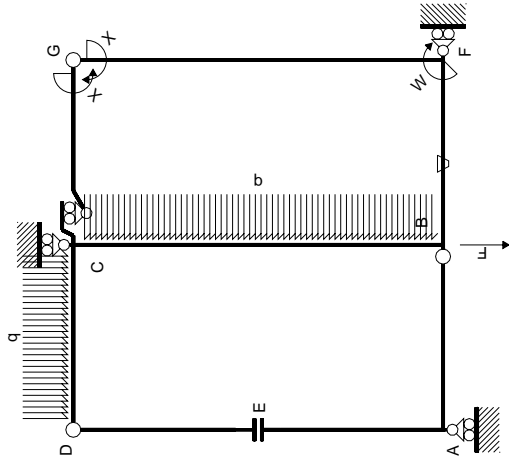

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

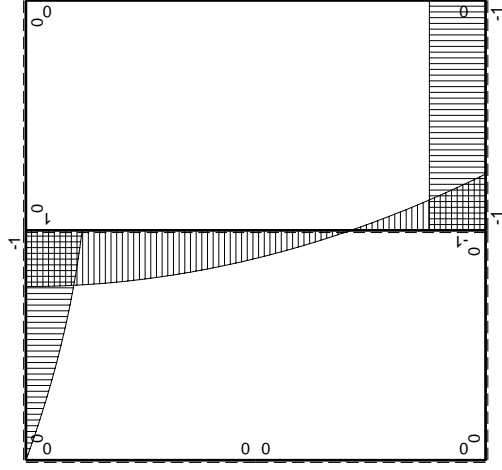

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FBB b        | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GCB b        | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

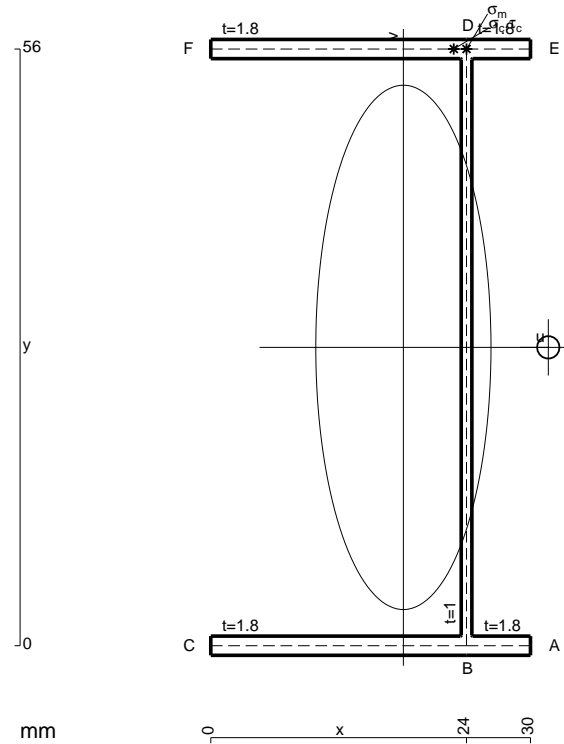

- A = 164. mm<sup>2</sup>
- J<sub>u</sub> = 99307. mm<sup>4</sup>
- J<sub>v</sub> = 11087. mm<sup>4</sup>
- J<sub>t</sub> = 135.3 mm<sup>4</sup>
- x<sub>o</sub> = 13.6 mm
- x<sub>g</sub> = 18.07 mm
- N = 1389. N
- T<sub>y</sub> = -2020. N
- M<sub>x</sub> = -747400. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 5.927 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 219.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 5.927 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 219.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 379.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.67 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 365.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 1818. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 692.3 N/mm<sup>2</sup>





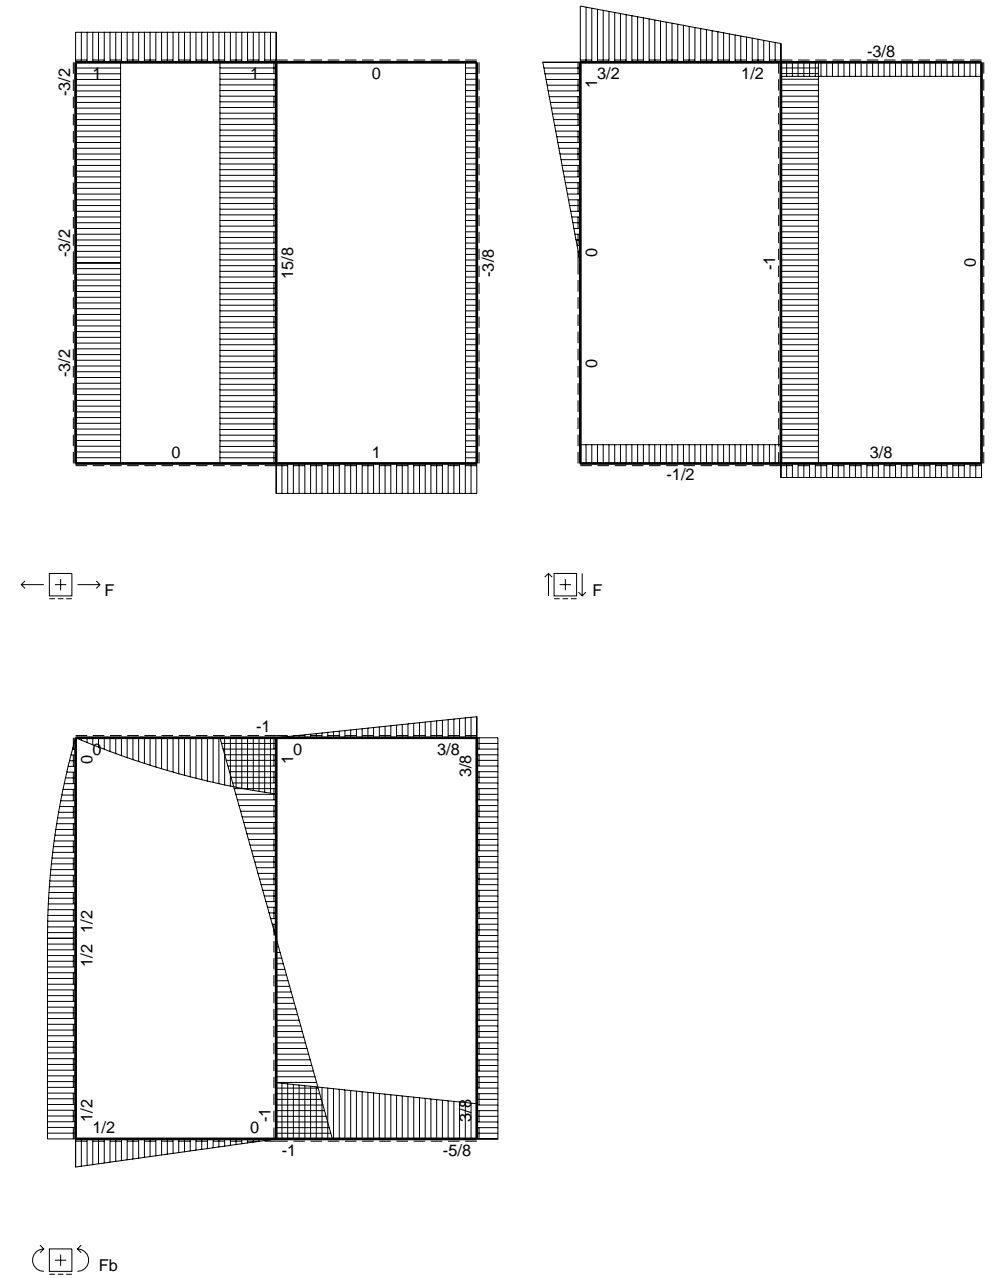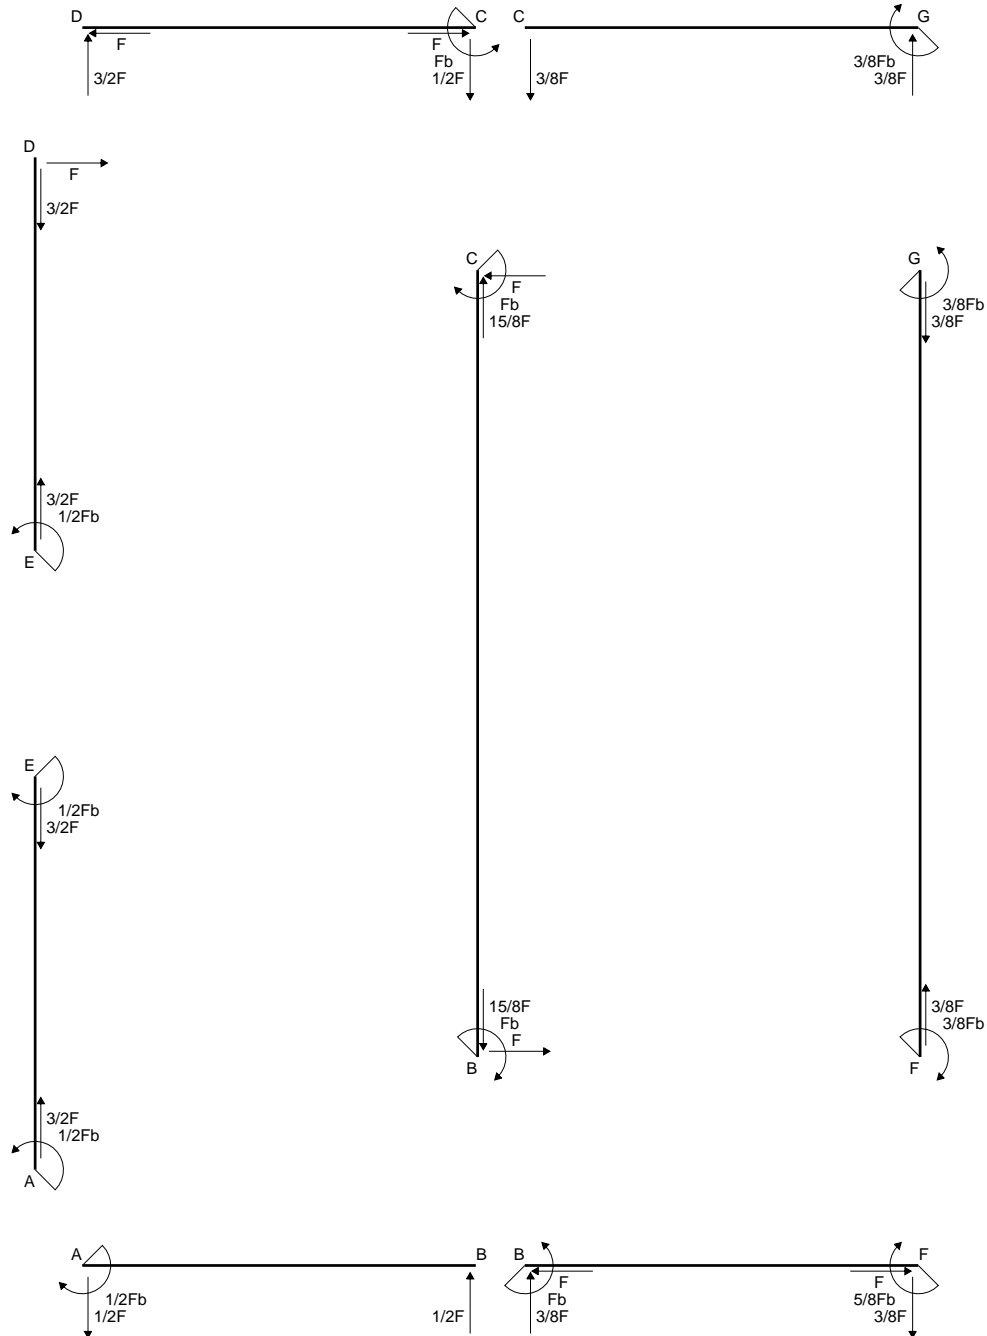

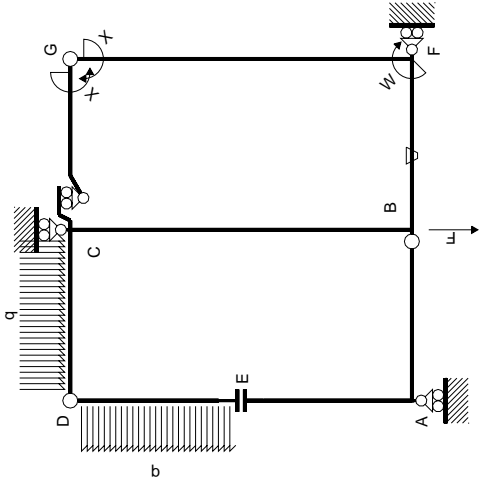

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

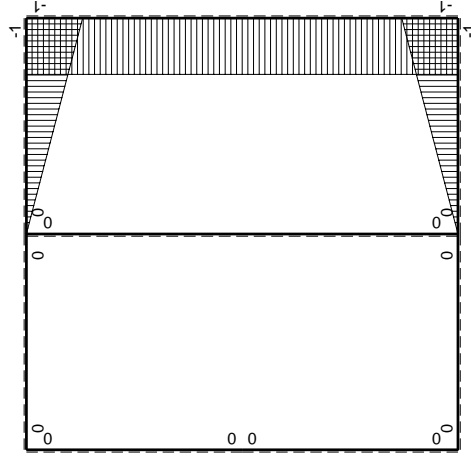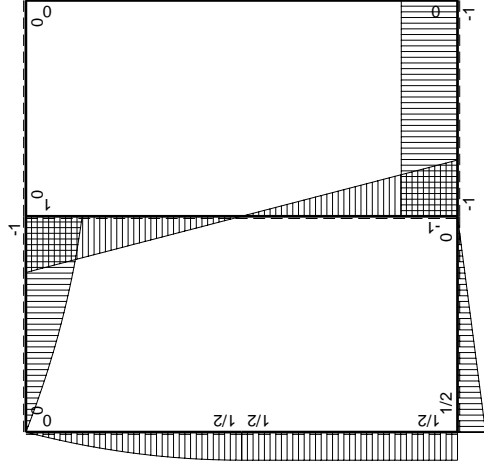

$M_x$  flessione da iperstatica  $X=1$

Quadro contribuiti PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | $1/2Fb-1/2Fx$      | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | $-1/2Fx$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | $Fx-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b         | 0        | $-1/2Fb+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | $1/2Fb$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | $-1/2Fb$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FBB b        | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$






$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


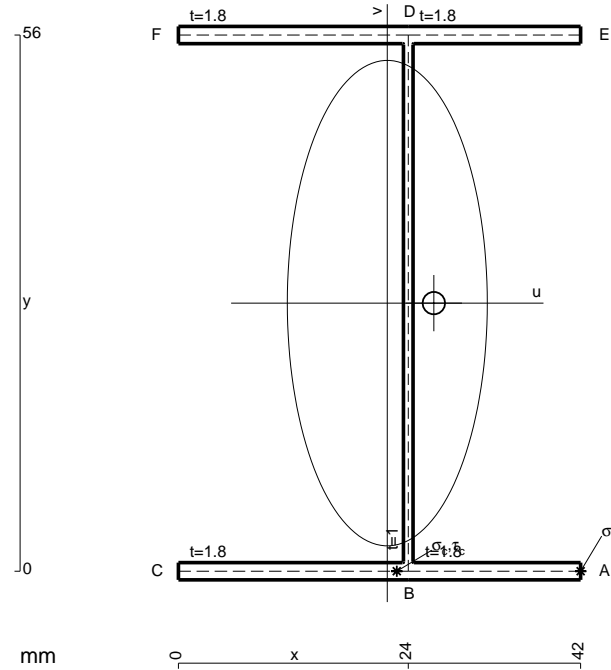


- A = 207.2 mm<sup>2</sup>
- J<sub>u</sub> = 133175. mm<sup>4</sup>
- J<sub>v</sub> = 22594. mm<sup>4</sup>
- J<sub>t</sub> = 182. mm<sup>4</sup>
- x<sub>o</sub> = 4.86 mm
- x<sub>g</sub> = 21.81 mm
- N = 2456. N
- T<sub>y</sub> = -1310. N
- M<sub>x</sub> = 1034900. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 20.19 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 2.189 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 69.58 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.61 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 62.97 N/mm<sup>2</sup>
- t<sub>c</sub> = 2358. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 259.2 N/mm<sup>2</sup>





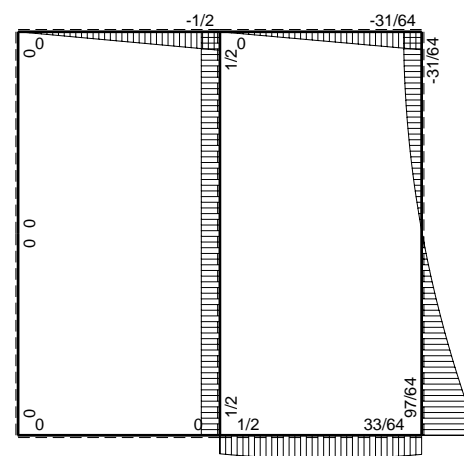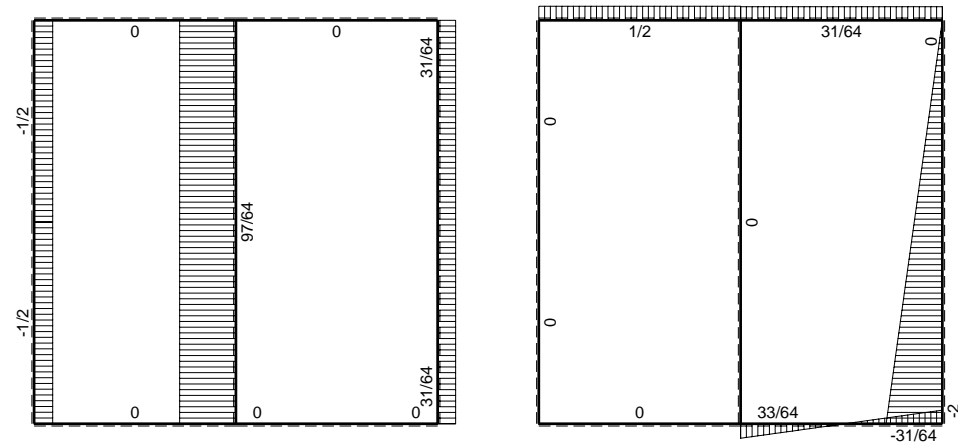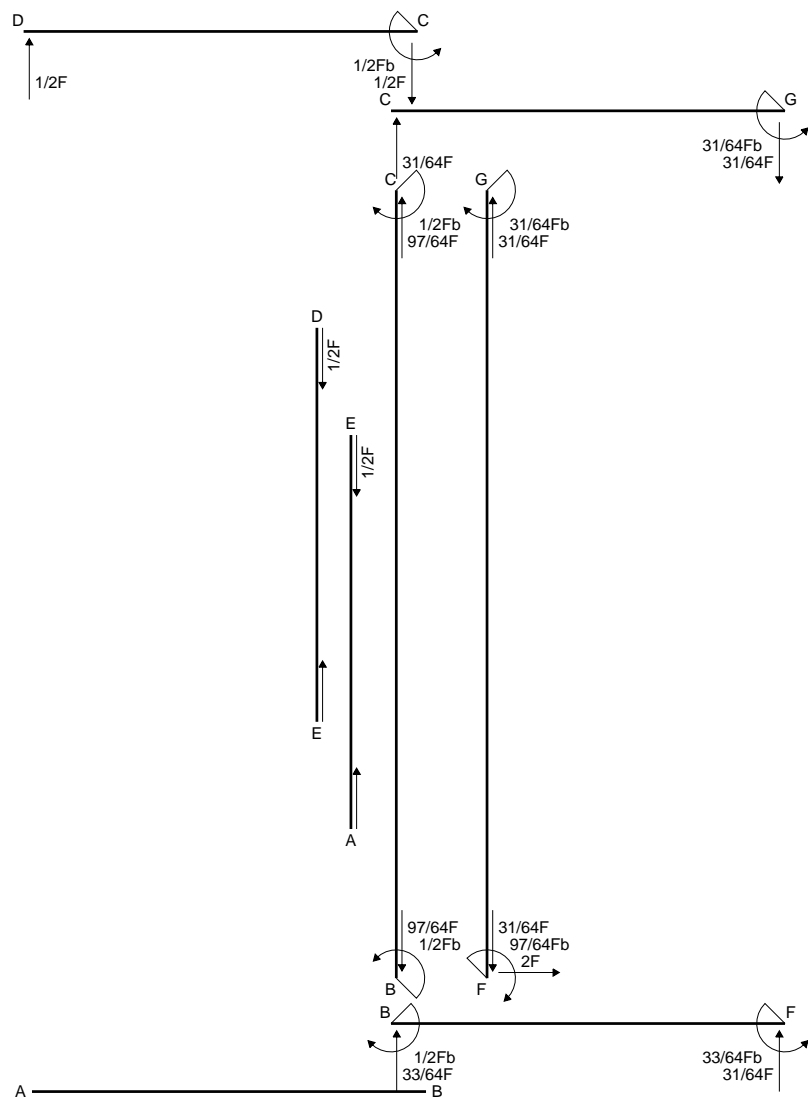

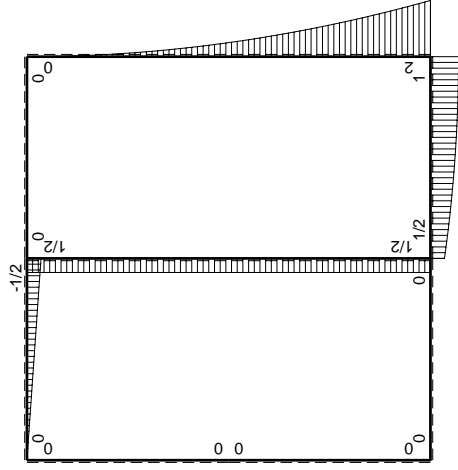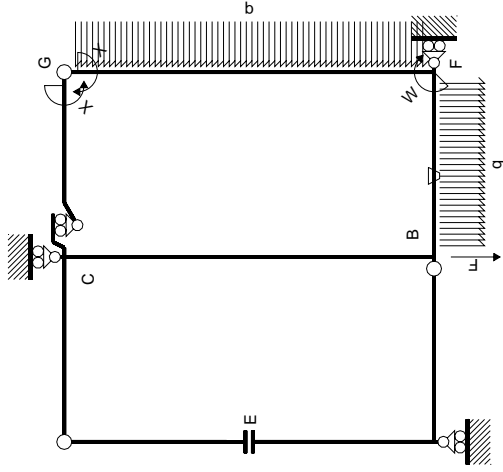

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | iperstatica $X=W_{gc}$ |          |                              |               |                  |                             |                      |            |
|--|----------|------------------------|----------|------------------------------|---------------|------------------|-----------------------------|----------------------|------------|
| $\rightarrow$                                    | $M^x(x)$ | $M^0(x)$               | $\theta$ | $M^x M_0$                    | $M^x \theta$  | $M^x M_x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M^x/EJ dx$ |            |
| AB b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| BA b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| CD b   | 0        | $-1/2Fx+1/2Fx$         | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| DC b   | 0        | $1/2Fx$                | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| DE b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| EA b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| AE b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| BF b   | $-x/b$   | $1/2Fb+Fx-1/2qx^2$     | $-Fb/EJ$ | $-1/2Fx-Fx^2/b+1/2qx^3/b$    | $Fx/EJ$       | $x^2/b^2$        | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$           | $1/3xb/EJ$ |
| FB b   | $1-x/b$  | $-Fb+1/2qx^2$          | $Fb/EJ$  | $-Fb+Fx+1/2Fx^2/b-1/2qx^3/b$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$           | $1/3xb/EJ$ |
| GC b   | $-1+x/b$ | 0                      | 0        | 0                            | 0             | $1-2x/b+x^2/b^2$ | 0                           | 0                    | 0          |
| CG b   | $x/b$    | 0                      | 0        | 0                            | 0             | $x^2/b^2$        | 0                           | 0                    | 0          |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             | $2xb/EJ$   |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$                 | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             | $2xb/EJ$   |
| CB 2b  | 0        | $1/2Fb$                | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| BC 2b  | 0        | $-1/2Fb$               | 0        | 0                            | 0             | 0                | 0                           | 0                    | 0          |
| totali   |          |                        |          |                              |               |                  |                             |                      |            |
|  |          |                        |          |                              |               |                  | $-31/24Fb^2/EJ$             | $8/3xb/EJ$           | $31/64Fb$  |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

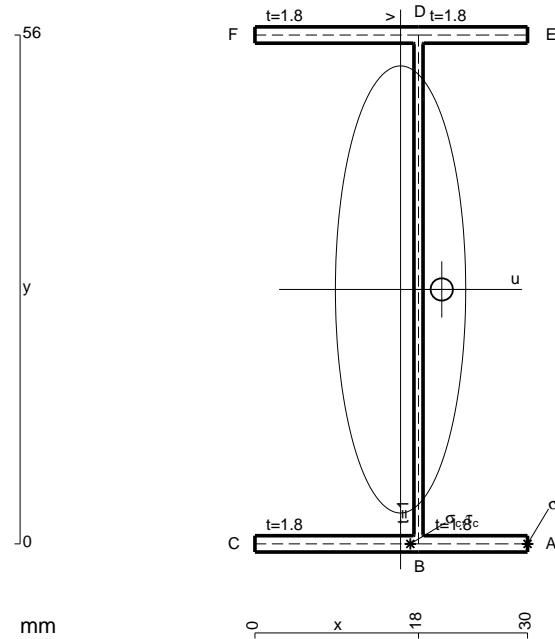


- A = 164. mm<sup>2</sup>
- J<sub>u</sub> = 99307. mm<sup>4</sup>
- J<sub>v</sub> = 8432. mm<sup>4</sup>
- J<sub>t</sub> = 135.3 mm<sup>4</sup>
- x<sub>o</sub> = 4.534 mm
- x<sub>g</sub> = 16.02 mm
- T<sub>y</sub> = 1025. N
- M<sub>x</sub> = -850750. Nmm
- x<sub>m</sub> = 30. mm
- u<sub>m</sub> = 13.98 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = 1.976 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 67.02 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.202 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 61.82 N/mm<sup>2</sup>
- t<sub>c</sub> = 3690. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 266.5 N/mm<sup>2</sup>



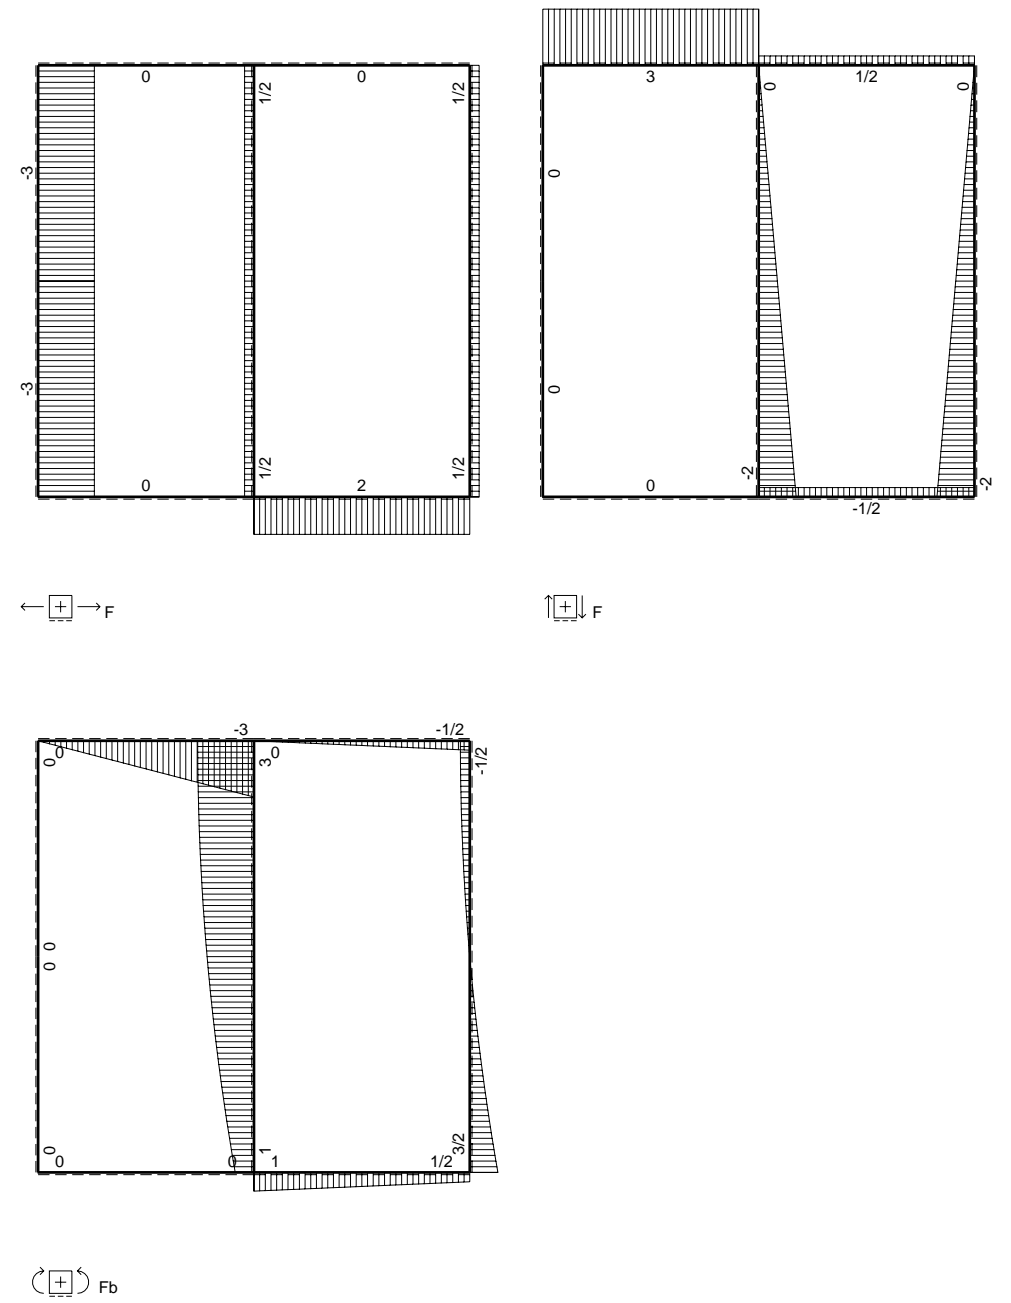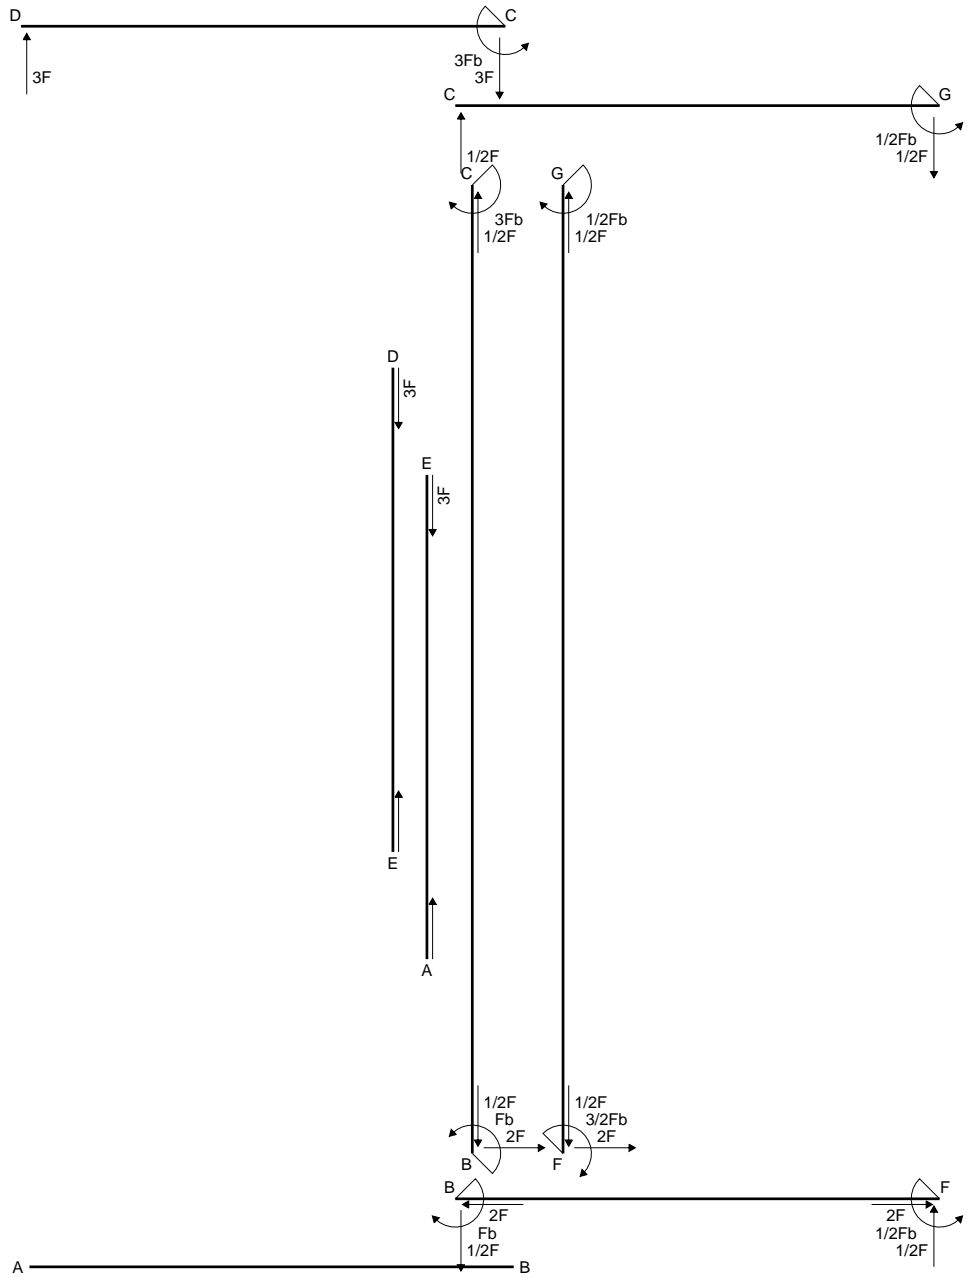

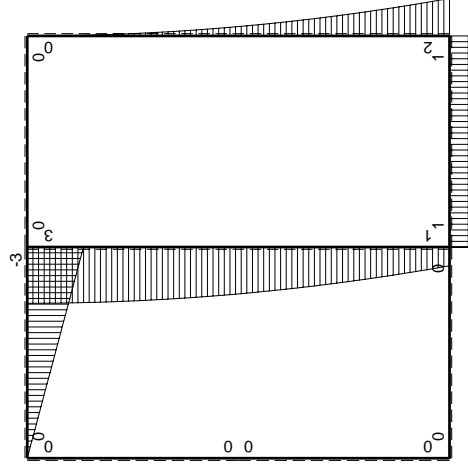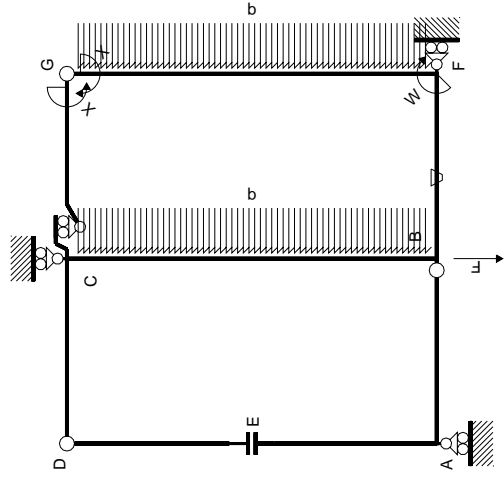

$M_0$  flessione da carichi assegnati

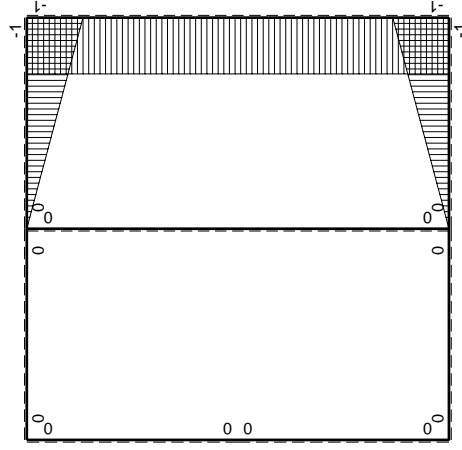

$M_x$  flessione da iperstatica X=1

| ←      | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / EJ dx$ | iperstatica X=W <sub>gc</sub> |   |
|--------|----------|-------------------|----------|----------------------|--------------|------------------|---------------------------------|------------------------|-------------------------------|---|
|        |          |                   |          |                      |              |                  |                                 |                        | totali                        |   |
| AB b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| BA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| CD b   | 0        | -3Fb+3Fx          | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| DC b   | 0        | 3Fx               | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| DE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| ED b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| EA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| AE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0 |
| BF b   | -x/b     | Fb                | -Fb/EJ   | -Fx                  | Fx/EJ        | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$             | 0+0                           | 0 |
| FB b   | 1-x/b    | -Fb               | Fb/EJ    | -Fb+Fx               | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$             | 0+0                           | 0 |
| GC b   | -1+x/b   | 0                 | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             | 0                             | 0 |
| CG b   | x/b      | 0                 | 0        | 0                    | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             | 0                             | 0 |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$               | 0                             | 0 |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$               | 0                             | 0 |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0            | 0                | 0+0                             | $8/3xb/EJ$             | 0                             | 0 |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                | 0+0                             | $8/3xb/EJ$             | 0                             | 0 |
| totali |          |                   |          |                      |              |                  |                                 |                        |                               |   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

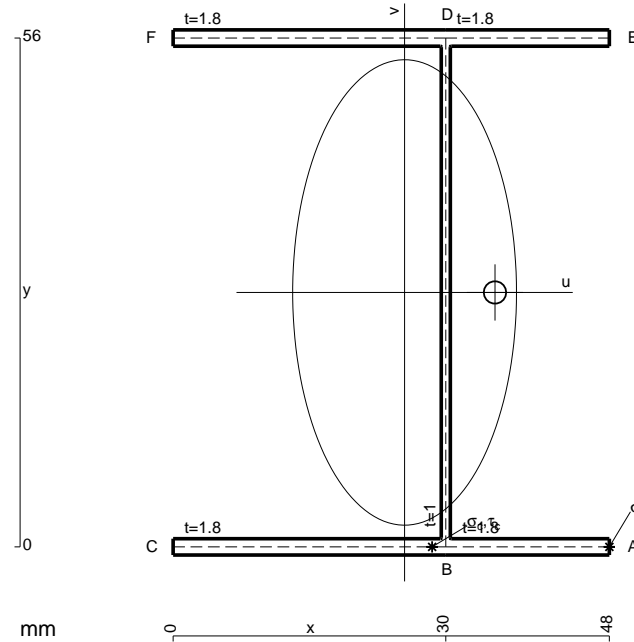

$A = 228.8 \text{ mm}^2$   
 $J_u = 150110. \text{ mm}^4$   
 $J_v = 34700. \text{ mm}^4$   
 $J_t = 205.3 \text{ mm}^4$   
 $x_o = 9.947 \text{ mm}$   
 $x_g = 25.47 \text{ mm}$   
 $T_y = 2430. \text{ N}$   
 $M_x = -1069200. \text{ Nmm}$   
 $x_m = 48. \text{ mm}$   
 $u_m = 22.53 \text{ mm}$   
 $v_m = -28. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -199.4 \text{ N/mm}^2$   
 $x_c = 30. \text{ mm}$   
 $u_c = 4.531 \text{ mm}$   
 $v_c = -28. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -199.4 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 225.5 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 13.6 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 211.9 \text{ N/mm}^2$   
 $t_c = 1458. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 438.6 \text{ N/mm}^2$






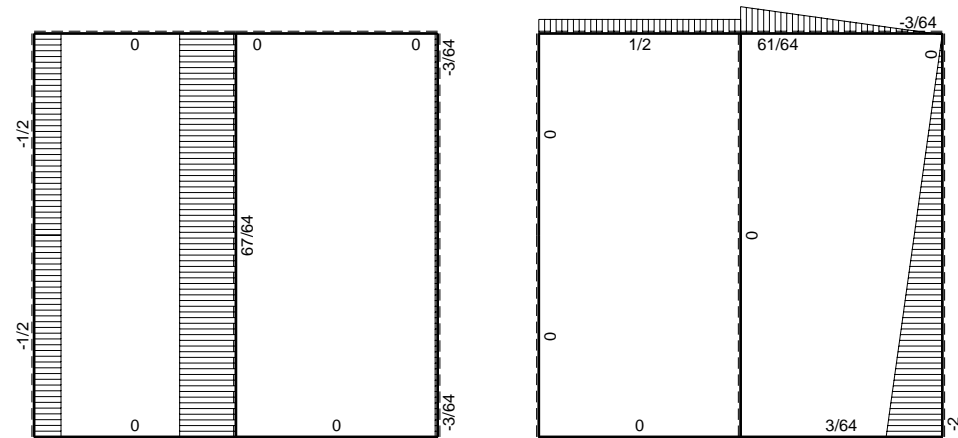
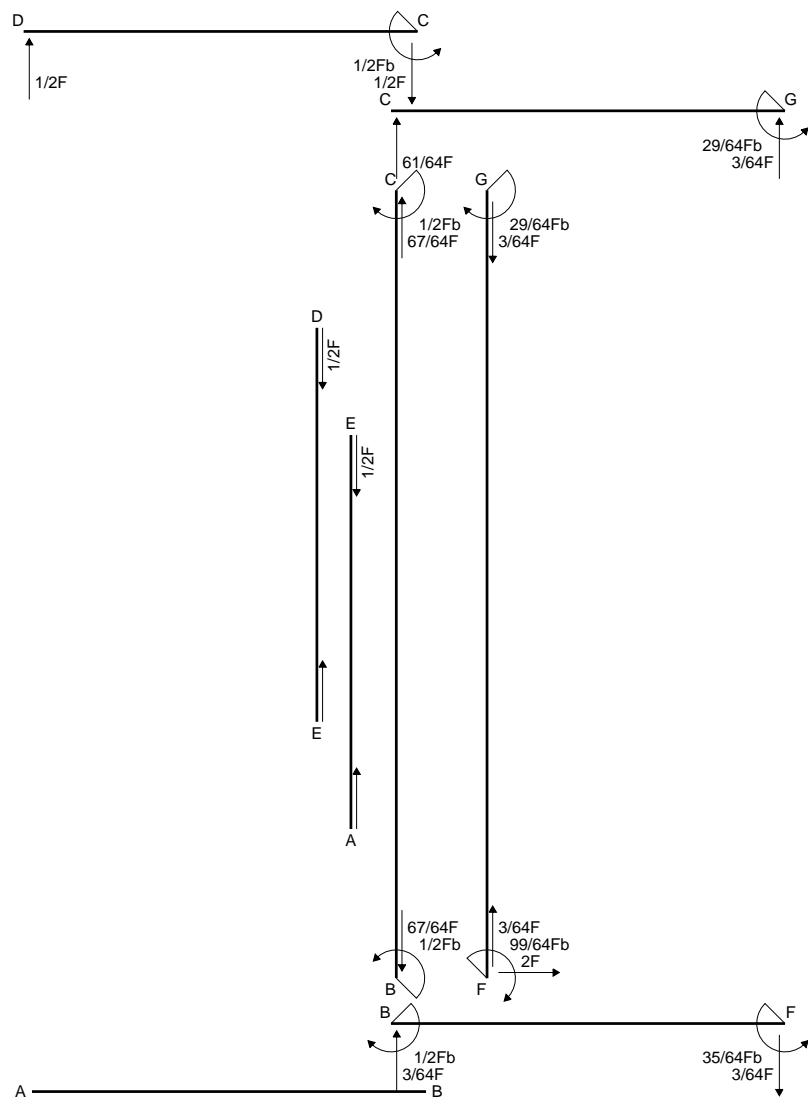


← ⊕ → F

↑ ⊕ ↓ F

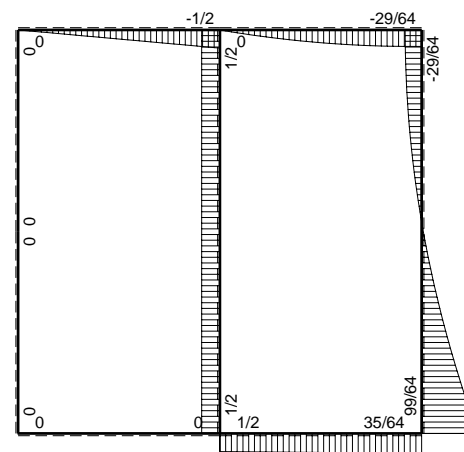

⊕ F<sub>b</sub>

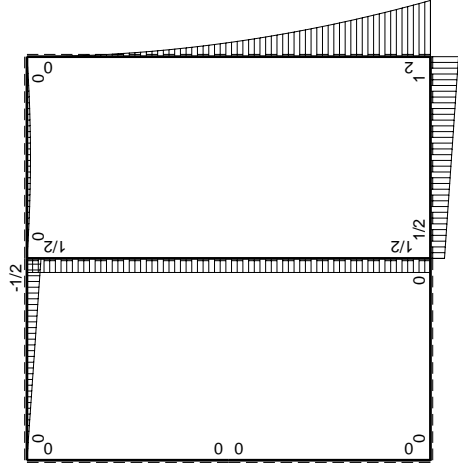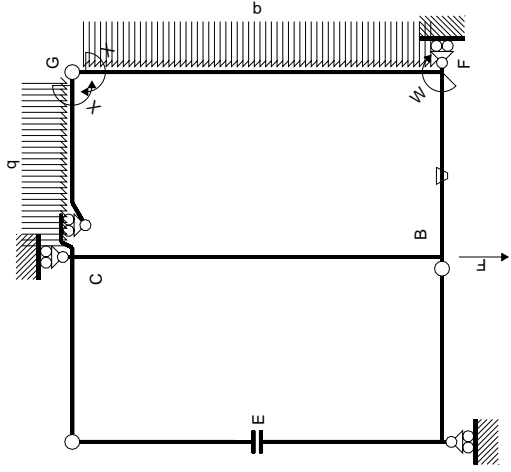

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M_x(x)$ | $M_0(x)$                   | $\theta$ | $M_x M_0$                                      | $M_x \theta$ | $M_x M_x$                             | $\int M_x(M_0/EJ+\theta)dx$    | $\int M_x M_x/EJ dx$ |
|--------------|----------|----------------------------|----------|--|--------------|---------------------------------------|--------------------------------|----------------------|
| AB b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| BA b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| CD b         | 0        | -1/2Fb+1/2Fx               | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| DC b         | 0        | 1/2Fx                      | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| DE b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| EA b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| AE b         | 0        | 0                          | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| BF b         | -x/b     | 1/2Fb+1/2Fx                | -Fb/EJ   | -1/2Fx-1/2Fx <sup>2</sup> /b                   | Fx/EJ        | x <sup>2</sup> /b <sup>2</sup>        | (-5/12+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ             |
| FB b         | 1-x/b    | -Fb+1/2Fx                  | Fb/EJ    | -Fb+3/2Fx-1/2Fx <sup>2</sup> /b                | Fb/EJ-Fx/EJ  | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-5/12+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ             |
| GC b         | -1+x/b   | -1/2Fx+1/2qx <sup>2</sup>  | 0        | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0            | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ    | 1/3xb/EJ             |
| CG b         | x/b      | 1/2Fx-1/2qx <sup>2</sup>   | 0        | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0            | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ    | 1/3xb/EJ             |
| FG 2b        | -1       | 2Fb-2Fx+1/2qx <sup>2</sup> | 0        | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                 | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ    | 2xb/EJ               |
| GF 2b        | 1        | -1/2qx <sup>2</sup>        | 0        | -1/2Fx <sup>2</sup> /b                         | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ    | 2xb/EJ               |
| CB 2b        | 0        | 1/2Fb                      | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| BC 2b        | 0        | -1/2Fb                     | 0        | 0  | 0            | 0                                     | 0+0                            | 0                    |
| totali       |          |                            |          |  |              |                                       | -29/24Fb <sup>2</sup> /EJ      | 8/3xb/EJ             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$





$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

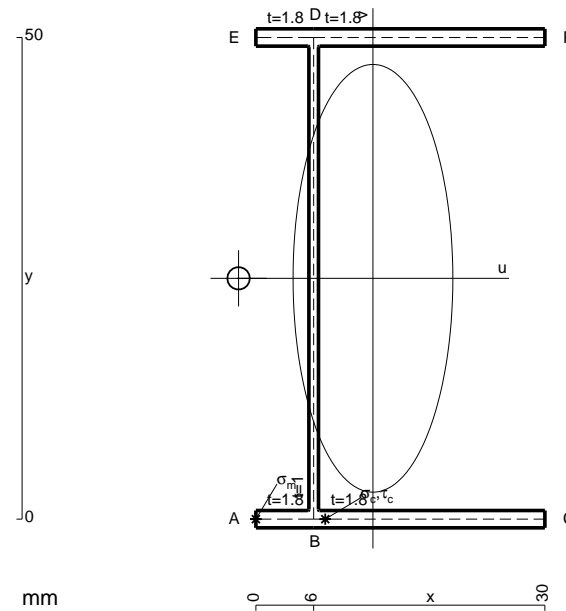


- A = 158. mm<sup>2</sup>
- J<sub>u</sub> = 77917. mm<sup>4</sup>
- J<sub>v</sub> = 10868. mm<sup>4</sup>
- J<sub>t</sub> = 133.3 mm<sup>4</sup>
- x<sub>o</sub> = -13.95 mm
- x<sub>g</sub> = 12.15 mm
- T<sub>y</sub> = 1485. N
- M<sub>x</sub> = -653400. Nmm
- u<sub>m</sub> = -12.15 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = -M<sub>v</sub>/J<sub>u</sub> = -209.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -6.152 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = -M<sub>v</sub>/J<sub>u</sub> = -209.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 291.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = T<sub>S</sub>/tJ<sub>u</sub> = 11.44 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/J<sub>t</sub> = 279.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 5346. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 546.1 N/mm<sup>2</sup>



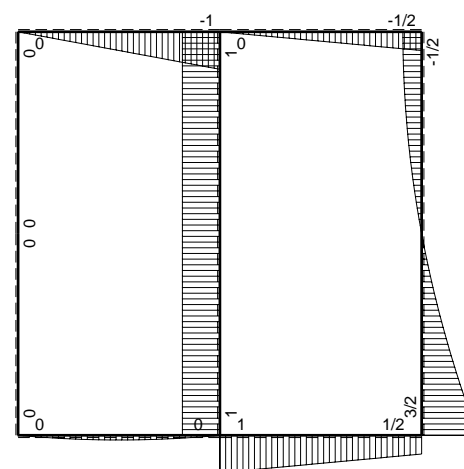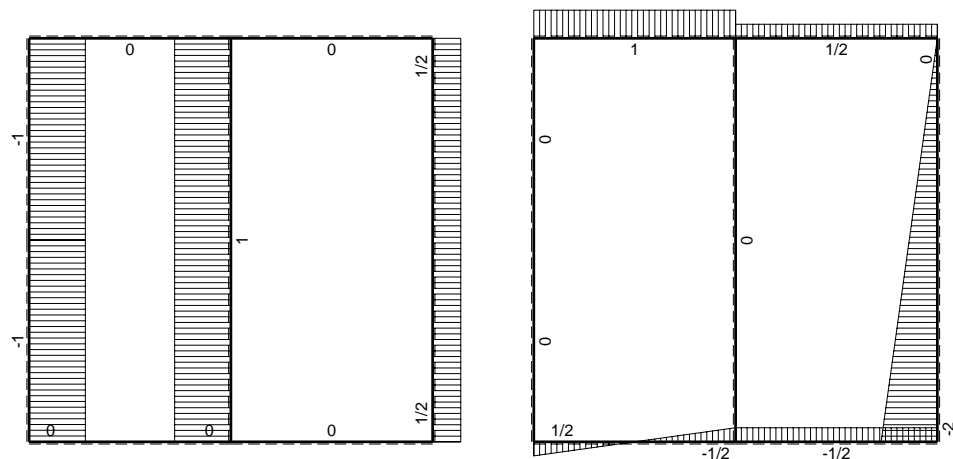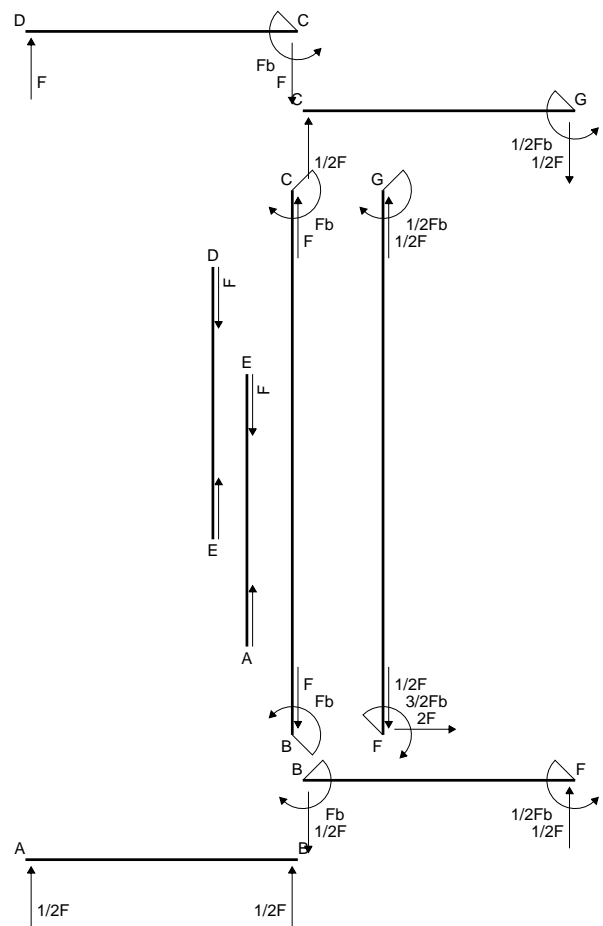

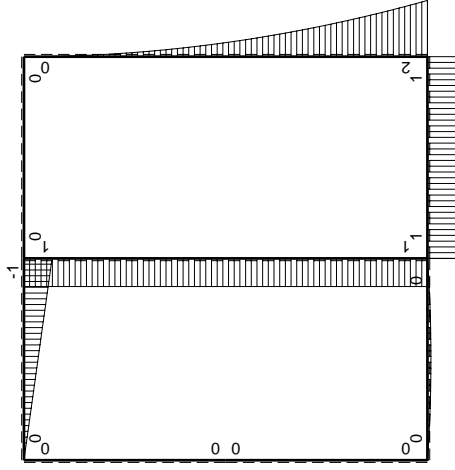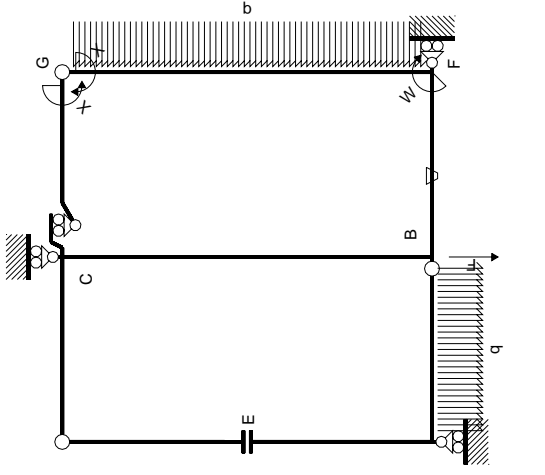

$M_0$  flessione da carichi assegnati

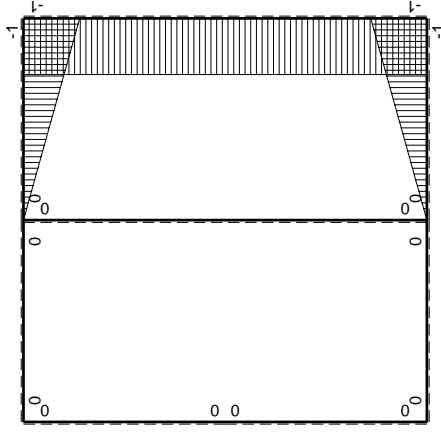

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sup>gc</sup> |          | iperstatica X=W <sup>gc</sup> |          |                      |              |                  |                                 | totali               |   |
|---|----------|-------------------------------|----------|----------------------|--------------|------------------|---------------------------------|----------------------|---|
| $\rightarrow$   | $M^0(x)$ | $M^0(x)$                      | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_0/EJ dx$ |   |
| AB b  | 0        | $1/2Fx - 1/2qx^2$             | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| BA b  | 0        | $-1/2Fx + 1/2qx^2$            | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| CD b  | 0        | $-b + Fx$                     | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| DC b  | 0        | Fx                            | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| DE b  | 0        | 0                             | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| ED b  | 0        | 0                             | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| EA b  | 0        | 0                             | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| AE b  | 0        | 0                             | 0        | 0                    | 0            | 0                | 0                               | 0                    | 0 |
| BF b  | -x/b     | Fb                            | -Fb/EJ   | -Fx                  | Fx/EJ        | $x^2/b^2$        | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$           | 0 |
| FB b  | 1-x/b    | -Fb                           | Fb/EJ    | -Fb+Fx               | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $-1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$           | 0 |
| GC b  | -1+x/b   | 0                             | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$           | 0 |
| CG b  | x/b      | 0                             | 0        | 0                    | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$           | 0 |
| FG 2b   | -1       | $2Fb-2Fx+1/2qx^2$             | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$             | 0 |
| GF 2b   | 1        | $-1/2qx^2$                    | 0        | $-1/2Fx^2/b$         | 0            | 1                | 0+0                             | $2xb/EJ$             | 0 |
| CB 2b   | 0        | Fb                            | 0        | 0                    | 0            | 0                | 0                               | $8/3xb/EJ$           | 0 |
| BC 2b   | 0        | -Fb                           | 0        | 0                    | 0            | 0                | 0                               | $8/3xb/EJ$           | 0 |
|   |          | iperstatica X=W <sup>gc</sup> |          |                      |              |                  |                                 |                      |   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


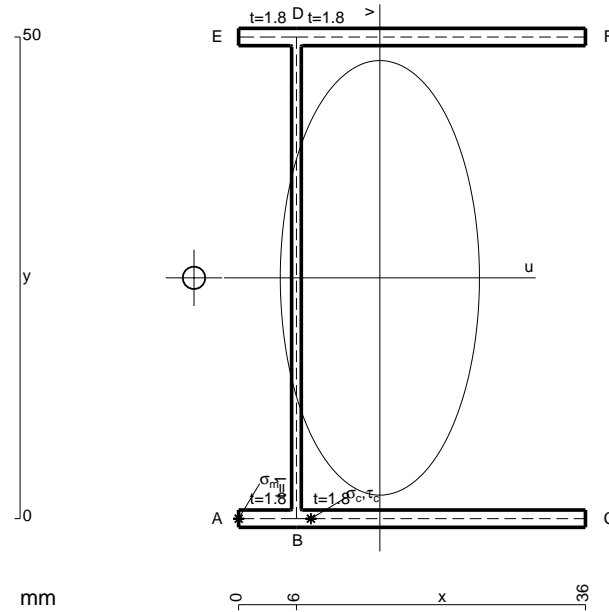


$A = 179.6 \text{ mm}^2$   
 $J_u = 91417. \text{ mm}^4$   
 $J_v = 19192. \text{ mm}^4$   
 $J_t = 156.6 \text{ mm}^4$   
 $x_o = -19.29 \text{ mm}$   
 $x_g = 14.66 \text{ mm}$   
 $T_y = 1670. \text{ N}$   
 $M_x = -801600. \text{ Nmm}$   
 $u_m = -14.66 \text{ mm}$   
 $v_m = -25. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -219.2 \text{ N/mm}^2$   
 $x_c = 6. \text{ mm}$   
 $u_c = -8.659 \text{ mm}$   
 $v_c = -25. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -219.2 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 383.9 \text{ N/mm}^2$   
 $\tau_g = TS'/tJ_u = 13.7 \text{ N/mm}^2$   
 $\tau_o = Tx_o/tJ_t = 370.2 \text{ N/mm}^2$   
 $t_c = 3006. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 700.2 \text{ N/mm}^2$






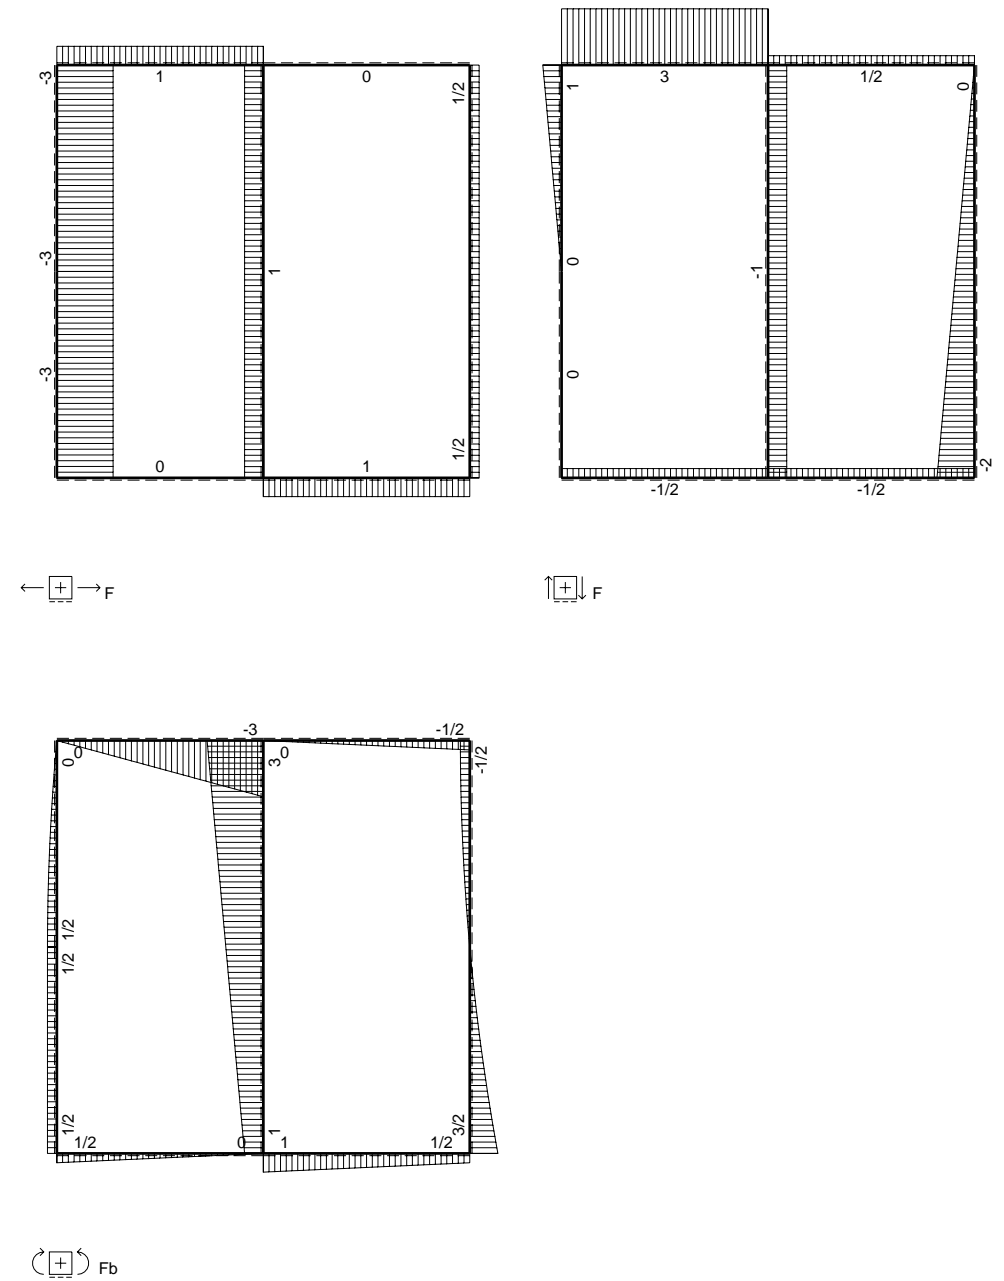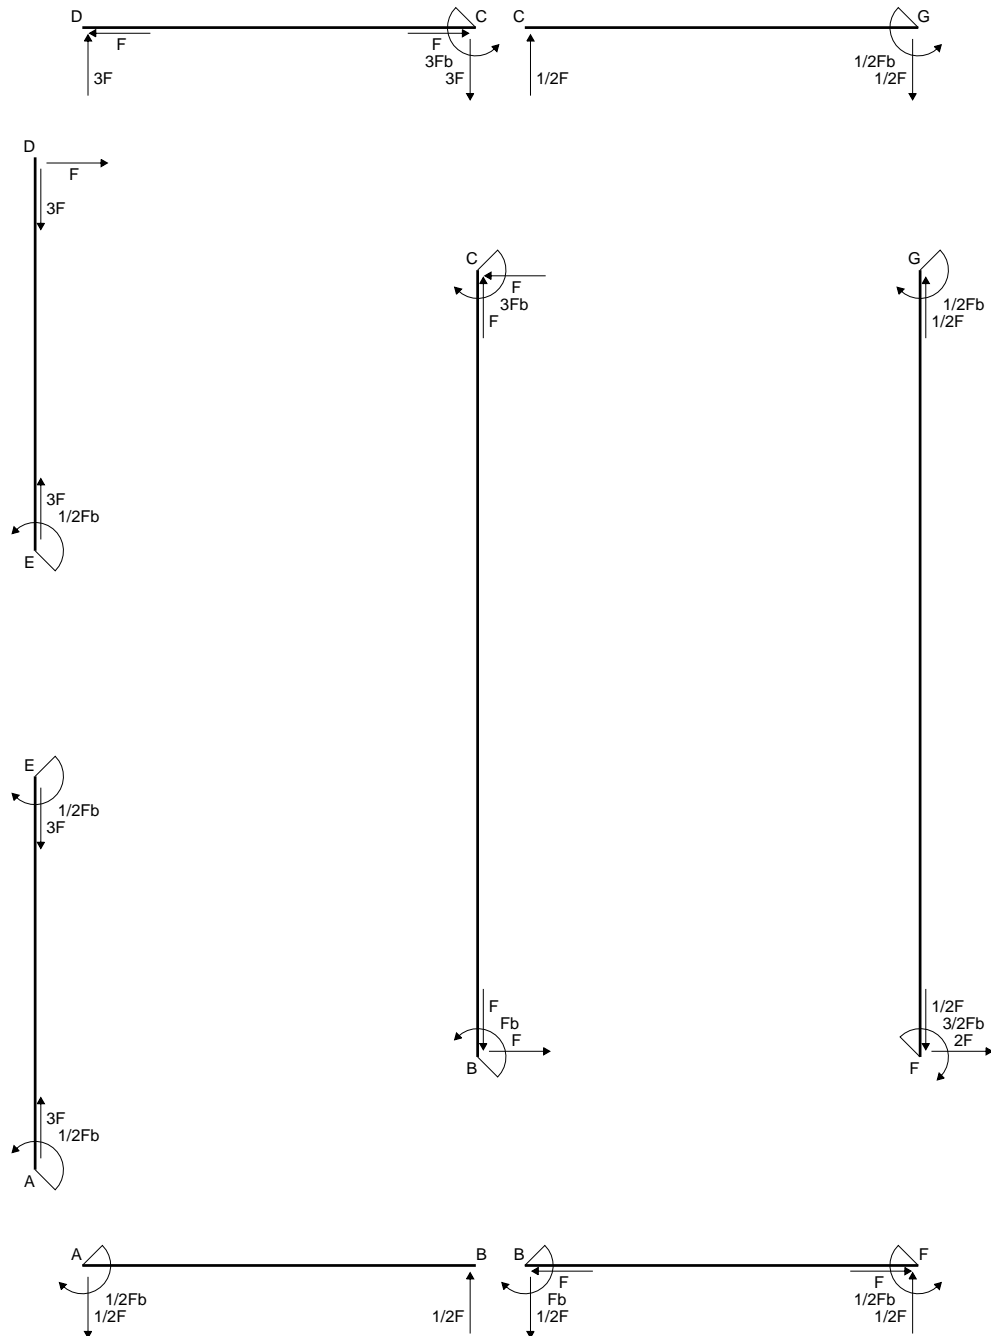

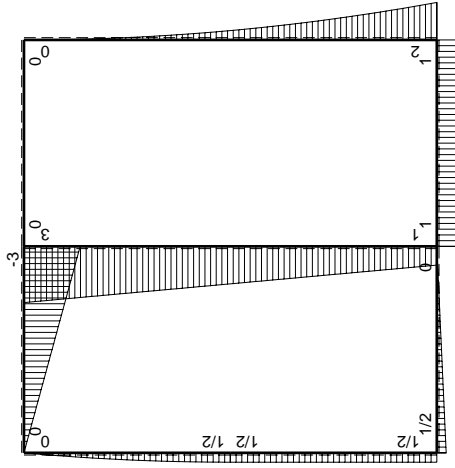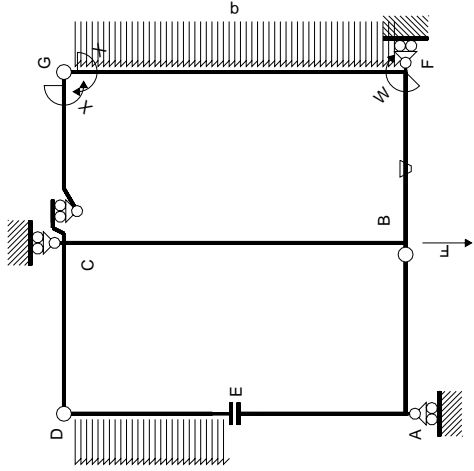

$M_0$  flessione da carichi assegnati

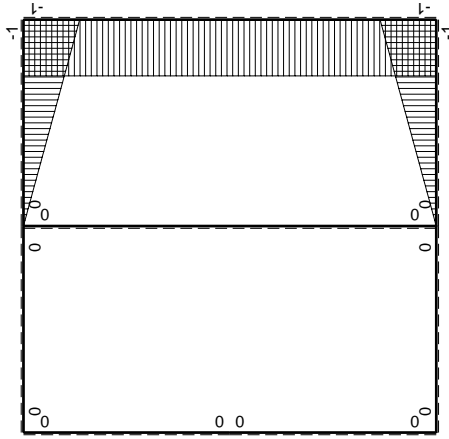

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |        | $M_x$                       |        | $M_\theta$                     |             | $M_0$                          |             | $\theta$ |       | $M^0(x)$ |        | $M^x(x)$ |        | $\int M_x M^0/EJ dx$ |  | $\int M_x M^x/EJ dx$ |          |
|--|--------|-----------------------------|--------|--------------------------------|-------------|--------------------------------|-------------|----------|-------|----------|--------|----------|--------|----------------------|--|----------------------|----------|
| AB b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| BA b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| CD b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| DC b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| DE b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| ED b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| EA b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| AE b   | 0      | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| BF b   | -x/b   | Fb                          | -Fb/EJ | -Fx                            | Fx/EJ       | -Fb+Fx                         | Fb/EJ-Fx/EJ | -Fb+Fx   | Fb/EJ | Fb       | -Fb/EJ | Fb       | -Fb/EJ | -1/2Fx               | Fx/b <sup>2</sup>                      | -1/2Fx-1/2Fx         | 1/3Xb/EJ |
| FB b   | 1-x/b  | -Fb                         | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ | -Fb+Fx                         | Fb/EJ-Fx/EJ | -Fb+Fx   | Fb/EJ | -Fb      | -Fb/EJ | -Fb      | Fb/EJ  | -1/2Fx+1/2Fx         | -1/2x/b+x <sup>2</sup> /b <sup>2</sup> | -1/2Fx-1/2Fx         | 1/3Xb/EJ |
| GC b   | -1+x/b | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| CG b   | x/b    | 0                           | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| FG 2b  | -1     | -2Fb-2Fx+1/2qx <sup>2</sup> | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0           | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| GF 2b  | 1      | -1/2qx <sup>2</sup>         | 0      | -1/2Fx <sup>2</sup> /b         | 0           | -1/2Fx <sup>2</sup> /b         | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| CB 2b  | 0      | 3Fb-Fx                      | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| BC 2b  | 0      | -Fb-Fx                      | 0      | 0                              | 0           | 0                              | 0           | 0        | 0     | 0        | 0      | 0        | 0      | 0                    | 0                                      | 0                    | 0        |
| totali   |        |                             |        |                                |             |                                |             |          |       |          |        |          |        |                      |  |                      |          |
|  |        | iperstatica $X=W_{gc}$      |        |                                |             |                                |             |          |       |          |        |          |        |                      |  |                      |          |
|  |        |                             |        |                                |             |                                |             |          |       |          |        |          |        |                      |  |                      |          |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


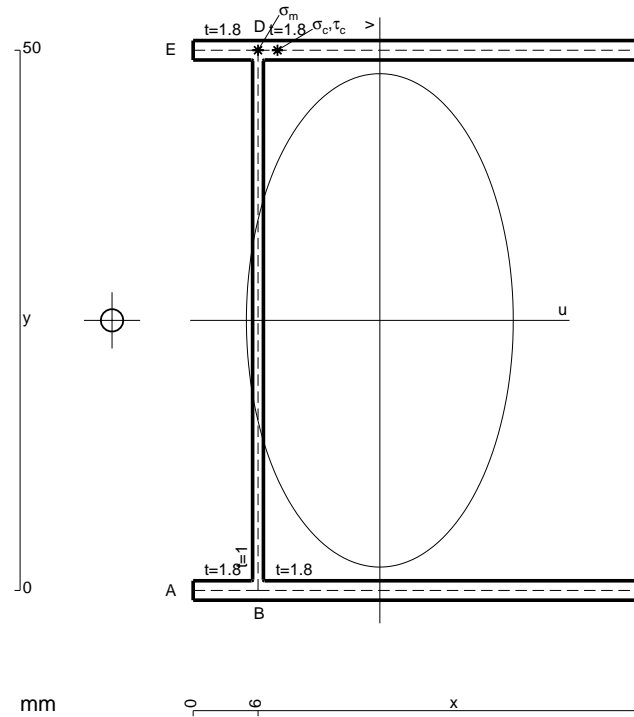


- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 30681. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = -24.78 mm
- x<sub>g</sub> = 17.27 mm
- N = 610. N
- T<sub>y</sub> = 1830. N
- M<sub>x</sub> = -951600. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -11.27 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -11.27 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 469.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.7 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 453.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 1098. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 844.7 N/mm<sup>2</sup>




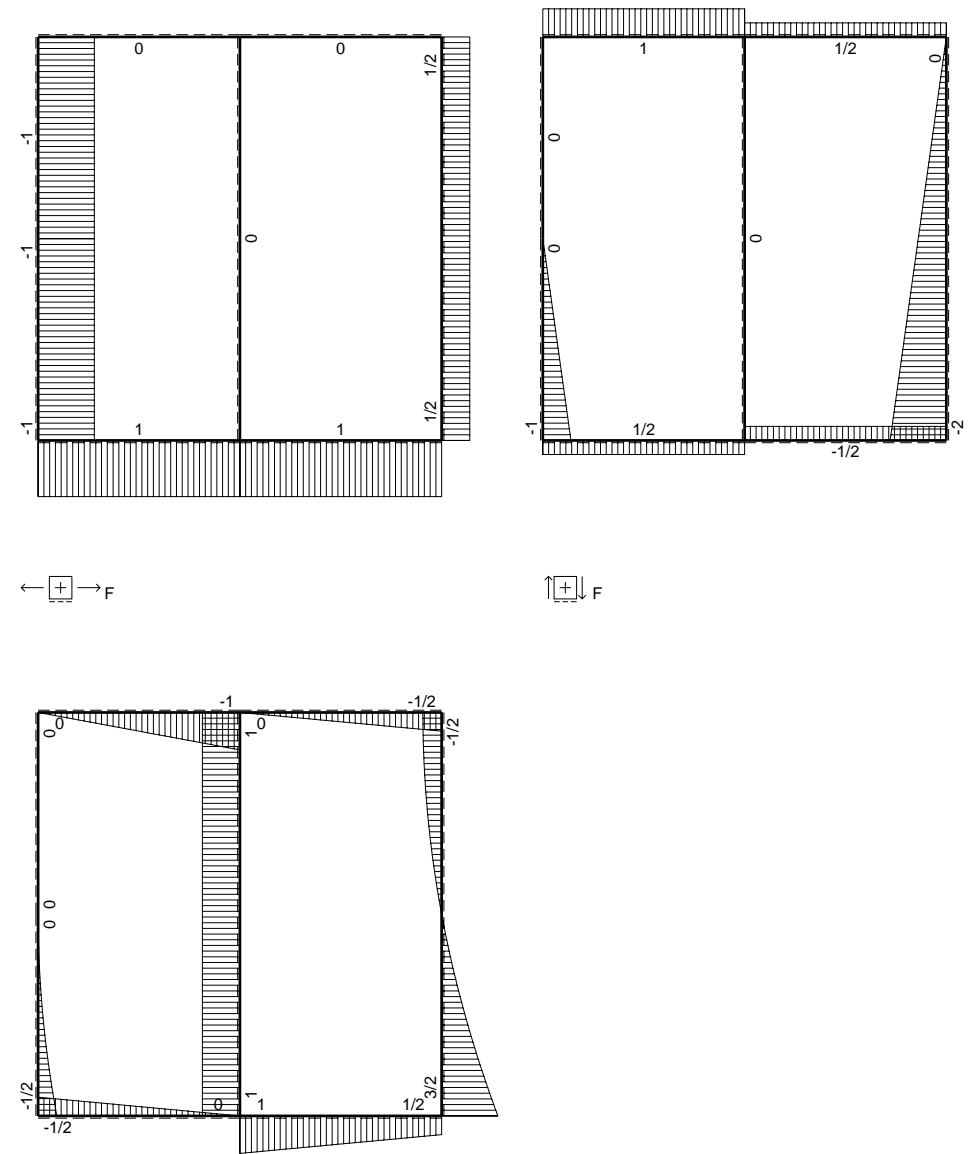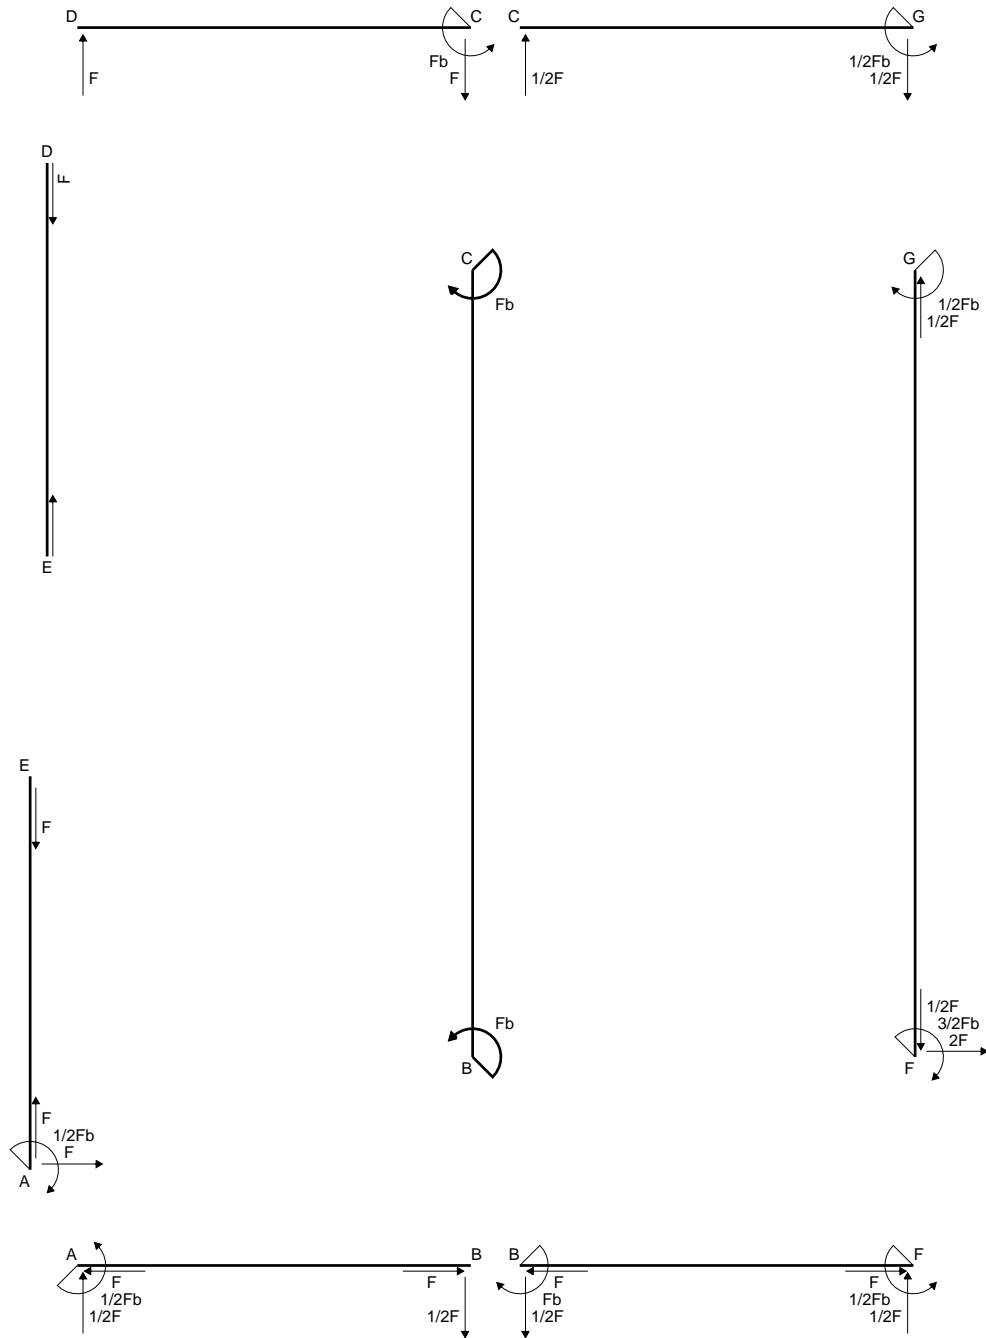

(+) Fb

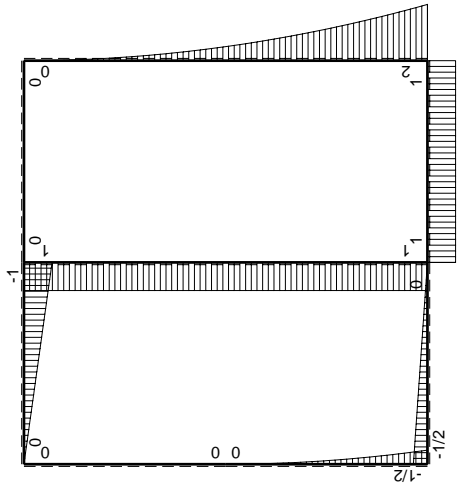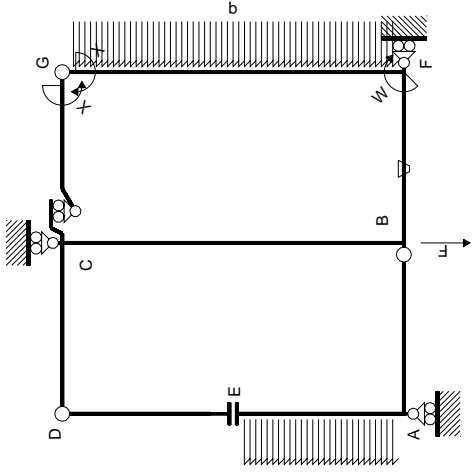

$M_0$  flessione da carichi assegnati

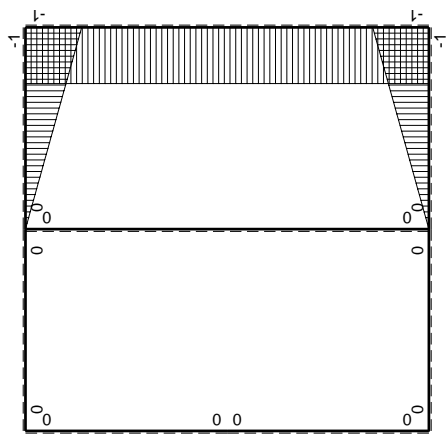

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|----------|------------------------|----------|--------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BA b          | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| CD b          | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| DC b          | 0        | $Fx$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| ED b          | 0        | 0                      | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| EA b          | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| AE b          | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BF b          | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$          | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b          | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0        | $Fb$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BC 2b         | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| totali        |          |                        |          |                          |                 |                    | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


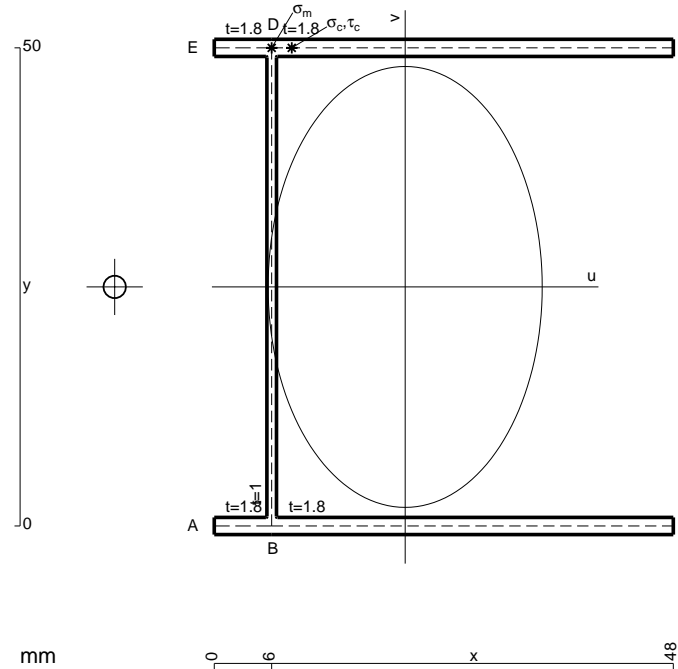


- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 45742. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = -30.38 mm
- x<sub>g</sub> = 19.96 mm
- T<sub>y</sub> = 2030. N
- M<sub>x</sub> = -1136800. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -13.96 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 240. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -13.96 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 240. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 564. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 18. N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 546. N/mm<sup>2</sup>
- t<sub>c</sub> = 3654. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 1006. N/mm<sup>2</sup>






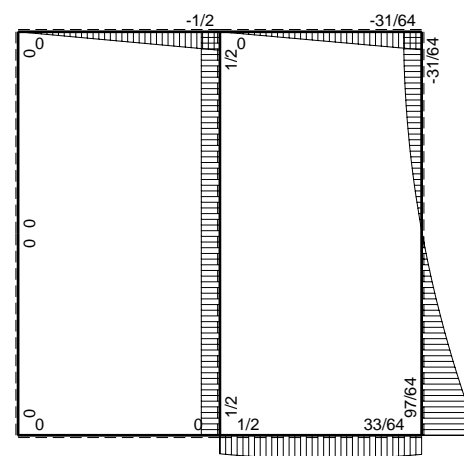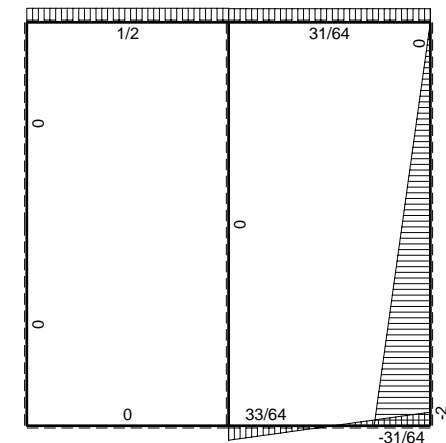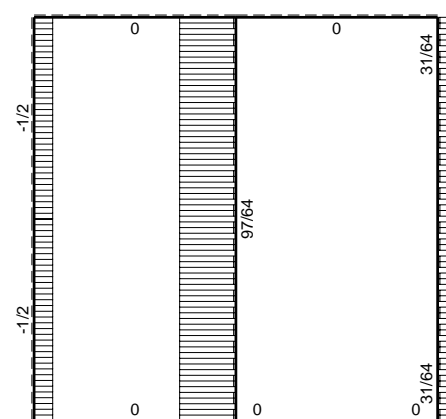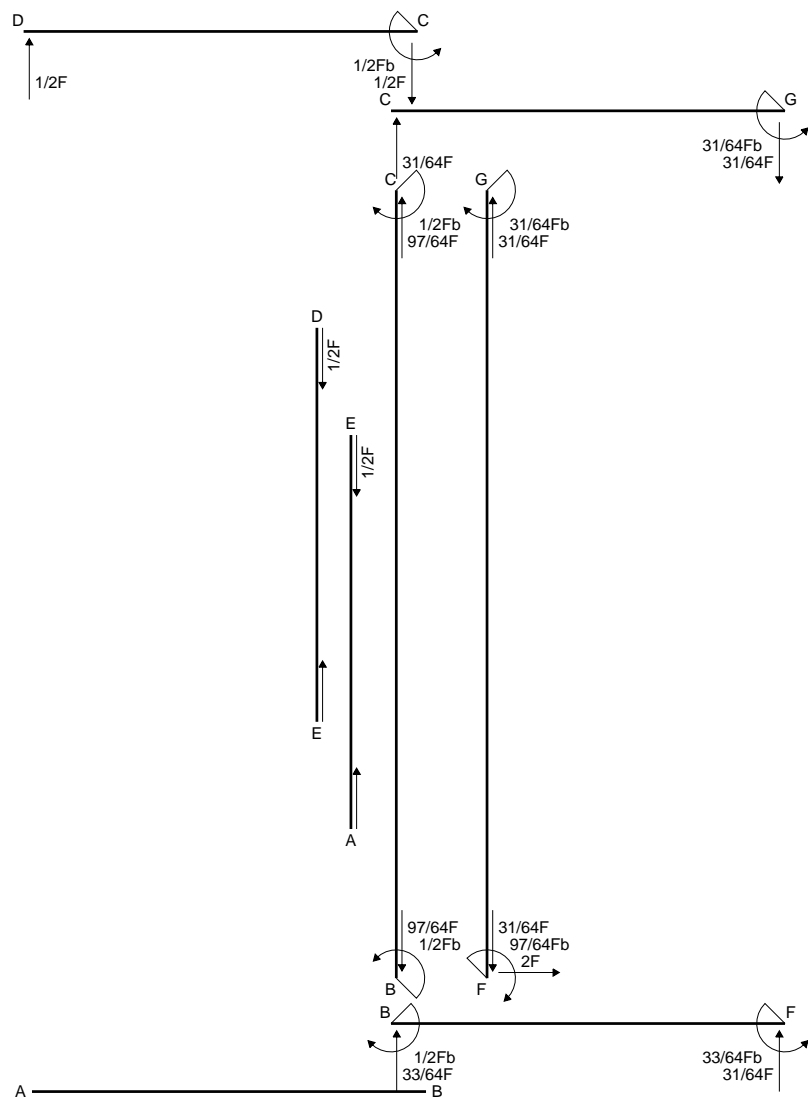

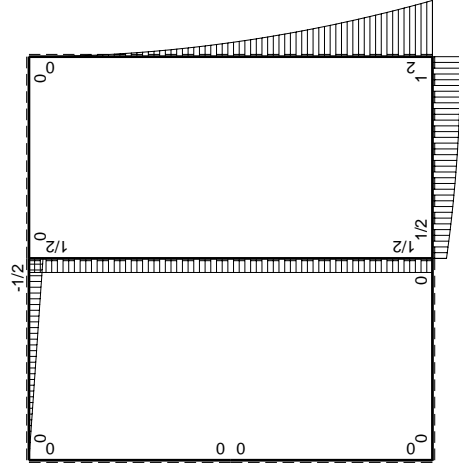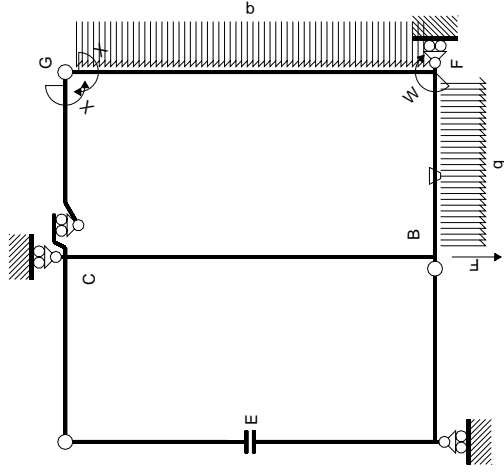

$M_0$  flessione da carichi assegnati

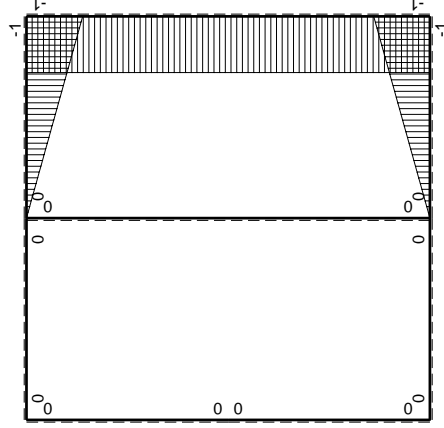

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sup>gc</sup> |                    | iperstatica X=W <sup>gc</sup> |        |  |                  |                                       |                                  |                    |          |
|---|--------------------|-------------------------------|--------|--|------------------|---------------------------------------|----------------------------------|--------------------|----------|
| ←   | M <sup>x</sup> (x) | M <sup>0</sup> (x)            | θ      | M <sup>x</sup> M <sub>0</sub>                      | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>         | $\int M^x(M^0/EJ+\theta)dx$      | $\int M^xM^x/EJdx$ |          |
| AB b  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| BA b  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| CD b  | 0                  | -1/2Fb+1/2Fx                  | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| DC b  | 0                  | 1/2Fx                         | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| DE b  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| EA b  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| AE b  | 0                  | 0                             | 0      | 0  | 0                | 0                                     | 0                                | 0                  | 0        |
| BF b  | -x/b               | 1/2Fb+Fx-1/2qx <sup>2</sup>   | -Fb/EJ | -1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (-1/1/24+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ           | 1/3xb/EJ |
| FB b  | 1-x/b              | -Fb+1/2qx <sup>2</sup>        | Fb/EJ  | -Fb+Fx+1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-1/1/24+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ           | 1/3xb/EJ |
| GC b  | -1+x/b             | 0                             | 0      | 0  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                              | 1/3xb/EJ           | 1/3xb/EJ |
| CG b  | x/b                | 0                             | 0      | 0  | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                              | 1/3xb/EJ           | 1/3xb/EJ |
| FG 2b   | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup>    | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                     | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ             | 2xb/EJ   |
| GF 2b   | 1                  | -1/2qx <sup>2</sup>           | 0      | -1/2Fx <sup>2</sup> /b                             | 0                | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ             | 2xb/EJ   |
| CB 2b   | 0                  | 1/2Fb                         | 0      | 0  | 0                | 0                                     | 0+0                              | 8/3xb/EJ           | 8/3xb/EJ |
| BC 2b   | 0                  | -1/2Fb                        | 0      | 0  | 0                | 0                                     | 0+0                              | 8/3xb/EJ           | 8/3xb/EJ |
| totali  |                    |                               |        |  |                  |                                       |                                  |                    |          |
|   |                    |                               |        |  |                  |                                       |                                  |                    | 31/64Fb  |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

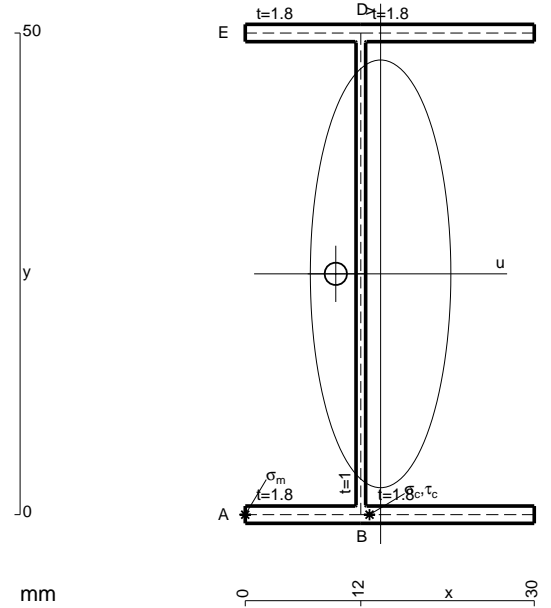



- A = 158. mm<sup>2</sup>
- J<sub>u</sub> = 77917. mm<sup>4</sup>
- J<sub>v</sub> = 8408. mm<sup>4</sup>
- J<sub>t</sub> = 133.3 mm<sup>4</sup>
- x<sub>o</sub> = -4.65 mm
- x<sub>g</sub> = 14.05 mm
- T<sub>y</sub> = 1035. N
- M<sub>x</sub> = -621000. Nmm
- u<sub>m</sub> = -14.05 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -199.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -2.051 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -199.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 70.96 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 5.978 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t / J<sub>t</sub> = 64.98 N/mm<sup>2</sup>
- t<sub>c</sub> = 3726. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 234.1 N/mm<sup>2</sup>



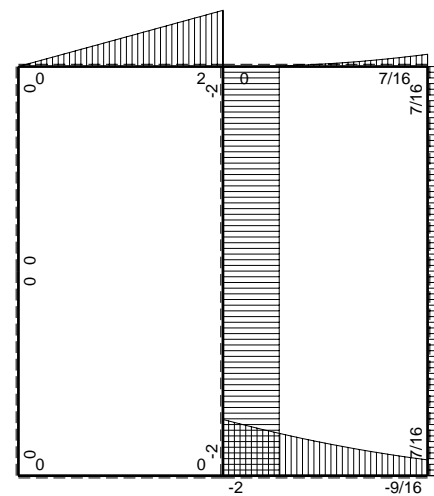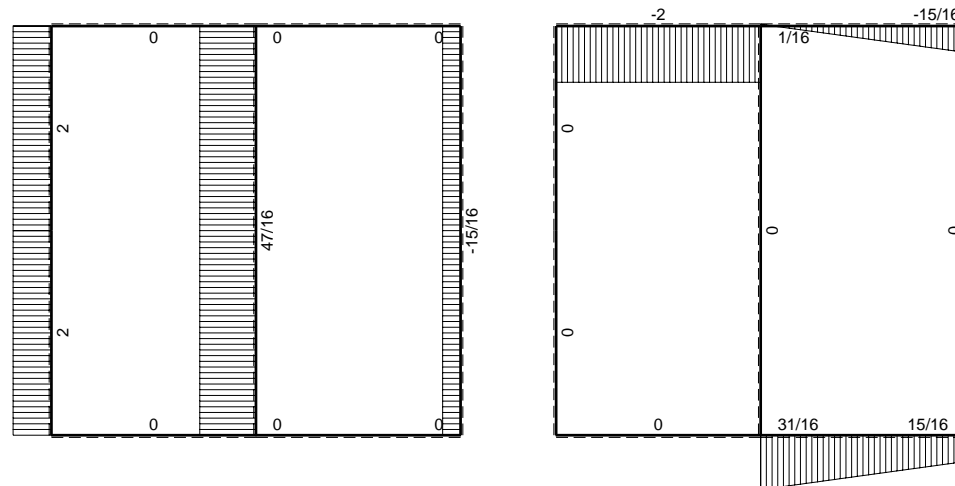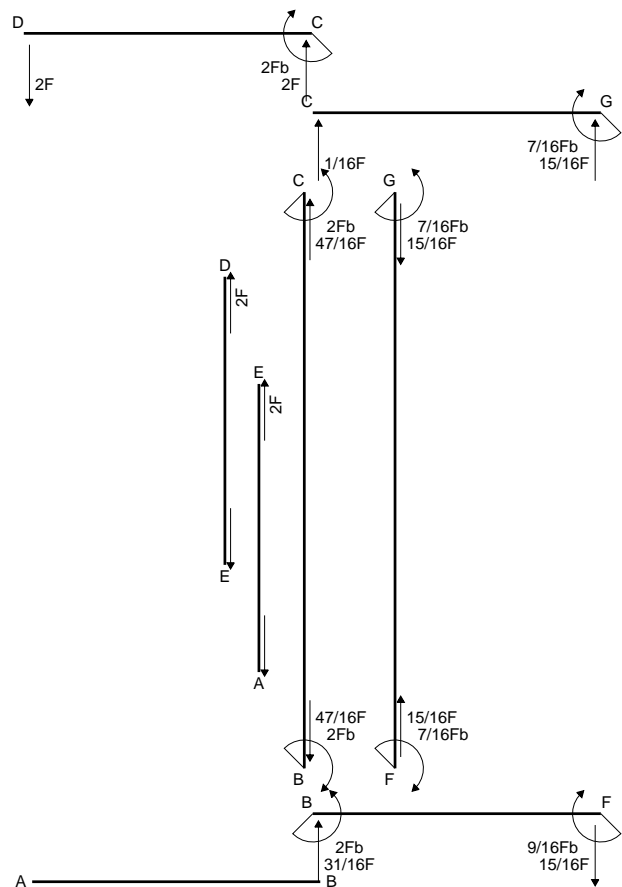

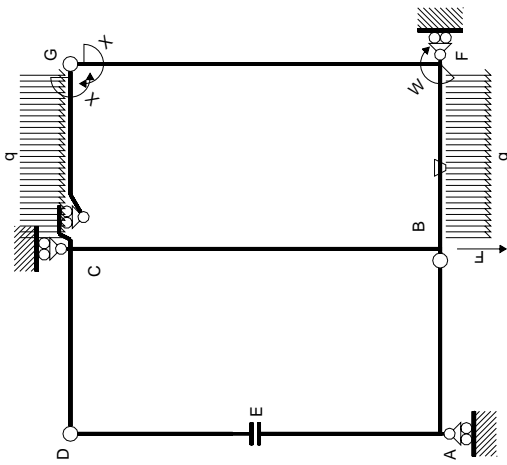

$M_x$  flessione da iperstatica  $X=1$

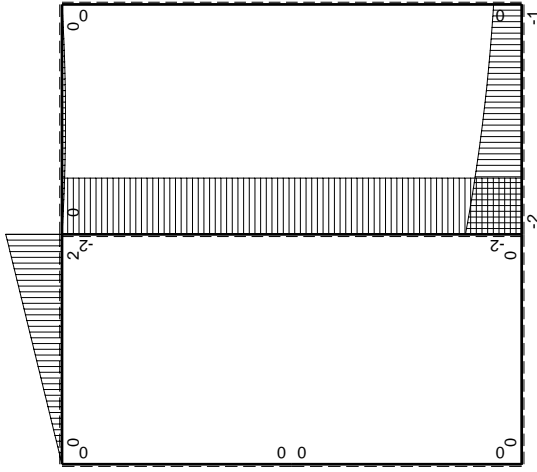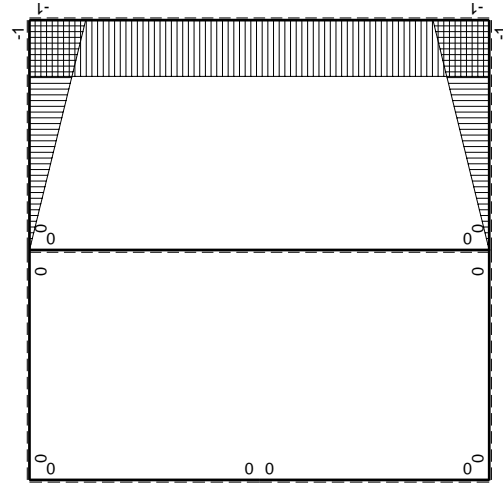

$M_0$  flessione da carichi assegnati

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$               | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |  |
|---------------|------------------------|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|---------------------|--|
| AB            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| BA            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| CD            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| DC            | 0                      | -2Fx                 | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| DE            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| EA            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| AE            | 0                      | 0                    | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| BF            | -x/b                   | $-2Fx+3/2Fx-1/2qx^2$ | $-b/EJ$  | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |  |
| FB            | 1-x/b                  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |  |
| GC            | -1+x/b                 | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |  |
| CG            | x/b                    | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx^2/b-1/2qx^3/b$     | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |  |
| FG            | -1                     | 0                    | 0        | 0                         | 0             | 1                | 0                           | 0                   |  |
| GF            | 1                      | 0                    | 0        | 0                         | 0             | 1                | 0                           | 0                   |  |
| CB            | 0                      | -2Fb                 | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| BC            | 0                      | 2Fb                  | 0        | 0                         | 0             | 0                | 0                           | 0                   |  |
| totali        |                        |                      |          |                           |               |                  |                             |                     |  |
|               | iperstatica $X=W_{gc}$ |                      |          |                           |               |                  |                             |                     |  |
|               | $M^x(x)$               | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |  |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$


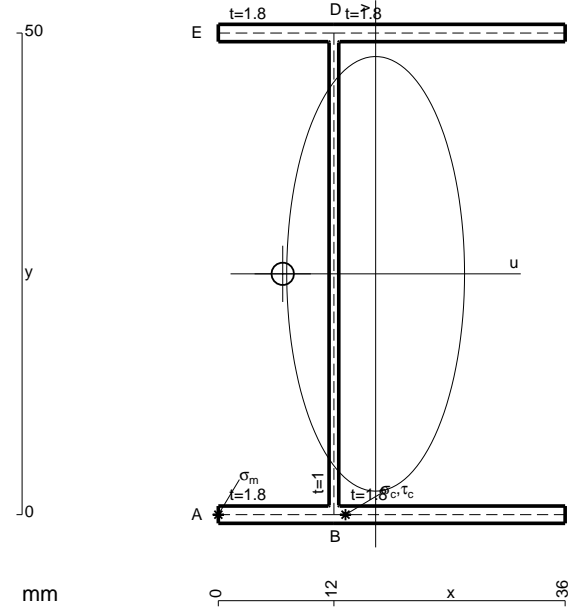


- A = 179.6 mm<sup>2</sup>
- J<sub>u</sub> = 91417. mm<sup>4</sup>
- J<sub>v</sub> = 15296. mm<sup>4</sup>
- J<sub>t</sub> = 156.6 mm<sup>4</sup>
- x<sub>o</sub> = -9.646 mm
- x<sub>g</sub> = 16.33 mm
- T<sub>y</sub> = -1180. N
- M<sub>x</sub> = 755200. Nmm
- u<sub>m</sub> = -16.33 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 206.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -4.33 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 206.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 138.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 7.745 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 130.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1062. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 316.6 N/mm<sup>2</sup>






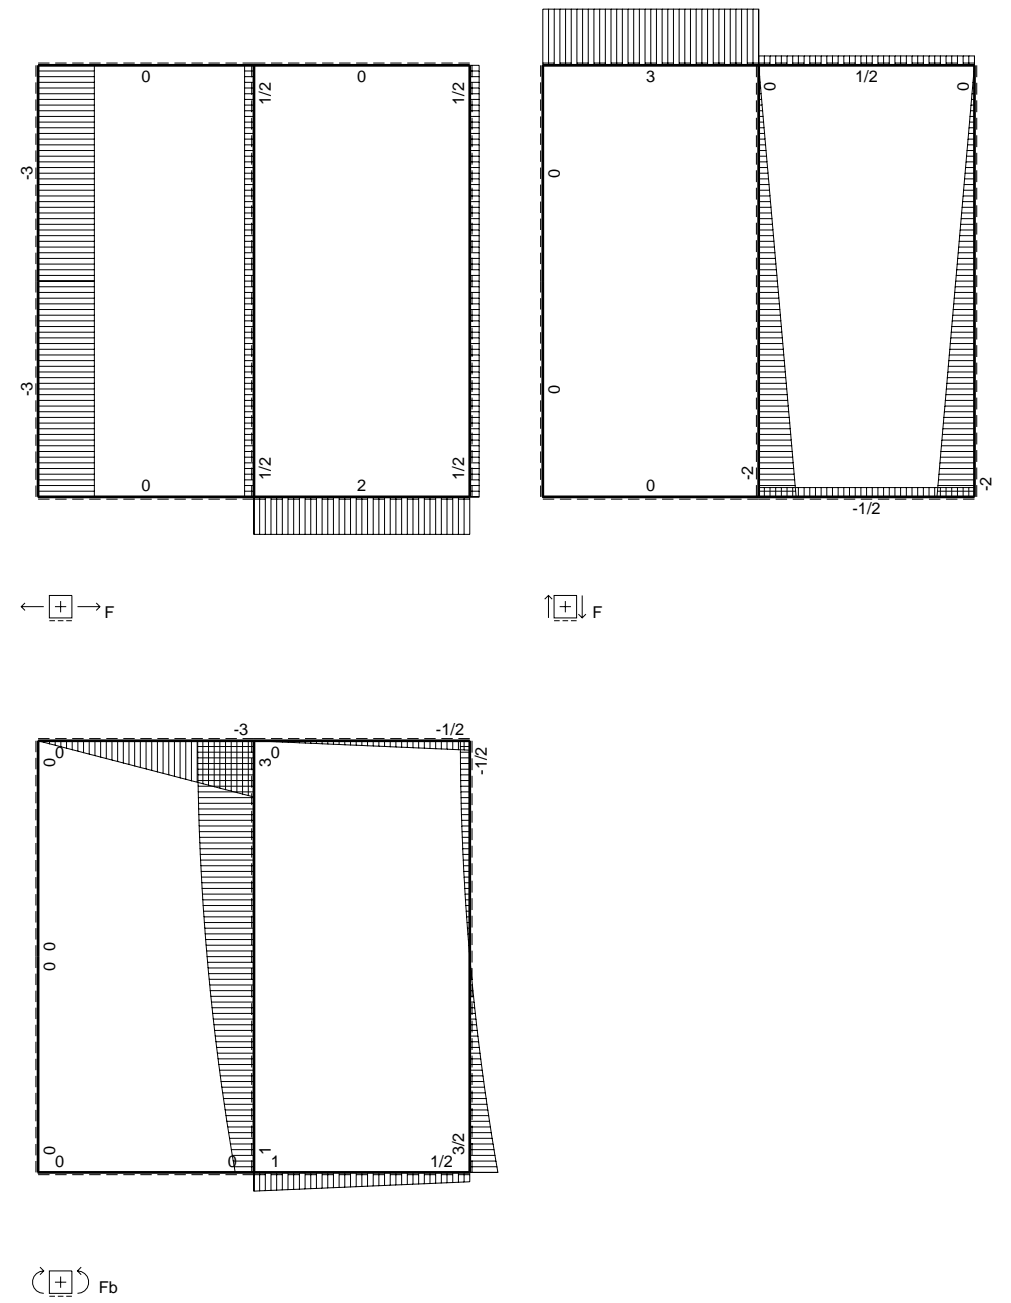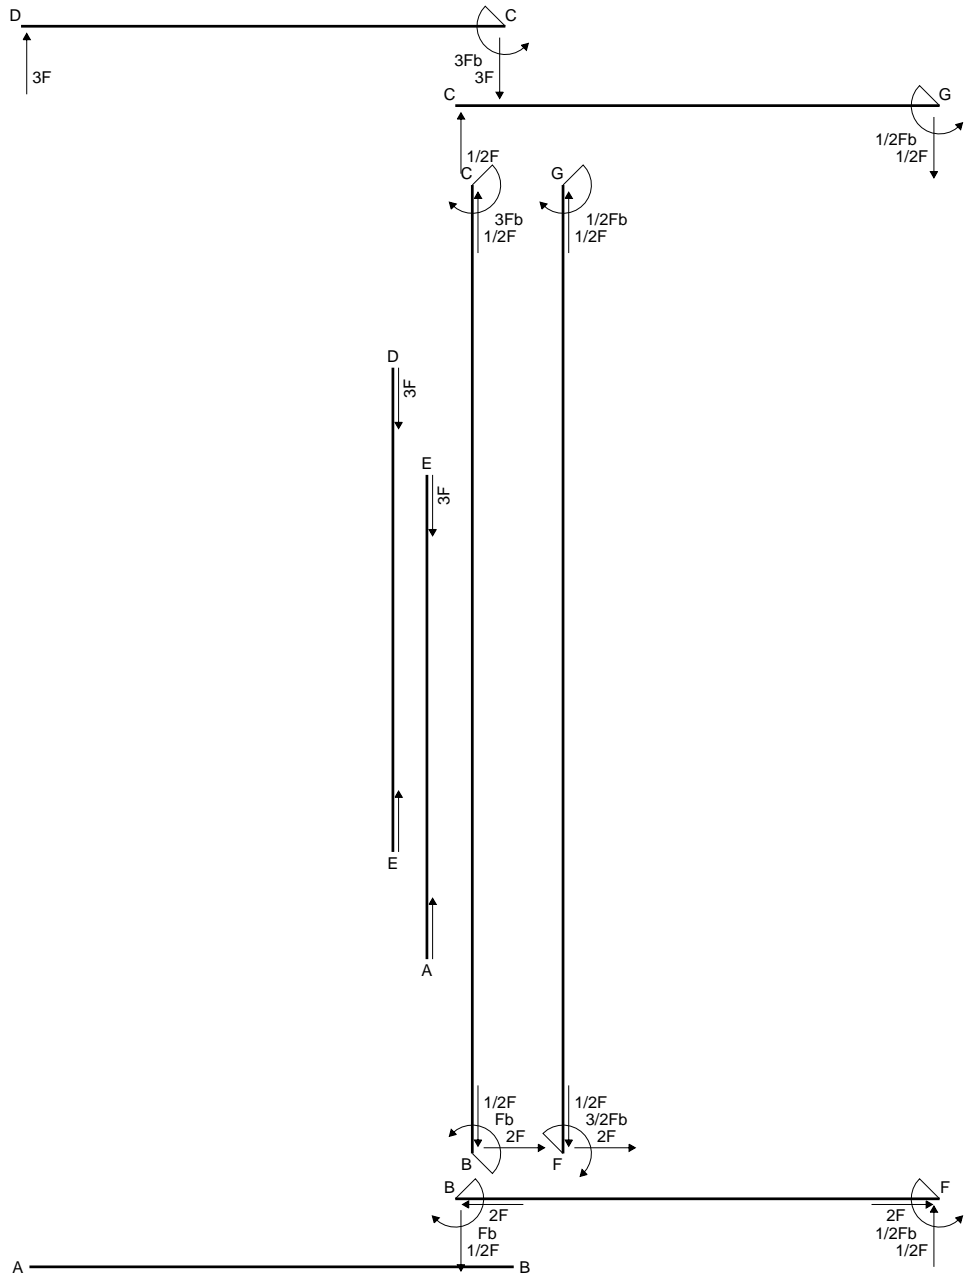

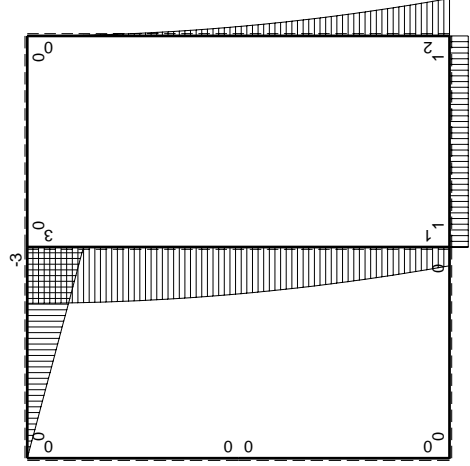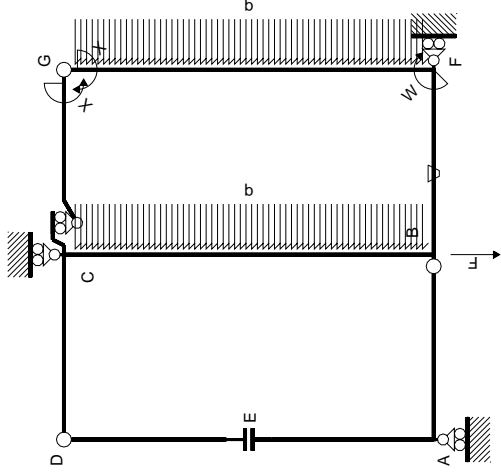

$M_0$  flessione da carichi assegnati

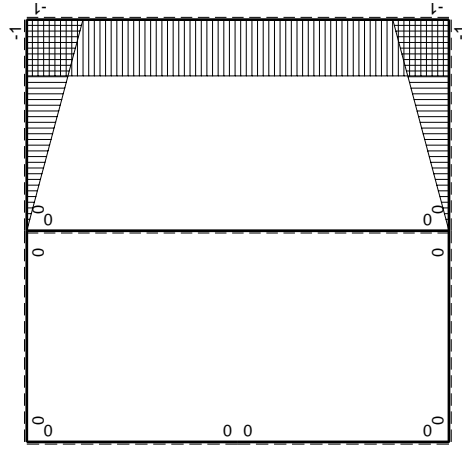

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| ←      | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ |                   | $\int M^x M_x / EJ dx$ |
|--------|----------|-------------------|----------|----------------------|---------------|------------------|---------------------------------|-------------------|------------------------|
|        |          |                   |          |                      |               |                  | $x^2/b^2$                       | $-1-2x/b+x^2/b^2$ |                        |
| AB b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| BA b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| CD b   | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| DC b   | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| DE b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| ED b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| EA b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| AE b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                 | 0                      |
| BF b   | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $-1/2+1/2(Fb^2/EJ)$             | $1/3xb/EJ$        | $1/3xb/EJ$             |
| FB b   | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$        | $1/3xb/EJ$             |
| GC b   | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$        | $1/3xb/EJ$             |
| CG b   | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$        | $1/3xb/EJ$             |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$          | $2xb/EJ$               |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$          | $2xb/EJ$               |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0             | 0                | 0+0                             | 0                 | 0                      |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                             | 0                 | 0                      |
| totali |          |                   |          |                      |               |                  | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$        | $1/2Fb$                |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

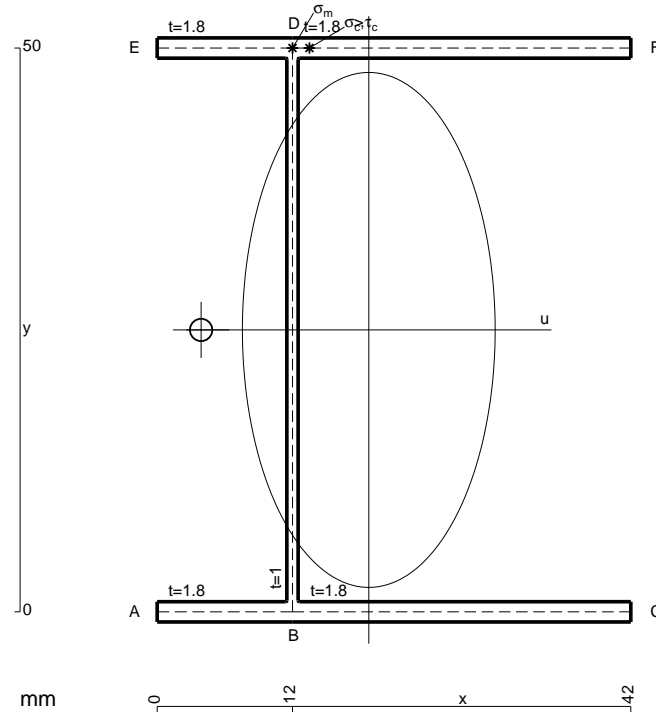

- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 25270. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = -14.87 mm
- x<sub>g</sub> = 18.76 mm
- T<sub>y</sub> = 1350. N
- M<sub>x</sub> = -918000. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -6.763 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = -M<sub>v</sub>/J<sub>u</sub> = 218.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -6.763 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = -M<sub>v</sub>/J<sub>u</sub> = 218.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 210.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = T<sub>S</sub>/t<sub>u</sub> = 9.651 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/J<sub>t</sub> = 200.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 810. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 425.1 N/mm<sup>2</sup>




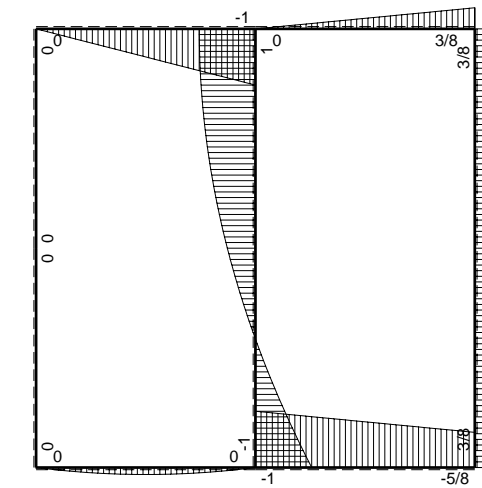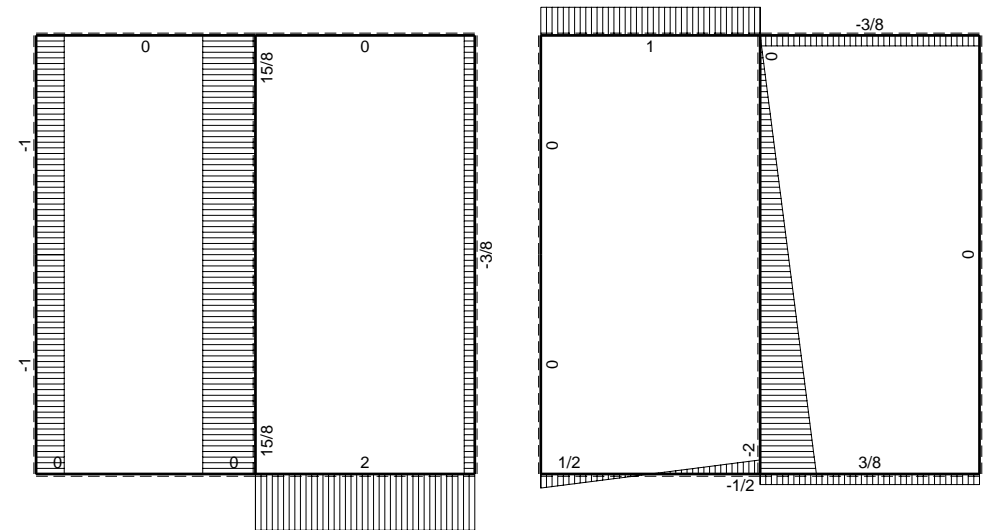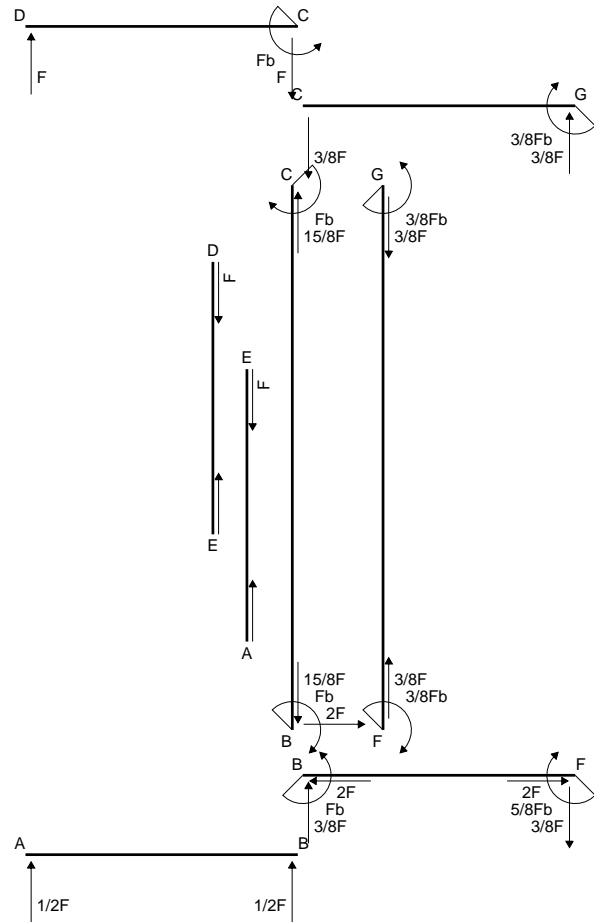

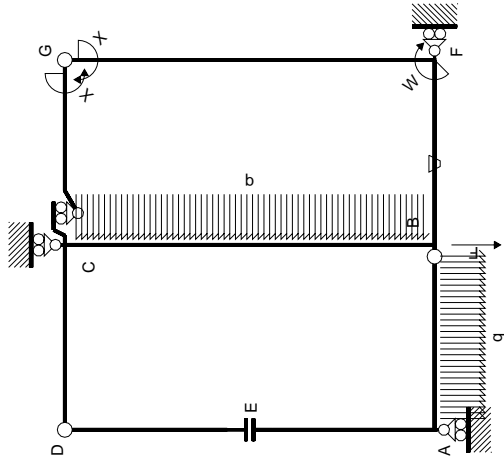

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

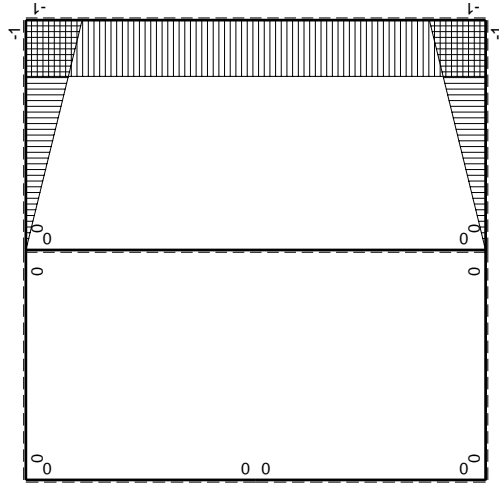

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b         | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b         | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b         | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b         | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b        | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b        | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b        | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali       |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |
|              |          |                      |          |           |                 |                  |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

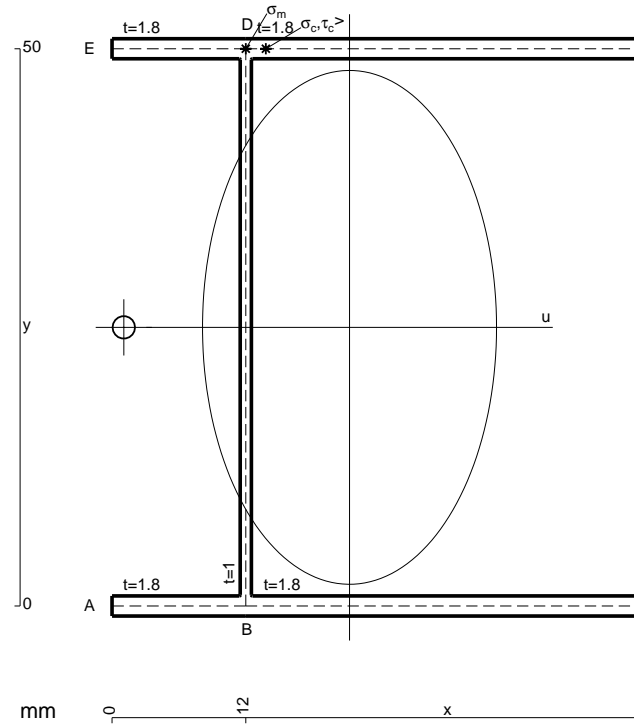


- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 38762. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = -20.25 mm
- x<sub>g</sub> = 21.31 mm
- N = 2681. N
- T<sub>y</sub> = -2860. N
- M<sub>x</sub> = -1029600. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -9.307 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -9.307 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 534.6 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 21.74 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/J<sub>t</sub> = 512.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 2574. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 953.9 N/mm<sup>2</sup>






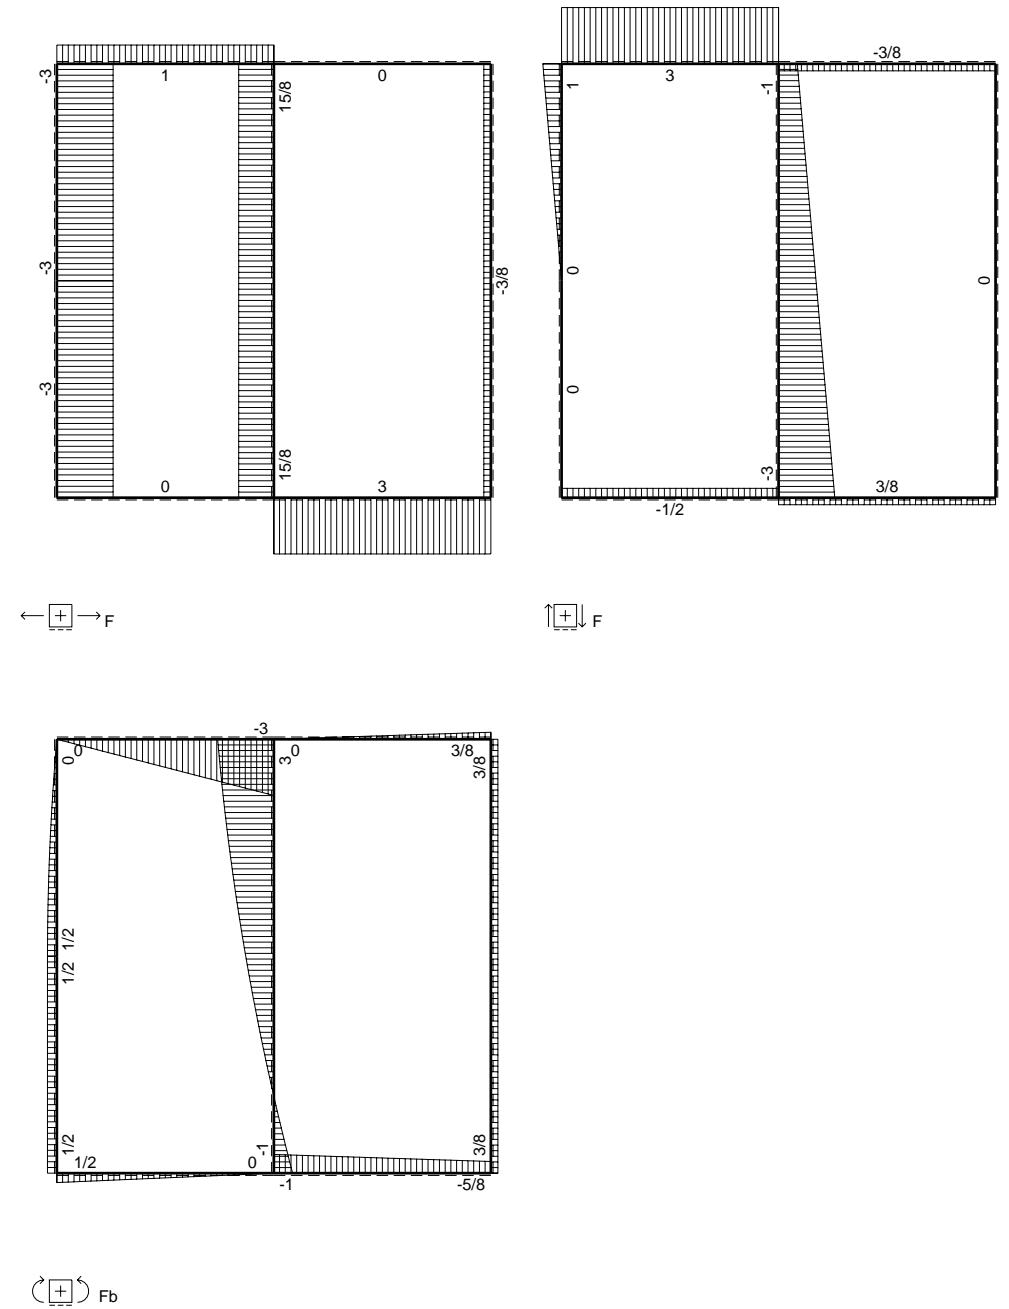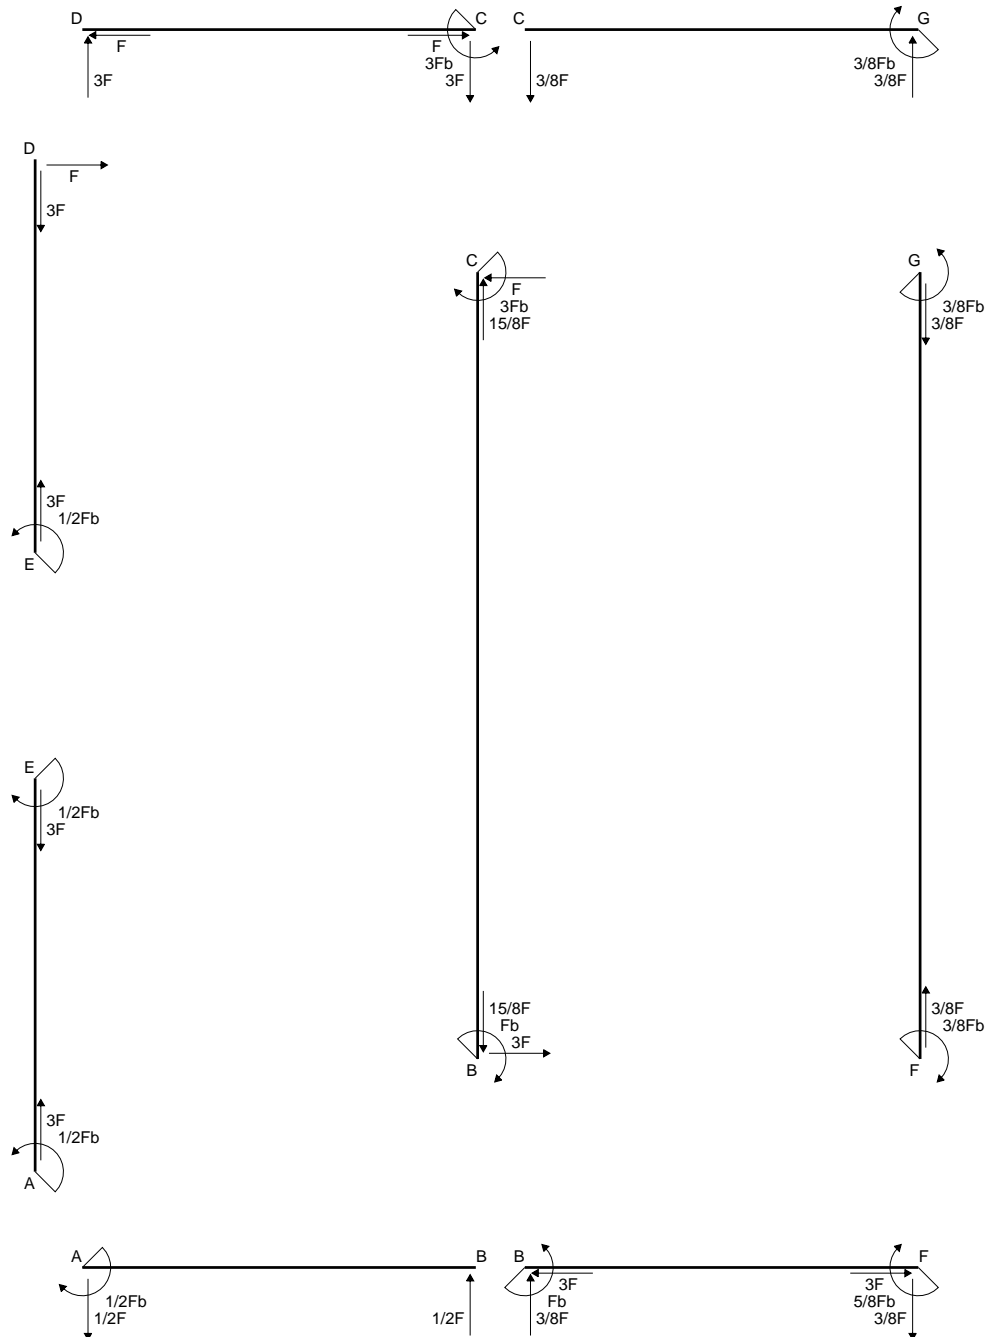


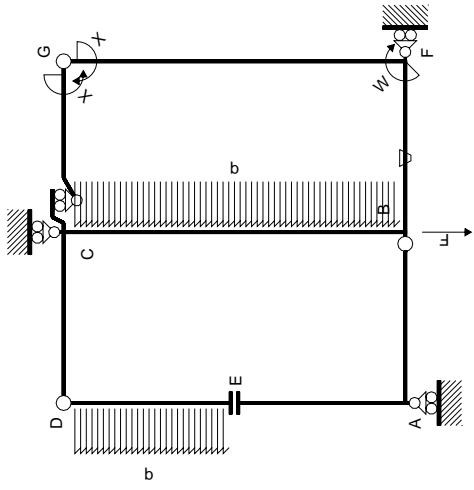

Schema di calcolo iperstatico

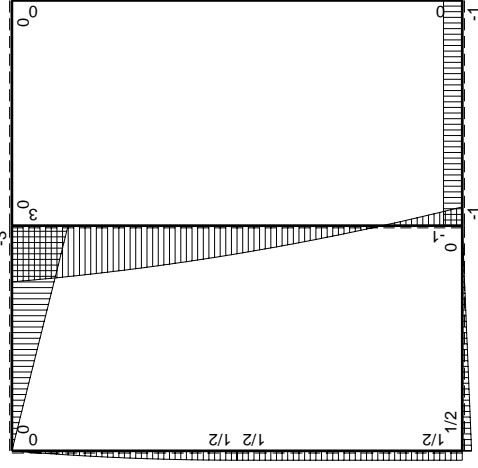

$M_0$  flessione da carichi assegnati

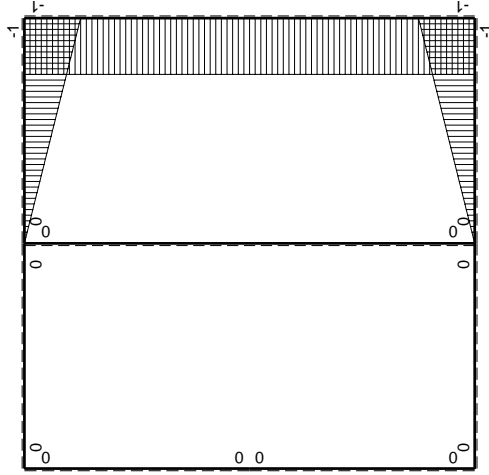

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$                  | $\theta$  | $M_x M_0$   | $M_x \theta$      | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|---------------------------|-----------|-------------|-------------------|--------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 F b - 1/2 F x$       | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 F x$                | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| CD b          | 0        | $-3 F b + 3 F x$          | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| DC b          | 0        | $3 F x$                   | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| DE b          | 0        | $F x - 1/2 q x^2$         | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 F b + 1/2 q x^2$    | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| EA b          | 0        | $1/2 F b$                 | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 F b$                | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-F b$                    | $-F b/EJ$ | $F x$       | $F x/EJ$          | $F x/EJ$           | $(1/2 + 1/2) F b^2/EJ$          | $1/3 x b^3/EJ$         |
| FB b          | $1-x/b$  | $F b$                     | $F b/EJ$  | $F b - F x$ | $F b/EJ - F x/EJ$ | $1-2x/b + x^2/b^2$ | $1/2 + 1/2 F b^2/EJ$            | $1/3 x b^3/EJ$         |
| GC b          | $-1+x/b$ | 0                         | 0         | 0           | 0                 | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3 x b^3/EJ$         |
| CG b          | $x/b$    | 0                         | 0         | 0           | 0                 | $x^2/b^2$          | 0+0                             | $1/3 x b^3/EJ$         |
| FG 2b         | -1       | 0                         | 0         | 0           | 0                 | 1                  | 0+0                             | $2 x b^3/EJ$           |
| GF 2b         | 1        | 0                         | 0         | 0           | 0                 | 1                  | 0+0                             | $2 x b^3/EJ$           |
| CB 2b         | 0        | $3 F b - F x - 1/2 q x^2$ | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| BC 2b         | 0        | $F b - 3 F x + 1/2 q x^2$ | 0         | 0           | 0                 | 0                  | 0+0                             | 0                      |
| totali        |          |                           |           |             |                   |                    |                                 | $8/3 x b^3/EJ$         |
|               |          |                           |           |             |                   |                    |                                 | $-3/8 F b$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

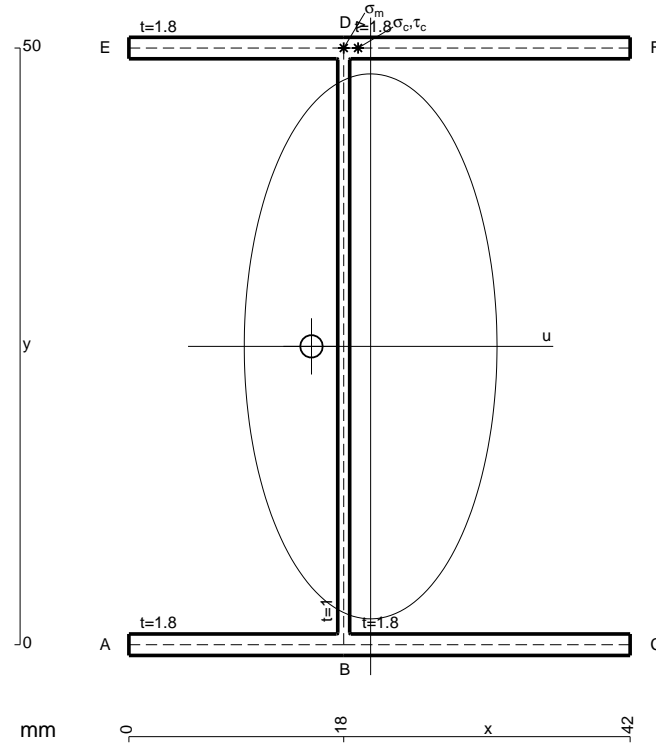

- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 22565. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = -4.957 mm
- x<sub>g</sub> = 20.25 mm
- N = 430. N
- T<sub>y</sub> = 1290. N
- M<sub>x</sub> = -980400. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -2.254 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 235.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -2.254 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 235.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 71.33 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.377 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 63.95 N/mm<sup>2</sup>
- t<sub>c</sub> = 774. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 266.2 N/mm<sup>2</sup>




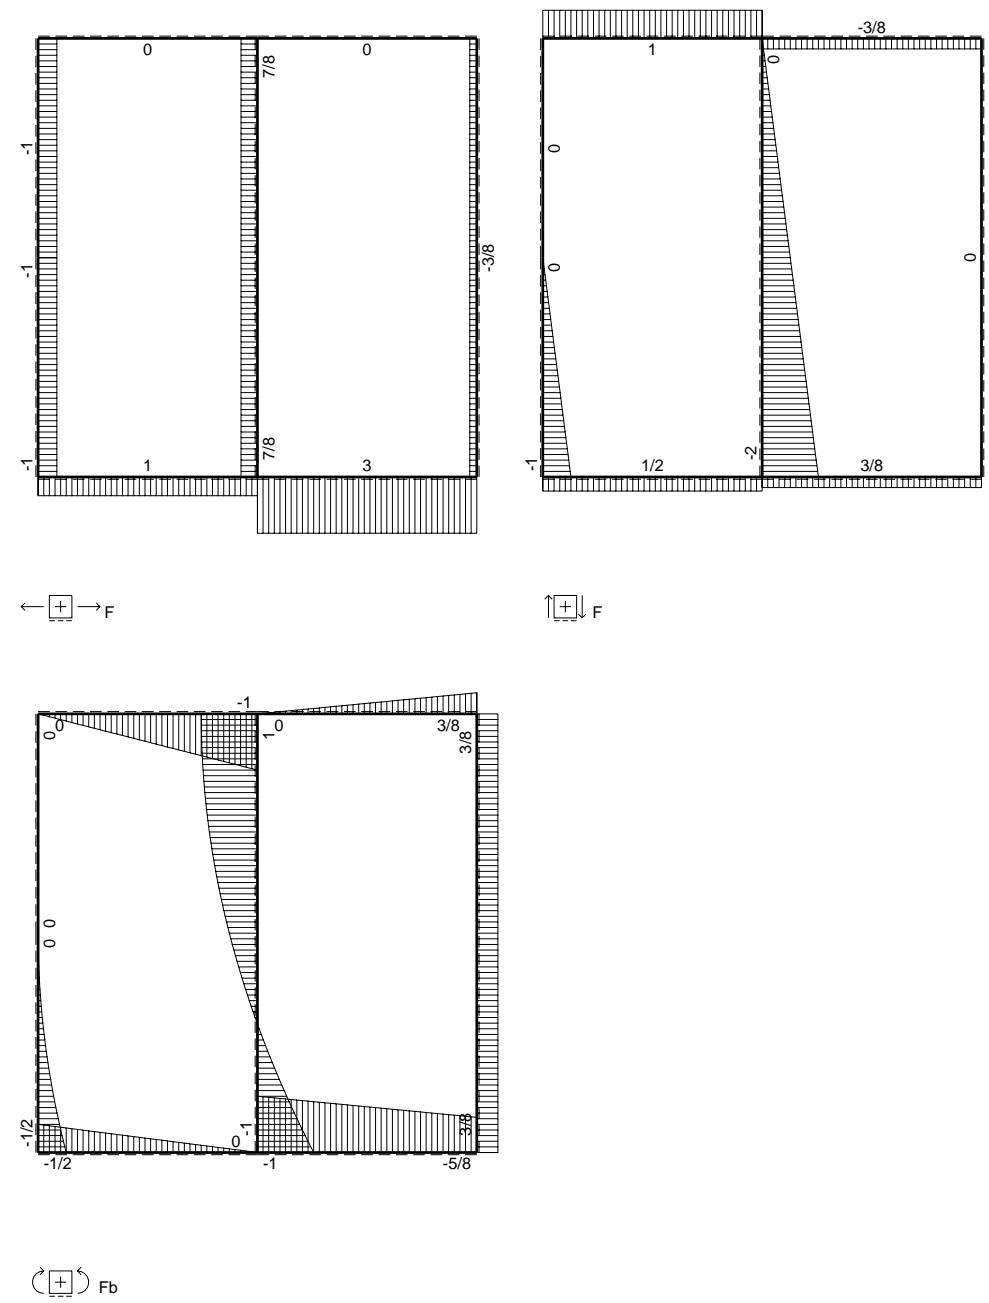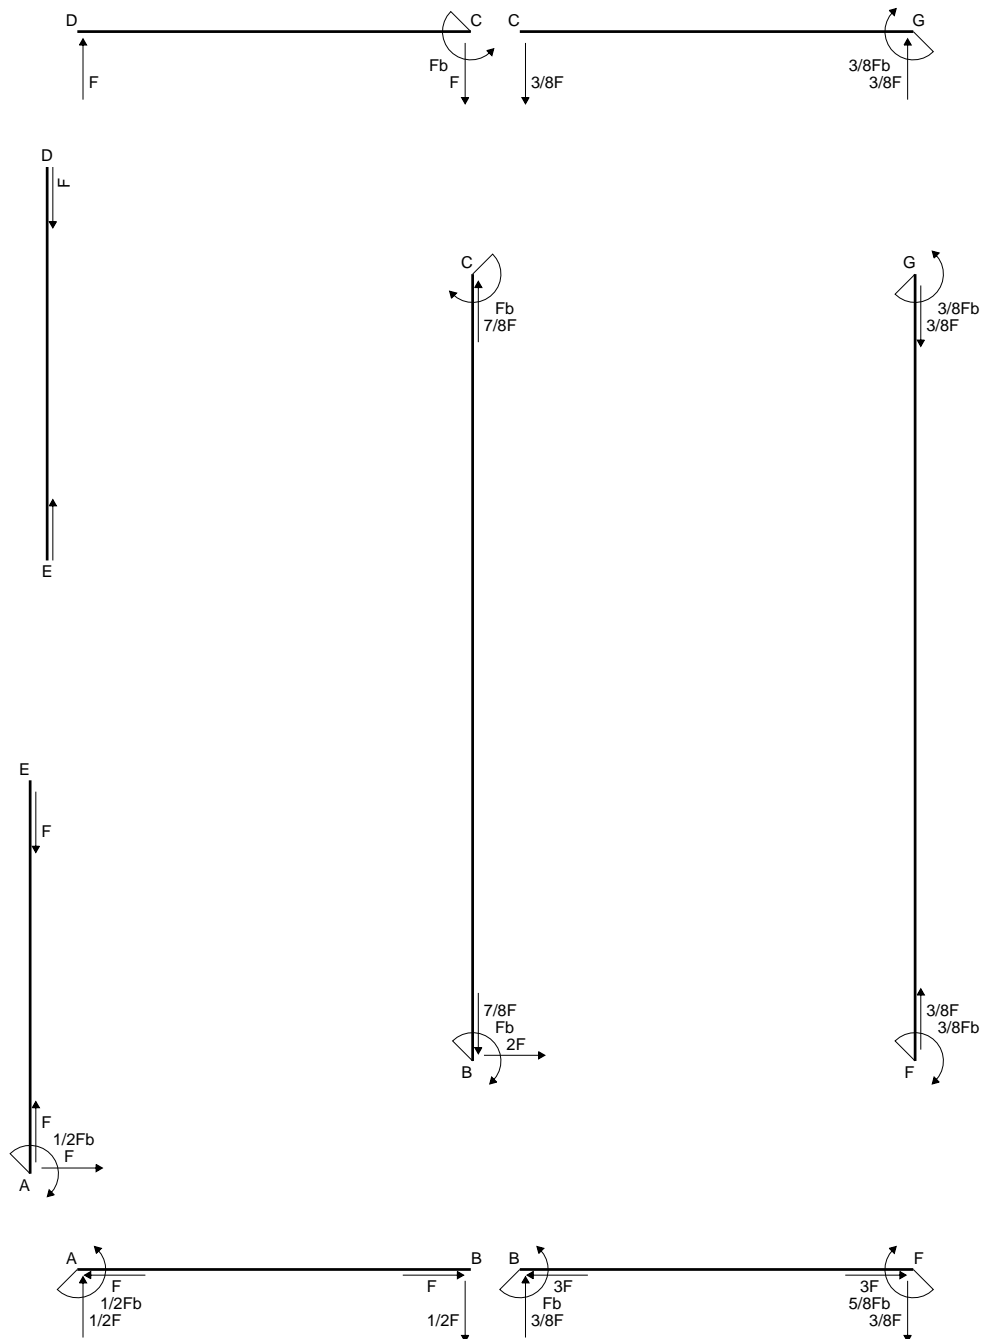

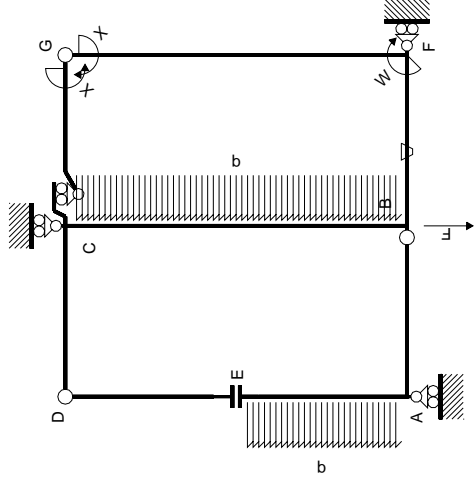

Schema di calcolo iperstatico

M<sub>0</sub> flessione da carichi assegnati

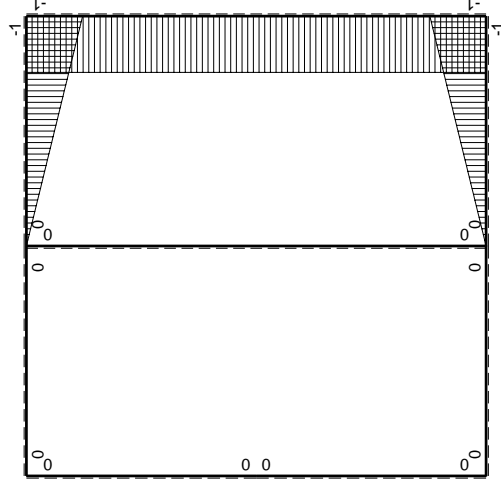

M<sub>x</sub> flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sup>gc</sup>

| $\rightarrow$ | $M(x)$   | $M(x)$                        | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|-------------------------------|----------|-----------|---------------|------------------|---------------------------------|------------------------|
| AB B          | 0        | $-1/2Fx$                      | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BA B          | 0        | $1/2Fx$                       | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| CD B          | 0        | $-Fb+Fx$                      | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DC B          | 0        | $Fx$                          | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DE B          | 0        | 0                             | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| EAB           | 0        | $-1/2qx^2$                    | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| AEB           | 0        | $1/2Fb-Fx+1/2qx^2$            | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BF B          | $-x/b$   | $-Fb$                         | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB B          | $1-x/b$  | $Fb$                          | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC B          | $-1+x/b$ | 0                             | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG B          | $x/b$    | 0                             | 0        | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                             | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                             | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb-1/2qx^2$                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$              | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| totali        |          |                               |          |           |               |                  |                                 |                        |
|               |          | iperstatica X=W <sup>gc</sup> |          |           |               |                  |                                 |                        |
|               |          |                               |          |           |               |                  |                                 | $Fb^2/EJ$              |
|               |          |                               |          |           |               |                  |                                 | $8/3xb/EJ$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$




$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

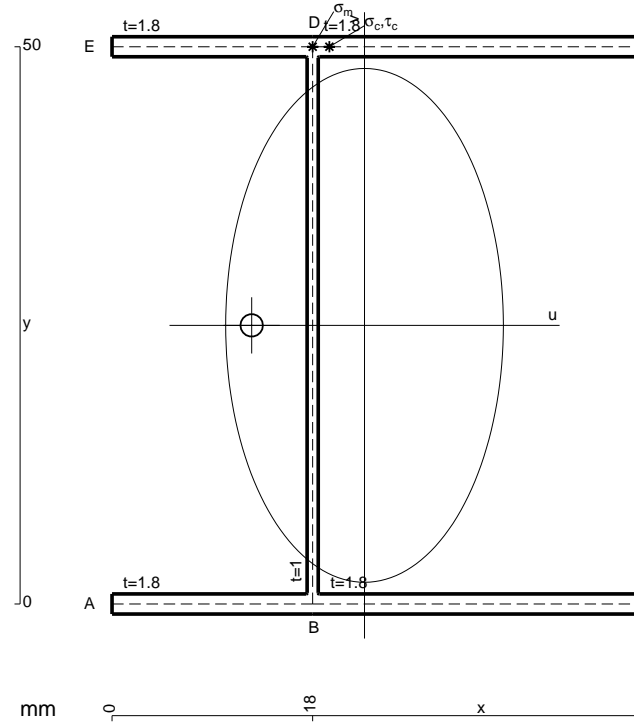

- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 34574. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = -10.13 mm
- x<sub>g</sub> = 22.65 mm
- N = 1978. N
- T<sub>y</sub> = -4520. N
- M<sub>x</sub> = -904000. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -4.654 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -4.654 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 199.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 433.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 28.63 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 405.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 4068. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 777.6 N/mm<sup>2</sup>






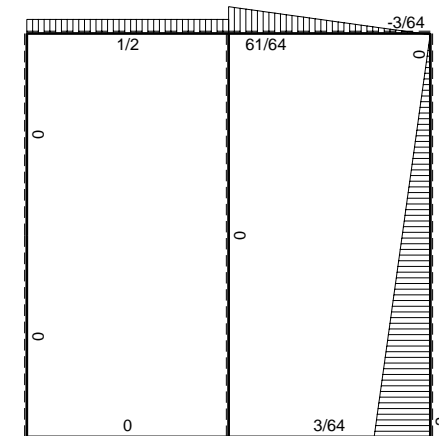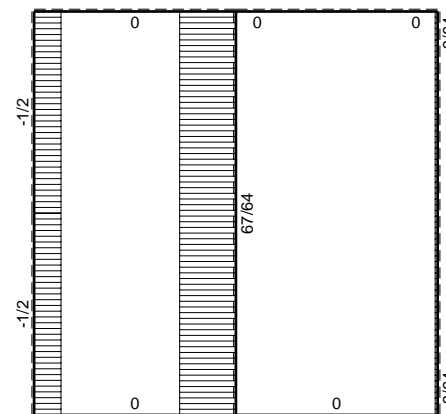
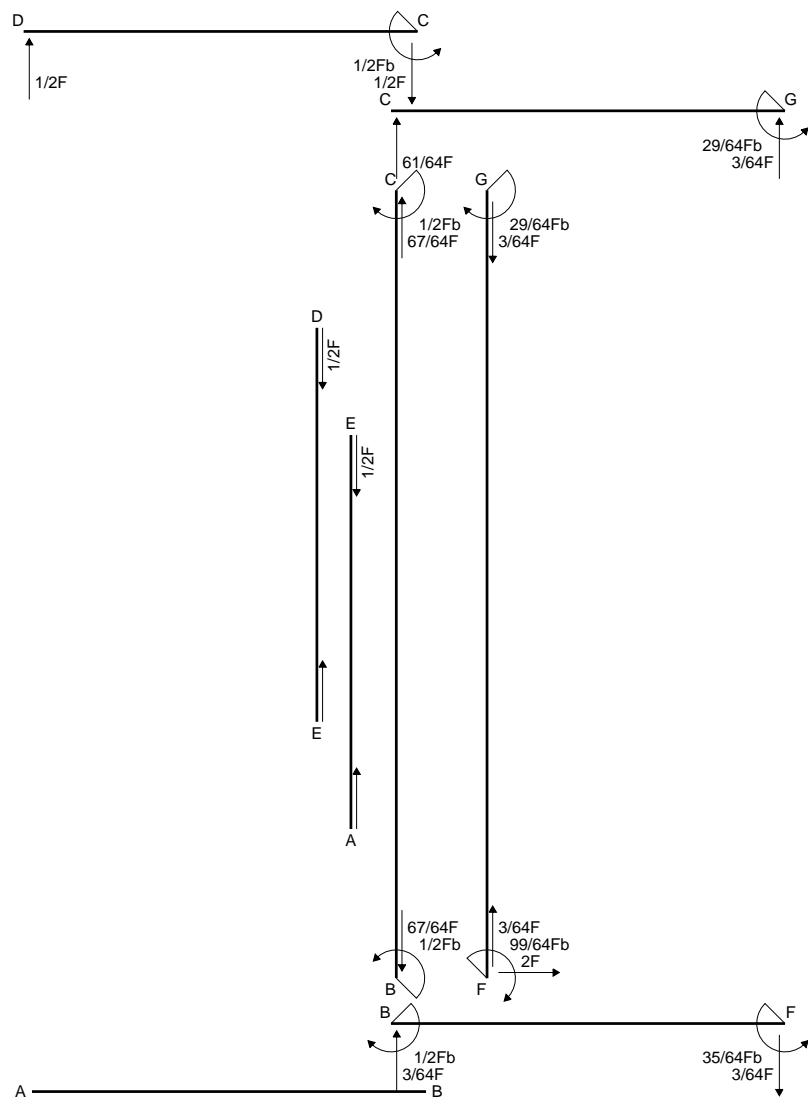


← ⊕ → F


↑ ⊕ ↓ F

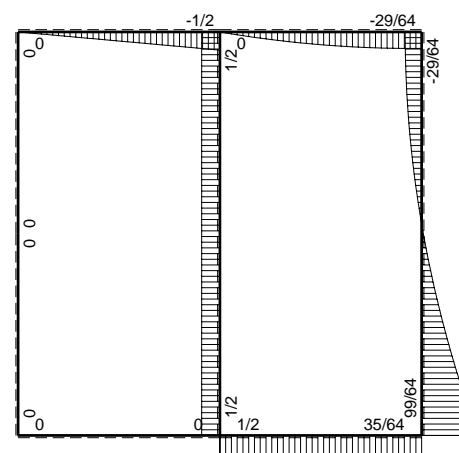

⊕ F<sub>b</sub>

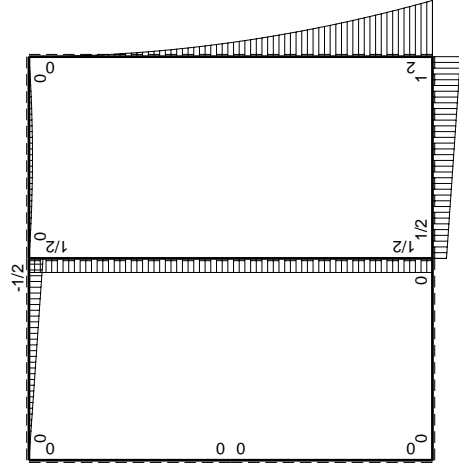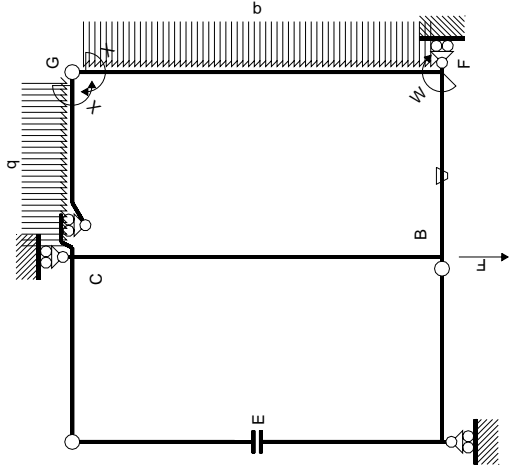

$M_0$  flessione da carichi assegnati

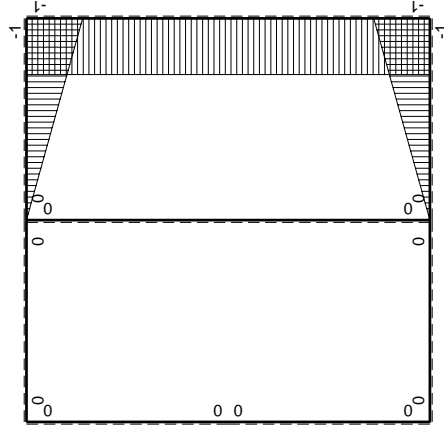

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | iperstatica $X=W_{gc}$ |          |                          |               |                  |                             |                      |
|--|----------|------------------------|----------|--------------------------|---------------|------------------|-----------------------------|----------------------|
| $\leftarrow$                                     | $M_x(x)$ | $M_0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
| AB b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BA b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| CD b   | 0        | $-1/2Fb+1/2Fx$         | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DC b   | 0        | $1/2Fx$                | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DE b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| EA b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| AE b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BF b   | $-x/b$   | $1/2Fb+1/2Fx$          | $-Fb/EJ$ | $-1/2Fx-1/2Fx^2/b$       | $Fx/EJ$       | $x^2/b^2$        | $(-5/12+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| FB b   | $1-x/b$  | $-Fb+1/2Fx$            | $Fb/EJ$  | $-Fb+3/2Fx-1/2Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b   | $-1+x/b$ | $-1/2Fx+1/2qx^2$       | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| CG b   | $x/b$    | $1/2Fx-1/2qx^2$        | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$     | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b  | 0        | $1/2Fb$                | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BC 2b  | 0        | $-1/2Fb$               | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| totali   |          |                        |          |                          |               |                  | $-29/24Fb^2/EJ$             | $8/3xb/EJ$           |
|  |          |                        |          |                          |               |                  | $29/64Fb$                   |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

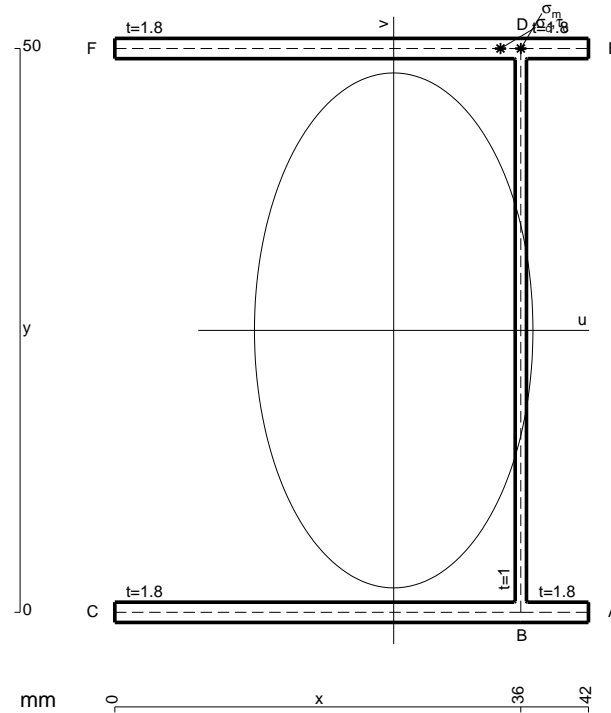


- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 30681. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = 24.78 mm
- x<sub>g</sub> = 24.73 mm
- T<sub>y</sub> = 2000. N
- M<sub>x</sub> = -880000. Nmm
- x<sub>m</sub> = 36. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 11.27 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 11.27 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 209.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 512.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>y</sub>/J<sub>u</sub> = 17.16 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 495.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 7200. mm
- σ<sub>o</sub> = √(σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup>) = 912.8 N/mm<sup>2</sup>



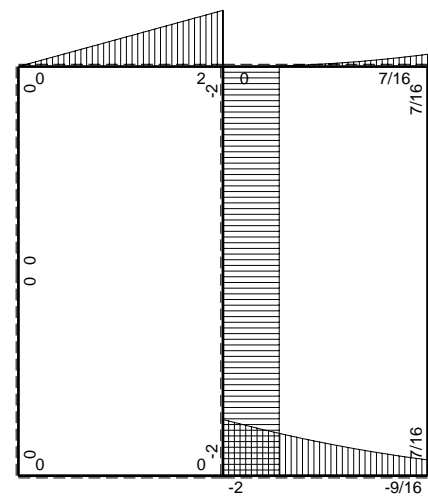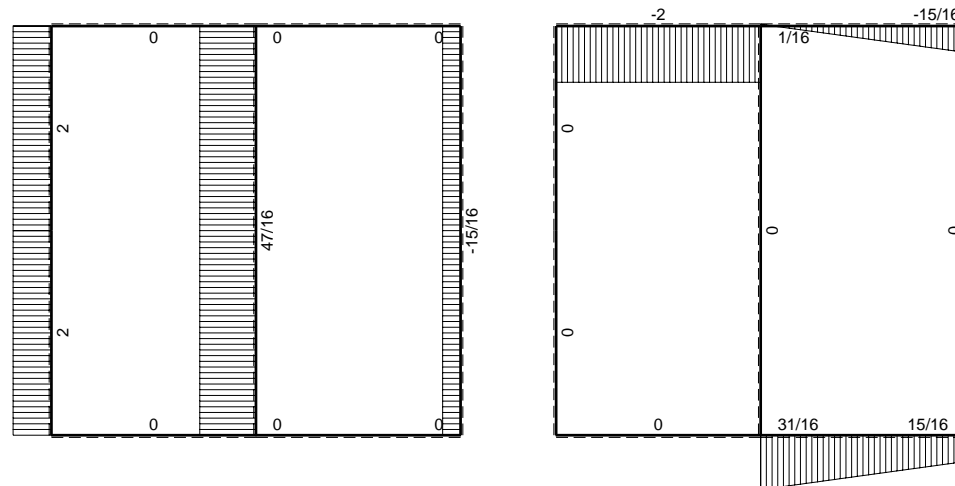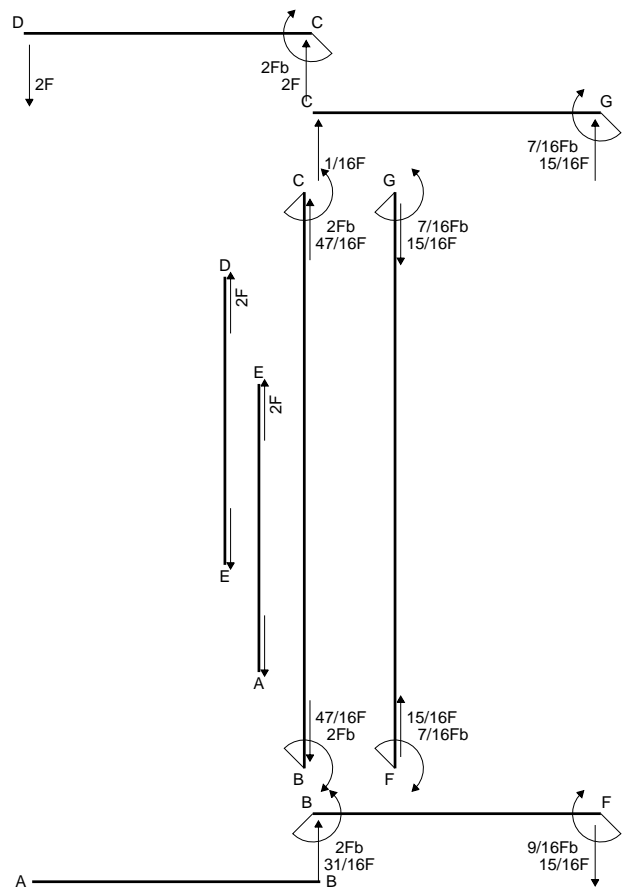


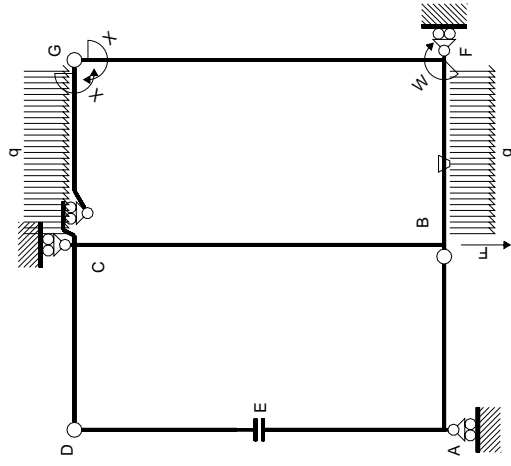

Schema di calcolo iperstatico

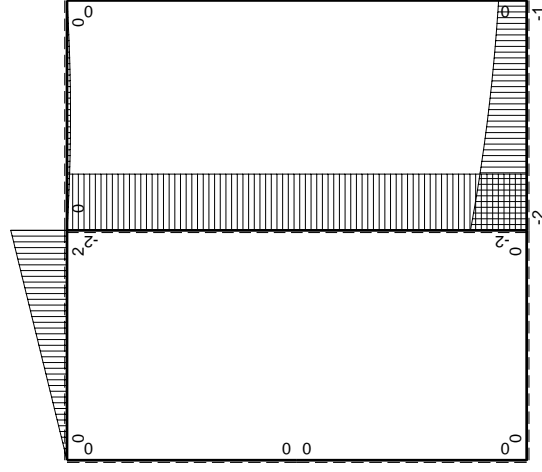

$M_0$  flessione da carichi assegnati

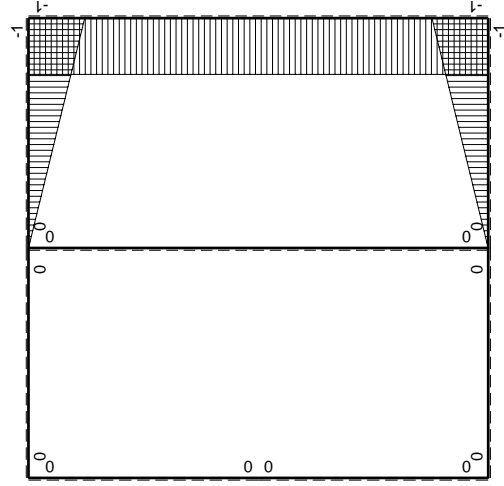

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|----------------------|
| AB B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| BA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| CD B          | 0        | $2Fb-2Fx$            | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| DC B          | 0        | $-2Fx$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| DE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| EA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| AE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| BF B          | $-x/b$   | $-2Fb+3/2Fx-1/2qx^2$ | $-Fb/EJ$ | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB B          | $1-x/b$  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC B          | $-1+x/b$ | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| CG B          | $x/b$    | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx-Fx^2/b-1/2qx^3/b$  | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $-2Fb$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $2Fb$                | 0        | 0                         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                      |          |                           |               |                  |                             |                      |
|               |          |                      |          |                           |               |                  | $7/6Fb^2/EJ$                | $8/3xb/EJ$           |
|               |          |                      |          |                           |               |                  |                             | $-7/16Fb$            |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

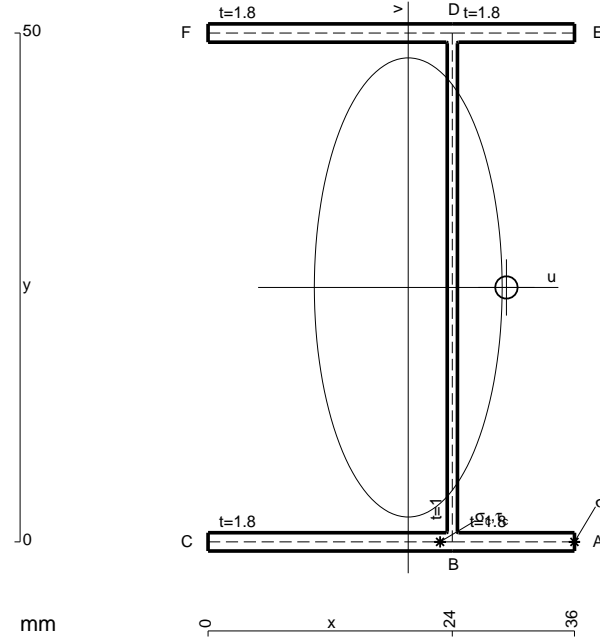

$$A = 179.6 \text{ mm}^2$$

$$J_u = 91417. \text{ mm}^4$$

$$J_v = 15296. \text{ mm}^4$$

$$J_t = 156.6 \text{ mm}^4$$

$$x_o = 9.646 \text{ mm}$$

$$x_g = 19.67 \text{ mm}$$

$$T_y = -1660. \text{ N}$$

$$M_x = 796800. \text{ Nmm}$$

$$x_m = 36. \text{ mm}$$

$$u_m = 16.33 \text{ mm}$$

$$v_m = -25. \text{ mm}$$

$$\sigma_m = -Mv/J_u = 217.9 \text{ N/mm}^2$$

$$x_c = 24. \text{ mm}$$

$$u_c = 4.33 \text{ mm}$$

$$v_c = -25. \text{ mm}$$

$$\sigma_c = -Mv/J_u = 217.9 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 194.9 \text{ N/mm}^2$$

$$\tau_g = TS/tJ_u = 10.9 \text{ N/mm}^2$$



$$\tau_o = Tx_o t/J_t = 184. \text{ N/mm}^2$$

$$t_c = 1494. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 401.8 \text{ N/mm}^2$$






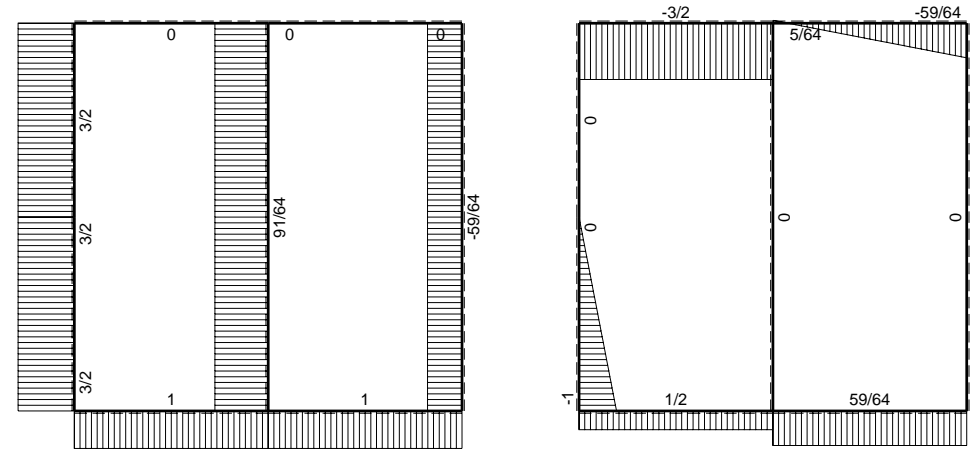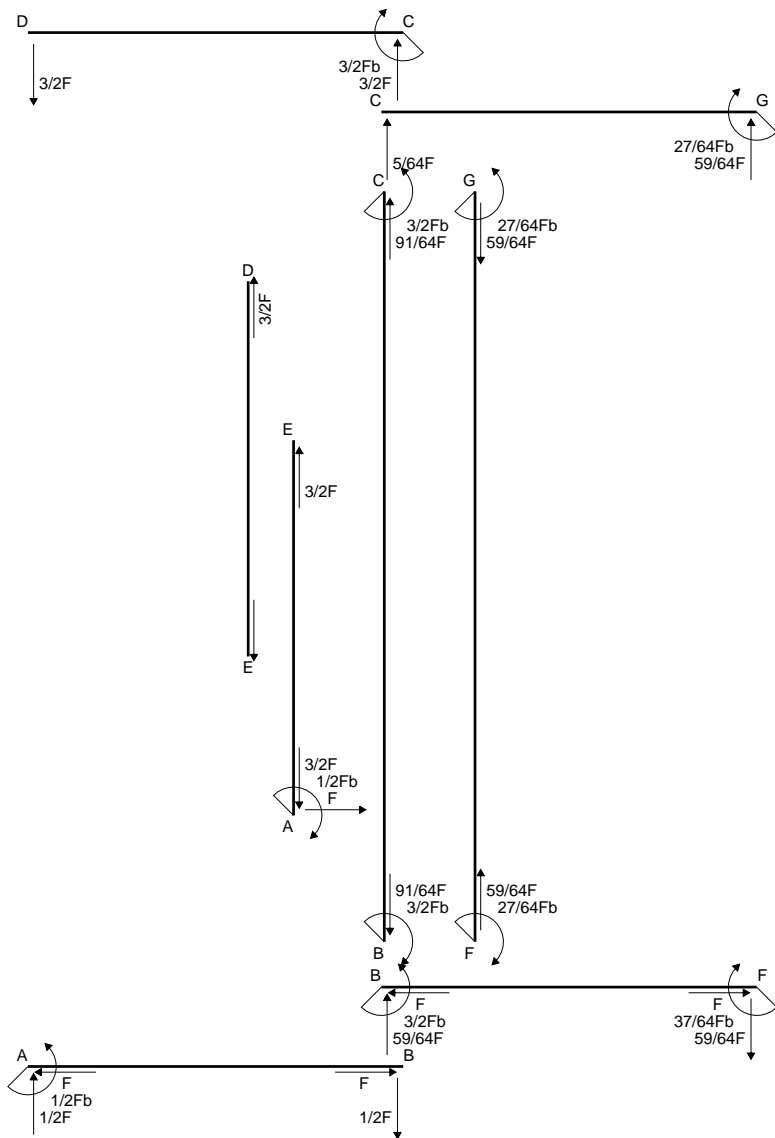


← ⊕ → F


↑ ⊕ ↓ F

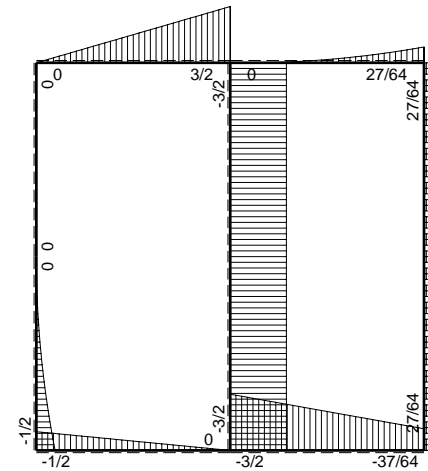


⊕ ⊖ F<sub>b</sub>

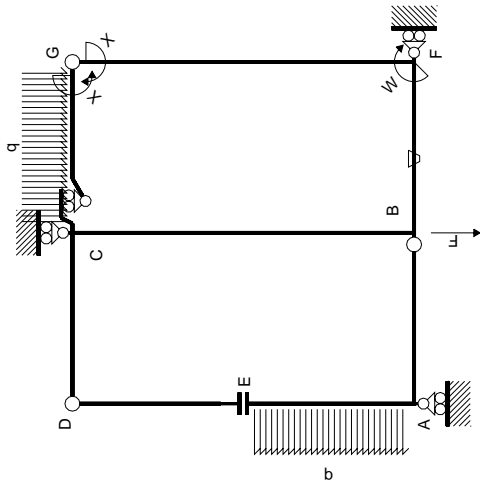

Schema di calcolo iperstatico

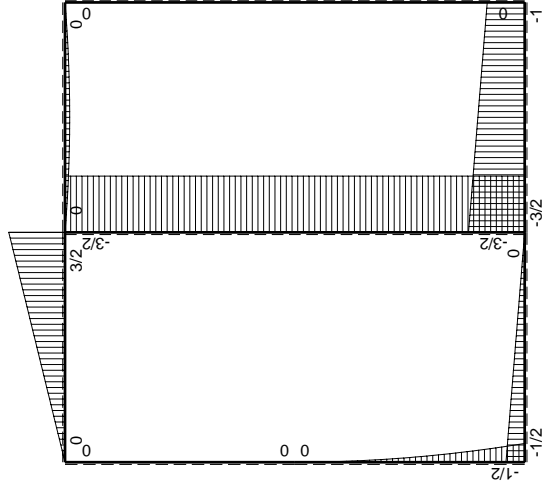

$M_0$  flessione da carichi assegnati

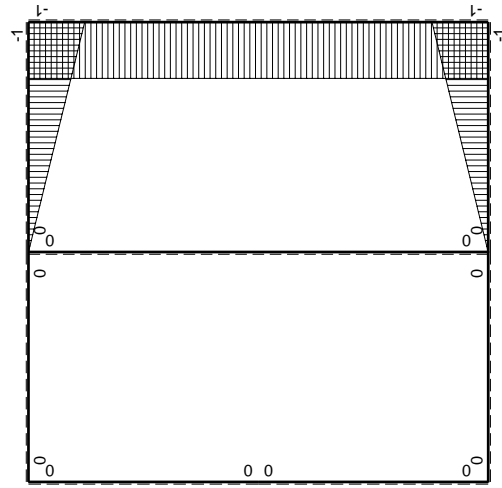

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | $M_x(x)$           |          | $M_0(x)$                 | $\theta$          | $M_x M_0$     | $M_x \theta$     | $M_x M_x$ | $\int M_x (M_0/EJ + \theta) dx$ | $\int X M_x M_x / E J dx$ |
|--|----------|--------------------|----------|--------------------------|-------------------|---------------|------------------|-----------|---------------------------------|---------------------------|
| AB b   | 0        | $-1/2Fb+1/2Fx$     | 0        | $1/2Fx$                  | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| BA b   | 0        | $1/2Fx$            | 0        | $1/2Fx$                  | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| CD b   | 0        | $3/2Fb-3/2Fx$      | 0        | $-3/2Fx$                 | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| DC b   | 0        | 0                  | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| ED b   | 0        | 0                  | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| EA b   | 0        | $-1/2qx^2$         | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| AE b   | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| BF b   | $-x/b$   | $-3/2Fb+1/2Fx$     | $-Fb/EJ$ | $-F/EJ$                  | $3/2Fx-1/2Fx^2/b$ | $F/EJ$        | $F/EJ$           | $x^2/b^2$ | $(7/12+1/2)Fb^2/EJ$             | $1/3Xb/EJ$                |
| FB b   | $1-x/b$  | $Fb+1/2Fx$         | $Fb/EJ$  | $Fb-1/2Fx-1/2Fx^2/b$     | $1/2Fx-Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $x^2/b^2$ | $(7/12+1/2)Fb^2/EJ$             | $1/3Xb/EJ$                |
| GC b   | $-1+x/b$ | $-1/2Fx+1/2qx^2$   | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0                 | 0             | $1-2x/b+x^2/b^2$ | $x^2/b^2$ | $(1/24+0)Fb^2/EJ$               | $1/3Xb/EJ$                |
| CG b   | $x/b$    | $1/2Fx-1/2qx^2$    | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| FG 2b  | -1       | 0                  | 0        | 0                        | 0                 | 0             | 1                | 1         | 0+0                             | $2Xb/EJ$                  |
| GF 2b  | 1        | 0                  | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| CB 2b  | 0        | $-3/2Fb$           | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| BC 2b  | 0        | $3/2Fb$            | 0        | 0                        | 0                 | 0             | 0                | 0         | 0+0                             | 0                         |
| totali   |          |                    |          |                          |                   |               |                  |           | $9/8Fb^2/EJ$                    | $8/3Xb/EJ$                |
|  |          |                    |          |                          |                   |               |                  |           | $-27/64Fb$                      |                           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$





$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

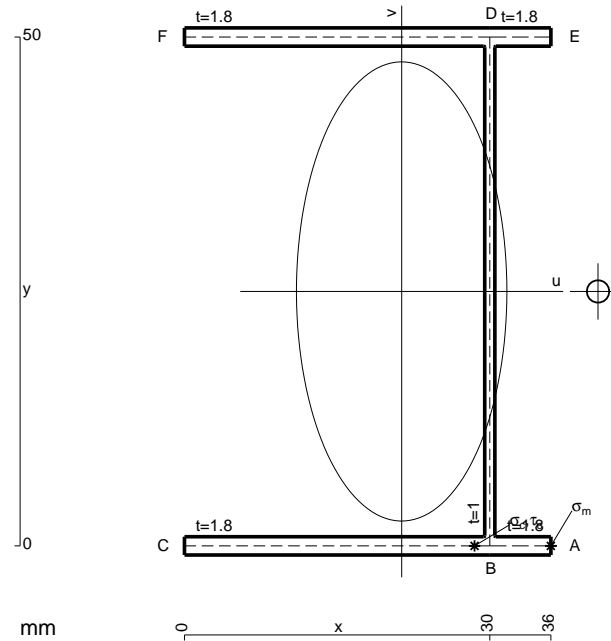


- A = 179.6 mm<sup>2</sup>
- J<sub>u</sub> = 91417. mm<sup>4</sup>
- J<sub>v</sub> = 19192. mm<sup>4</sup>
- J<sub>t</sub> = 156.6 mm<sup>4</sup>
- x<sub>o</sub> = 19.29 mm
- x<sub>g</sub> = 21.34 mm
- T<sub>y</sub> = -1605. N
- M<sub>x</sub> = 834600. Nmm
- x<sub>m</sub> = 36. mm
- u<sub>m</sub> = 14.66 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 228.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 8.659 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 228.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 369. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.17 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 355.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1926. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 678.6 N/mm<sup>2</sup>



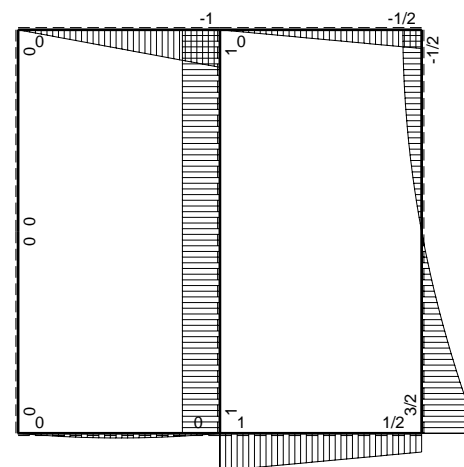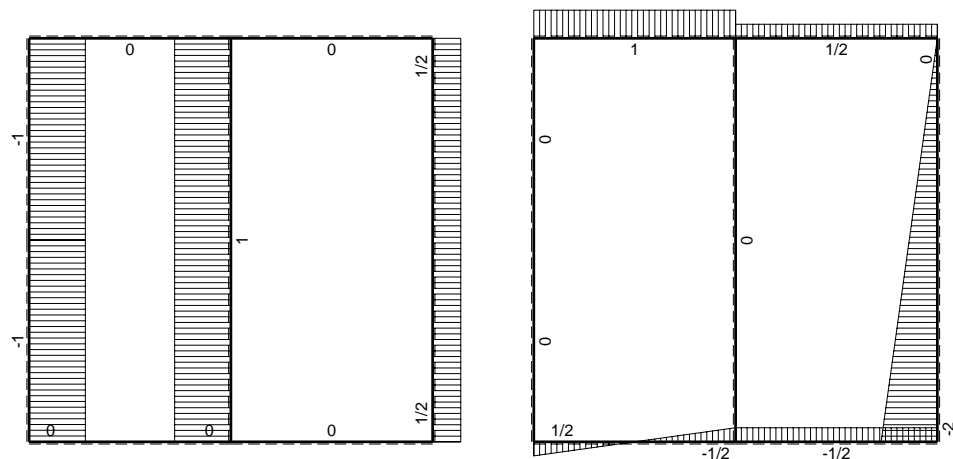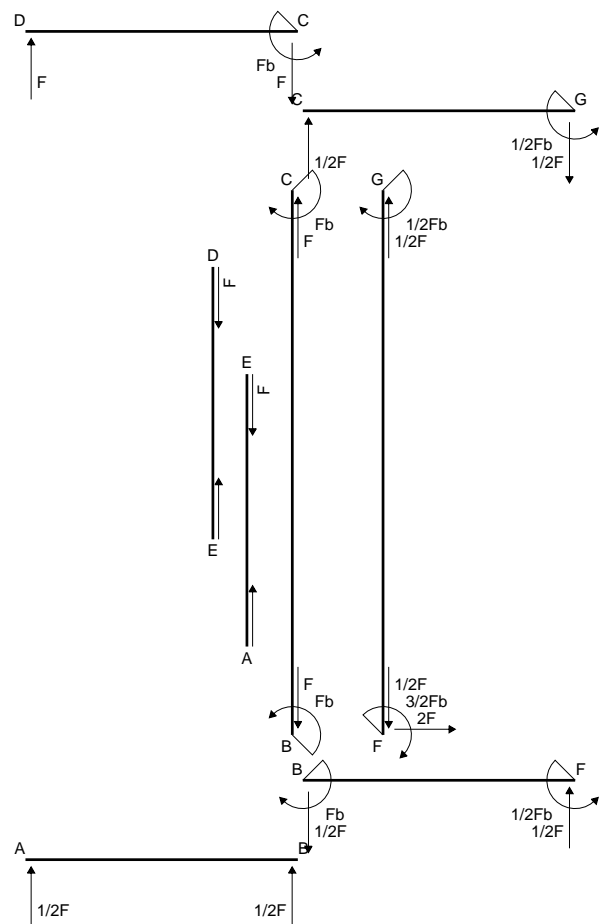

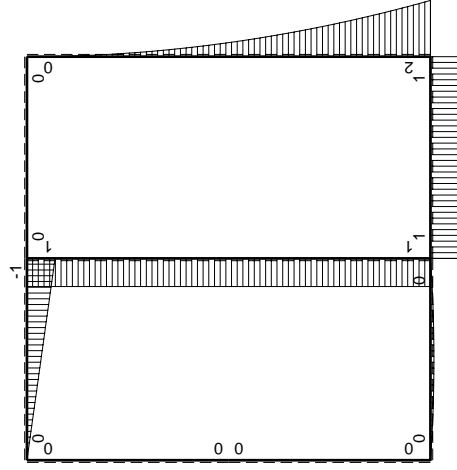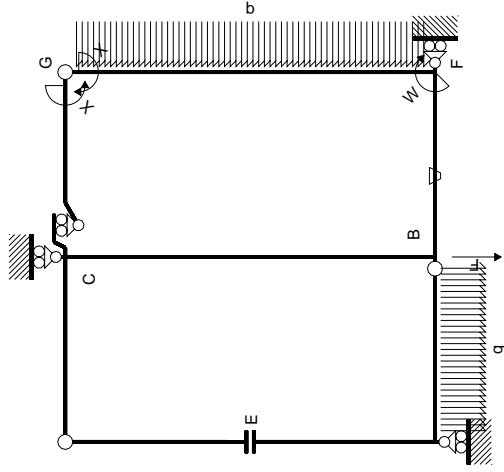

$M_0$  flessione da carichi assegnati

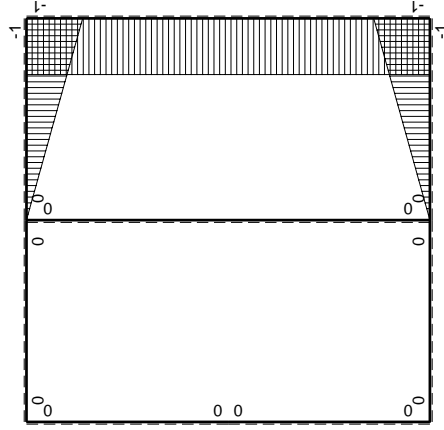

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>0</sup> (x) | θ      | M <sup>x</sup> M <sub>0</sub> | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>  | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------|--------------------|--------|-------------------------------|------------------|--------------------------------|-----------------------------|---------------------|
| AB b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| BA b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| CD b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| DC b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| DE b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| ED b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| EA b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| AE b   | 0                  | 0      | 0                             | 0                | 0                              | 0                           | 0                   |
| BF b   | -x/b               | -Fb/EJ | -Fx                           | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup> | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| FB b   | 1-x/b              | Fb/EJ  | -Fx                           | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$               | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| GC b   | -1+x/b             | 0      | 0                             | 0                | $1-2x/b+x^2/b^2$               | 0+0                         | 1/3xb/EJ            |
| CG b   | x/b                | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup> | 0+0                         | 1/3xb/EJ            |
| FG 2b  | -1                 | 0      | 0                             | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| GF 2b  | 1                  | 0      | 0                             | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| CB 2b  | 0                  | 0      | 0                             | 0                | 0                              | 0+0                         | 0                   |
| BC 2b  | 0                  | 0      | 0                             | 0                | 0                              | 0+0                         | 0                   |
| totali | 0                  | 0      | 0                             | 0                | 0                              | -4/3Fb <sup>2</sup> /EJ     | 8/3xb/EJ            |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

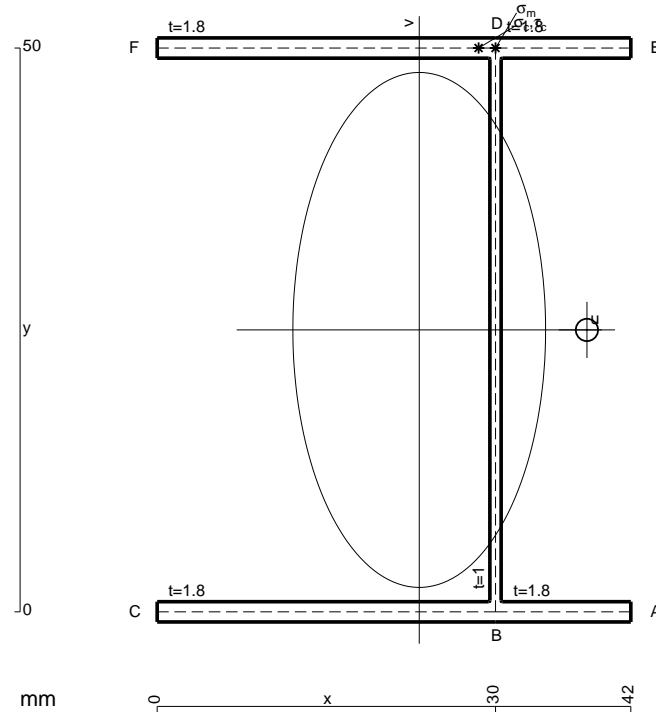


- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 25270. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = 14.87 mm
- x<sub>g</sub> = 23.24 mm
- T<sub>y</sub> = 1790. N
- M<sub>x</sub> = -1002400. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 6.763 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = -M<sub>v</sub>/J<sub>u</sub> = 238.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 6.763 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = -M<sub>v</sub>/J<sub>u</sub> = 238.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 279. N/mm<sup>2</sup>
- τ<sub>g</sub> = T<sub>S</sub>/t<sub>u</sub> = 12.8 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/J<sub>t</sub> = 266.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 3222. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 539.1 N/mm<sup>2</sup>






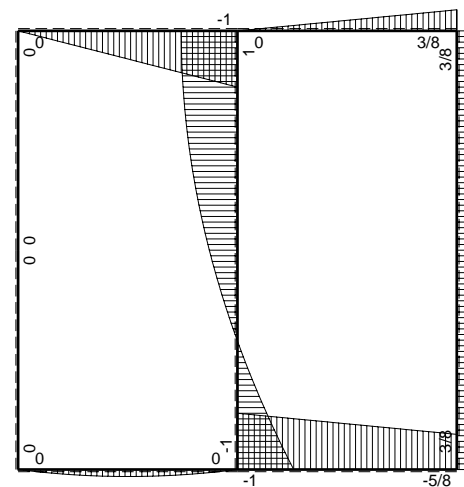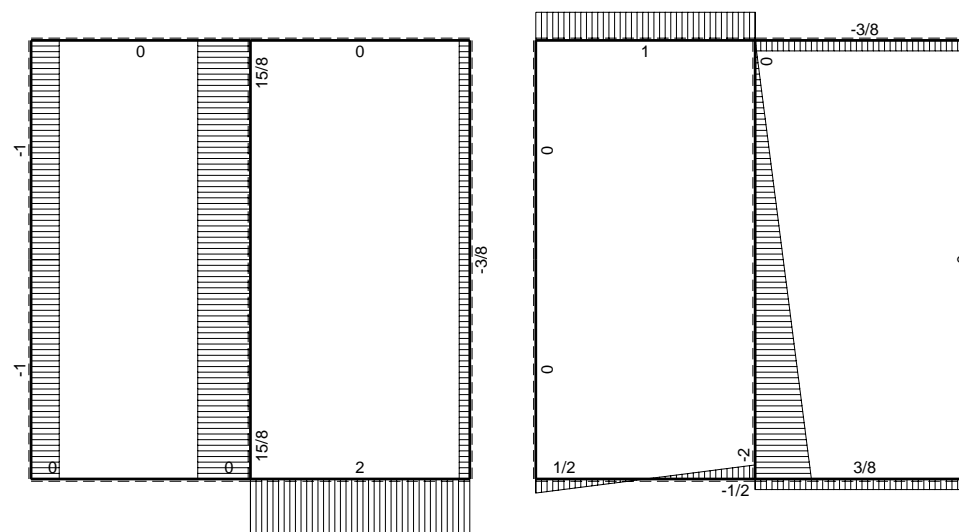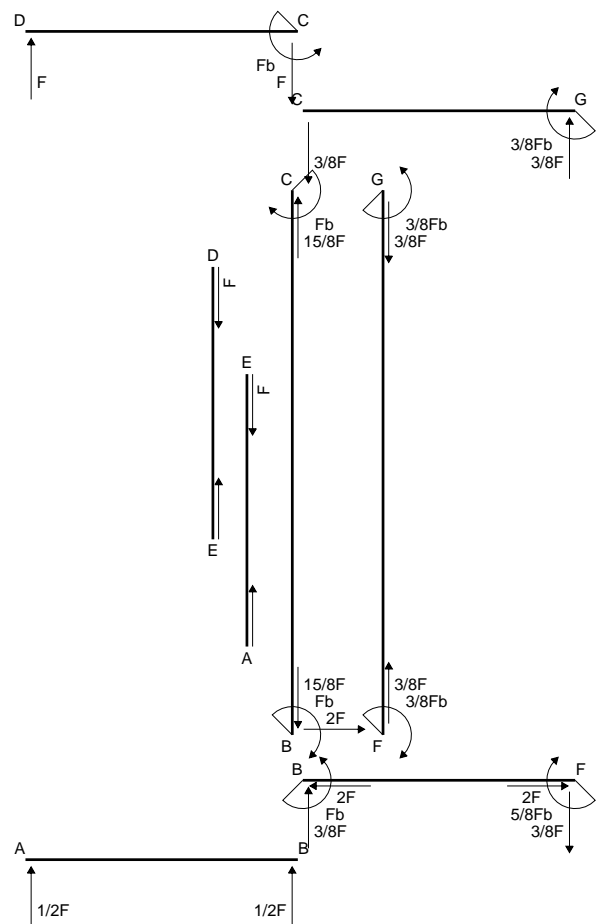

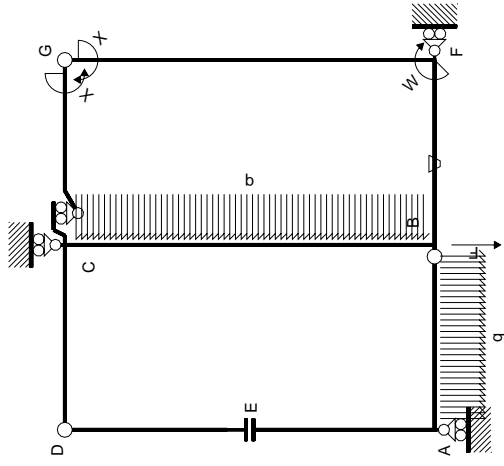

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

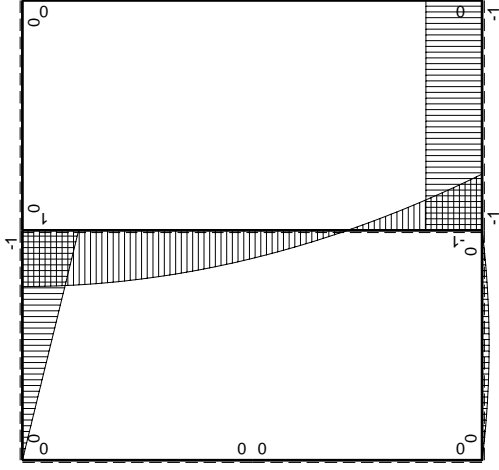

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M_0(x)$             | $\theta$ | $M^x M_0$ | $M^x \theta$    | $M^x M_x$          | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x/EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|--------------------|---------------------------------|----------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| ED b          | 0        | 0                    | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$          | $(1/2+1/2)Fb^2/EJ$              | $1/3xb^2/EJ$         |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/3xb^2/EJ$                    | $1/3xb^2/EJ$         |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb^2/EJ$         |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$          | 0+0                             | $1/3xb^2/EJ$         |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                  | 0+0                             | $2xb^2/EJ$           |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                  | 0+0                             | $2xb^2/EJ$           |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                  | 0+0                             | 0                    |
| totali        |          |                      |          |           |                 |                    |                                 | $8/3xb^2/EJ$         |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

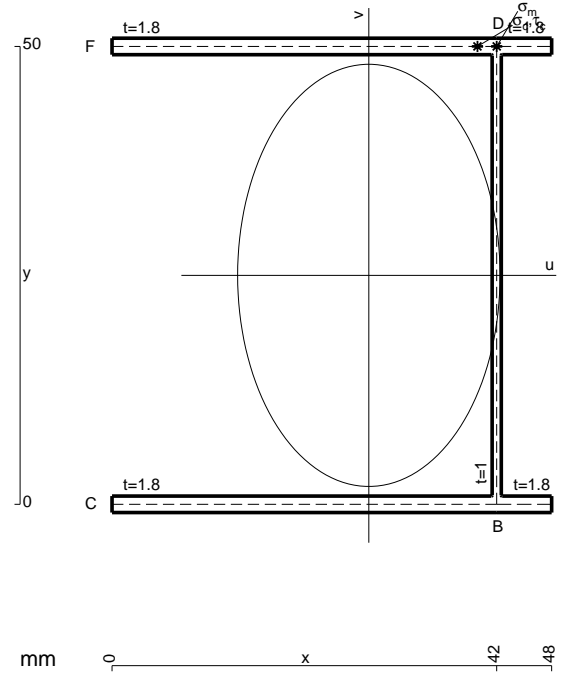

- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 45742. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = 30.38 mm
- x<sub>g</sub> = 28.04 mm
- N = 2775. N
- T<sub>y</sub> = -2960. N
- M<sub>x</sub> = -888000. Nmm
- x<sub>m</sub> = 42. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 13.96 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 199.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 13.96 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 199.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 822.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 26.25 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 796.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 2664. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 1438. N/mm<sup>2</sup>




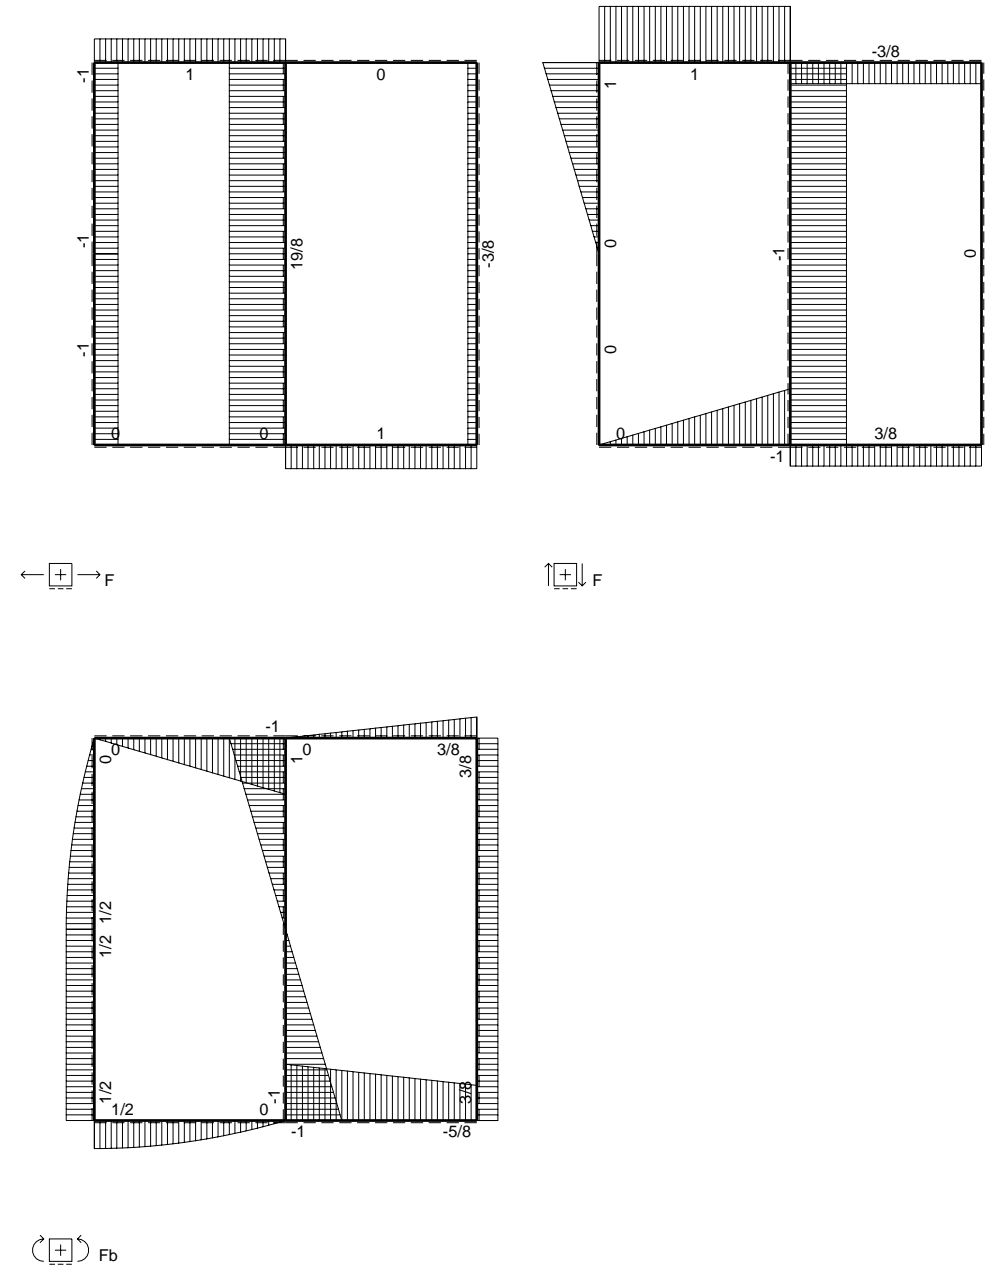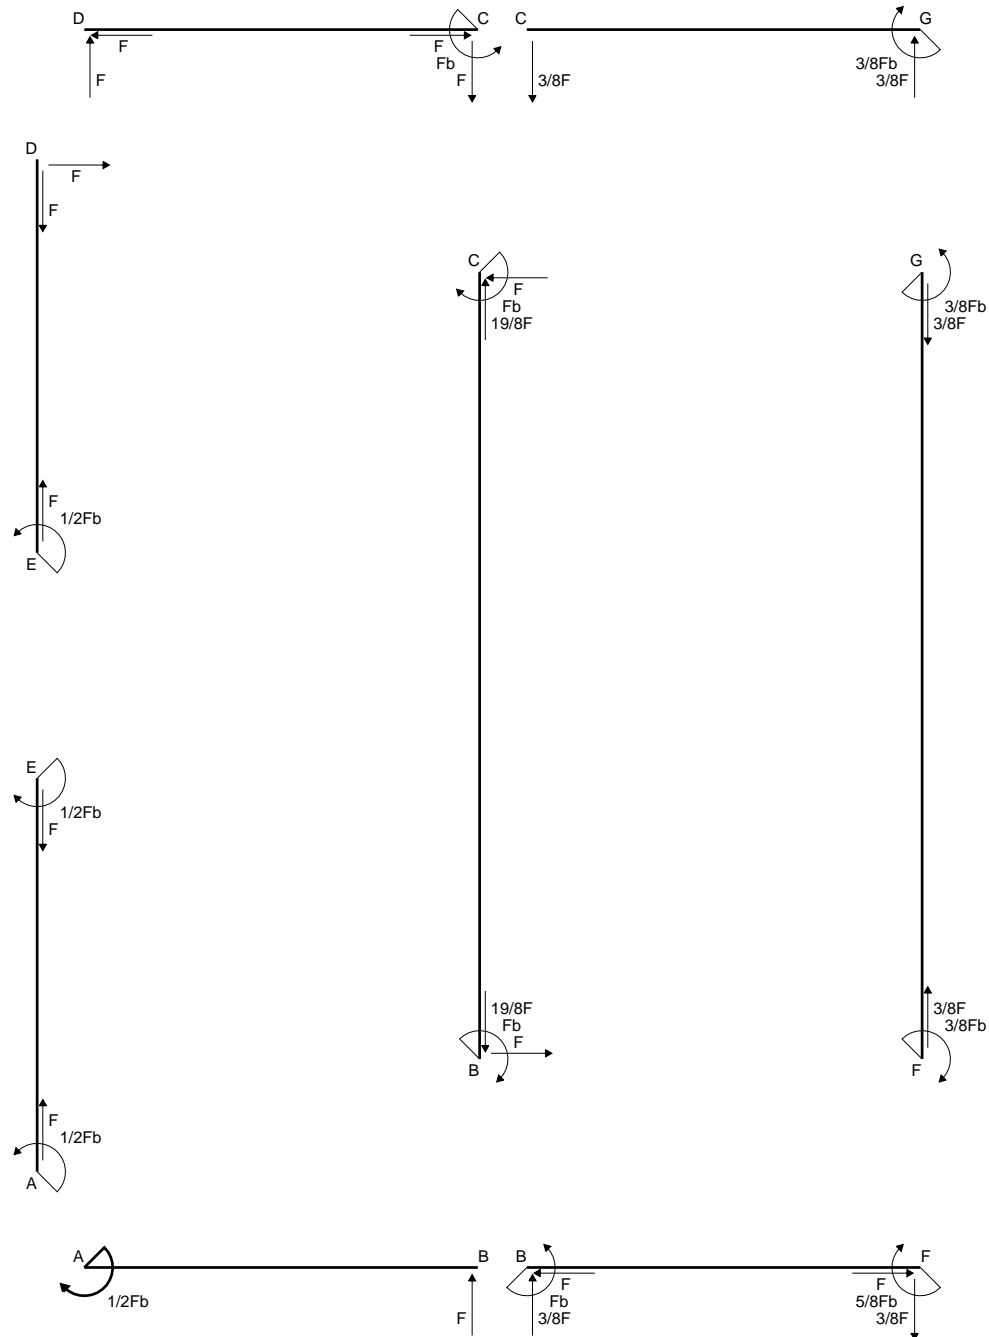

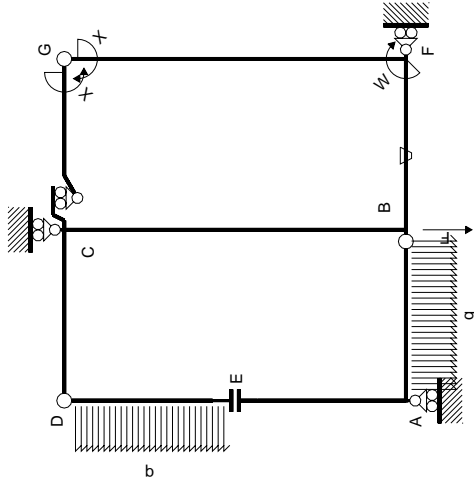


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

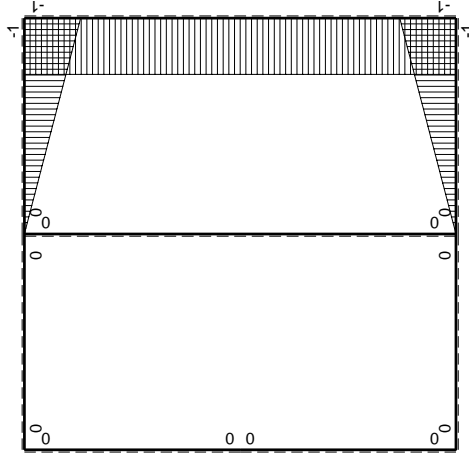

$M_x$  flessione da iperstatica X=1

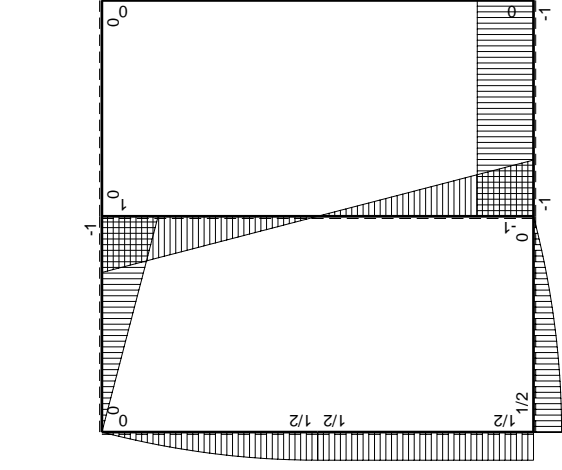

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| →      | M <sub>0</sub> (x) | M <sub>0</sub> (x)        | θ      | M <sub>0</sub> M <sub>0</sub> | M <sub>0</sub> θ | M <sub>0</sub> M <sub>0</sub>         | $\int M_0(M_0/EJ+\theta)dx$  | $\int M_0M_x/EJdx$ |
|--------|--------------------|---------------------------|--------|-------------------------------|------------------|---------------------------------------|------------------------------|--------------------|
| AB b   | 0                  | 1/2Fb-1/2qx <sup>2</sup>  | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| BA b   | 0                  | -Fx+1/2qx <sup>2</sup>    | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| CD b   | 0                  | -Fb+Fx                    | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| DC b   | 0                  | Fx                        | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| DE b   | 0                  | Fx-1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| ED b   | 0                  | -1/2Fb+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| EA b   | 0                  | 1/2Fb                     | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| AE b   | 0                  | -1/2Fb                    | 0      | 0                             | 0                | 0                                     | 0                            | 0                  |
| BF b   | -x/b               | -Fb                       | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ           |
| FB b   | 1-x/b              | Fb                        | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                     | 1/3xb/EJ           |
| GC b   | -1+x/b             | 0                         | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                          | 1/3xb/EJ           |
| CG b   | x/b                | 0                         | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                          | 2xb/EJ             |
| FG 2b  | -1                 | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                  |
| GF 2b  | 1                  | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                  |
| CB 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0                            | 8/3xb/EJ           |
| BC 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0                            | -3/8Fb             |
| totali |                    |                           |        |                               |                  |                                       |                              |                    |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


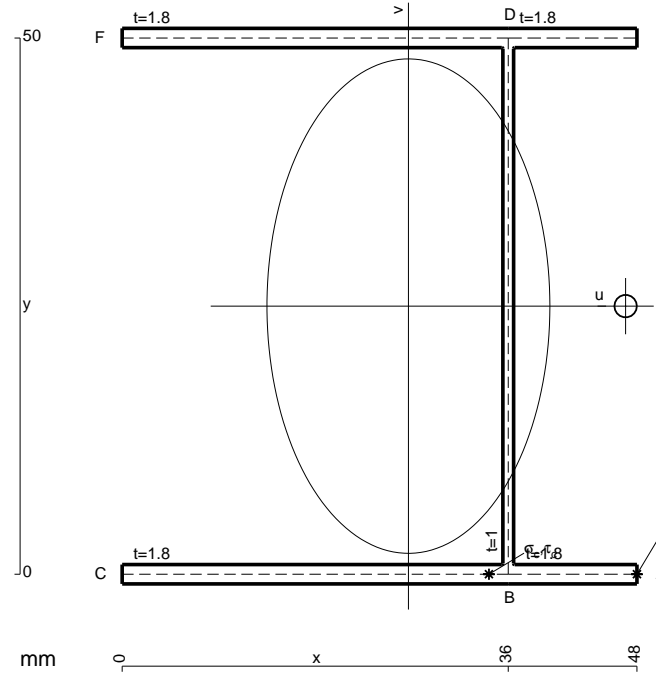


- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 38762. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = 20.25 mm
- x<sub>g</sub> = 26.69 mm
- N = 3420. N
- T<sub>y</sub> = -1440. N
- M<sub>x</sub> = 921600. Nmm
- x<sub>m</sub> = 48. mm
- u<sub>m</sub> = 21.31 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.307 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 269.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.94 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 258.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 2592. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 511.3 N/mm<sup>2</sup>






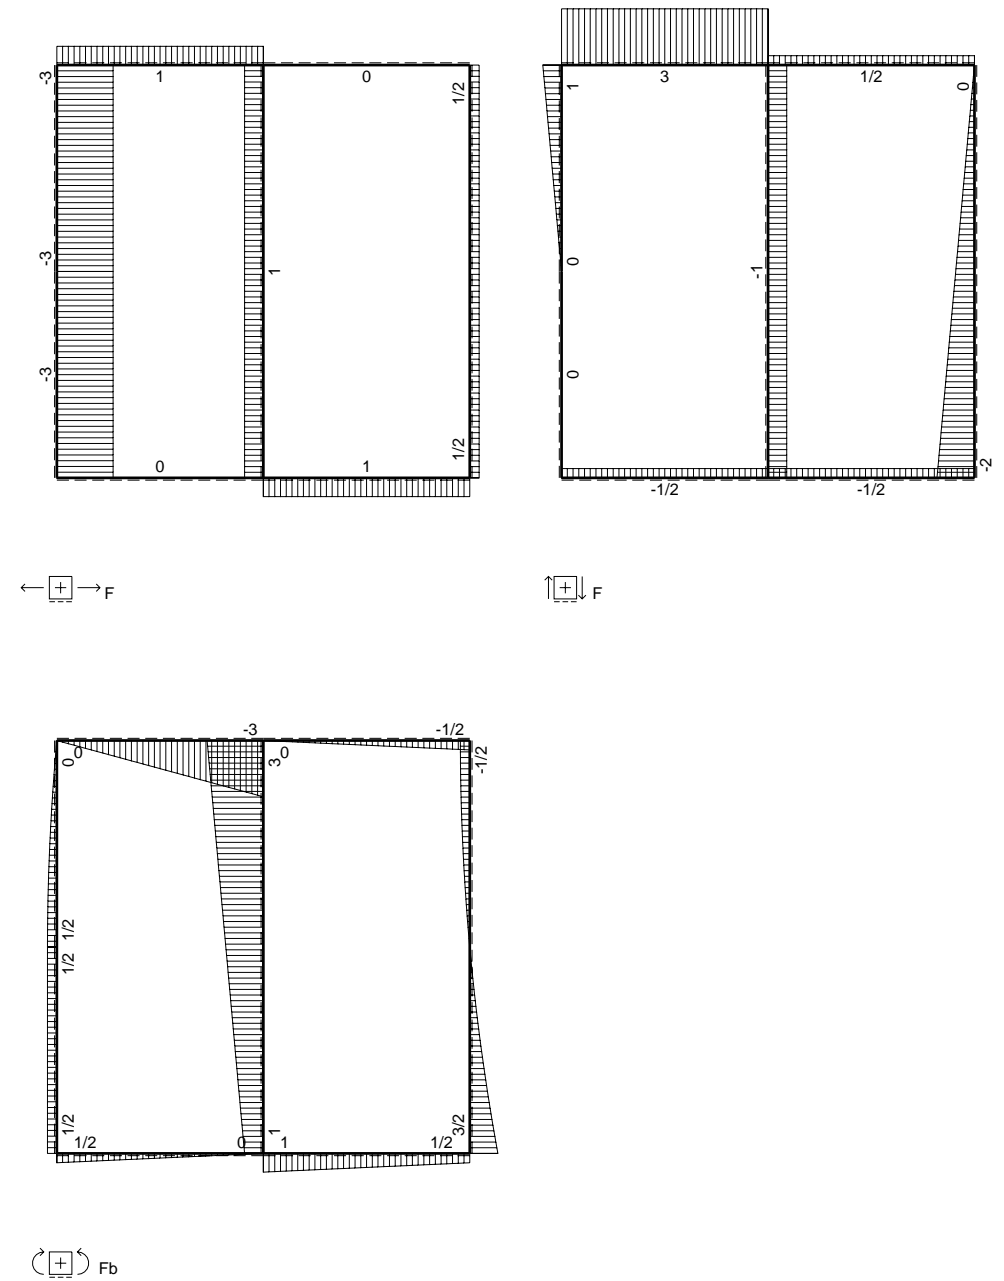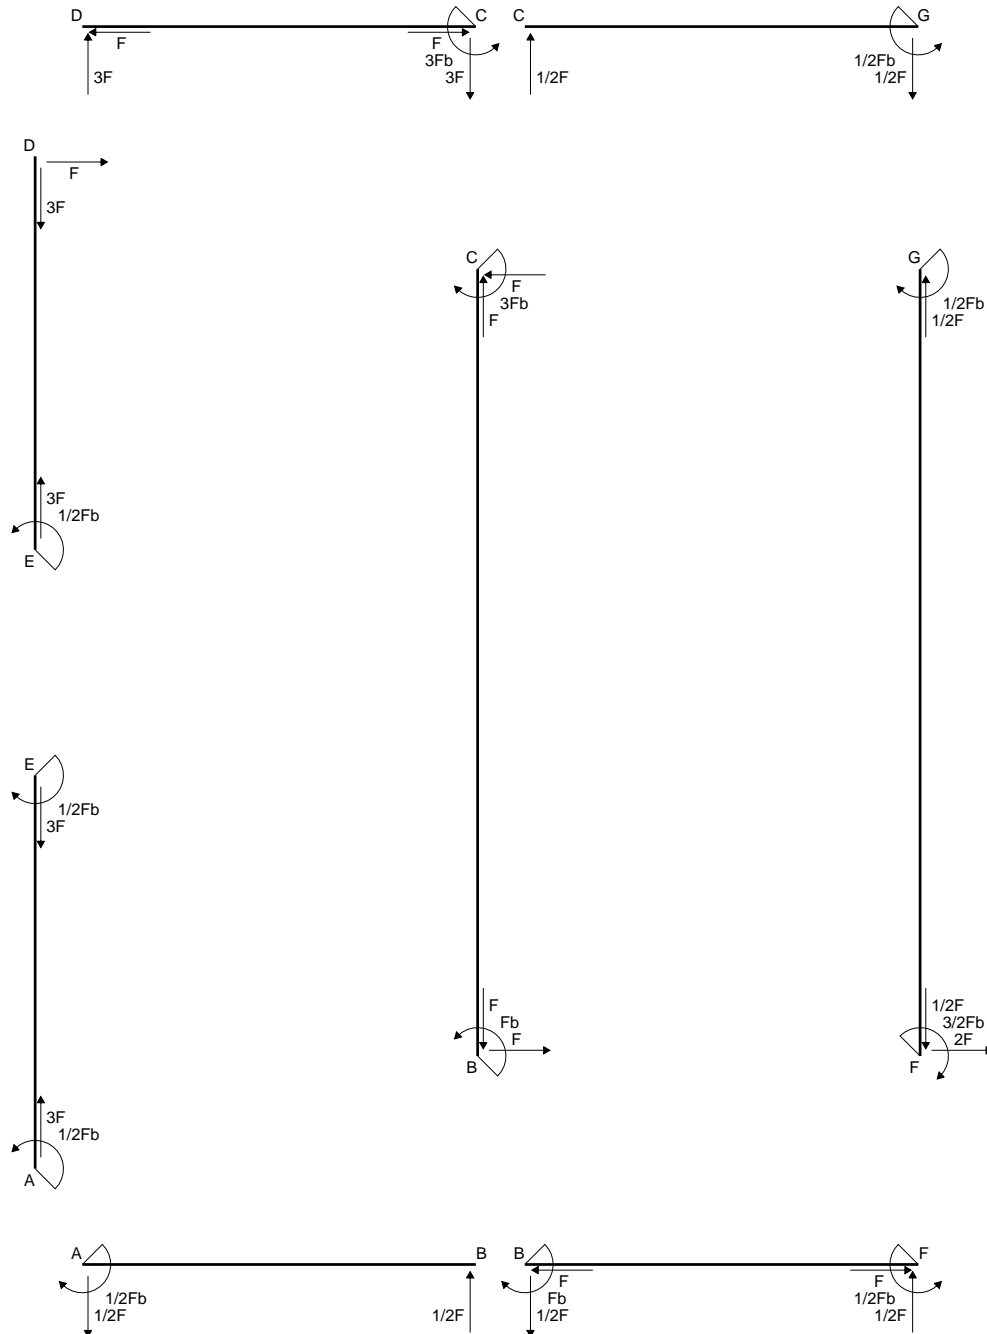

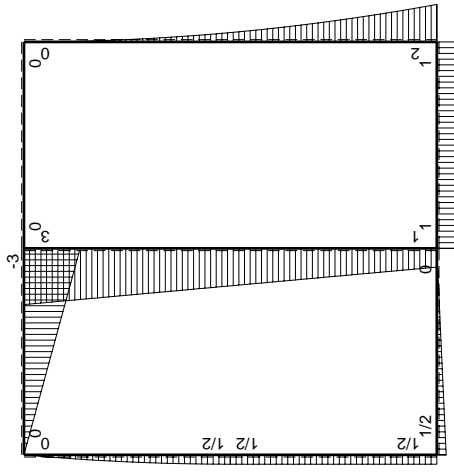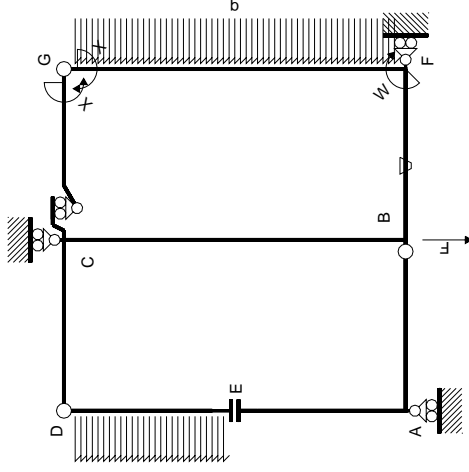

$M_x$  flessione da carichi assegnati

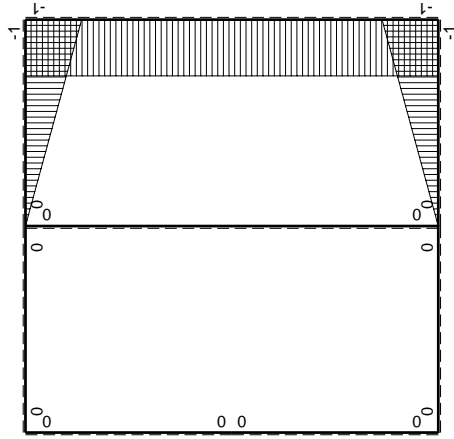

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | iperstatica $X=W_{gc}$ |          |                      |               |                  |                                   |
|--|----------|------------------------|----------|----------------------|---------------|------------------|-----------------------------------|
| $\rightarrow$                                    | $M^0(x)$ | $M^0(x)$               | $\theta$ | $M^0 M_0$            | $M^0 \theta$  | $M^0 M_x$        | $\int M^0_x (M_0/EJ + \theta) dx$ |
| AB b   | 0        | $1/2Fb-1/2Fx$          | 0        | 0                    | 0             | 0                | 0+0                               |
| BA b   | 0        | $-1/2Fx$               | 0        | 0                    | 0             | 0                | 0+0                               |
| CD b   | 0        | $-3Fb+3Fx$             | 0        | 0                    | 0             | 0                | 0+0                               |
| DC b   | 0        | $3Fx$                  | 0        | 0                    | 0             | 0                | 0+0                               |
| DE b   | 0        | $Fx-1/2qx^2$           | 0        | 0                    | 0             | 0                | 0+0                               |
| ED b   | 0        | $-1/2Fb+1/2qx^2$       | 0        | 0                    | 0             | 0                | 0+0                               |
| EA b   | 0        | $1/2Fb$                | 0        | 0                    | 0             | 0                | 0+0                               |
| AE b   | 0        | $-1/2Fb$               | 0        | 0                    | 0             | 0                | 0+0                               |
| BF b   | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$               |
| FB b   | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                        |
| GC b   | $-1+x/b$ | 0                      | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                        |
| CG b   | $x/b$    | 0                      | 0        | 0                    | 0             | $x^2/b^2$        | $1/3xb/EJ$                        |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$                 |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$         | 0             | 1                | $2xb/EJ$                          |
| CB 2b  | 0        | $3Fb-Fx$               | 0        | 0                    | 0             | 0                | 0+0                               |
| BC 2b  | 0        | $-Fb-Fx$               | 0        | 0                    | 0             | 0                | 0+0                               |
| totali   |          |                        |          |                      |               |                  | $-4/3Fb^2/EJ$                     |
|  |          |                        |          |                      |               |                  | $8/3xb/EJ$                        |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

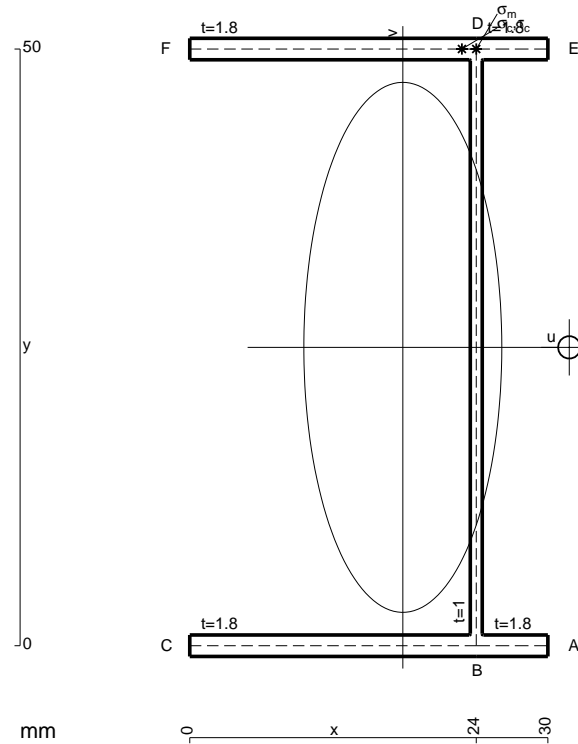

- A = 158. mm<sup>2</sup>
- J<sub>u</sub> = 77917. mm<sup>4</sup>
- J<sub>v</sub> = 10868. mm<sup>4</sup>
- J<sub>t</sub> = 133.3 mm<sup>4</sup>
- x<sub>o</sub> = 13.95 mm
- x<sub>g</sub> = 17.85 mm
- N = 330. N
- T<sub>y</sub> = 990. N
- M<sub>x</sub> = -673200. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 6.152 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 218.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 6.152 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 218.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 194.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.624 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 186.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 594. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 400.7 N/mm<sup>2</sup>




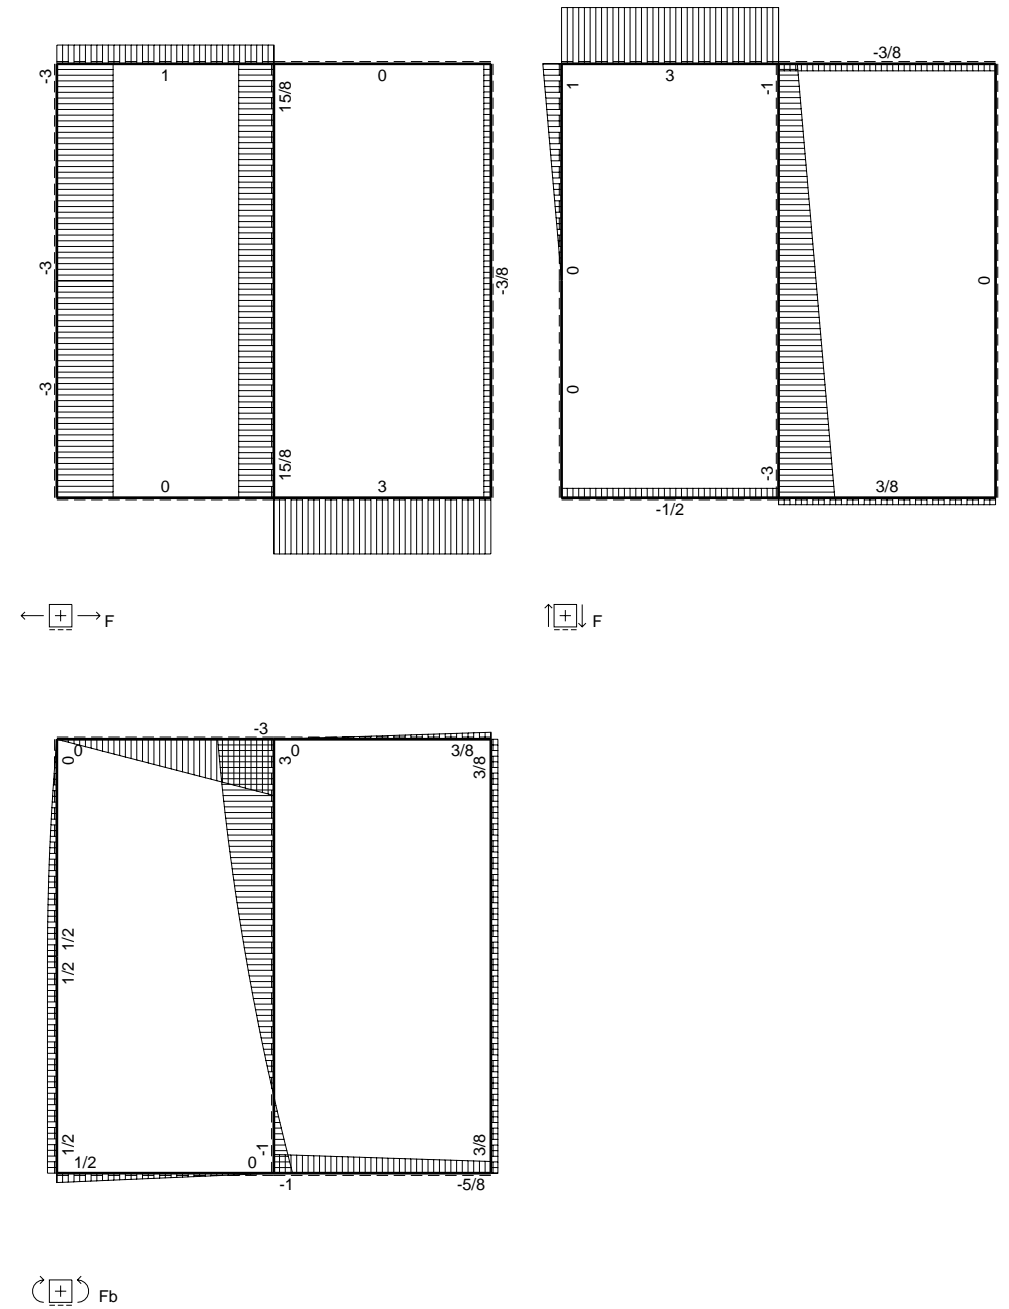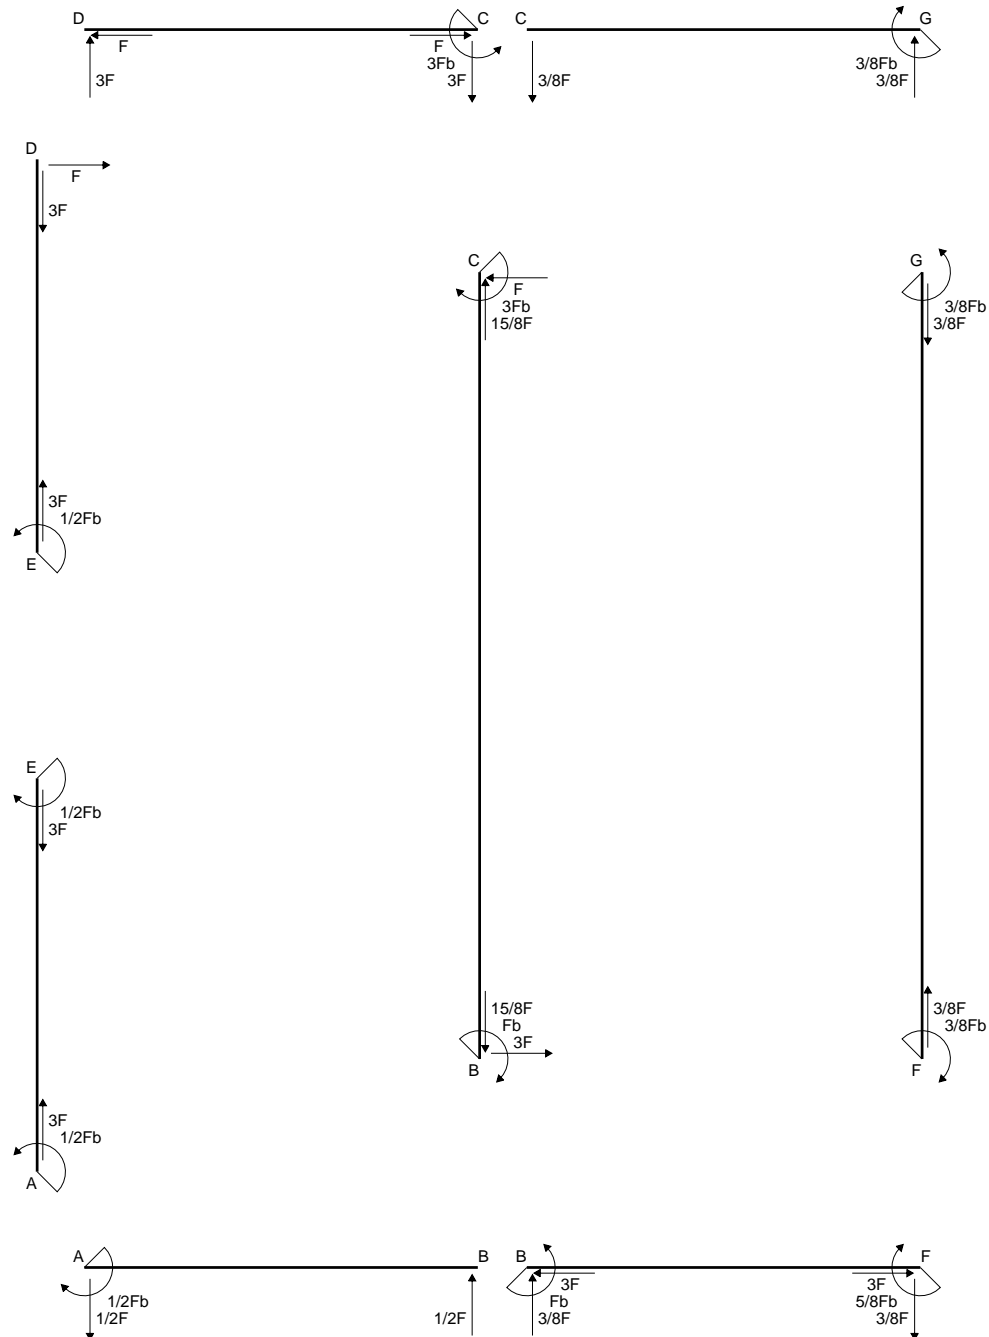

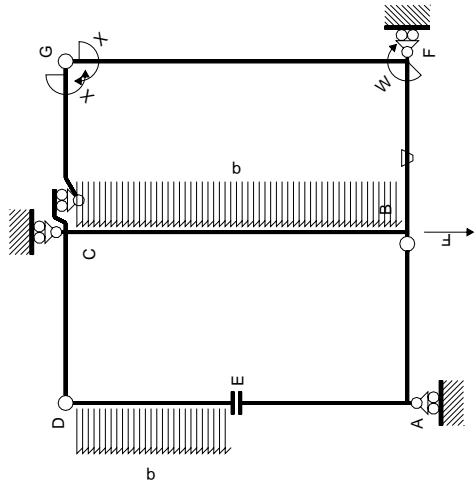

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

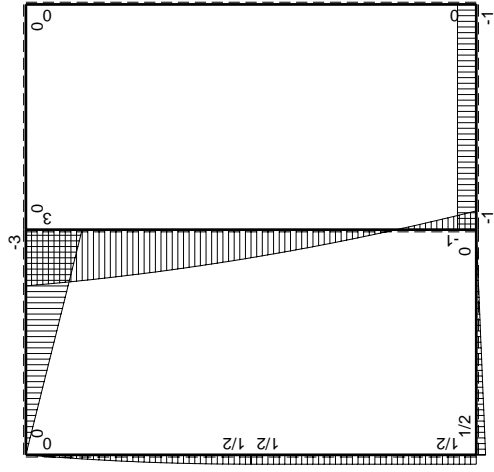

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$              | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$       | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|-----------------------|----------|-----------|-----------------|-----------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 Fb - 1/2 Fx$     | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 Fx$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DC b          | 0        | $3Fx$                 | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DE b          | 0        | $Fx - 1/2 qx^2$       | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 Fb + 1/2 qx^2$  | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| EA b          | 0        | $1/2 Fb$              | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 Fb$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fb/EJ - Fx/EJ$ | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b^3/EJ$         |
| FB b          | $1-x/b$  | $Fb$                  | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$              | $1/3 x b^3/EJ$         |
| GC b          | $-1+x/b$ | 0                     | 0        | 0         | 0               | 0               | $-1-2x/b + x^2/b^2$             | $1/3 x b^3/EJ$         |
| CG b          | $x/b$    | 0                     | 0        | 0         | 0               | 0               | $x^2/b^2$                       | $1/3 x b^3/EJ$         |
| FG 2b         | -1       | 0                     | 0        | 0         | 0               | 0               | 1                               | $2x b/EJ$              |
| GF 2b         | 1        | 0                     | 0        | 0         | 0               | 0               | 1                               | $2x b/EJ$              |
| CB 2b         | 0        | $3Fb - Fx - 1/2 qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 3Fx + 1/2 qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| totali        |          |                       |          |           |                 |                 |                                 | $8/3 x b^3/EJ$         |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

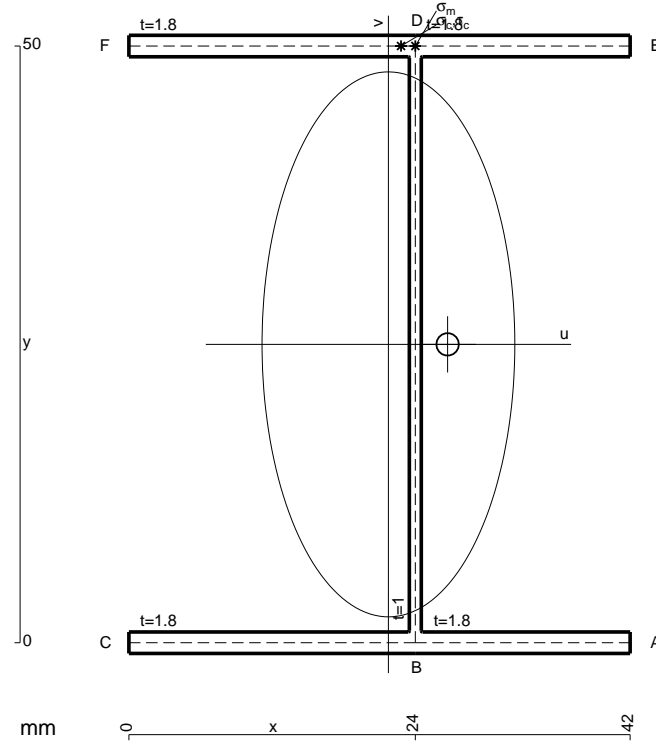


- A = 201.2 mm<sup>2</sup>
- J<sub>u</sub> = 104917. mm<sup>4</sup>
- J<sub>v</sub> = 22565. mm<sup>4</sup>
- J<sub>t</sub> = 180. mm<sup>4</sup>
- x<sub>o</sub> = 4.957 mm
- x<sub>g</sub> = 21.75 mm
- N = 440. N
- T<sub>y</sub> = 1320. N
- M<sub>x</sub> = -950400. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 2.254 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 228.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 2.254 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 228.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 72.99 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.549 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 65.44 N/mm<sup>2</sup>
- t<sub>c</sub> = 792. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 261.3 N/mm<sup>2</sup>






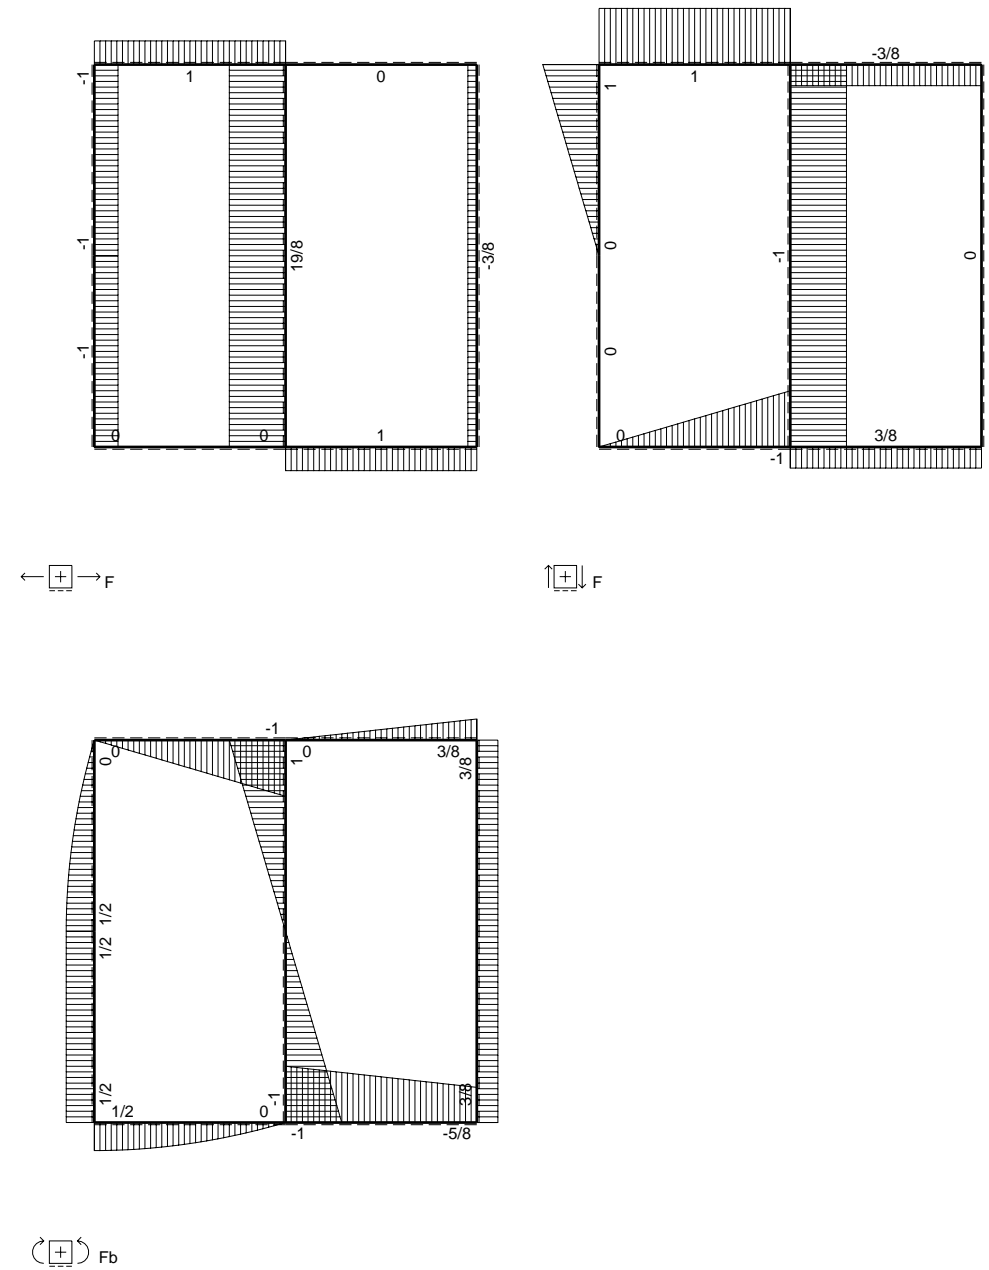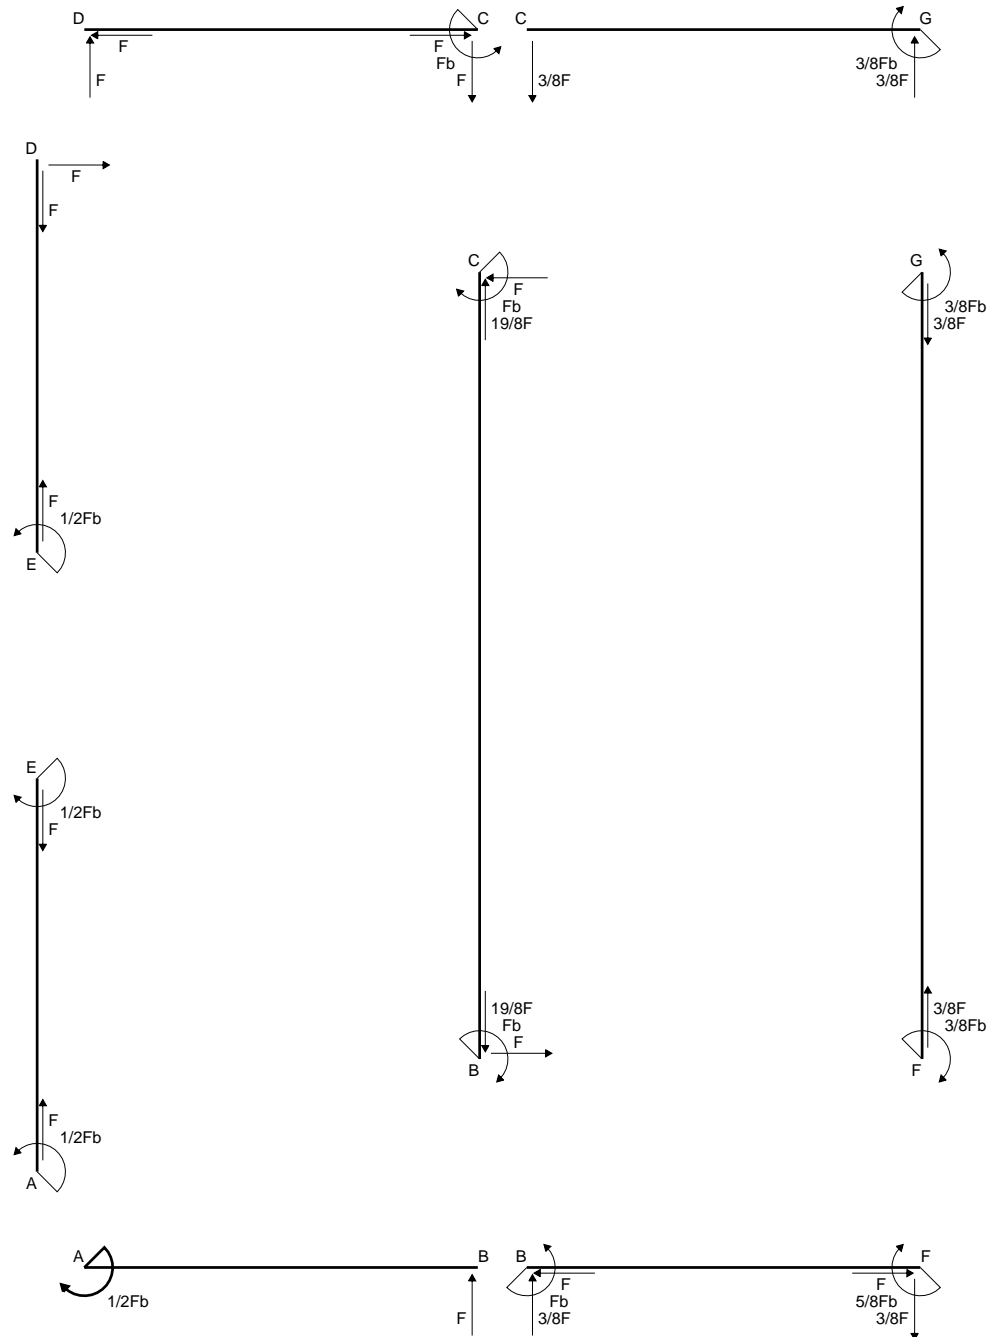

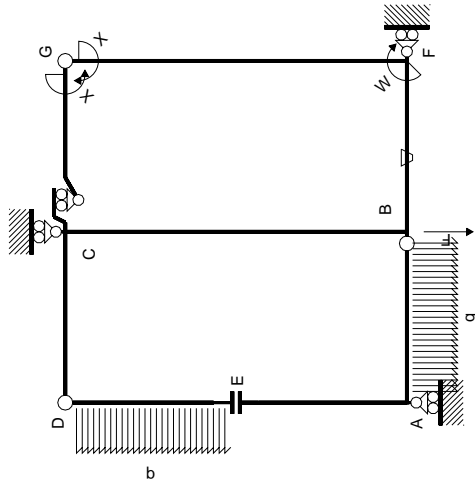

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

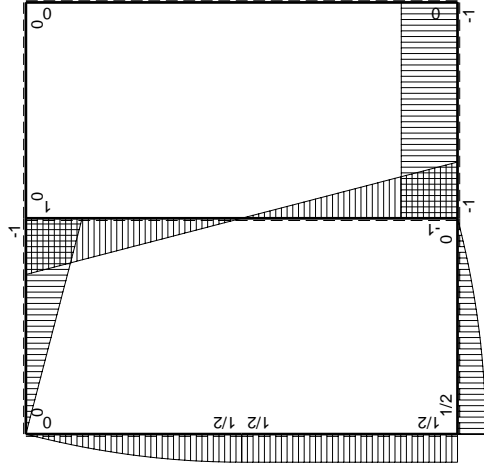

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$           | $M_0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|------------------|----------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | $1/2Fb-1/2qx^2$  | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | $-Fx+1/2qx^2$    | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | $-Fb+Fx$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | $Fx$             | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | $Fx-1/2qx^2$     | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | $-1/2Fb+1/2qx^2$ | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | $1/2Fb$          | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | $-1/2Fb$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$           | $-Fb$    | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$          | $Fb$     | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | $-1+x/b$         | 0        | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$            | 0        | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1               | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1                | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |                  |          |          |           |               |                  |                             | $Fb^2/EJ$            |
|               |                  |          |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

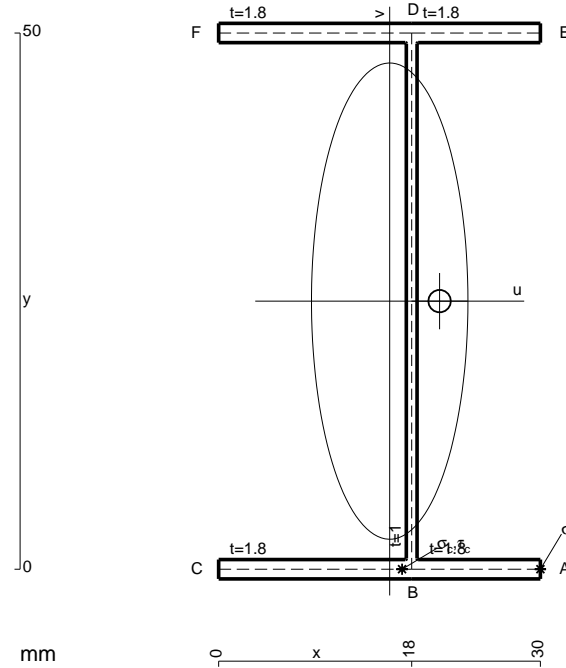


- A = 158. mm<sup>2</sup>
- J<sub>u</sub> = 77917. mm<sup>4</sup>
- J<sub>v</sub> = 8408. mm<sup>4</sup>
- J<sub>t</sub> = 133.3 mm<sup>4</sup>
- x<sub>o</sub> = 4.65 mm
- x<sub>g</sub> = 15.95 mm
- N = 2185. N
- T<sub>y</sub> = -920. N
- M<sub>x</sub> = 699200. Nmm
- x<sub>m</sub> = 30. mm
- u<sub>m</sub> = 14.05 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 238.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = 2.051 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 238.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 63.07 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.313 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 57.76 N/mm<sup>2</sup>
- t<sub>c</sub> = 1656. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 262. N/mm<sup>2</sup>



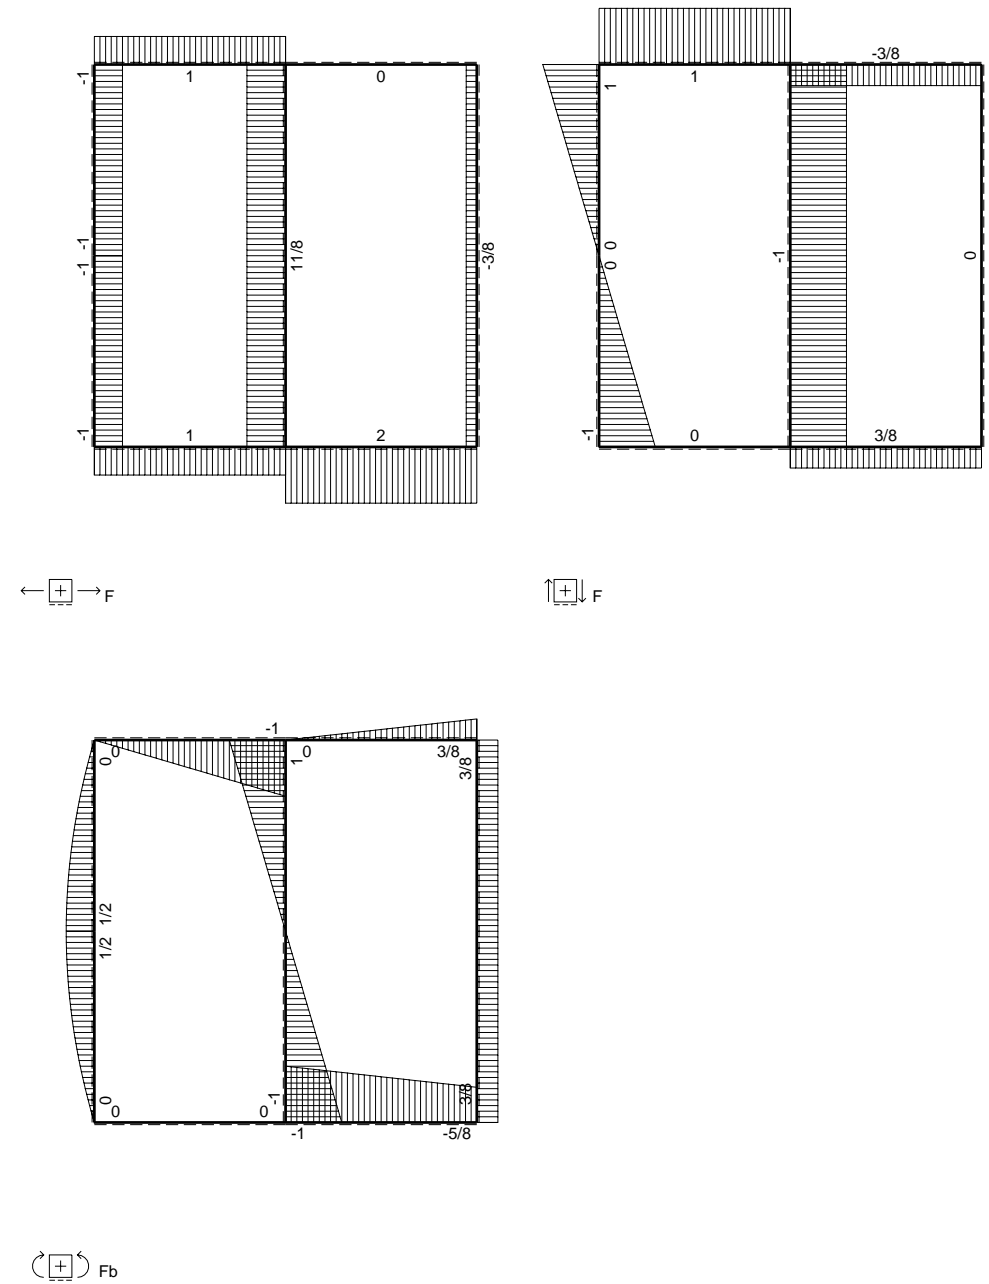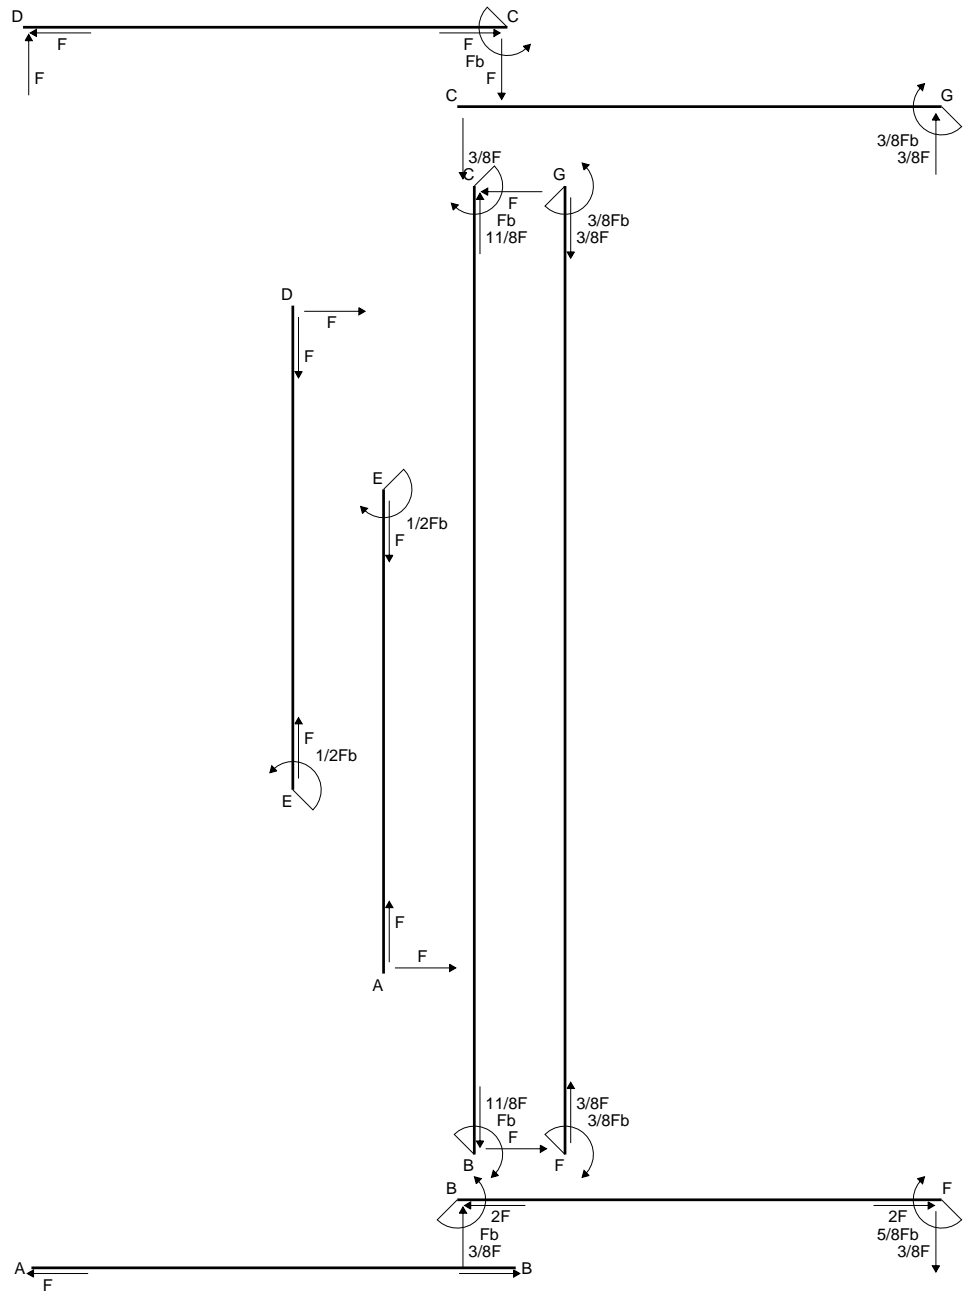


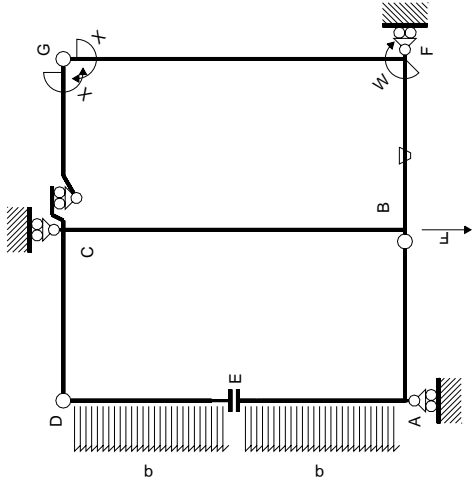

Schema di calcolo iperstatico

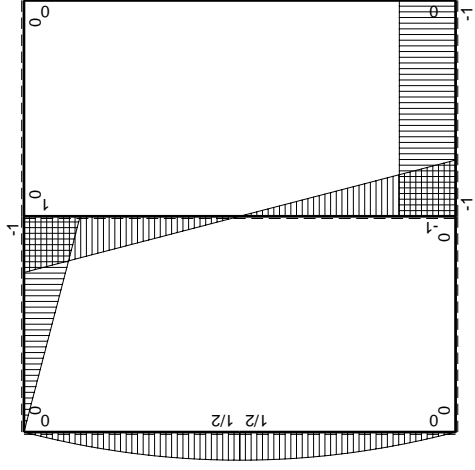

$M_0$  flessione da carichi assegnati

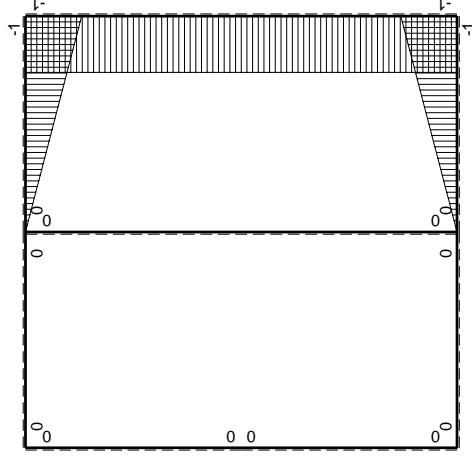

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$                  | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|--------|---------------------------|----------|-----------|--------------|------------------|---------------------------------|------------------------|
| AB b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| BA b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| CD b          | 0      | -Fb+Fx                    | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| DC b          | 0      | Fx                        | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| DE b          | 0      | Fx-1/2qx <sup>2</sup>     | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| ED b          | 0      | -1/2Fb+1/2qx <sup>2</sup> | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| EA b          | 0      | 1/2Fb-1/2qx <sup>2</sup>  | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| AE b          | 0      | -Fx+1/2qx <sup>2</sup>    | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| BF b          | -x/b   | -Fb                       | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | 1-x/b  | Fb                        | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3xb/EJ$             |
| GC b          | -1+x/b | 0                         | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | x/b    | 0                         | 0        | 0         | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1     | 0                         | 0        | 0         | 0            | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1      | 0                         | 0        | 0         | 0            | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| BC 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                             | 0                      |
| totali        |        |                           |          |           |              |                  |                                 | $8/3xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


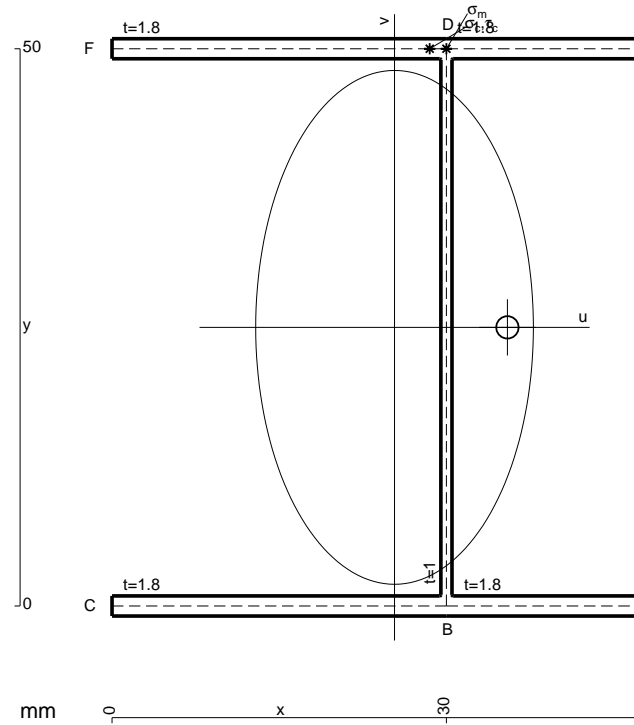


- A = 222.8 mm<sup>2</sup>
- J<sub>u</sub> = 118417. mm<sup>4</sup>
- J<sub>v</sub> = 34574. mm<sup>4</sup>
- J<sub>t</sub> = 203.3 mm<sup>4</sup>
- x<sub>o</sub> = 10.13 mm
- x<sub>g</sub> = 25.35 mm
- N = 3025. N
- T<sub>y</sub> = -2200. N
- M<sub>x</sub> = -880000. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = 4.654 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = 4.654 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 199.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 211.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.93 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 197.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 3960. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 416.6 N/mm<sup>2</sup>






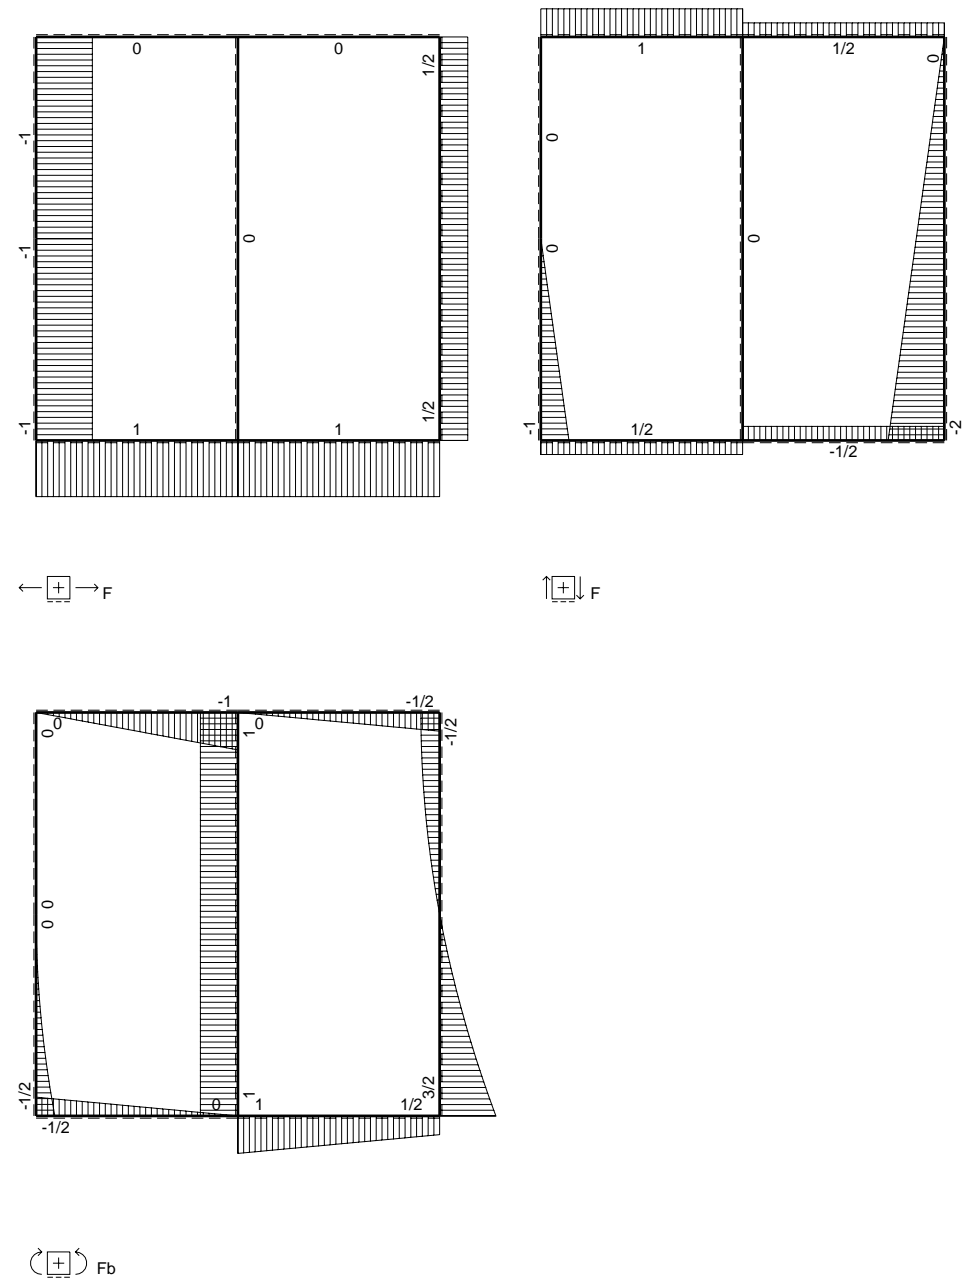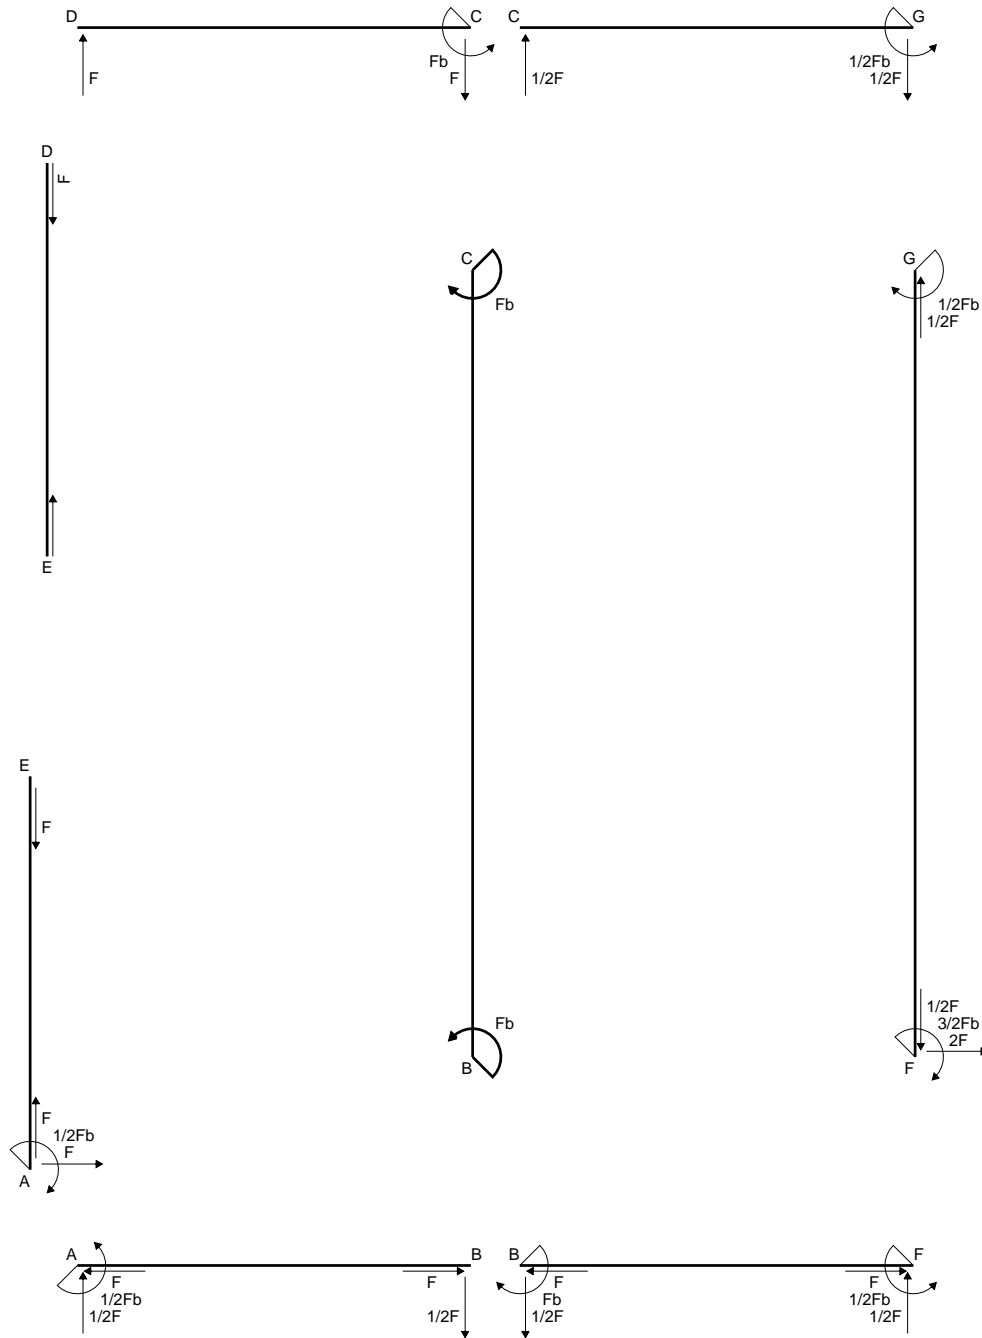

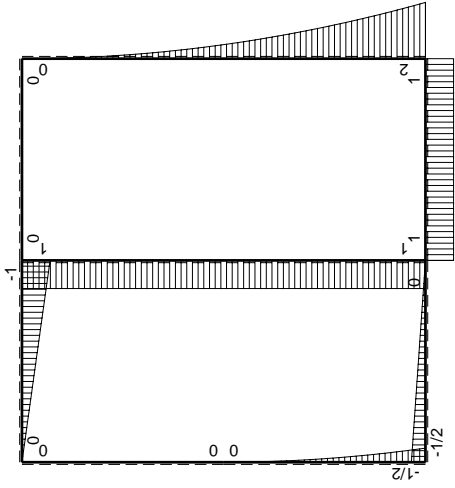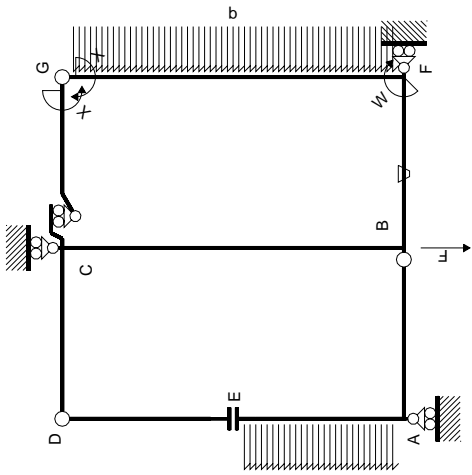

(+)  $M_x$  flessione da carichi assegnati

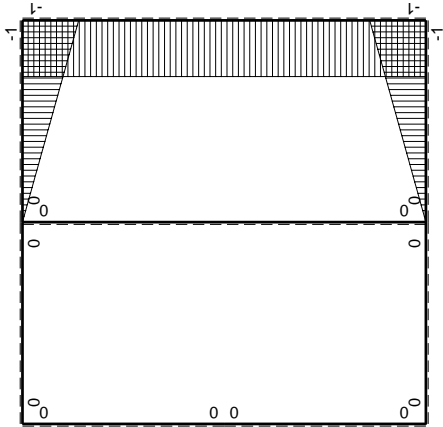

(+)  $M_0$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sup>gc</sup>

| ←                             | M <sup>x</sup> (x) | M <sup>0</sup> (x)          | θ      | M <sup>x</sup> M <sub>0</sub>  | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub> | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|-------------------------------|--------------------|-----------------------------|--------|--------------------------------|------------------|-------------------------------|-----------------------------|---------------------|
| AB b                          | 0                  | -1/2Fb+1/2Fx                | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| BA b                          | 0                  | 1/2Fx                       | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| CD b                          | 0                  | -Fb+Fx                      | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| DC b                          | 0                  | Fx                          | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| DE b                          | 0                  | 0                           | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| EA b                          | 0                  | -1/2qx <sup>2</sup>         | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| AE b                          | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup> | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| BF b                          | -x/b               | Fb                          | -Fb/EJ | -Fx                            | Fx/EJ            | $x^2/b^2$                     | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| FB b                          | 1-x/b              | -Fb                         | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$              | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| GC b                          | -1+x/b             | 0                           | 0      | 0                              | 0                | $1-2x/b+x^2/b^2$              | 0+0                         | 1/3xb/EJ            |
| CG b                          | x/b                | 0                           | 0      | 0                              | 0                | $x^2/b^2$                     | 0+0                         | 1/3xb/EJ            |
| FG 2b                         | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup>  | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0                | 1                             | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| GF 2b                         | 1                  | -1/2qx <sup>2</sup>         | 0      | -1/2Fx <sup>2</sup> /b         | 0                | 1                             | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| CB 2b                         | 0                  | Fb                          | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| BC 2b                         | 0                  | -Fb                         | 0      | 0                              | 0                | 0                             | 0+0                         | 0                   |
| totali                        |                    |                             |        |                                |                  |                               |                             |                     |
| iperstatica X=W <sup>gc</sup> |                    |                             |        |                                |                  |                               |                             |                     |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

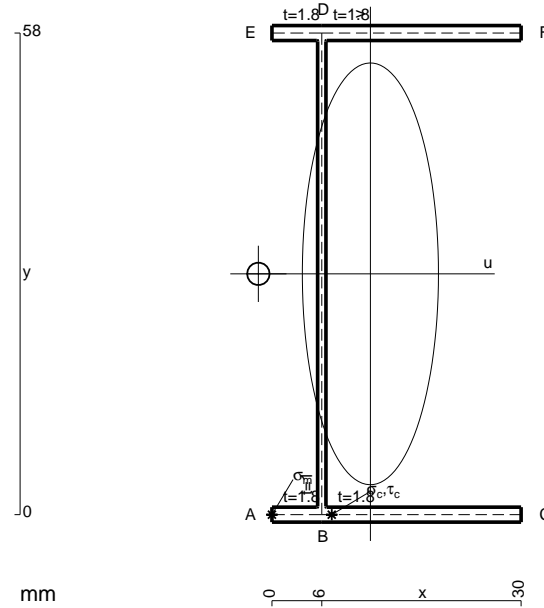

- A = 166. mm<sup>2</sup>
- J<sub>u</sub> = 107087. mm<sup>4</sup>
- J<sub>v</sub> = 11157. mm<sup>4</sup>
- J<sub>t</sub> = 136. mm<sup>4</sup>
- x<sub>o</sub> = -13.49 mm
- x<sub>g</sub> = 11.86 mm
- T<sub>y</sub> = 1550. N
- M<sub>x</sub> = -775000. Nmm
- u<sub>m</sub> = -11.86 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -5.855 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 286.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.07 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 276.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 2790. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 539.3 N/mm<sup>2</sup>




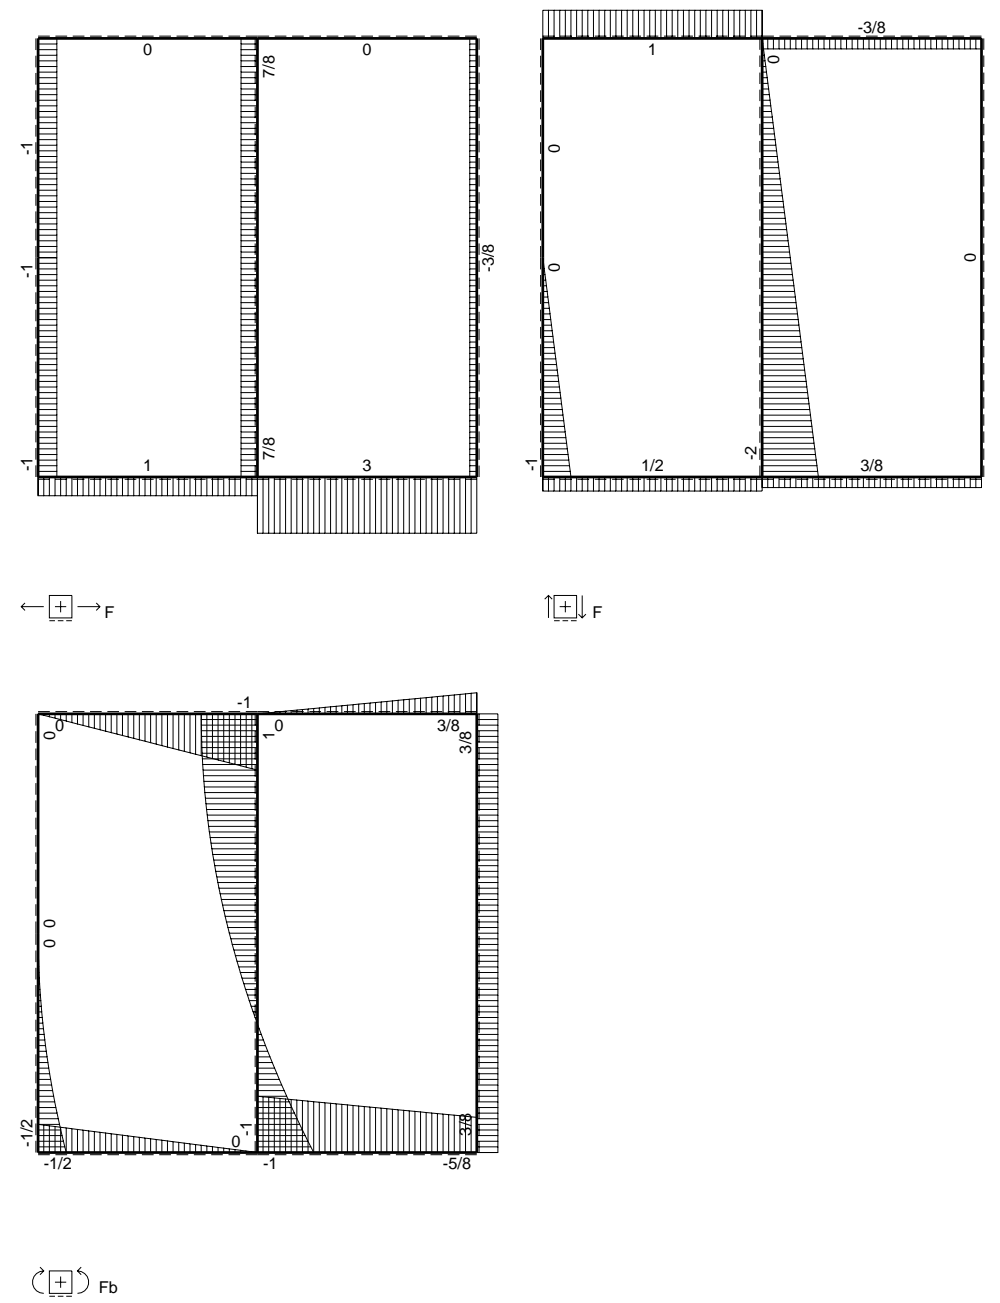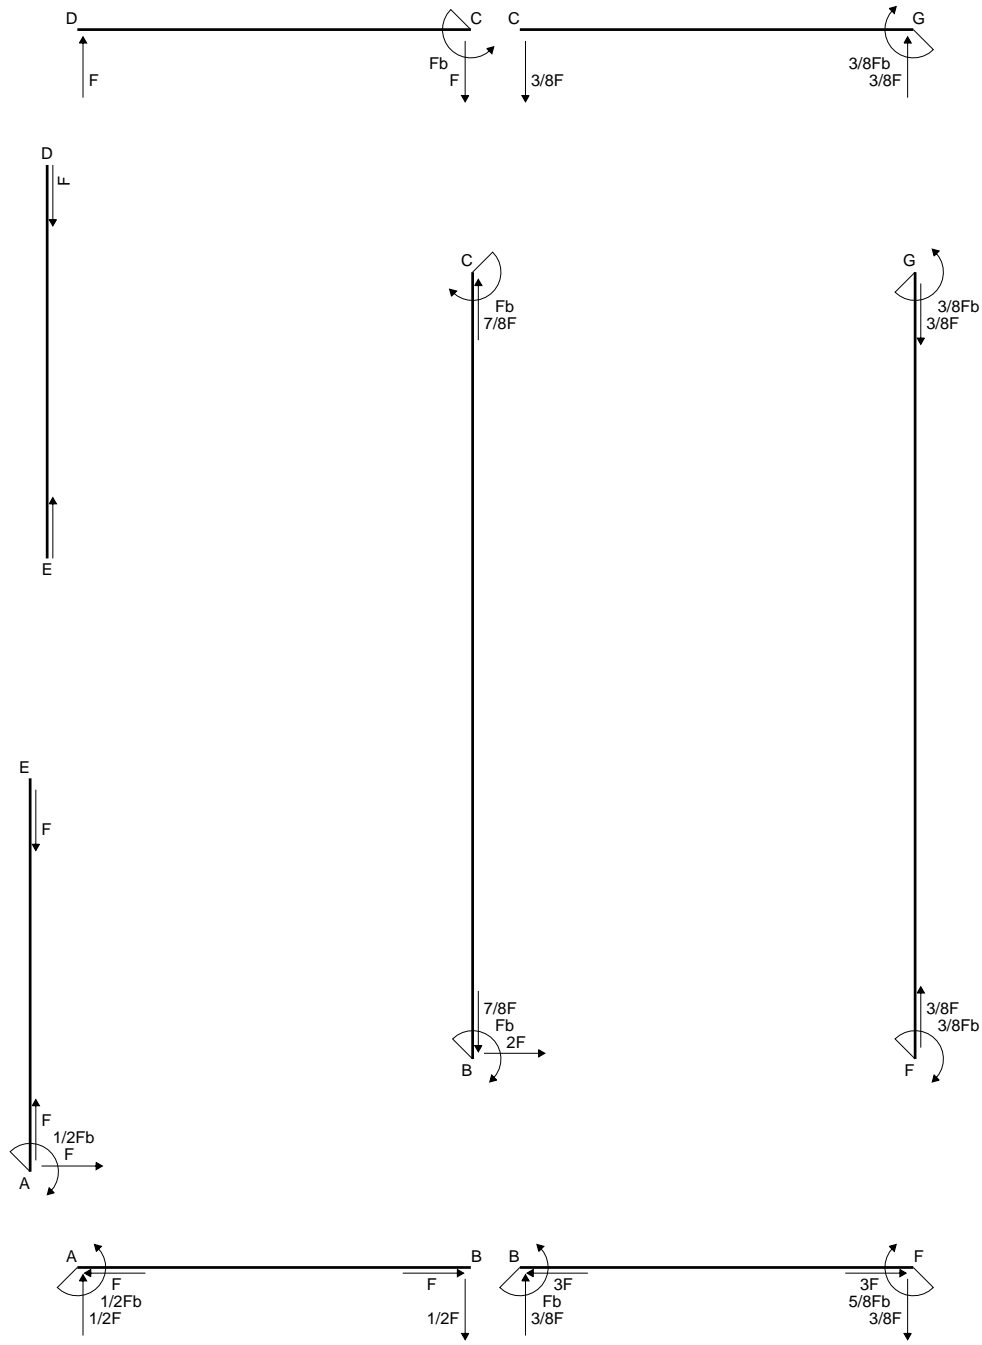

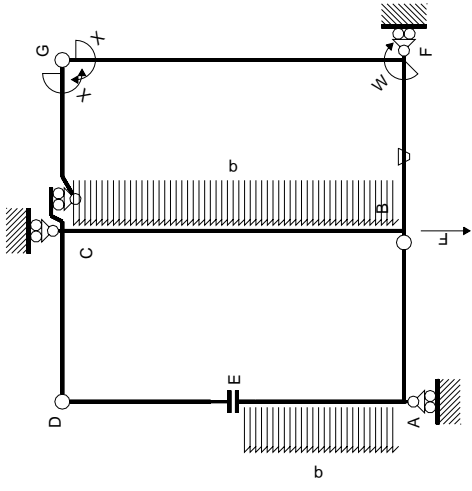

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

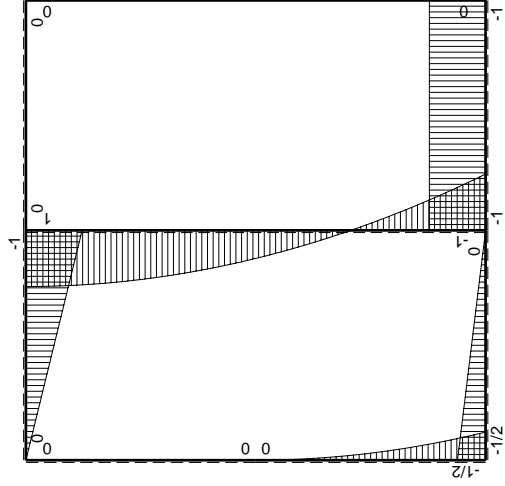

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^x(x)$           | $\theta$ | $M^x M_0$ | $M^x \theta$  | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x/EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|------------------|---------------------------------|----------------------|
| AB b          | 0        | $-1/2Fx$           | 0        | 0         | 0             | 0                | 0                               | 0                    |
| BA b          | 0        | $1/2Fx$            | 0        | 0         | 0             | 0                | 0                               | 0                    |
| CD b          | 0        | $-Fb+Fx$           | 0        | 0         | 0             | 0                | 0                               | 0                    |
| DC b          | 0        | $Fx$               | 0        | 0         | 0             | 0                | 0                               | 0                    |
| DE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0                               | 0                    |
| EA b          | 0        | $-1/2qx^2$         | 0        | 0         | 0             | 0                | 0                               | 0                    |
| AE b          | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0                               | 0                    |
| BF b          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0                               | 0                    |
| CG b          | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0                               | 0                    |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 1                | 0                               | 0                    |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 1                | 0                               | 0                    |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0                               | 0                    |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0                               | 0                    |
| totali        |          |                    |          |           |               |                  |                                 | $Fb^2/EJ$            |
|               |          |                    |          |           |               |                  |                                 | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

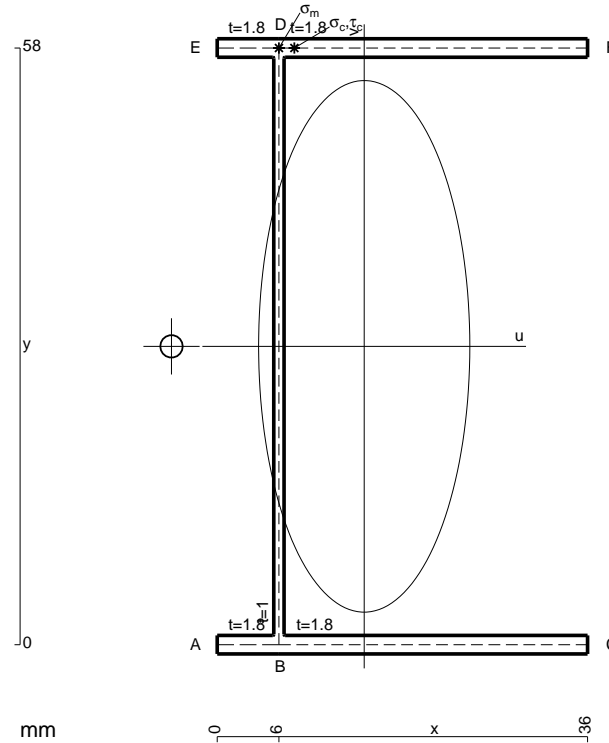

- A = 187.6 mm<sup>2</sup>
- J<sub>u</sub> = 125253. mm<sup>4</sup>
- J<sub>v</sub> = 19767. mm<sup>4</sup>
- J<sub>t</sub> = 159.3 mm<sup>4</sup>
- x<sub>o</sub> = -18.73 mm
- x<sub>g</sub> = 14.29 mm
- N = 1453. N
- T<sub>y</sub> = -3320. N
- M<sub>x</sub> = -913000. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = -8.29 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 219.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = -8.29 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 219.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 725.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 23.06 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 702.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 2988. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 1276. N/mm<sup>2</sup>






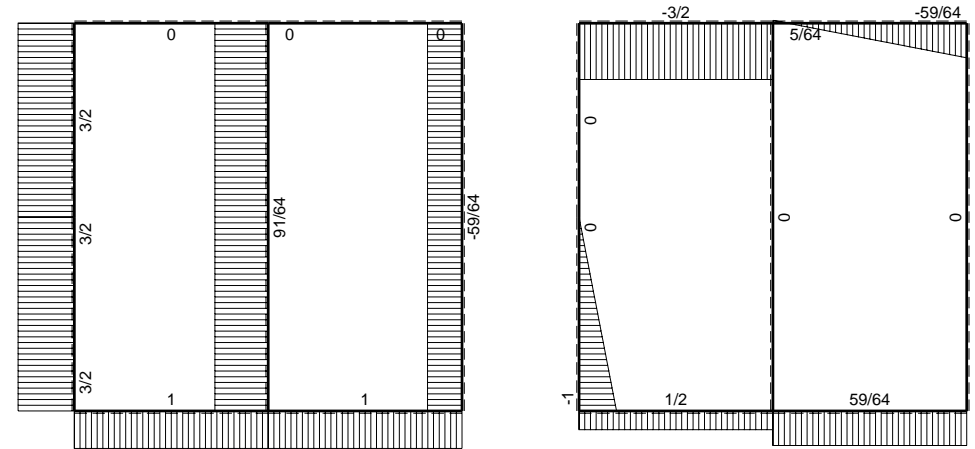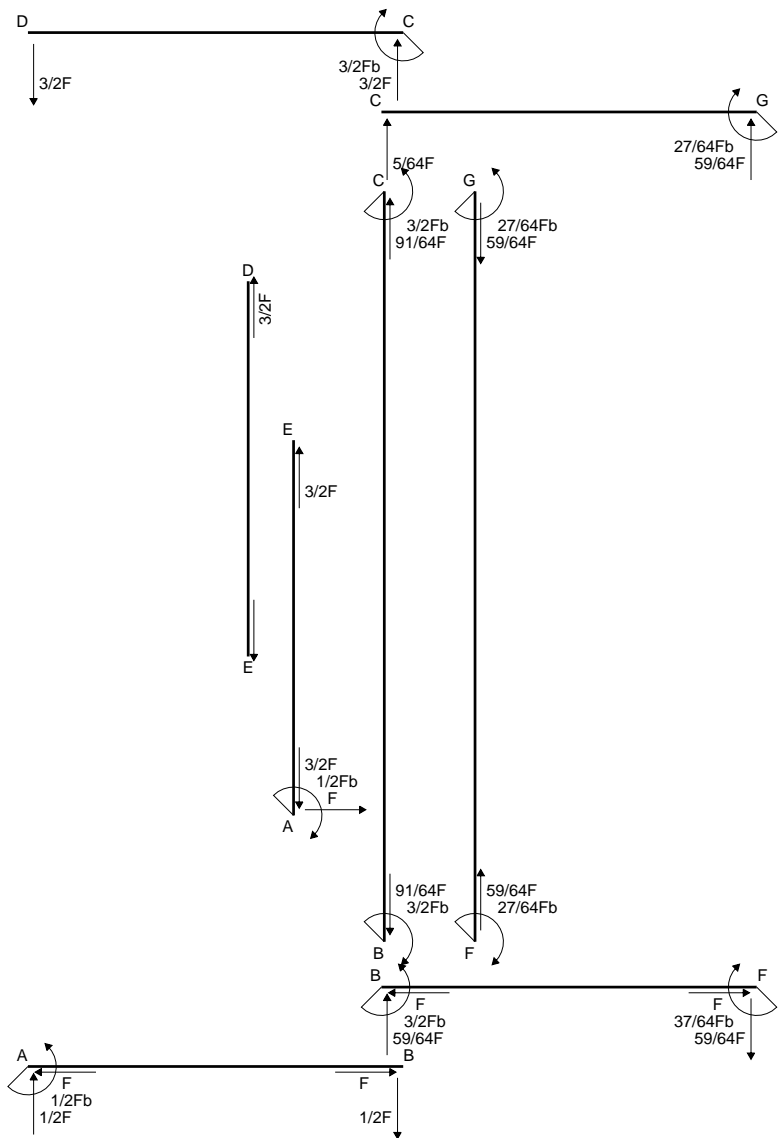


← ⊕ → F


↑ ⊕ ↓ F

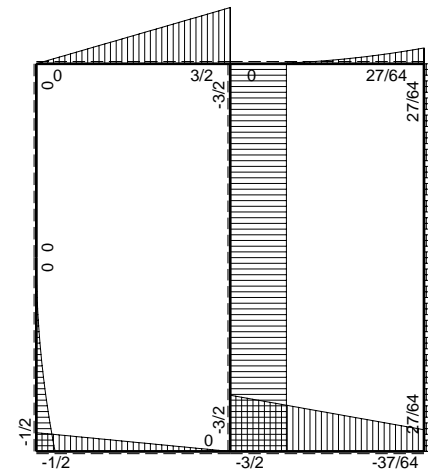


⊕ ⊖ F<sub>b</sub>

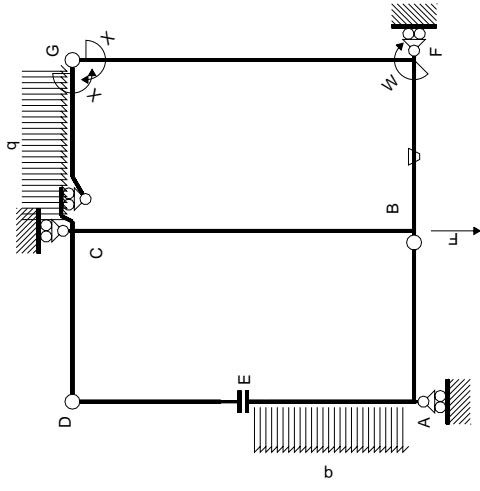

Schema di calcolo iperstatico

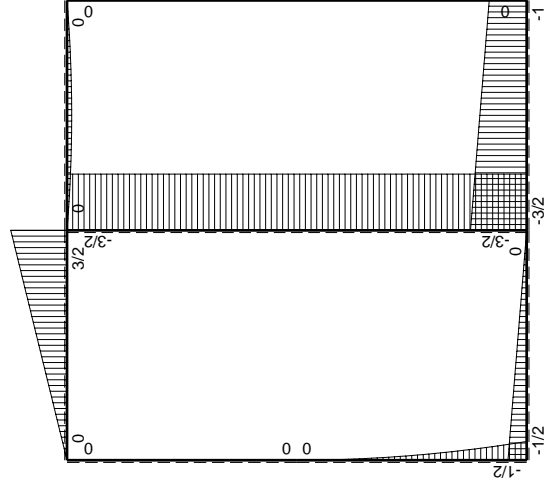

$M_x$  flessione da carichi assegnati

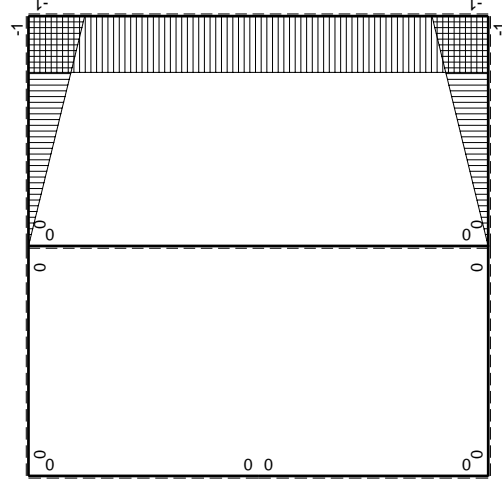

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | Sviluppi di calcolo iperstatica |          |  |              |                                       |                                 |                        |
|--|----------|---------------------------------|----------|--|--------------|---------------------------------------|---------------------------------|------------------------|
| $\leftarrow$                                     | $M^x(x)$ | $M^0(x)$                        | $\theta$ | $M^x M_0$                                      | $M^x \theta$ | $M^x M_x$                             | $\int M^x (M^0/EJ + \theta) dx$ | $\int X M^x M^0/EJ dx$ |
| AB b   | 0        | -1/2Fb+1/2Fx                    | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| BA b   | 0        | 1/2Fx                           | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| CD b   | 0        | 3/2Fb-3/2Fx                     | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| DC b   | 0        | -3/2Fx                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| DE b   | 0        | 0                               | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| EA b   | 0        | -1/2qx <sup>2</sup>             | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| AE b   | 0        | 1/2Fb-Fx+1/2qx <sup>2</sup>     | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| BF b   | -x/b     | -3/2Fb+1/2Fx                    | -Fb/EJ   | 3/2Fx-1/2Fx <sup>2</sup> /b                    | Fx/EJ        | x <sup>2</sup> /b <sup>2</sup>        | (7/12+1/2)Fb <sup>2</sup> /EJ   | 1/3Xb/EJ               |
| FB b   | 1-x/b    | Fb+1/2Fx                        | Fb/EJ    | Fb-1/2Fx-1/2Fx <sup>2</sup> /b                 | Fb/EJ-Fx/EJ  | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (7/12+1/2)Fb <sup>2</sup> /EJ   | 1/3Xb/EJ               |
| GC b   | -1+x/b   | -1/2Fx+1/2qx <sup>2</sup>       | 0        | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0            | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ     | 1/3Xb/EJ               |
| CG b   | x/b      | 1/2Fx-1/2qx <sup>2</sup>        | 0        | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0            | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ     | 1/3Xb/EJ               |
| FG 2b  | -1       | 0                               | 0        | 0  | 0            | 1                                     | 0+0                             | 2Xb/EJ                 |
| GF 2b  | 1        | 0                               | 0        | 0  | 0            | 1                                     | 0+0                             | 2Xb/EJ                 |
| CB 2b  | 0        | -3/2Fb                          | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| BC 2b  | 0        | 3/2Fb                           | 0        | 0  | 0            | 0                                     | 0+0                             | 0                      |
| totali   |          |                                 |          |  |              |                                       |                                 |                        |
|  |          |                                 |          |  |              |                                       | 9/8Fb <sup>2</sup> /EJ          | 8/3Xb/EJ               |
|  |          |                                 |          |  |              |                                       |                                 | -27/64Fb               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$



$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

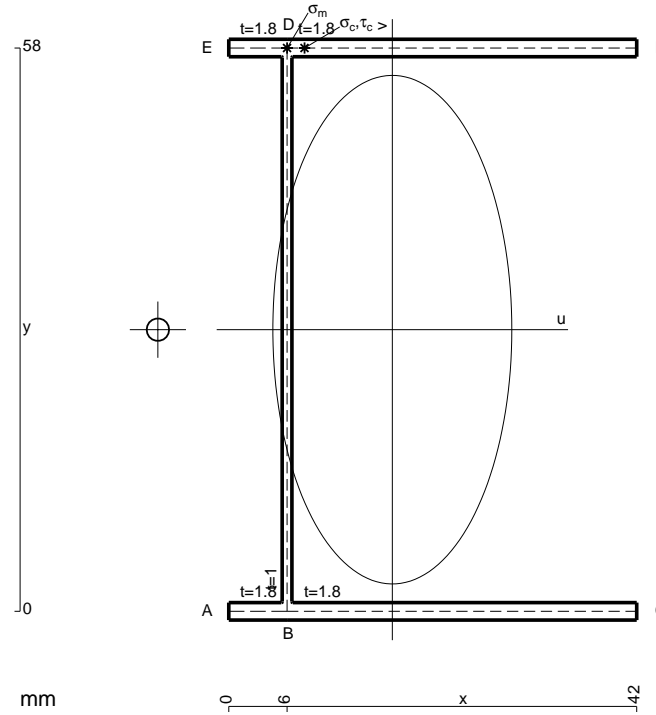

- A = 209.2 mm<sup>2</sup>
- J<sub>u</sub> = 143419. mm<sup>4</sup>
- J<sub>v</sub> = 31658. mm<sup>4</sup>
- J<sub>t</sub> = 182.6 mm<sup>4</sup>
- x<sub>o</sub> = -24.14 mm
- x<sub>g</sub> = 16.84 mm
- T<sub>y</sub> = -1920. N
- M<sub>x</sub> = 1132800. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = -10.84 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = -10.84 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 470.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.98 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 456.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 2304. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 847. N/mm<sup>2</sup>




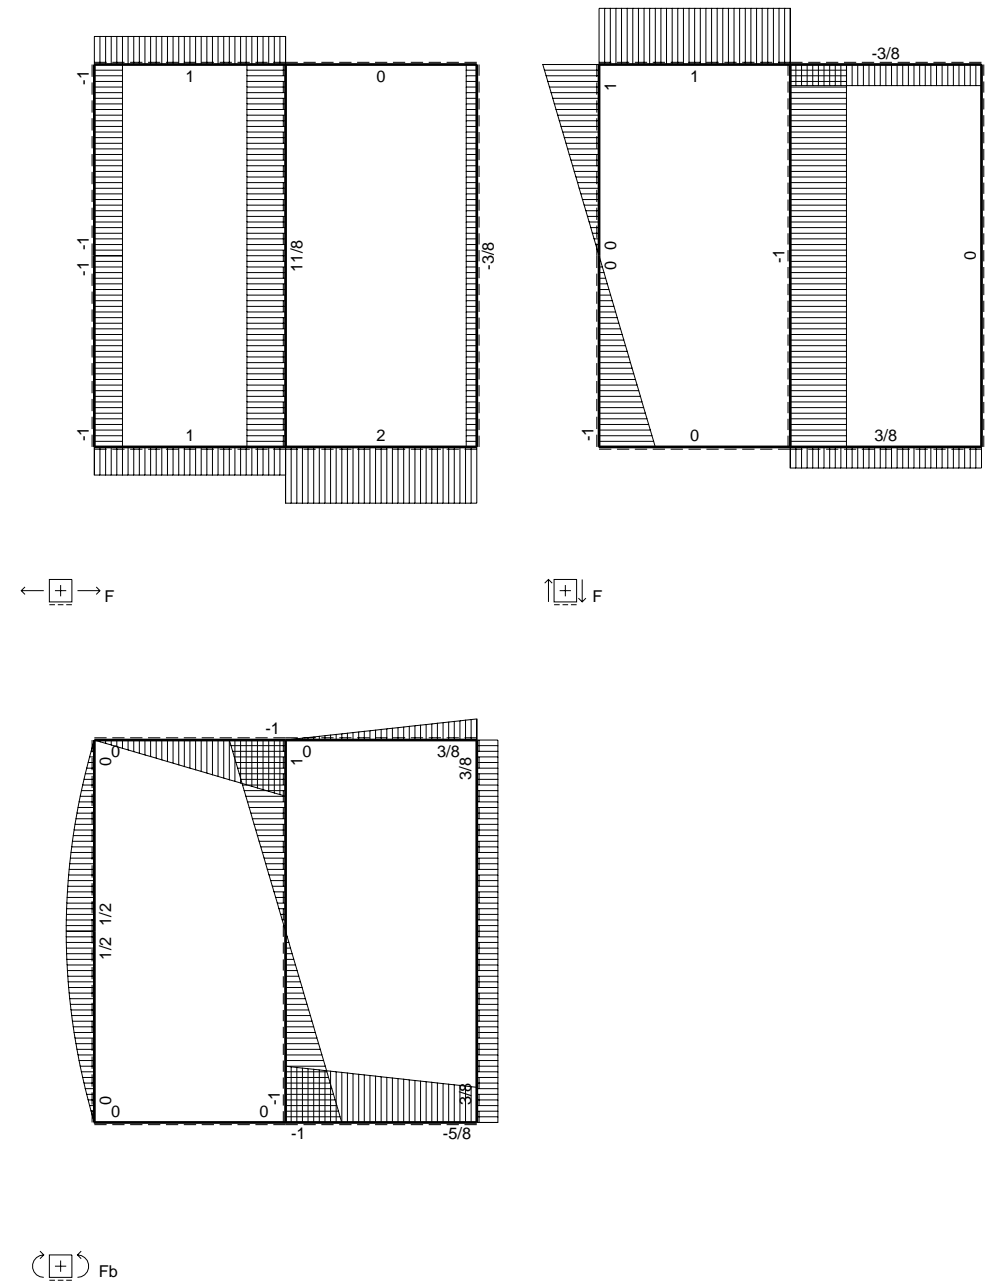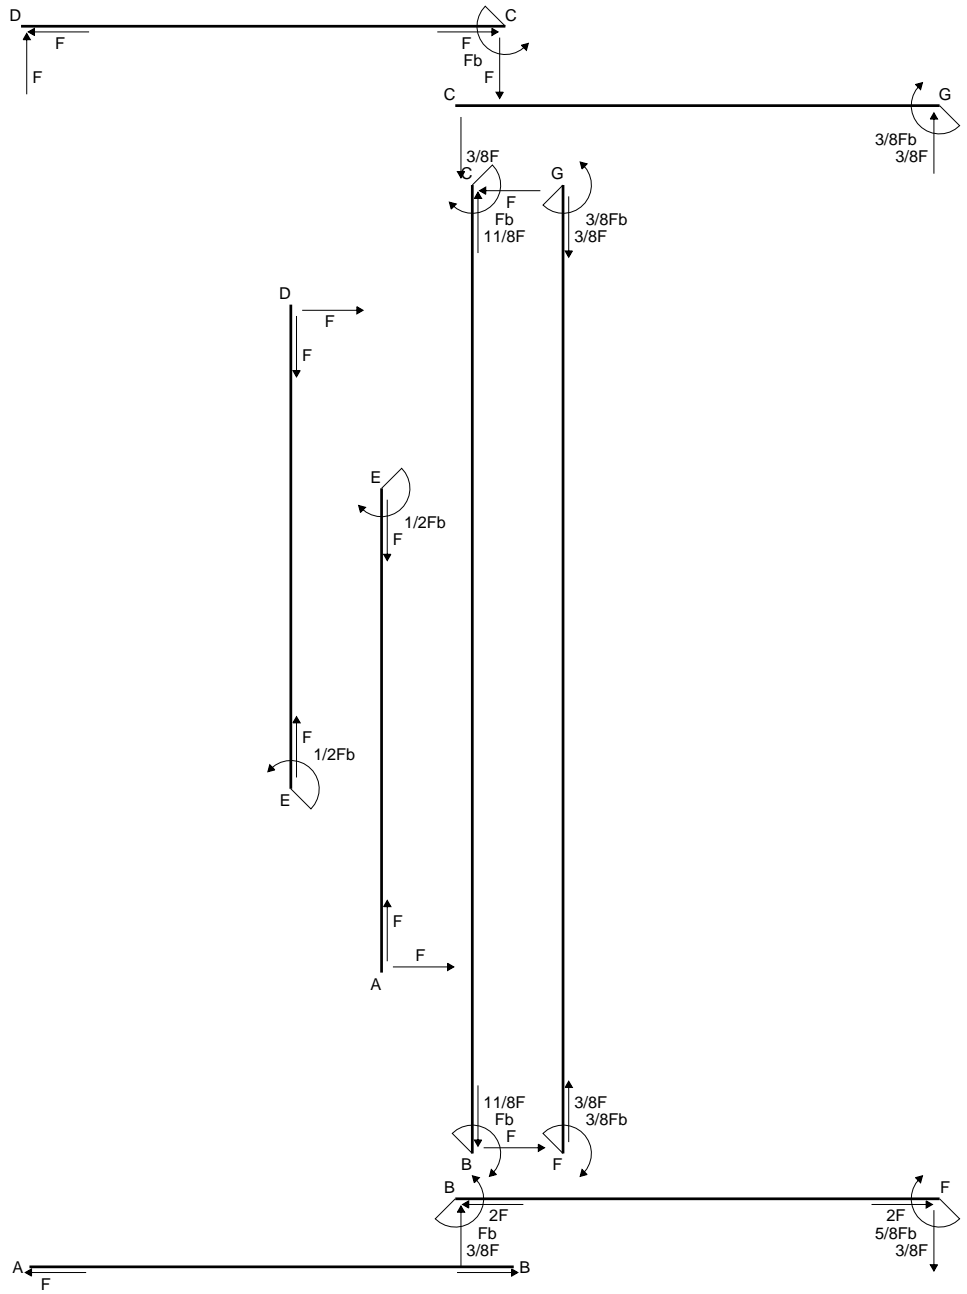

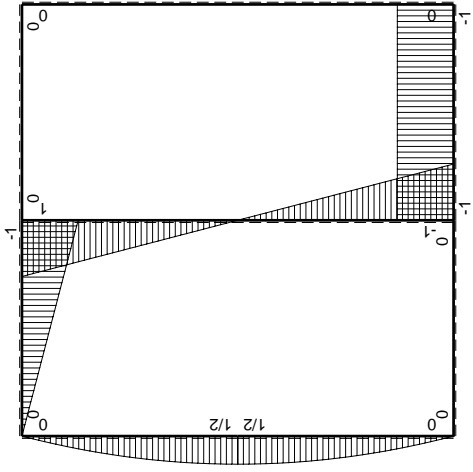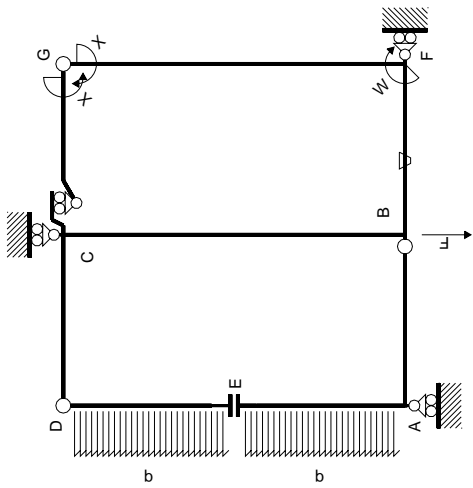

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

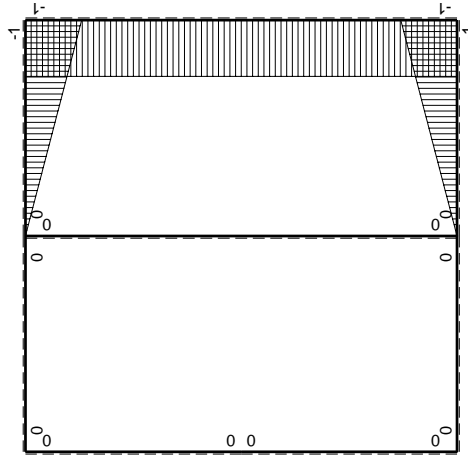

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$                  | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x/EJ dx$ |
|---------------|--------|---------------------------|----------|-----------|--------------|------------------|---------------------------------|----------------------|
| AB b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| BA b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| CD b          | 0      | -Fb+Fx                    | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| DC b          | 0      | Fx                        | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| DE b          | 0      | Fx-1/2qx <sup>2</sup>     | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| ED b          | 0      | -1/2Fb+1/2qx <sup>2</sup> | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| EA b          | 0      | 1/2Fb-1/2qx <sup>2</sup>  | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| AE b          | 0      | -Fx+1/2qx <sup>2</sup>    | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| BF b          | -x/b   | -Fb                       | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$           |
| FB b          | 1-x/b  | Fb                        | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3xb/EJ$           |
| GC b          | -1+x/b | 0                         | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$           |
| CG b          | x/b    | 0                         | 0        | 0         | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$           |
| FG 2b         | -1     | 0                         | 0        | 0         | 0            | 1                | 0+0                             | $2xb/EJ$             |
| GF 2b         | 1      | 0                         | 0        | 0         | 0            | 1                | 0+0                             | $2xb/EJ$             |
| CB 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| BC 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                             | 0                    |
| totali        |        |                           |          |           |              |                  |                                 | $Fb^2/EJ$            |
|               |        |                           |          |           |              |                  |                                 | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$






$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


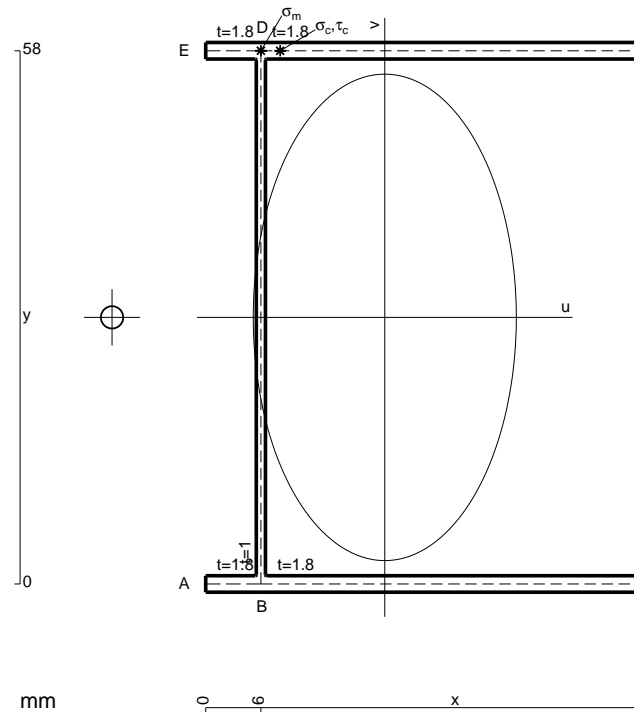


- A = 230.8 mm<sup>2</sup>
- J<sub>u</sub> = 161584. mm<sup>4</sup>
- J<sub>v</sub> = 47247. mm<sup>4</sup>
- J<sub>t</sub> = 206. mm<sup>4</sup>
- x<sub>o</sub> = -29.67 mm
- x<sub>g</sub> = 19.48 mm
- N = 2723. N
- T<sub>y</sub> = -1980. N
- M<sub>x</sub> = -1267200. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = -13.48 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 239.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = -13.48 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 239.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 528.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 14.93 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x</sub>t/J<sub>t</sub> = 513.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 3564. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 945.7 N/mm<sup>2</sup>





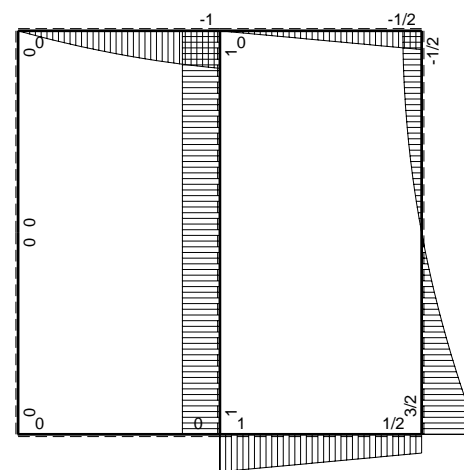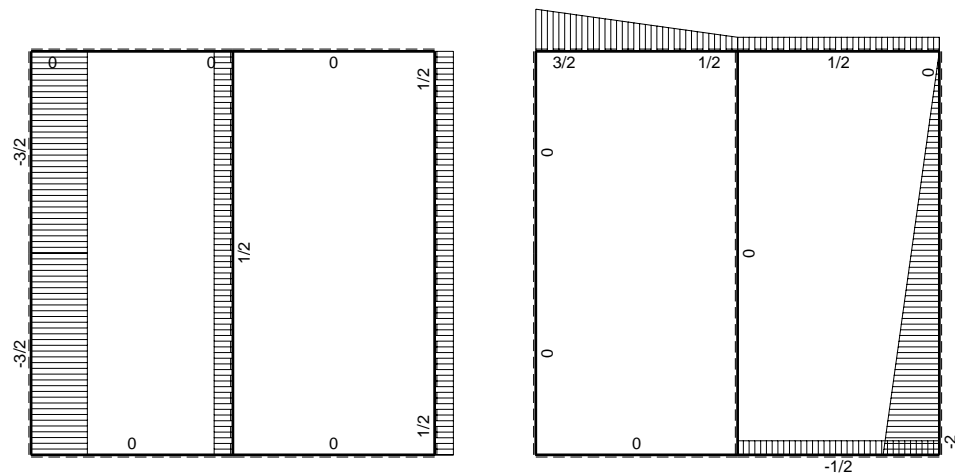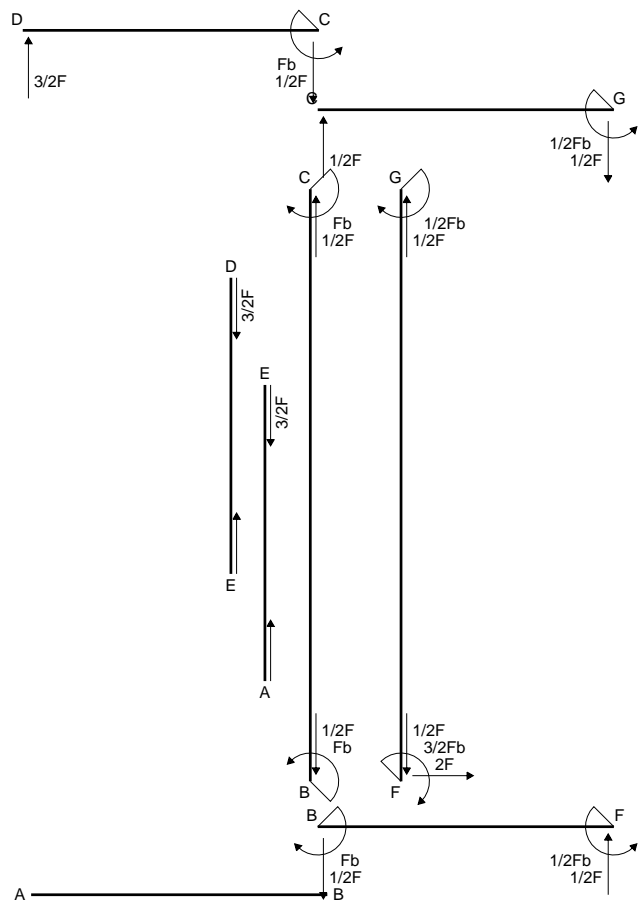

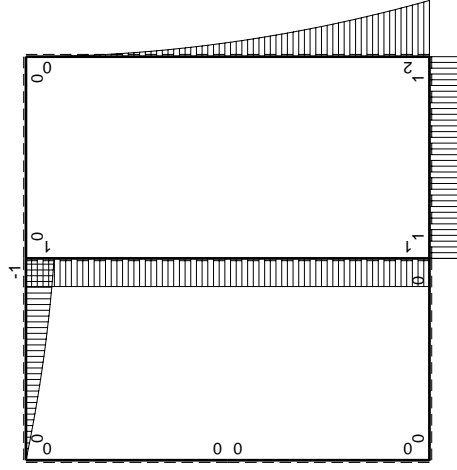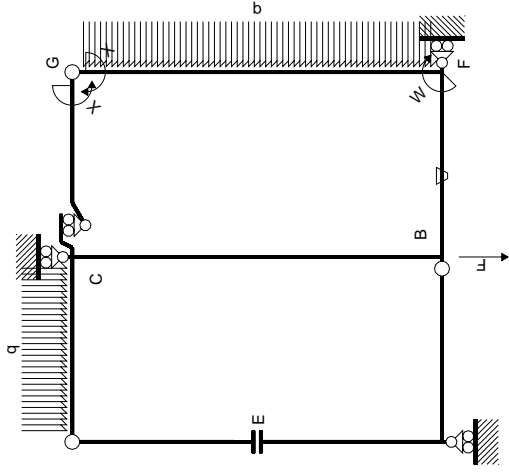

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M_x(x)$ | $M_0(x)$            | $\theta$ | $M_x M_0$            | $M_x \theta$ | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|---------------------|----------|----------------------|--------------|------------------|---------------------------------|------------------------|
| AB b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| BA b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| CD b         | 0        | $-Fb+1/2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| DC b         | 0        | $3/2Fx-1/2qx^2$     | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| DE b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| ED b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| EA b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| AE b         | 0        | 0                   | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| BF b         | $-x/b$   | Fb                  | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$      | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$             |
| FB b         | $1-x/b$  | $-Fb$               | Fb/EJ    | $-Fb+Fx$             | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                   | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | $x/b$    | 0                   | 0        | 0                    | 0            | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | $2Fb-2Fx+1/2qx^2$   | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$               |
| GF 2b        | 1        | $-1/2qx^2$          | 0        | $-1/2Fx^2/b$         | 0            | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$               |
| CB 2b        | 0        | Fb                  | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| BC 2b        | 0        | $-Fb$               | 0        | 0                    | 0            | 0                | 0+0                             | 0                      |
| totali       |          |                     |          |                      |              |                  |                                 | $8/3xb/EJ$             |
|              |          |                     |          |                      |              |                  |                                 | iperstatica $X=W_{gc}$ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

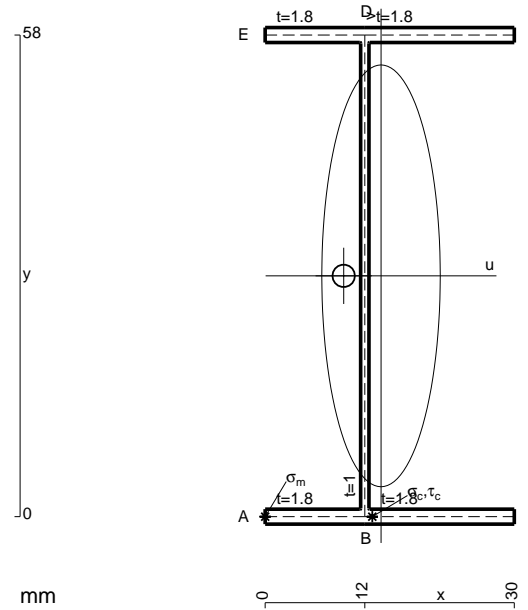


- A = 166. mm<sup>2</sup>
- J<sub>u</sub> = 107087. mm<sup>4</sup>
- J<sub>v</sub> = 8440. mm<sup>4</sup>
- J<sub>t</sub> = 136. mm<sup>4</sup>
- x<sub>o</sub> = -4.496 mm
- x<sub>g</sub> = 13.95 mm
- T<sub>y</sub> = 1710. N
- M<sub>x</sub> = -737438. Nmm
- u<sub>m</sub> = -13.95 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -199.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -1.952 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -199.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 110.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 8.335 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 101.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 3078. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 276.1 N/mm<sup>2</sup>



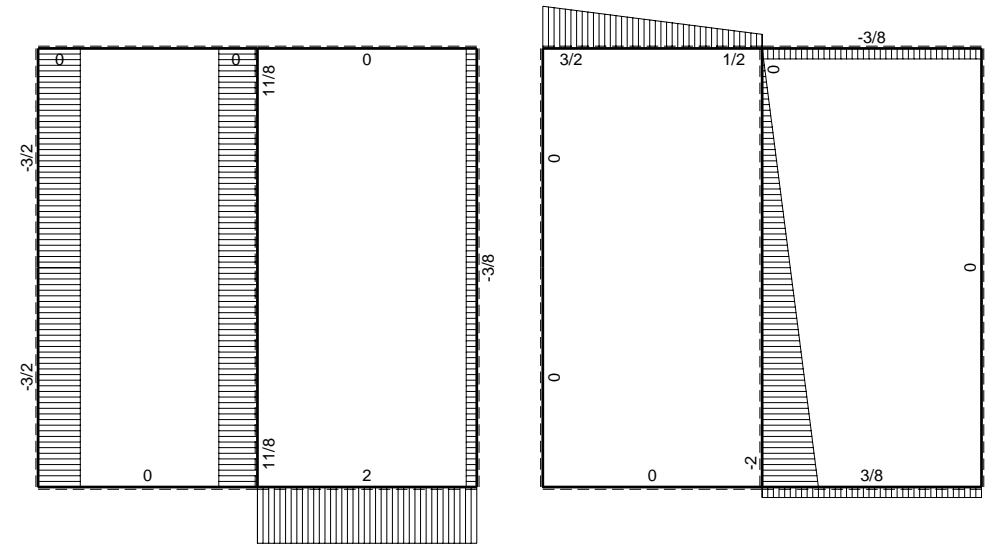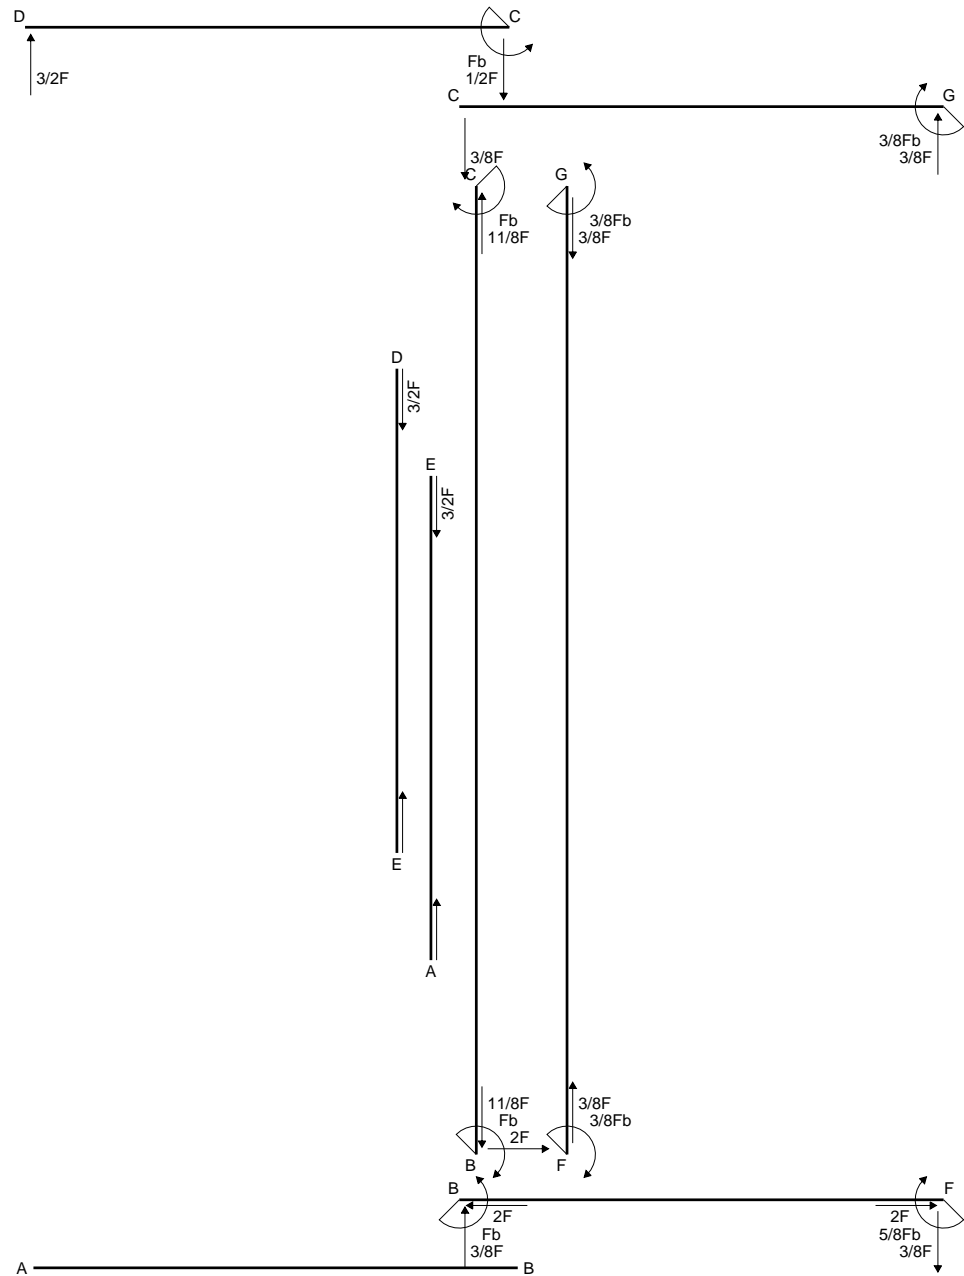


← ⊕ → F


↑ ⊕ ↓ F

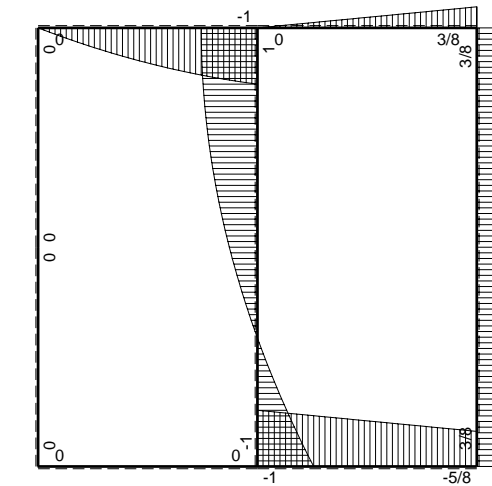


⊕ ⊖ F<sub>b</sub>

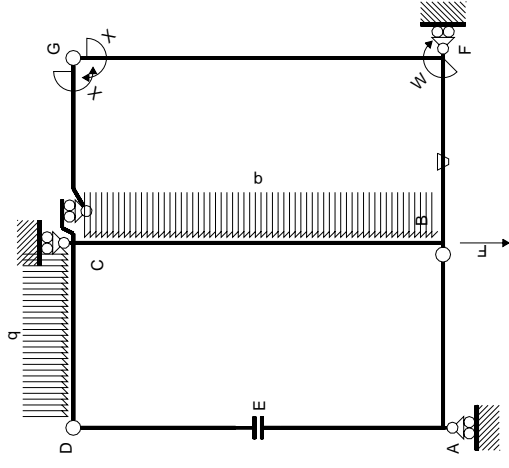

Schema di calcolo iperstatico

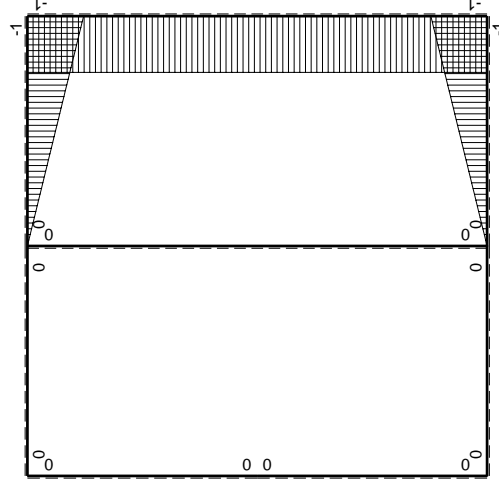

$M_x$ , flessione da iperstatica  $X=1$

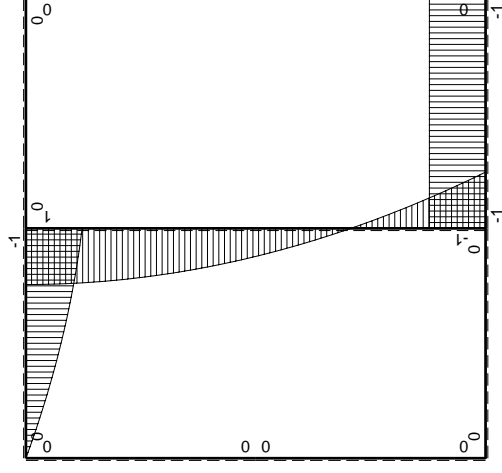

$M_0$ , flessione da carichi assegnati

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$ | $M_0(x)$               | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------------|--------|------------------------|----------|-----------|--------------|------------------|-----------------------------|---------------------|
| AB b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BA b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| CD b         | 0      | $-b+1/2Fx+1/2qx^2$     | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DC b         | 0      | $3/2Fx-1/2qx^2$        | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DE b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| ED b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| EA b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| AE b         | 0      | 0                      | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BF b         | -x/b   | -Fb                    | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FB b         | 1-x/b  | Fb                     | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| GC b         | -1+x/b | 0                      | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$          |
| CG b         | x/b    | 0                      | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$          |
| FG 2b        | -1     | 0                      | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b        | 1      | 0                      | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b        | 0      | $Fb-1/2qx^2$           | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BC 2b        | 0      | $Fb-2Fx+1/2qx^2$       | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| totali       |        |                        |          |           |              |                  |                             |                     |
|              |        | iperstatica $X=W_{gc}$ |          |           |              |                  |                             |                     |
|              |        | $Fb^2/EJ$              | $-3/8Fb$ |           |              |                  |                             |                     |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

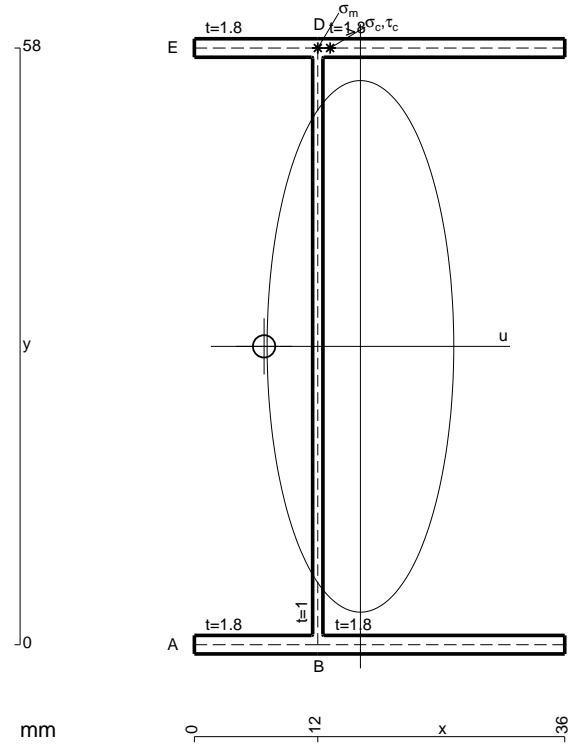


- A = 187.6 mm<sup>2</sup>
- J<sub>u</sub> = 125253. mm<sup>4</sup>
- J<sub>v</sub> = 15439. mm<sup>4</sup>
- J<sub>t</sub> = 159.3 mm<sup>4</sup>
- x<sub>o</sub> = -9.366 mm
- x<sub>g</sub> = 16.15 mm
- N = 1636. N
- T<sub>y</sub> = -2380. N
- M<sub>x</sub> = -868700. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = -4.145 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = -4.145 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 265.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.23 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>t/J<sub>t</sub> = 251.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 2142. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 504.9 N/mm<sup>2</sup>






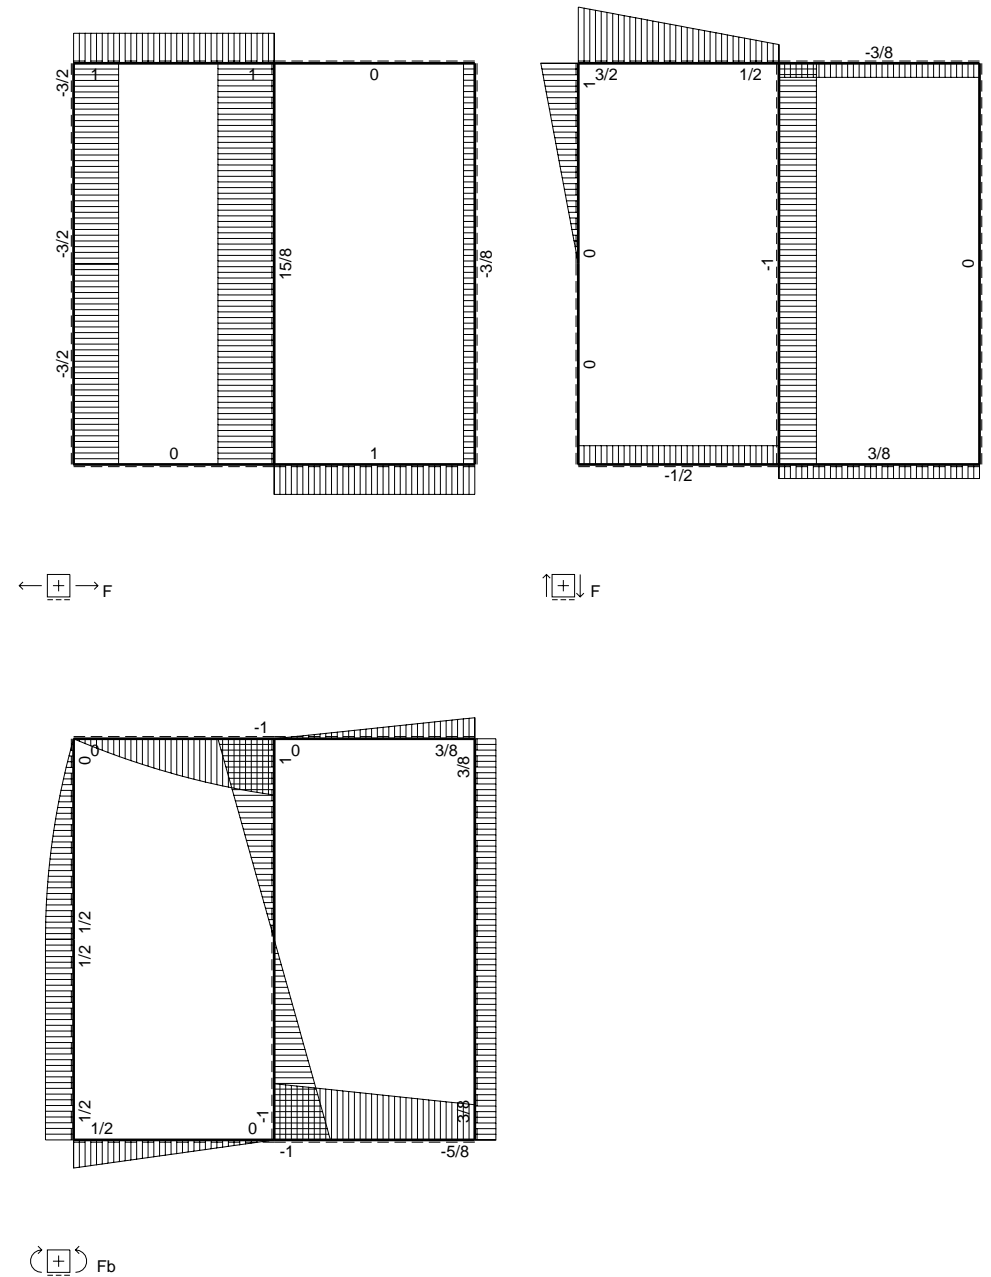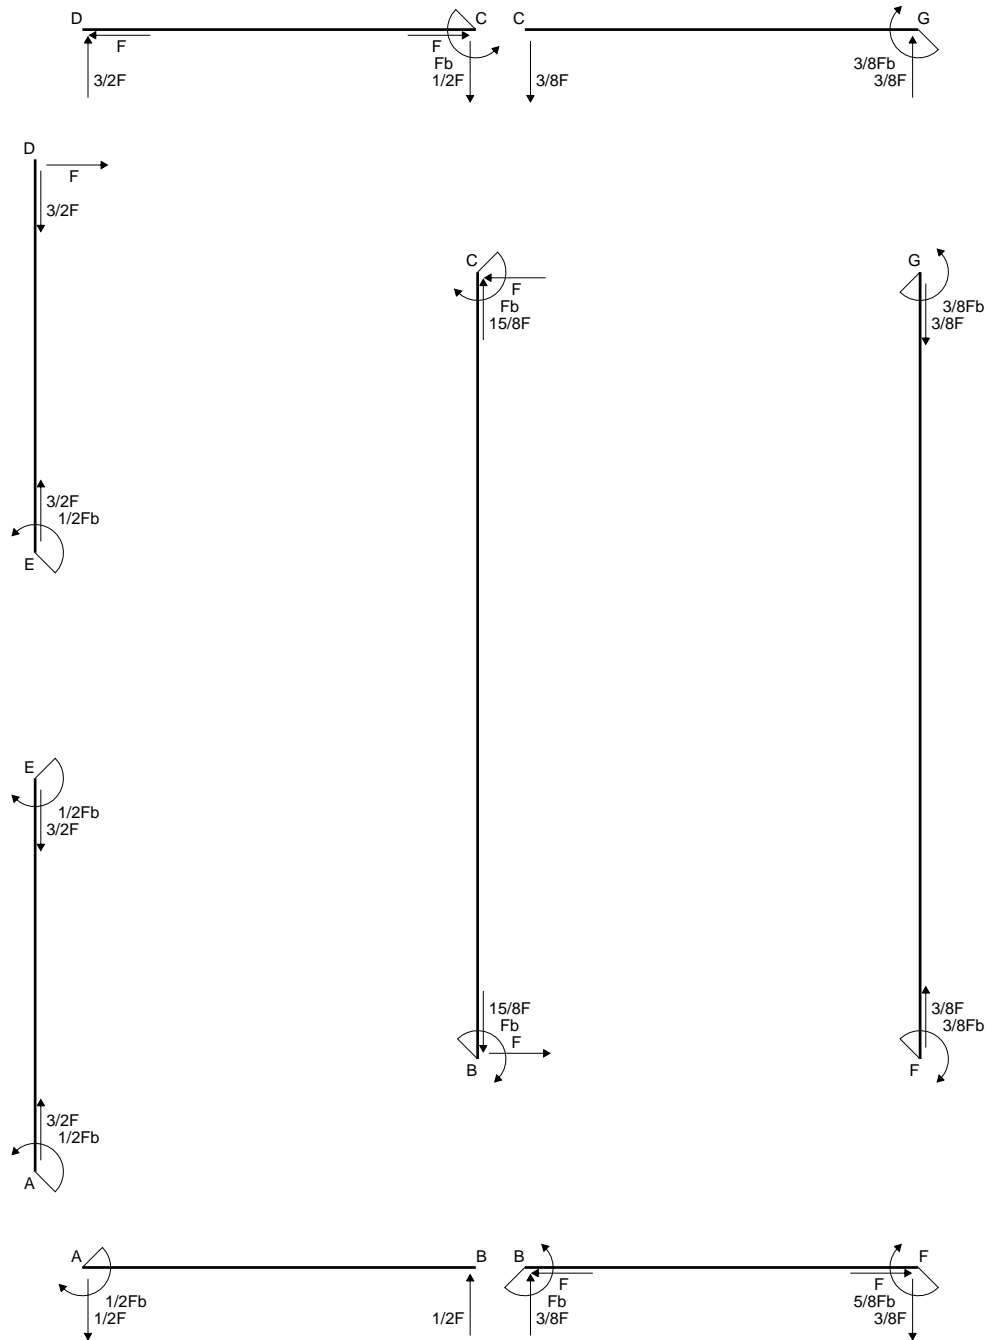

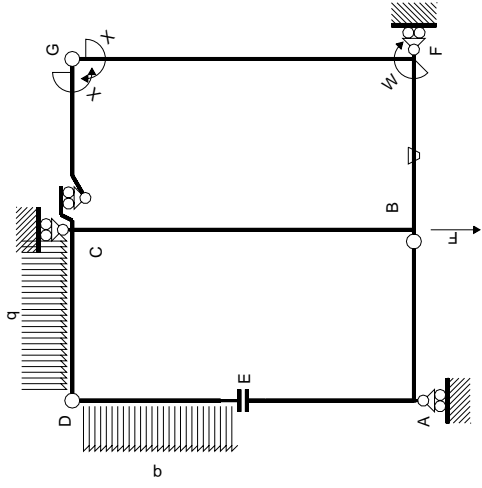

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

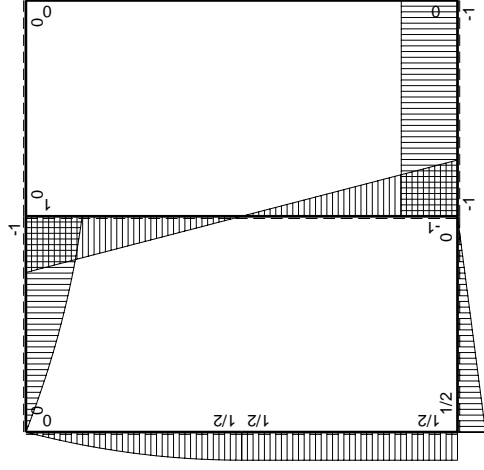

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$               | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|------------------------|----------|-----------|-----------------|--------------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fb - 1/2Fx$        | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx$               | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| CD b         | 0        | $-b + 1/2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| DC b         | 0        | $3/2Fx - 1/2qx^2$      | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| DE b         | 0        | $Fx - 1/2qx^2$         | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| ED b         | 0        | $-1/2Fb + 1/2qx^2$     | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| EA b         | 0        | $1/2Fb$                | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| AE b         | 0        | $-1/2Fb$               | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| BF b         | $-x/b$   | $-Fb$                  | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fx^2/b^2$         | $(1/2 + 1/2)Fb^2/EJ$            | $1/3xb/EJ$             |
| FBB b        | $1-x/b$  | $Fb$                   | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                      | 0        | 0         | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | $x/b$    | 0                      | 0        | 0         | 0               | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | 0                      | 0        | 0         | 0               | 1                  | 0+0                             | $2xb/EJ$               |
| GF 2b        | 1        | 0                      | 0        | 0         | 0               | 1                  | 0+0                             | $2xb/EJ$               |
| CB 2b        | 0        | $Fb-Fx$                | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| BC 2b        | 0        | $Fb-Fx$                | 0        | 0         | 0               | 0                  | 0+0                             | 0                      |
| totali       |          |                        |          |           |                 |                    |                                 | $8/3xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$






$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

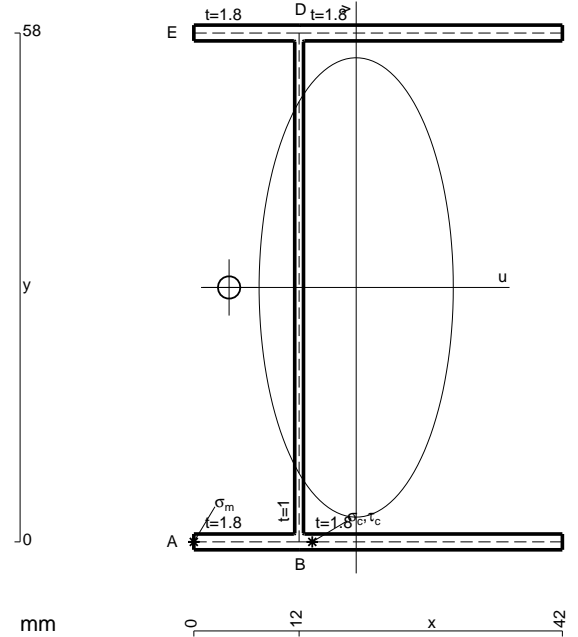


- A = 209.2 mm<sup>2</sup>
- J<sub>u</sub> = 143419. mm<sup>4</sup>
- J<sub>v</sub> = 25622. mm<sup>4</sup>
- J<sub>t</sub> = 182.6 mm<sup>4</sup>
- x<sub>o</sub> = -14.48 mm
- x<sub>g</sub> = 18.5 mm
- N = 2456. N
- T<sub>y</sub> = -1310. N
- M<sub>x</sub> = 1021800. Nmm
- u<sub>m</sub> = -18.5 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -6.505 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 195. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 7.947 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 187. N/mm<sup>2</sup>
- t<sub>c</sub> = 2358. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 402.1 N/mm<sup>2</sup>



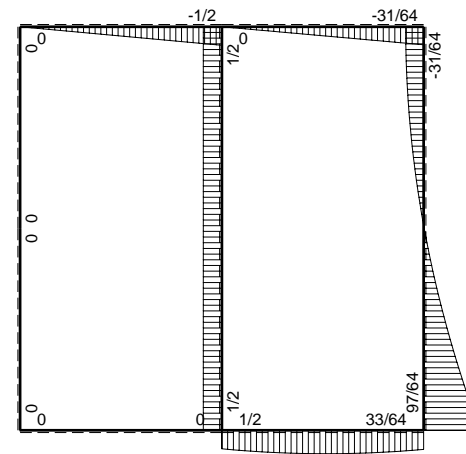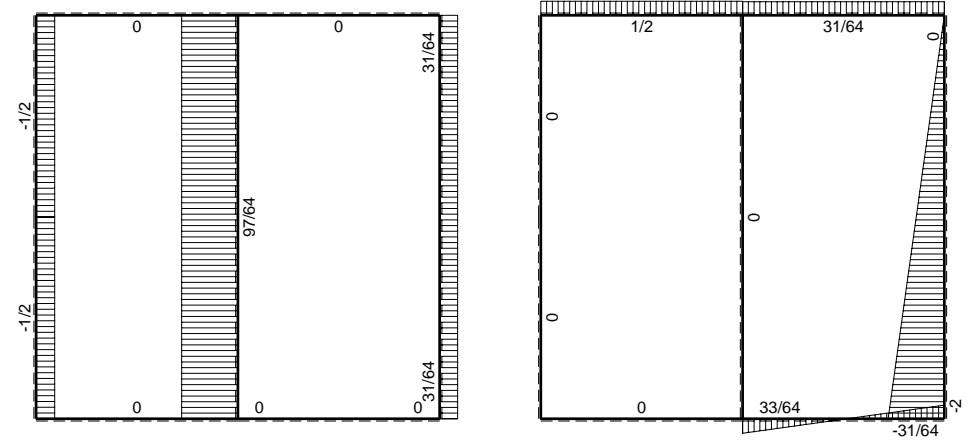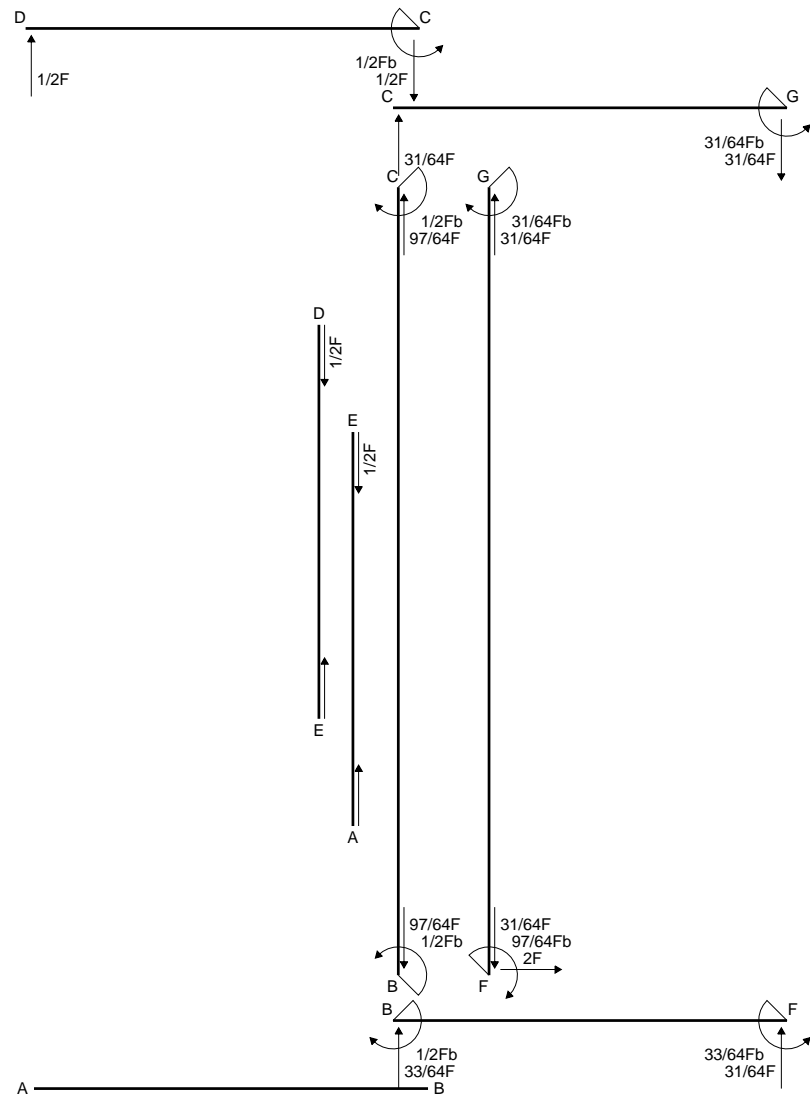

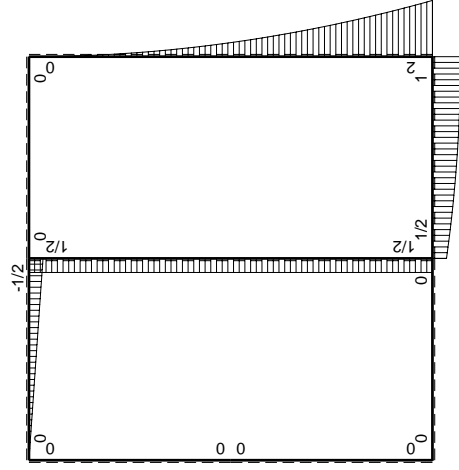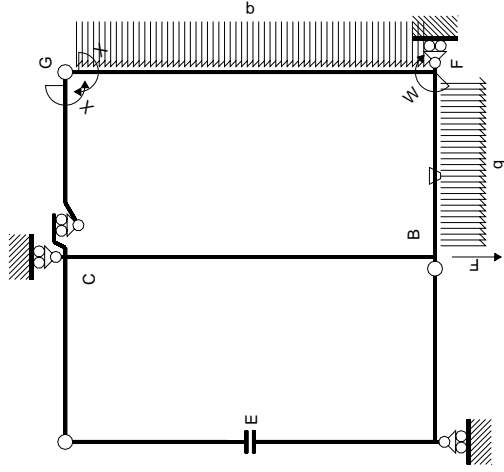

$M_0$  flessione da carichi assegnati

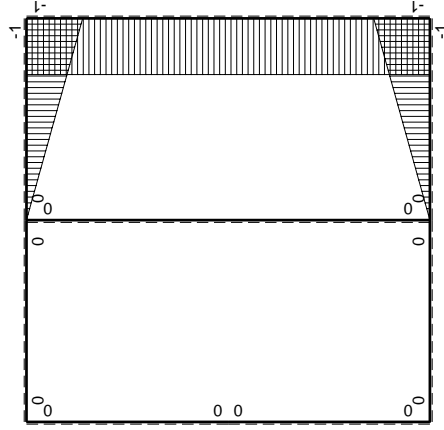

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | iperstatica $X=W_{gc}$ |          |                              |               |                  |                             |                     |          |
|--|----------|------------------------|----------|------------------------------|---------------|------------------|-----------------------------|---------------------|----------|
| $\rightarrow$                                    | $M^x(x)$ | $M^0(x)$               | $\theta$ | $M^x M_0$                    | $M^x \theta$  | $M^x M_x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M^0/EJdx$ |          |
| AB b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| BA b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| CD b   | 0        | $-1/2Fx+1/2Fx$         | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| DC b   | 0        | $1/2Fx$                | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| DE b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| EA b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| AE b   | 0        | 0                      | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| BF b   | $-x/b$   | $1/2Fb+Fx-1/2qx^2$     | $-Fb/EJ$ | $-1/2Fx-Fx^2/b+1/2qx^3/b$    | $Fx/EJ$       | $x^2/b^2$        | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$          | 1/3xb/EJ |
| FB b   | $1-x/b$  | $-Fb+1/2qx^2$          | $Fb/EJ$  | $-Fb+Fx+1/2Fx^2/b-1/2qx^3/b$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/1/24+1/2)Fb^2/EJ$      | $1/3xb/EJ$          | 1/3xb/EJ |
| GC b   | $-1+x/b$ | 0                      | 0        | 0                            | 0             | $1-2x/b+x^2/b^2$ | 0                           | 0                   | 0        |
| CG b   | $x/b$    | 0                      | 0        | 0                            | 0             | $x^2/b^2$        | 0                           | 0                   | 0        |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              | 2xb/EJ   |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$                 | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              | 2xb/EJ   |
| CB 2b  | 0        | $1/2Fb$                | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| BC 2b  | 0        | $-1/2Fb$               | 0        | 0                            | 0             | 0                | 0                           | 0                   | 0        |
| totali   |          |                        |          |                              |               |                  | $-31/24Fb^2/EJ$             | $8/3xb/EJ$          |          |
|  |          |                        |          |                              |               |                  | $31/64Fb$                   |                     |          |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

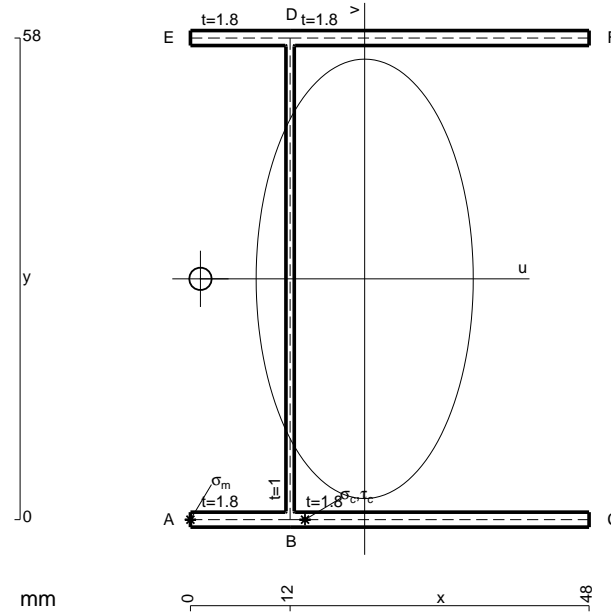

- A = 230.8 mm<sup>2</sup>
- J<sub>u</sub> = 161584. mm<sup>4</sup>
- J<sub>v</sub> = 39431. mm<sup>4</sup>
- J<sub>t</sub> = 206. mm<sup>4</sup>
- x<sub>o</sub> = -19.78 mm
- x<sub>g</sub> = 20.98 mm
- T<sub>y</sub> = 1560. N
- M<sub>x</sub> = -1279200. Nmm
- u<sub>m</sub> = -20.98 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -8.984 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 279.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.08 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 269.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 5616. mm
- σ<sub>o</sub> = √σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup> = 536.1 N/mm<sup>2</sup>






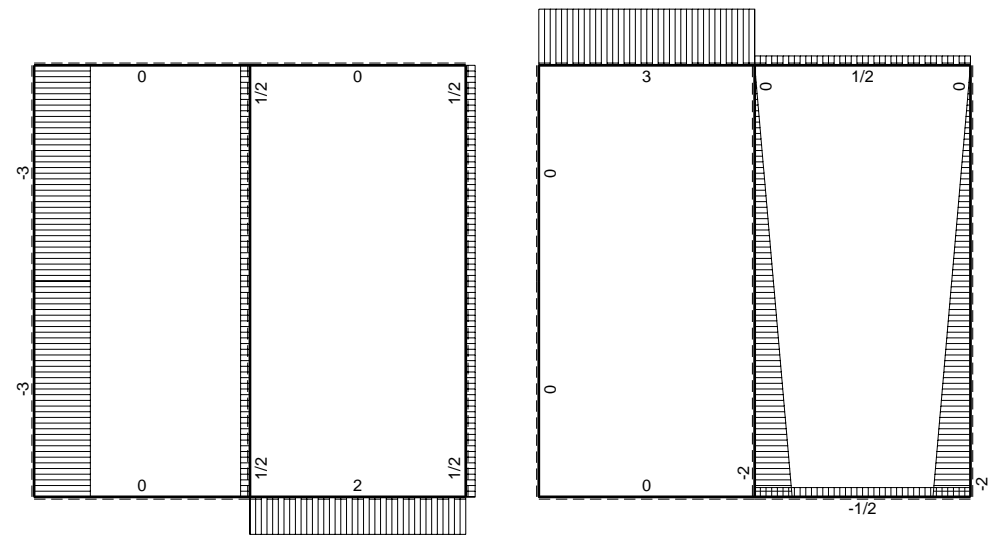
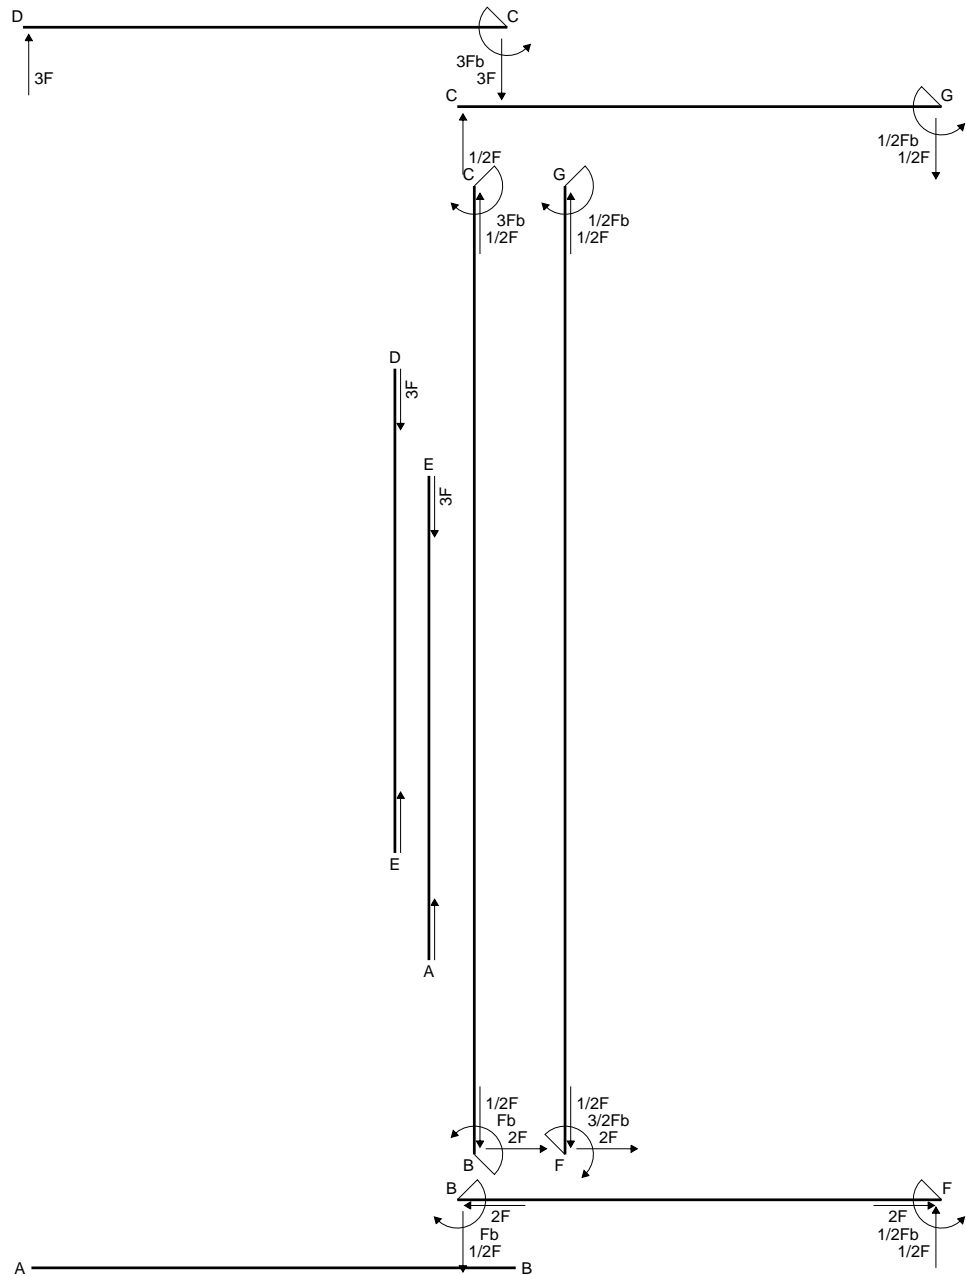


← ⊕ → F


↑ ⊕ ↓ F

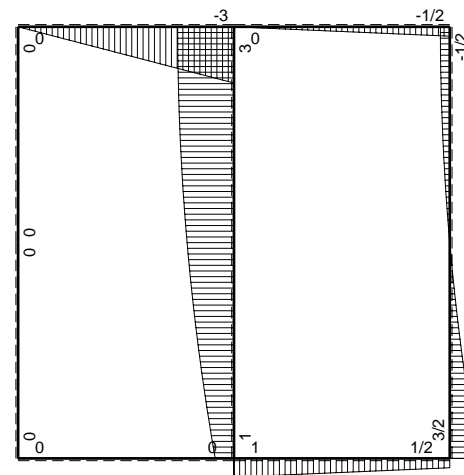

⊕ ⊖ Fb

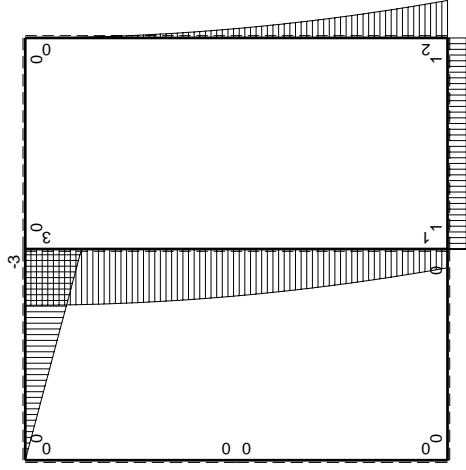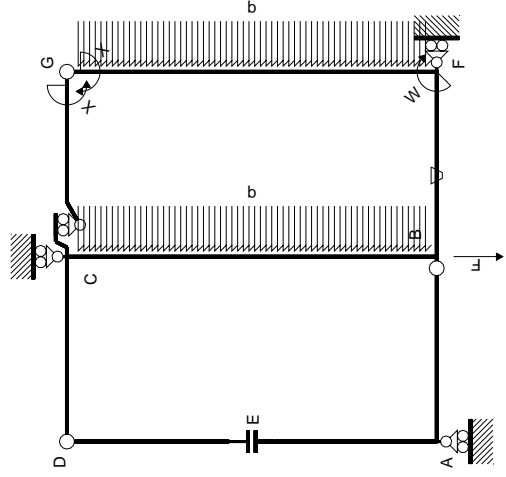

$M_0$  flessione da carichi assegnati

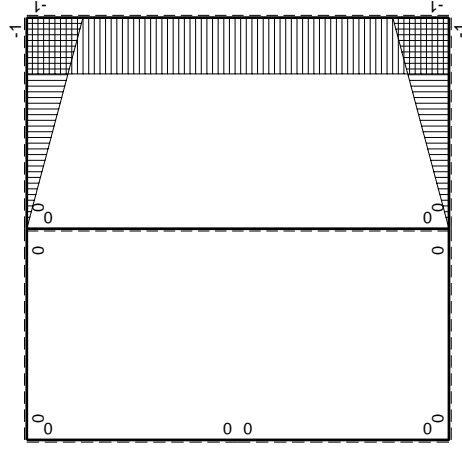

$M_x$  flessione da iperstatica  $X=1$

| ←     | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x(M_0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ | iperstatica $X=W_{gc}$ |         |
|-------|----------|-------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|------------------------|---------|
|       |          |                   |          |                      |               |                  |                             |                      | totali                 |         |
| AB b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| BA b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| CD b  | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| DC b  | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| DE b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| ED b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| EA b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| AE b  | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                    | 0                      | 0       |
| BF b  | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           | $1/3xb/EJ$             | $1/2Fb$ |
| FB b  | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           | $1/3xb/EJ$             | $1/2Fb$ |
| GC b  | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           | $1/3xb/EJ$             | 0       |
| CG b  | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           | $1/3xb/EJ$             | 0       |
| FG 2b | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             | $2xb/EJ$               | 0       |
| GF 2b | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             | $2xb/EJ$               | 0       |
| CB 2b | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0             | 0                | 0+0                         | $8/3xb/EJ$           | $8/3xb/EJ$             | 0       |
| BC 2b | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                         | $8/3xb/EJ$           | $8/3xb/EJ$             | 0       |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

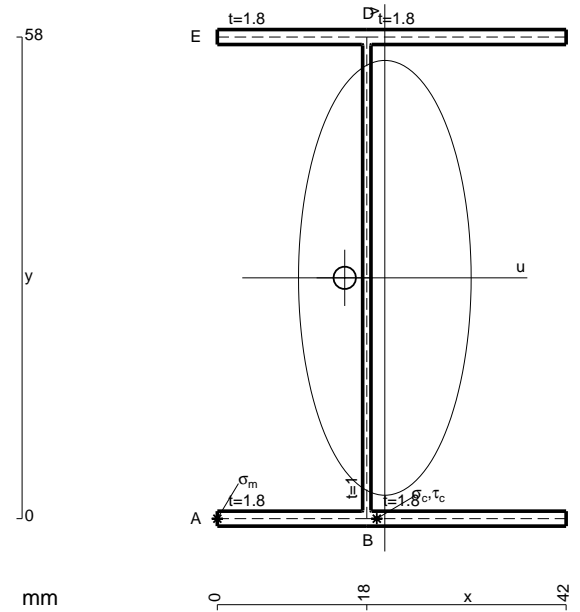


- A = 209.2 mm<sup>2</sup>
- J<sub>u</sub> = 143419. mm<sup>4</sup>
- J<sub>v</sub> = 22604. mm<sup>4</sup>
- J<sub>t</sub> = 182.6 mm<sup>4</sup>
- x<sub>o</sub> = -4.828 mm
- x<sub>g</sub> = 20.17 mm
- T<sub>y</sub> = 1350. N
- M<sub>x</sub> = -1174500. Nmm
- u<sub>m</sub> = -20.17 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -237.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -2.168 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -237.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 70.79 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 6.551 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 64.24 N/mm<sup>2</sup>
- t<sub>c</sub> = 810. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 267.3 N/mm<sup>2</sup>



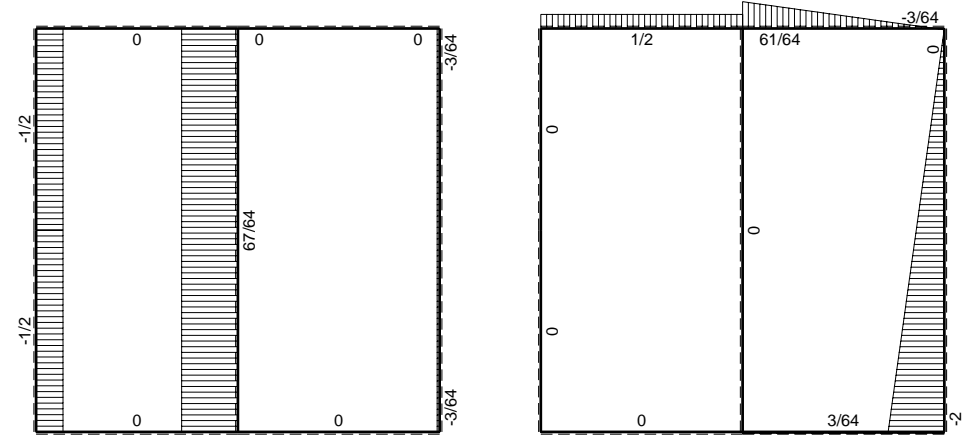
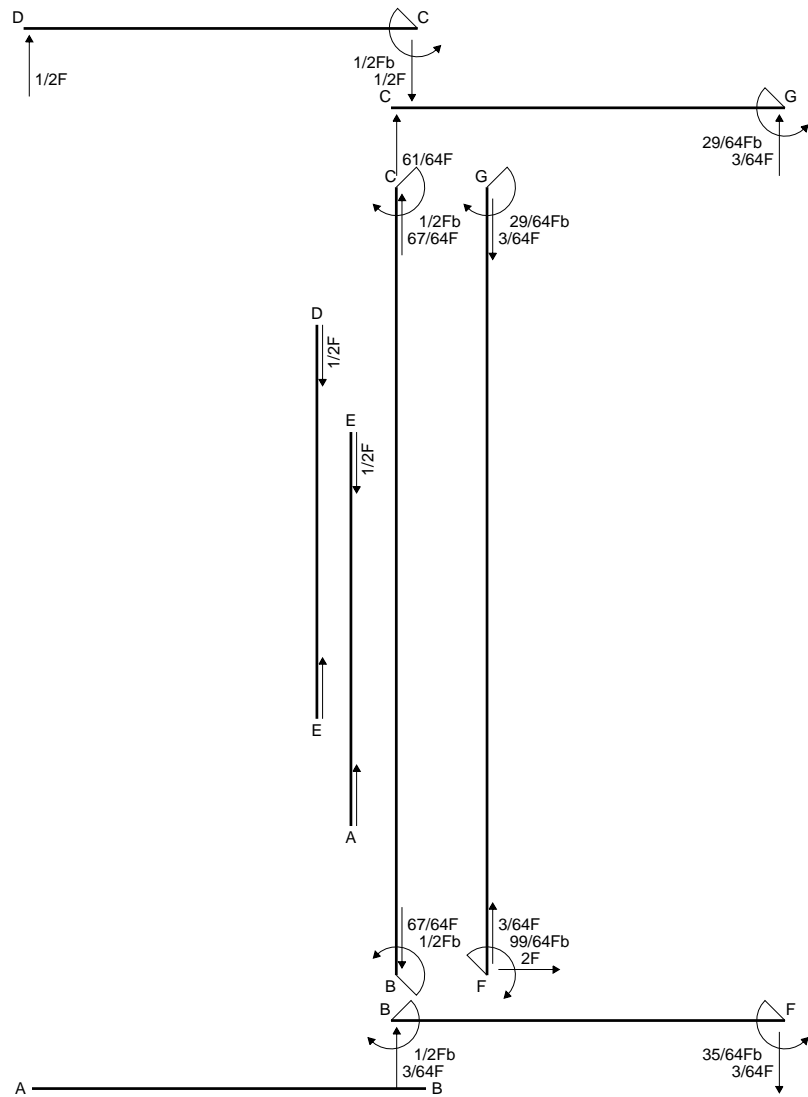


← ⊕ → F


↑ ⊕ ↓ F

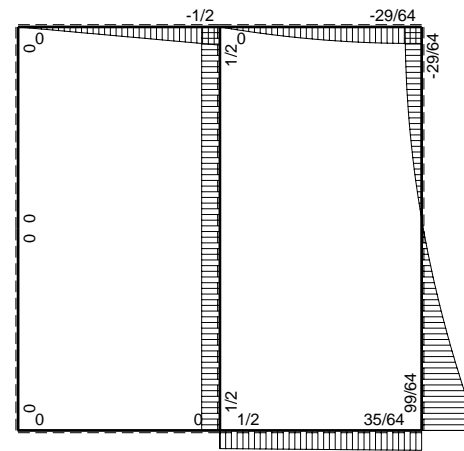

⊕ F<sub>b</sub>

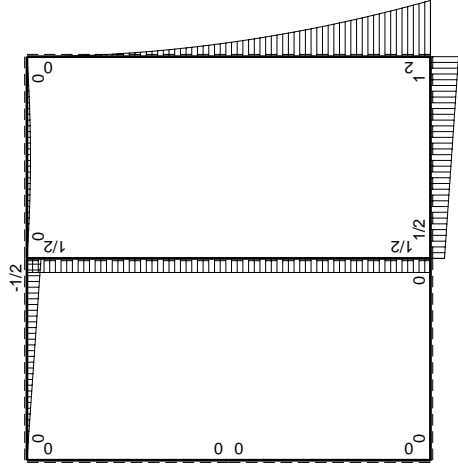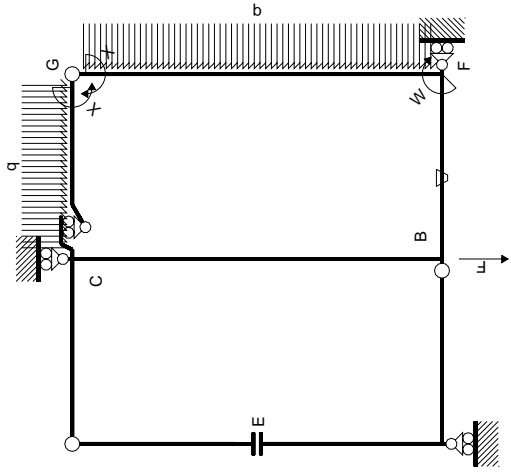

$M_0$  flessione da carichi assegnati

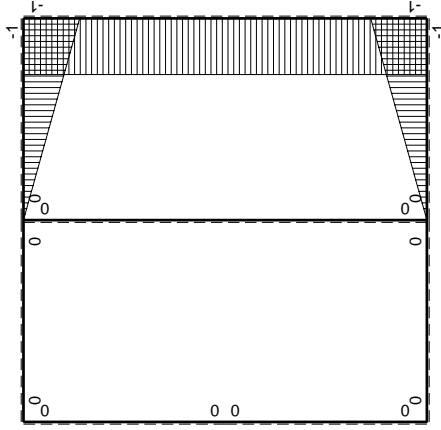

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | iperstatica $X=W_{gc}$ |          |                          |               |                  |                             |                      |
|--|----------|------------------------|----------|--------------------------|---------------|------------------|-----------------------------|----------------------|
| $\leftarrow$                                     | $M_x(x)$ | $M_0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
| AB b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BA b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| CD b   | 0        | $-1/2Fb+1/2Fx$         | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DC b   | 0        | $1/2Fx$                | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| DE b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| EA b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| AE b   | 0        | 0                      | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BF b   | $-x/b$   | $1/2Fb+1/2Fx$          | $-Fb/EJ$ | $-1/2Fx-1/2Fx^2/b$       | $Fx/EJ$       | $x^2/b^2$        | $(-5/12+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| FB b   | $1-x/b$  | $-Fb+1/2Fx$            | $Fb/EJ$  | $-Fb+3/2Fx-1/2Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b   | $-1+x/b$ | $-1/2Fx+1/2qx^2$       | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| CG b   | $x/b$    | $1/2Fx-1/2qx^2$        | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$     | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b  | 0        | $1/2Fb$                | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| BC 2b  | 0        | $-1/2Fb$               | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |
| totali   |          |                        |          |                          |               |                  | $-29/24Fb^2/EJ$             | $8/3xb/EJ$           |
|  |          |                        |          |                          |               |                  | $29/64Fb$                   |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{xo} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{xo} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{xo} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{xo} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{xo} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{xo} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

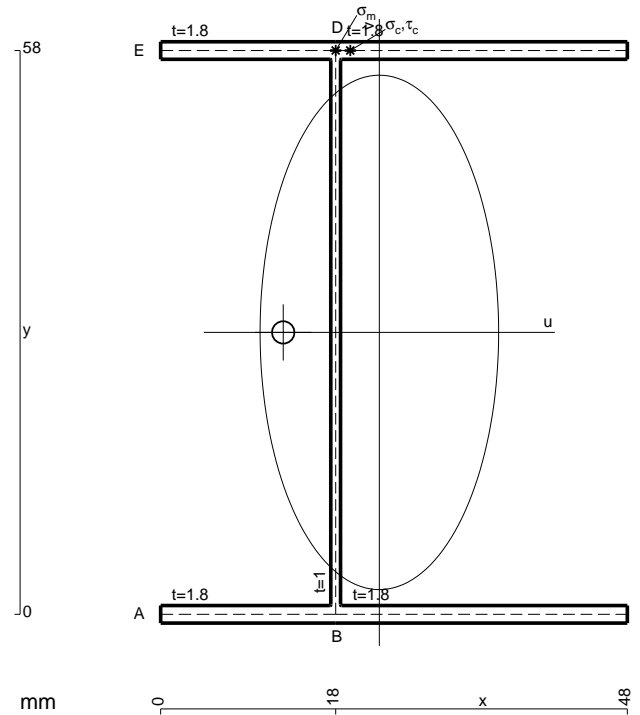

$$A = 230.8 \text{ mm}^2$$

$$J_u = 161584. \text{ mm}^4$$

$$J_v = 34741. \text{ mm}^4$$

$$J_t = 206. \text{ mm}^4$$

$$x_o = -9.888 \text{ mm}$$

$$y_g = 22.49 \text{ mm}$$

$$T_y = 2420. \text{ N}$$

$$M_x = -1113200. \text{ Nmm}$$

$$x_m = 18. \text{ mm}$$

$$y_m = 58. \text{ mm}$$

$$u_m = -4.492 \text{ mm}$$

$$v_m = 29. \text{ mm}$$

$$\sigma_m = -Mv/J_u = 199.8 \text{ N/mm}^2$$

$$x_c = 18. \text{ mm}$$

$$y_c = 58. \text{ mm}$$

$$u_c = -4.492 \text{ mm}$$

$$v_c = 29. \text{ mm}$$

$$\sigma_c = -Mv/J_u = 199.8 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 222.2 \text{ N/mm}^2$$

$$\tau_g = TS^*/J_u = 13.03 \text{ N/mm}^2$$




$$\tau_o = Tx_o/J_t = 209.1 \text{ N/mm}^2$$

$$t_c = 8712. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 433.6 \text{ N/mm}^2$$






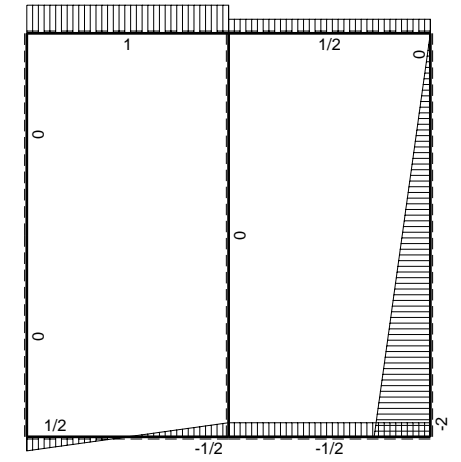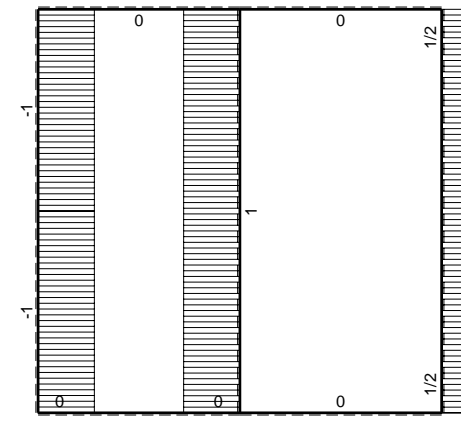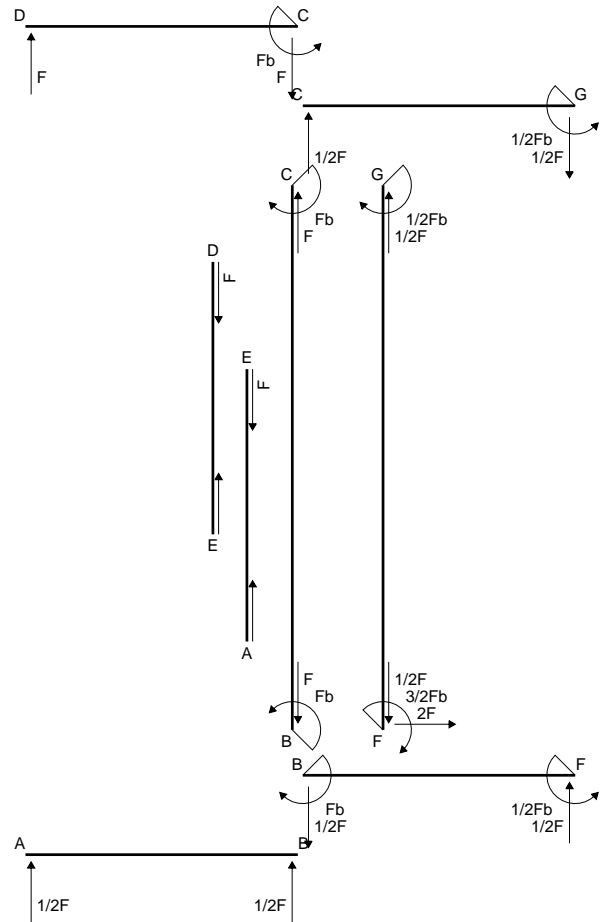

← ⊕ → F

↑ ⊕ ↓ F

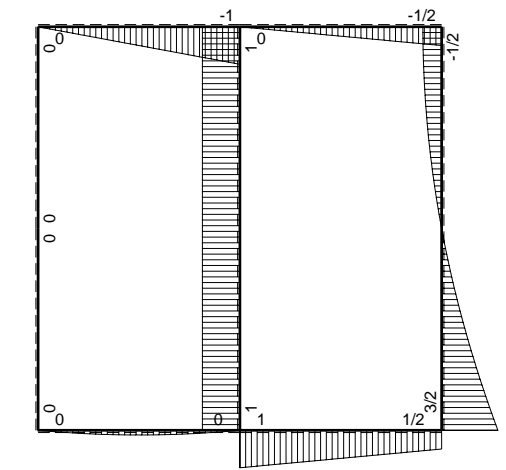

⊕ ⊖ F<sub>b</sub>



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

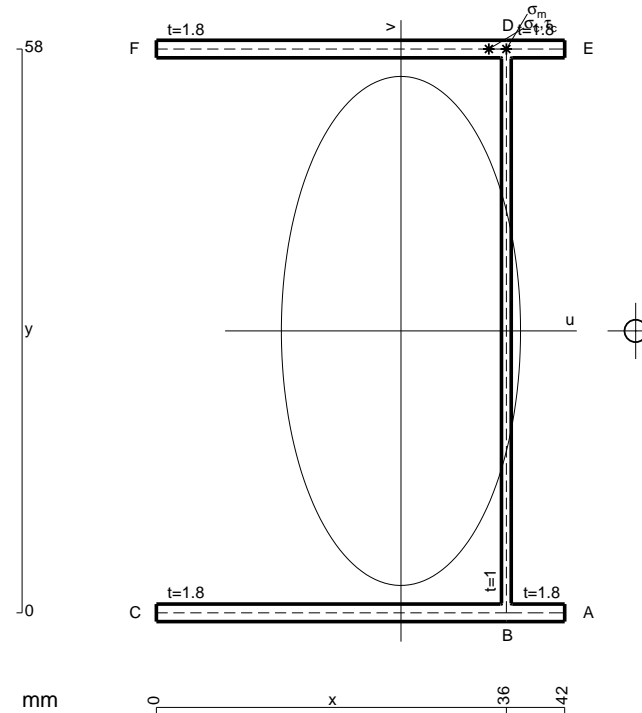


- A = 209.2 mm<sup>2</sup>
- J<sub>u</sub> = 143419. mm<sup>4</sup>
- J<sub>v</sub> = 31658. mm<sup>4</sup>
- J<sub>t</sub> = 182.6 mm<sup>4</sup>
- x<sub>o</sub> = 24.14 mm
- x<sub>g</sub> = 25.16 mm
- T<sub>y</sub> = 2070. N
- M<sub>x</sub> = -1035000. Nmm
- x<sub>m</sub> = 36. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 10.84 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 209.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 10.84 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 209.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 507.6 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS'/tJ<sub>u</sub> = 15.07 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 492.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 3726. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 903.7 N/mm<sup>2</sup>



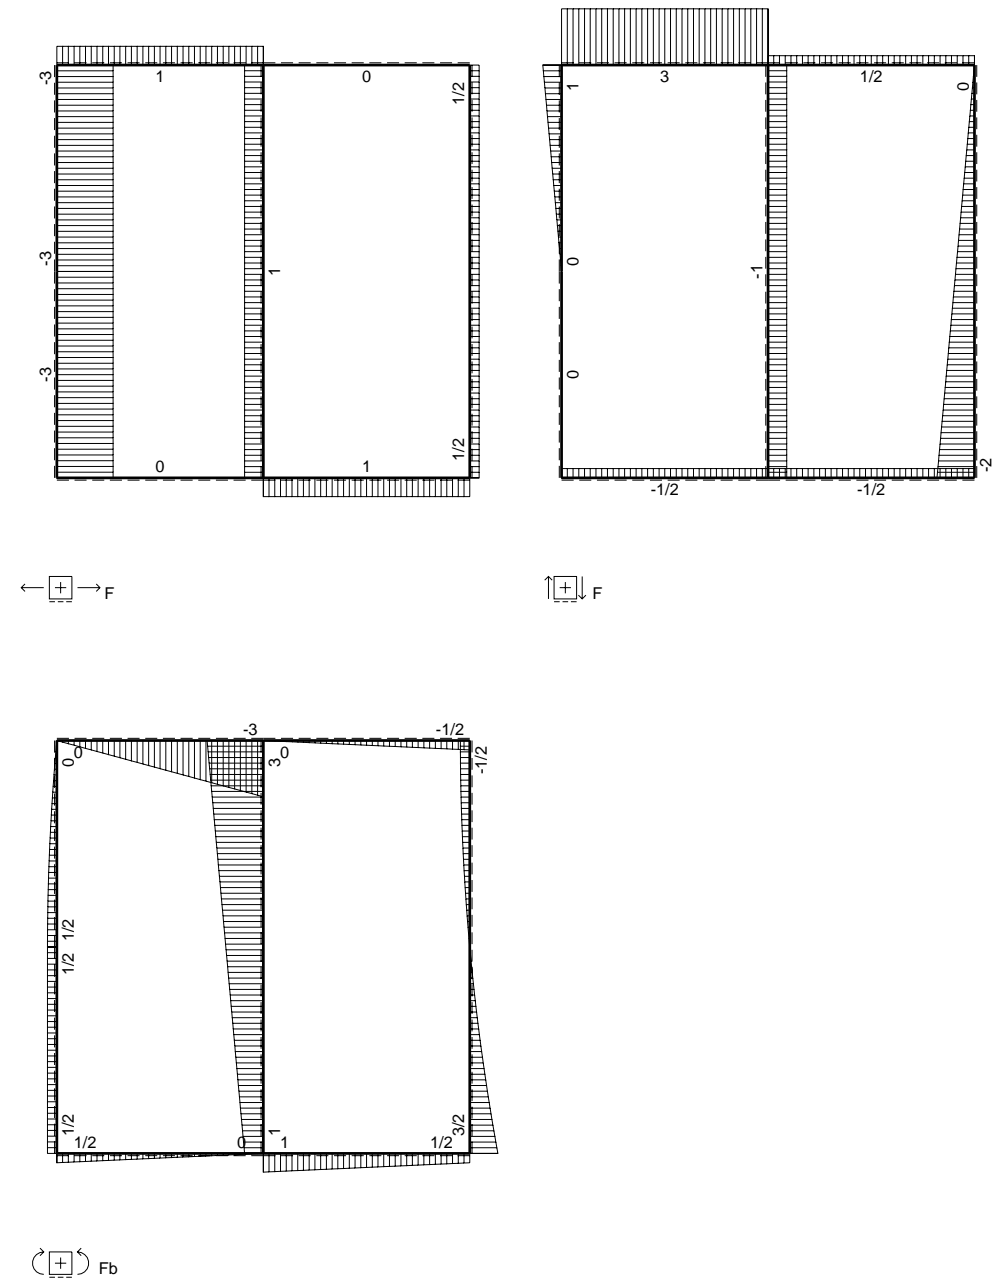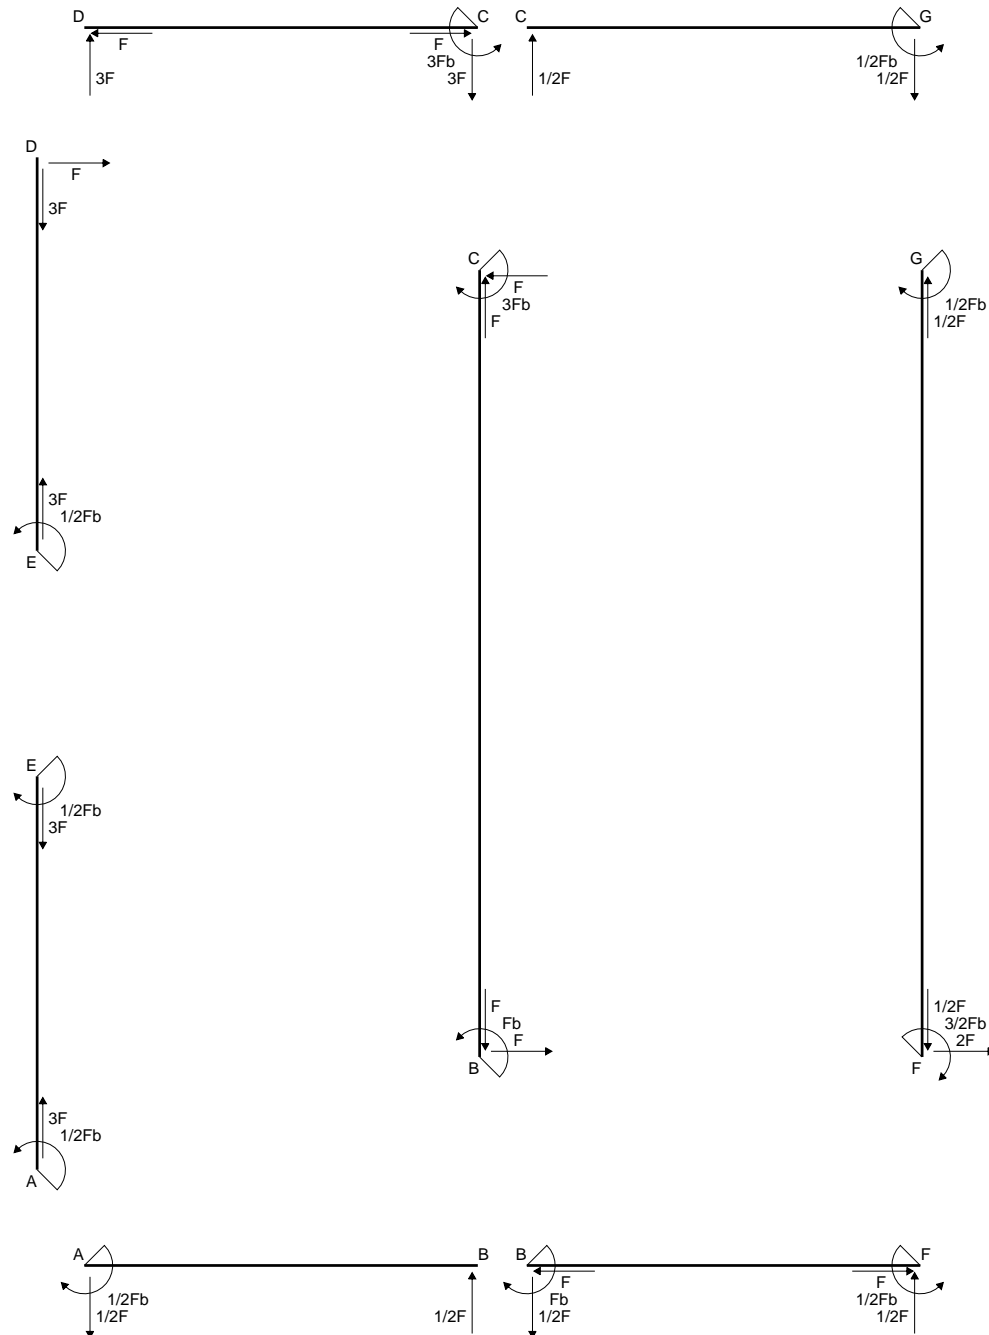

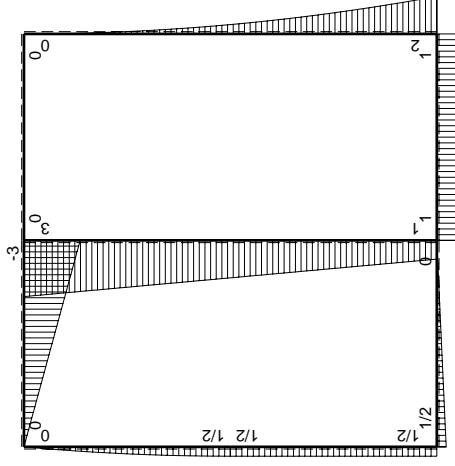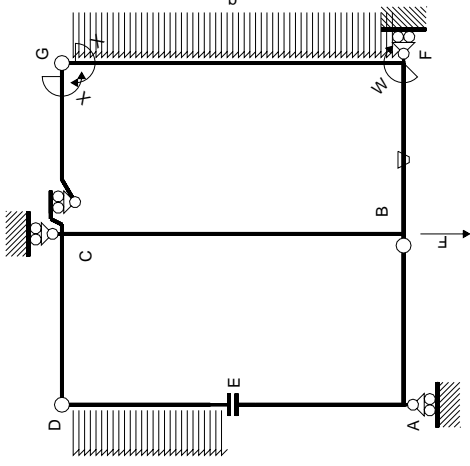

$M_0$  flessione da carichi assegnati

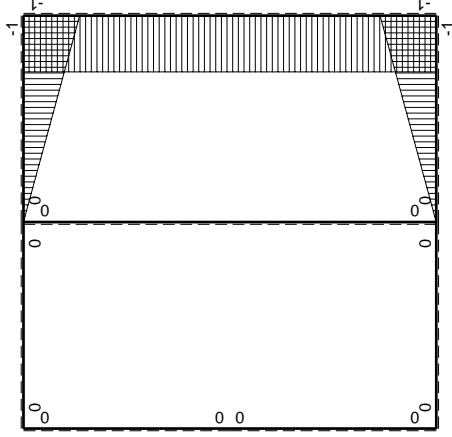

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^0(x)$ | $M^0(x)$              | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E J dx$ |
|---------------|----------|-----------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-------------------------|
| AB b          | 0        | $1/2Fb - 1/2Fx$       | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| BA b          | 0        | $-1/2Fx$              | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| DC b          | 0        | $3Fx$                 | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| DE b          | 0        | $Fx - 1/2qx^2$        | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| ED b          | 0        | $-1/2Fb + 1/2qx^2$    | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| EA b          | 0        | $1/2Fb$               | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| AE b          | 0        | $-1/2Fb$              | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| BF b          | $-x/b$   | $Fb$                  | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$              |
| FB b          | $1-x/b$  | $-Fb$                 | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$              |
| GC b          | $-1+x/b$ | 0                     | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$              |
| CG b          | $x/b$    | 0                     | 0        | 0                        | 0               | $x^2/b^2$            | 0+0                             | $1/3xb/EJ$              |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$ | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$                |
| GF 2b         | 1        | $-1/2qx^2$            | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$                |
| CB 2b         | 0        | $3Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| BC 2b         | 0        | $-Fb - Fx$            | 0        | 0                        | 0               | 0                    | 0+0                             | 0                       |
| totali        |          |                       |          |                          |                 |                      | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$              |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

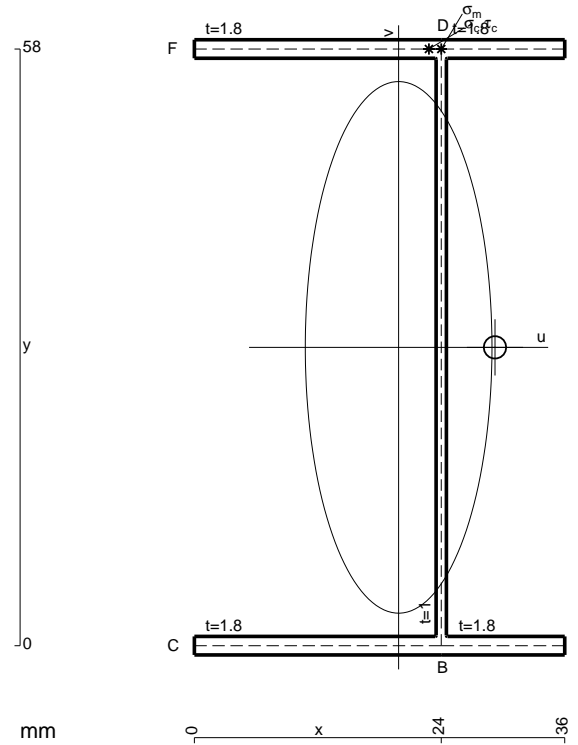



- A = 187.6 mm<sup>2</sup>
- J<sub>u</sub> = 125253. mm<sup>4</sup>
- J<sub>v</sub> = 15439. mm<sup>4</sup>
- J<sub>t</sub> = 159.3 mm<sup>4</sup>
- x<sub>o</sub> = 9.366 mm
- x<sub>g</sub> = 19.85 mm
- N = 560. N
- T<sub>y</sub> = 1680. N
- M<sub>x</sub> = -924000. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 4.145 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 216.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 4.145 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 216.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 187.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.335 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 177.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1008. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 390. N/mm<sup>2</sup>






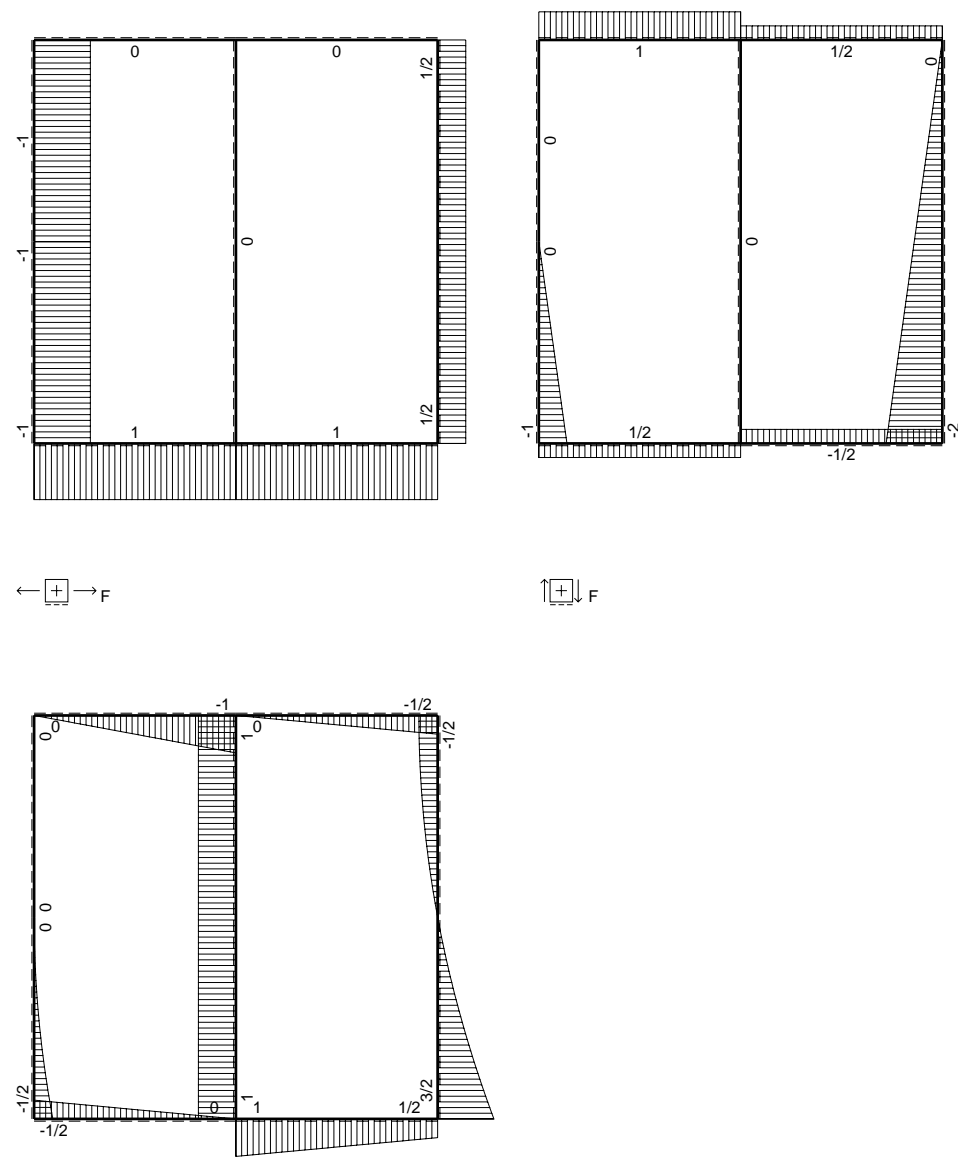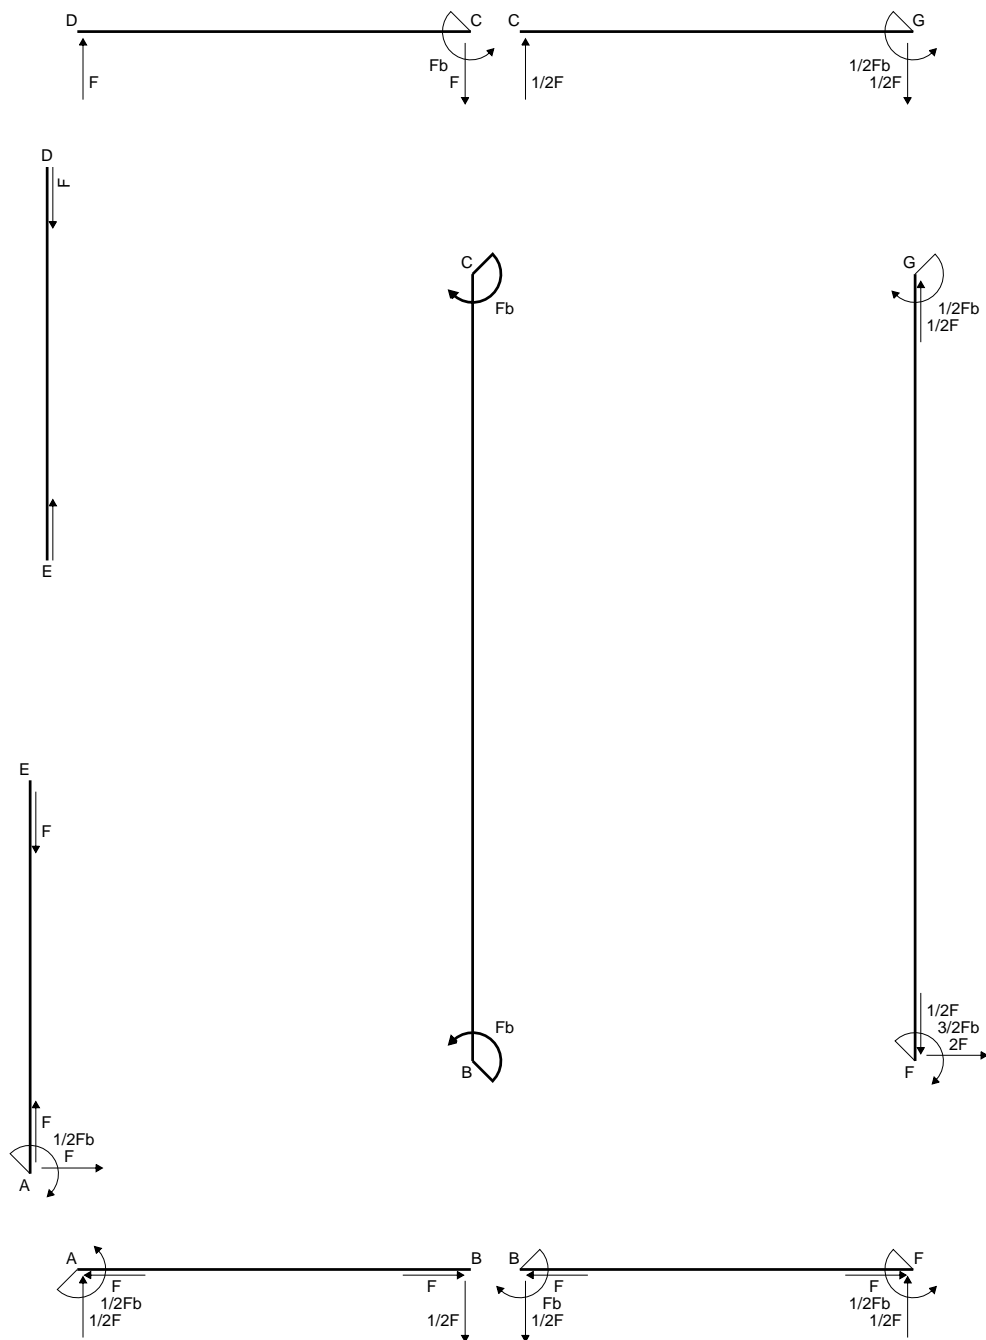

⊕ F<sub>b</sub>

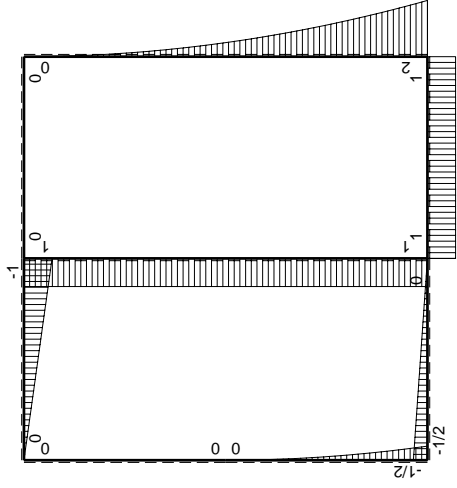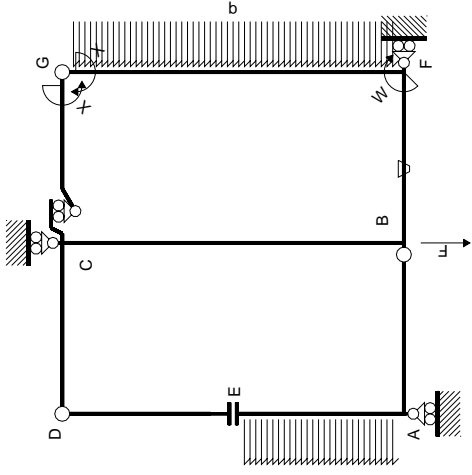

$M_0$  flessione da carichi assegnati

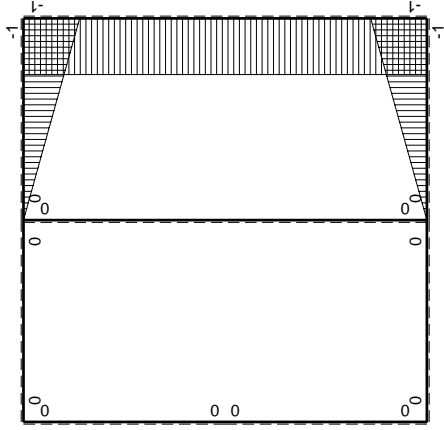

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|--------------|----------|------------------------|----------|--------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b         | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BA b         | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| CD b         | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| DC b         | 0        | $Fx$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| ED b         | 0        | 0                      | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| EAB          | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BAE b        | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BF b         | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$          | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b         | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fx + Fx$               | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b         | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b         | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$            |
| FG 2b        | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b        | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b        | 0        | $Fb$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BC 2b        | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| totali       |          |                        |          |                          |                 |                    | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$





$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

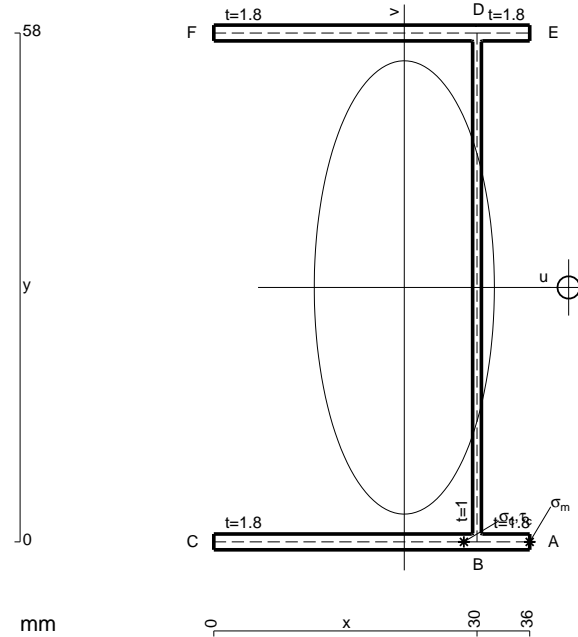


- A = 187.6 mm<sup>2</sup>
- J<sub>u</sub> = 125253. mm<sup>4</sup>
- J<sub>v</sub> = 19767. mm<sup>4</sup>
- J<sub>t</sub> = 159.3 mm<sup>4</sup>
- x<sub>o</sub> = 18.73 mm
- x<sub>g</sub> = 21.71 mm
- T<sub>y</sub> = 1680. N
- M<sub>x</sub> = -991200. Nmm
- x<sub>m</sub> = 36. mm
- u<sub>m</sub> = 14.29 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 8.29 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 367.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.67 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 355.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 3024. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 676.2 N/mm<sup>2</sup>



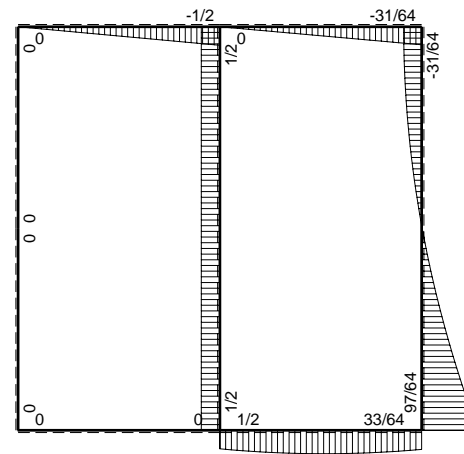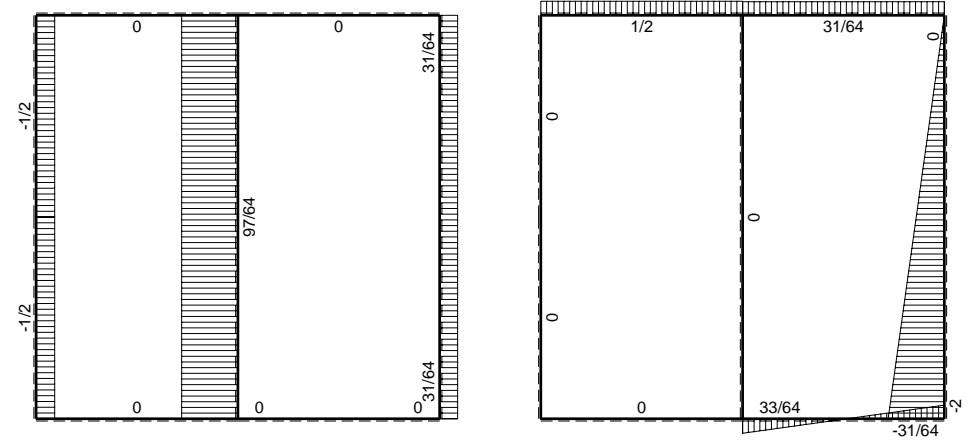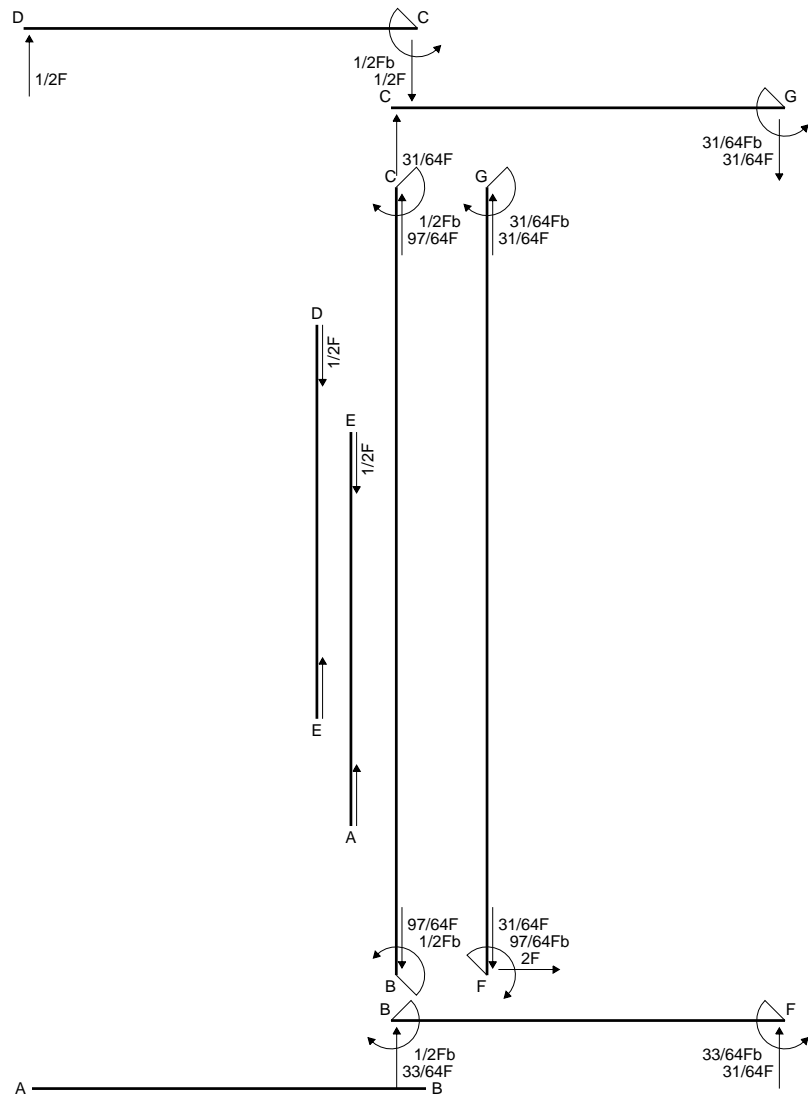

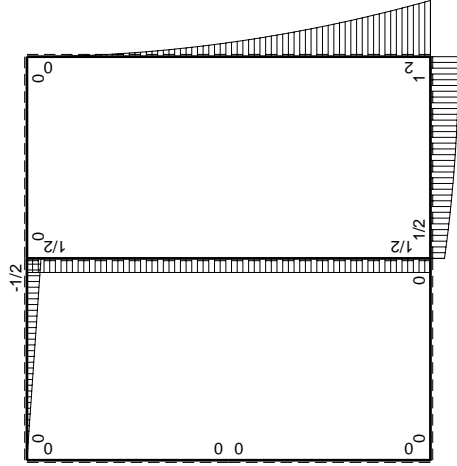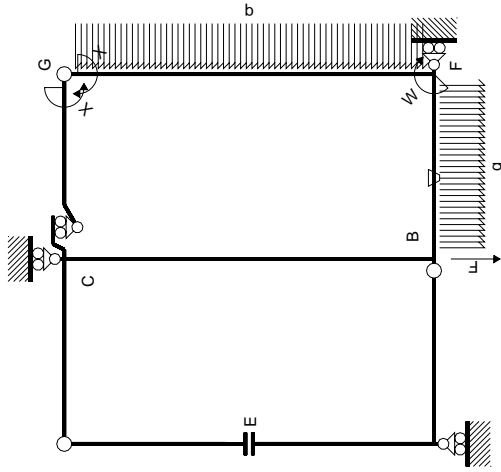

$M_0$  flessione da carichi assegnati

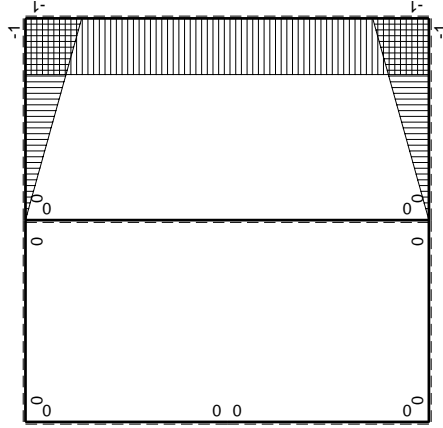

$M_x$  flessione da iperstatica X=1

| ←      | $M^x(x)$ | $M^0(x)$                    | $\theta$ | $M^x M_0$  | $M^x \theta$ | $M^x M_x$                             | $\int M^x (M^0/EJ + \theta) dx$  | $\int M^x M_x / EJ dx$ | iperstatica X=W <sup>gc</sup> |                             |  |
|--------|----------|-----------------------------|----------|--|--------------|---------------------------------------|----------------------------------|------------------------|-------------------------------|-----------------------------|--|
|        |          |                             |          |  |              |                                       |                                  |                        | totali                        | 31/64Fb                     |  |
| AB b   | 0        | 0                           | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| BA b   | 0        | 0                           | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| CD b   | 0        | -1/2Fx                      | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| DC b   | 0        | 1/2Fx                       | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| DE b   | 0        | 0                           | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| EA b   | 0        | 0                           | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| AE b   | 0        | 0                           | 0        | 0  | 0            | 0                                     | 0                                | 0                      | 0                             | 0                           |  |
| BF b   | -x/b     | 1/2Fb+Fx-1/2qx <sup>2</sup> | -Fb/EJ   | -1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b    | Fx/EJ        | x <sup>2</sup> /b <sup>2</sup>        | (-1/1/24+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ               | 1-x/b                         | 1/2Fb+Fx-1/2qx <sup>2</sup> |  |
| FB b   | 1-x/b    | -Fb+1/2qx <sup>2</sup>      | Fb/EJ    | -Fb+Fx+1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b | Fb/EJ-Fx/EJ  | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (-1/1/24+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ               | 1-x/b                         | -Fb+1/2qx <sup>2</sup>      |  |
| GC b   | -1+x/b   | 0                           | 0        | 0  | 0            | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                              | 1/3xb/EJ               | -1+x/b                        | 0                           |  |
| CG b   | x/b      | 0                           | 0        | 0  | 0            | x <sup>2</sup> /b <sup>2</sup>        | 0+0                              | 1/3xb/EJ               | x/b                           | 0                           |  |
| FG 2b  | -1       | 2Fb-2Fx+1/2qx <sup>2</sup>  | 0        | -2Fb+2Fx-1/2Fx <sup>2</sup> /b                     | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ                 | -1                            | 2Fb-2Fx+1/2qx <sup>2</sup>  |  |
| GF 2b  | 1        | -1/2qx <sup>2</sup>         | 0        | -1/2Fx <sup>2</sup> /b                             | 0            | 1                                     | (-4/3+0)Fb <sup>2</sup> /EJ      | 2xb/EJ                 | 1                             | -1/2qx <sup>2</sup>         |  |
| CB 2b  | 0        | 1/2Fb                       | 0        | 0  | 0            | 0                                     | 0+0                              | 8/3xb/EJ               | 0                             | 1/2Fb                       |  |
| BC 2b  | 0        | -1/2Fb                      | 0        | 0  | 0            | 0                                     | 0+0                              | 8/3xb/EJ               | 0                             | -1/2Fb                      |  |
| totali |          |                             |          |  |              |                                       |                                  |                        |                               |                             |  |
|        |          |                             |          |  |              |                                       |                                  |                        |                               |                             |  |

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/24 Fb^2/EJ$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

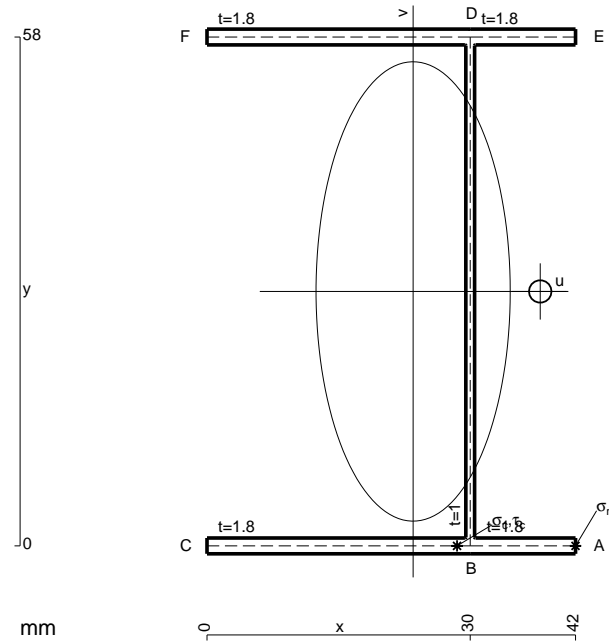


- A = 209.2 mm<sup>2</sup>
- J<sub>u</sub> = 143419. mm<sup>4</sup>
- J<sub>v</sub> = 25622. mm<sup>4</sup>
- J<sub>t</sub> = 182.6 mm<sup>4</sup>
- x<sub>o</sub> = 14.48 mm
- x<sub>g</sub> = 23.5 mm
- T<sub>y</sub> = 1850. N
- M<sub>x</sub> = -1184000. Nmm
- x<sub>m</sub> = 42. mm
- u<sub>m</sub> = 18.5 mm
- v<sub>m</sub> = -29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -239.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 6.505 mm
- v<sub>c</sub> = -29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -239.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 275.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.22 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 264.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 6660. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 533.6 N/mm<sup>2</sup>






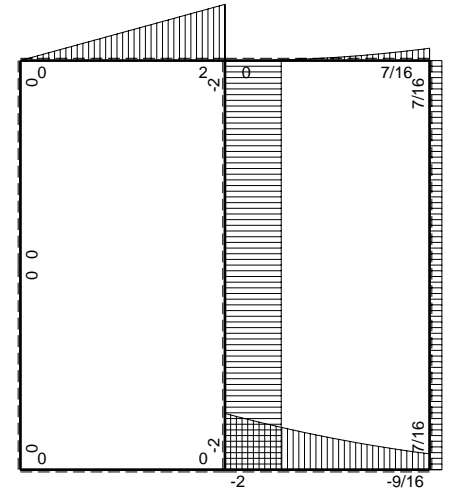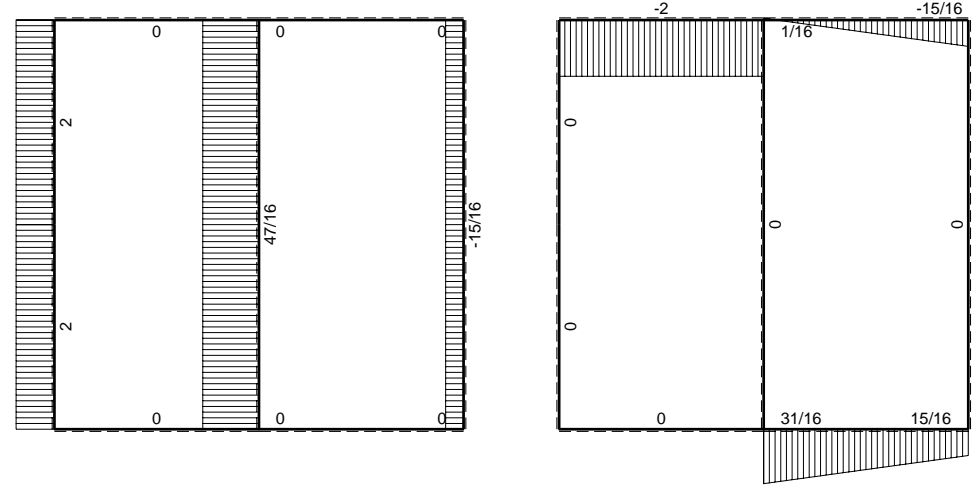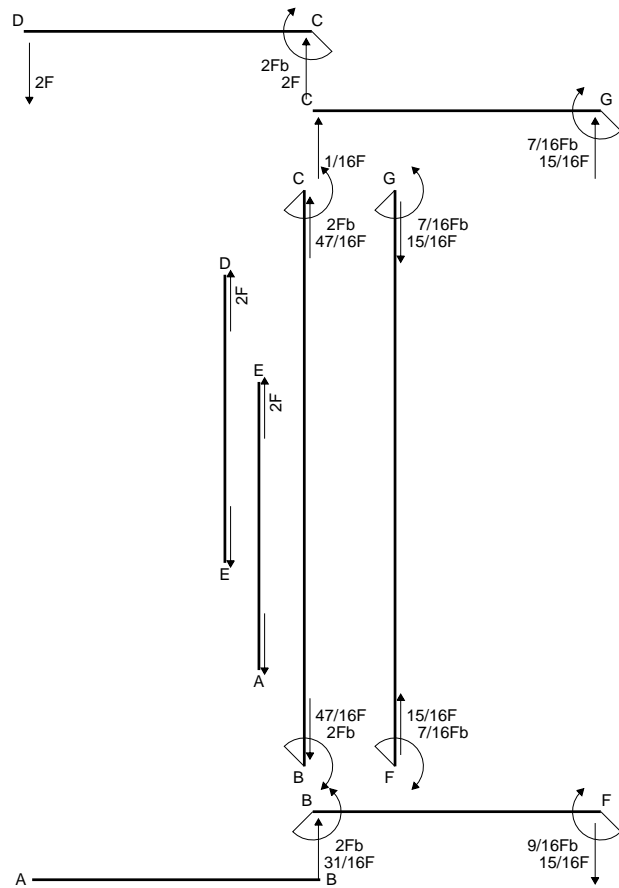


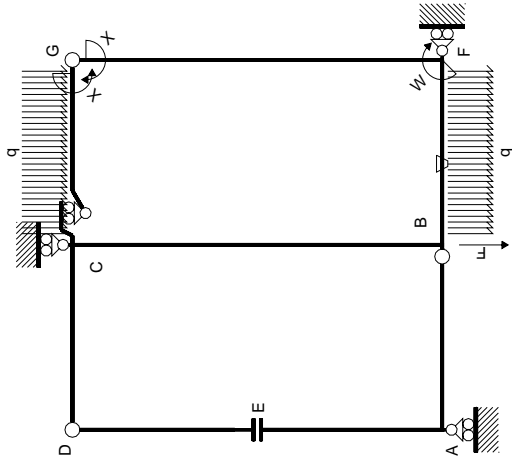

Schema di calcolo iperstatico

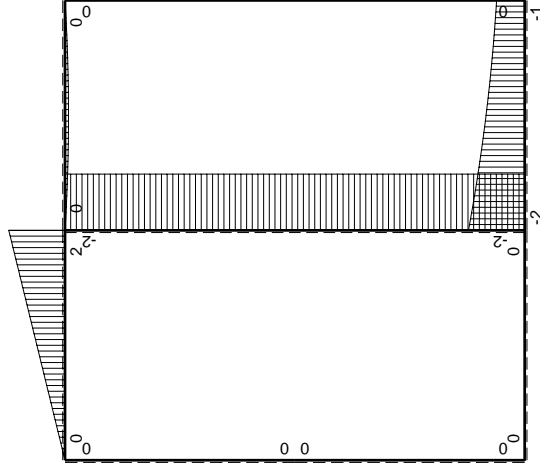

$M_0$  flessione da carichi assegnati

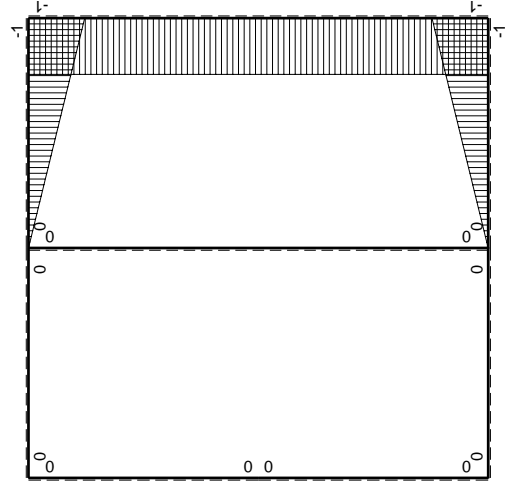

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>0</sup> (x) | M <sup>0</sup> (x)            | θ      | M <sub>x</sub> M <sub>0</sub>                   | M <sub>x</sub> θ | M <sub>x</sub> M <sub>x</sub>         | $\int M_x(M_0/EJ+\theta)dx$  | $\int M_x M_x/EJdx$    |
|--------|--------------------|-------------------------------|--------|---|------------------|---------------------------------------|------------------------------|------------------------|
| AB B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| BA B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| CD B   | 0                  | 2Fb-2Fx                       | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| DC B   | 0                  | -2Fx                          | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| DE B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| EA B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| AE B   | 0                  | 0                             | 0      | 0   | 0                | 0                                     | 0                            | 0                      |
| BF B   | -x/b               | -2Fb+3/2Fx-1/2qx <sup>2</sup> | -Fb/EJ | 2Fx-3/2Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (5/8+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ               |
| FB B   | 1-x/b              | Fb+1/2Fx+1/2qx <sup>2</sup>   | Fb/EJ  | Fb-1/2Fx-1/2qx <sup>3</sup> /b                  | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (5/8+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ               |
| GC B   | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ  | 1/3xb/EJ               |
| CG B   | x/b                | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b     | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ  | 1/3xb/EJ               |
| FG 2b  | -1                 | 0                             | 0      | 0   | 0                | 1                                     | 0+0                          | 2Xb/EJ                 |
| GF 2b  | 1                  | 0                             | 0      | 0   | 0                | 1                                     | 0+0                          | 2Xb/EJ                 |
| CB 2b  | 0                  | -2Fb                          | 0      | 0   | 0                | 0                                     | 0+0                          | 7/6Fb <sup>2</sup> /EJ |
| BC 2b  | 0                  | 2Fb                           | 0      | 0   | 0                | 0                                     | 0+0                          | 7/6Fb <sup>2</sup> /EJ |
| totali |                    |                               |        |   |                  |                                       |                              |                        |
|        |                    |                               |        |   |                  |                                       |                              | 8/3xb/EJ               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$



$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

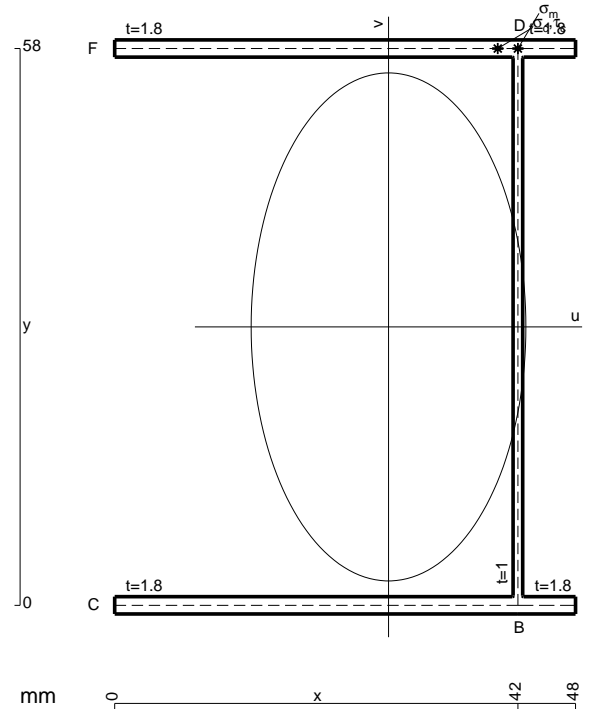


- A = 230.8 mm<sup>2</sup>
- J<sub>u</sub> = 161584. mm<sup>4</sup>
- J<sub>v</sub> = 47247. mm<sup>4</sup>
- J<sub>t</sub> = 206. mm<sup>4</sup>
- x<sub>o</sub> = 29.67 mm
- x<sub>g</sub> = 28.52 mm
- T<sub>y</sub> = -1600. N
- M<sub>x</sub> = 1104000. Nmm
- x<sub>m</sub> = 42. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 13.48 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -198.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 13.48 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -198.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 426.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 12.06 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 414.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 1440. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 765.5 N/mm<sup>2</sup>



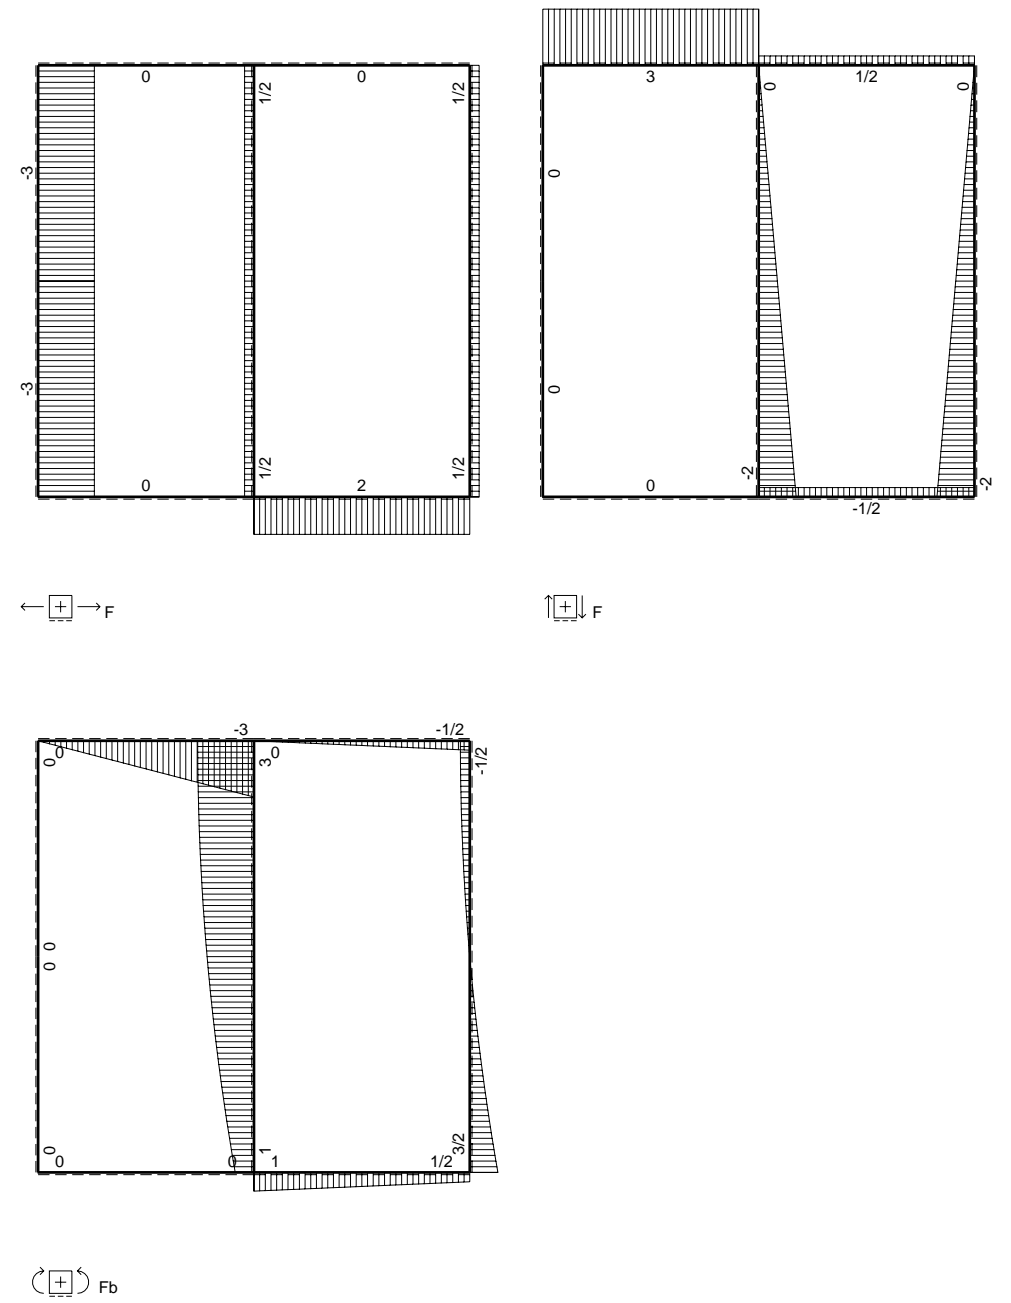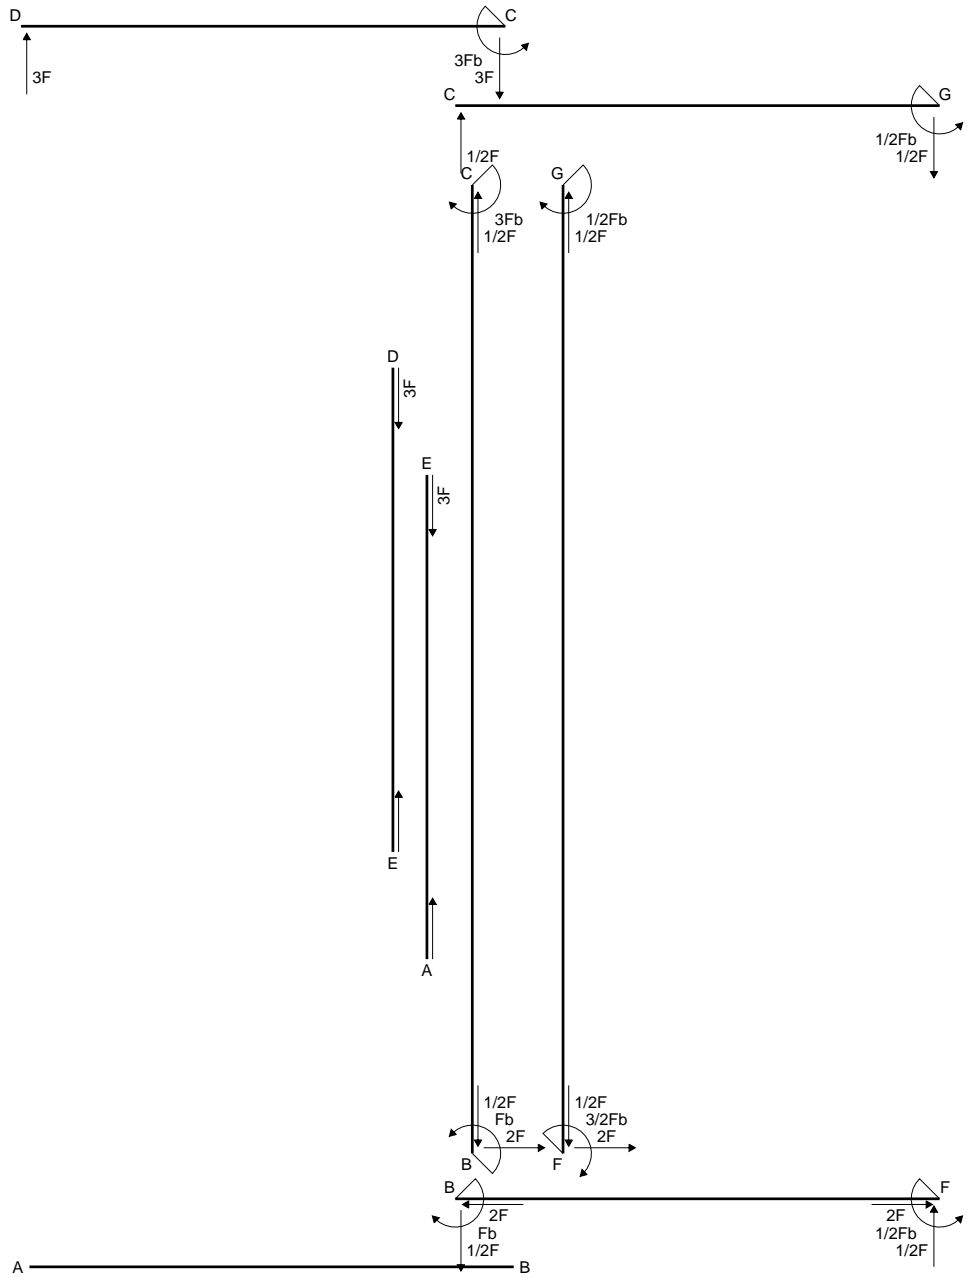

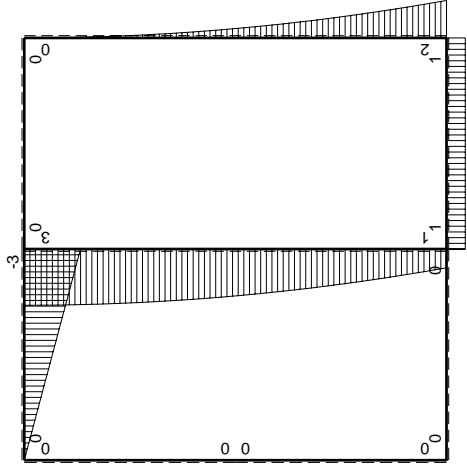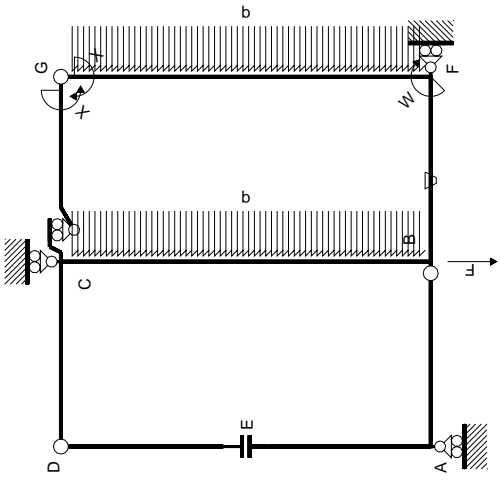

M<sub>0</sub> flessione da carichi assegnati

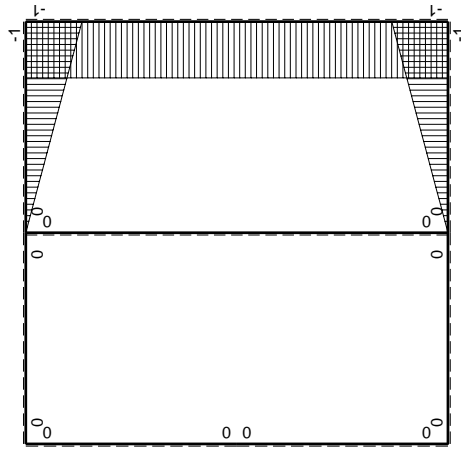

M<sub>x</sub> flessione da iperstatica X=1

Quadro contributi PLV per iperstatica  $X=W_{gc}$

|        | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ |
|--------|----------|-------------------|----------|----------------------|---------------|------------------|---------------------------------|-----------------------|
| AB b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| BA b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| CD b   | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| DC b   | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| DE b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| ED b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| EA b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| AE b   | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                     |
| BF b   | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            |
| FB b   | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            |
| GC b   | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b   | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$            |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                             | 0                     |
| totali |          |                   |          |                      |               |                  |                                 | $8/3xb/EJ$            |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

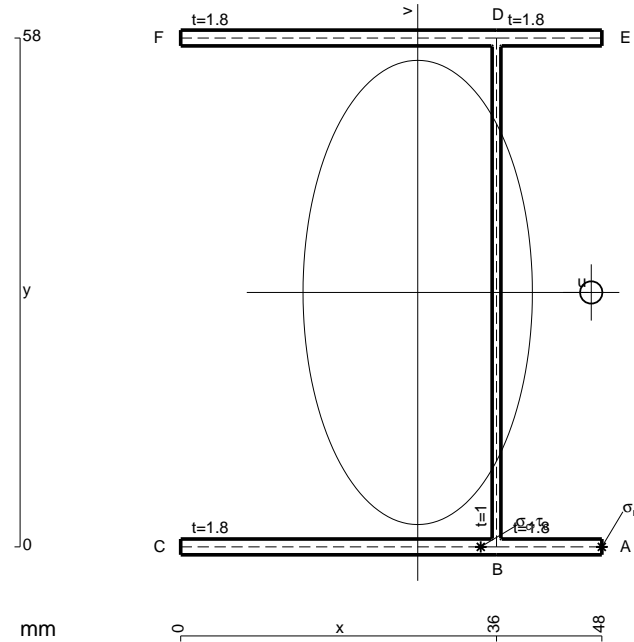


$A = 230.8 \text{ mm}^2$   
 $J_u = 161584. \text{ mm}^4$   
 $J_v = 39431. \text{ mm}^4$   
 $J_t = 206. \text{ mm}^4$   
 $x_o = 19.78 \text{ mm}$   
 $x_g = 27.02 \text{ mm}$   
 $T_y = 1590. \text{ N}$   
 $M_x = -1160700. \text{ Nmm}$   
 $x_m = 48. \text{ mm}$   
 $u_m = 20.98 \text{ mm}$   
 $v_m = -29. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -208.3 \text{ N/mm}^2$   
 $x_c = 36. \text{ mm}$   
 $u_c = 8.984 \text{ mm}$   
 $v_c = -29. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -208.3 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 285.1 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 10.27 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 274.8 \text{ N/mm}^2$   
 $t_c = 954. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 535.9 \text{ N/mm}^2$






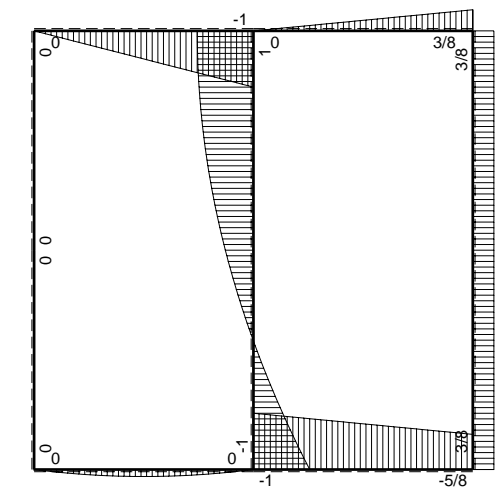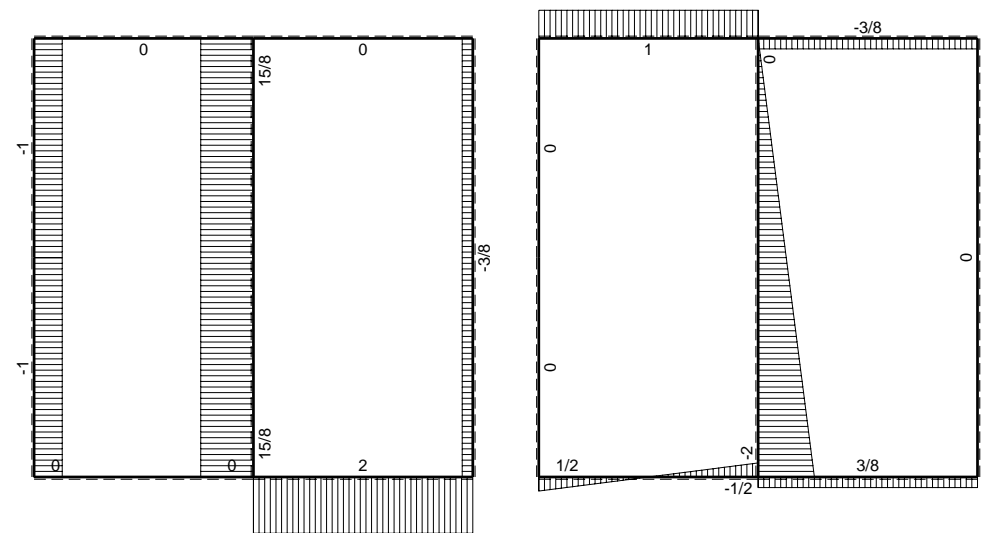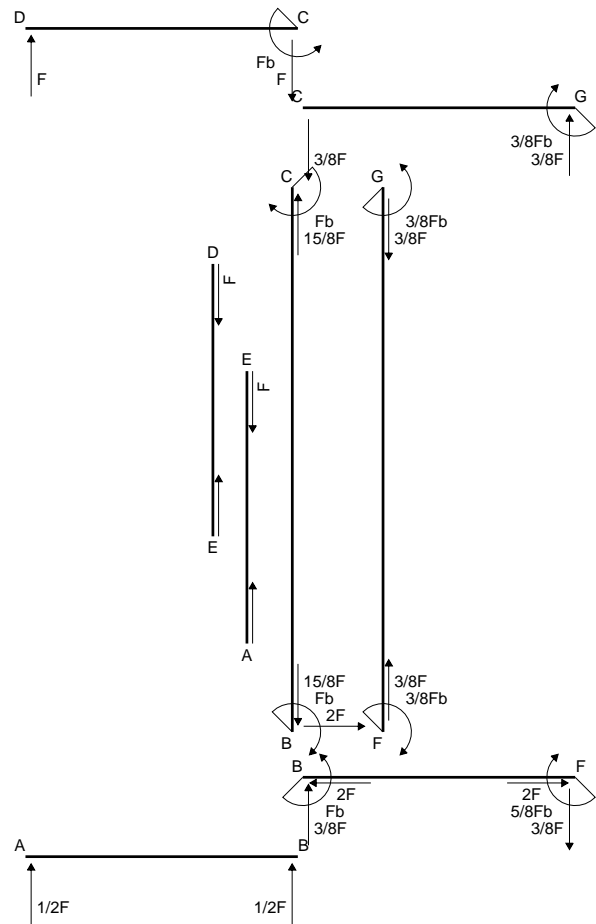


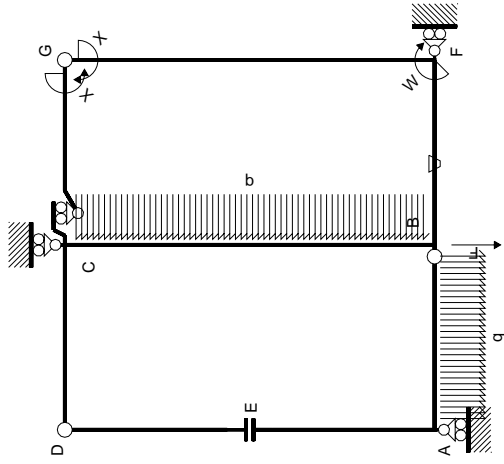

Schema di calcolo iperstatico

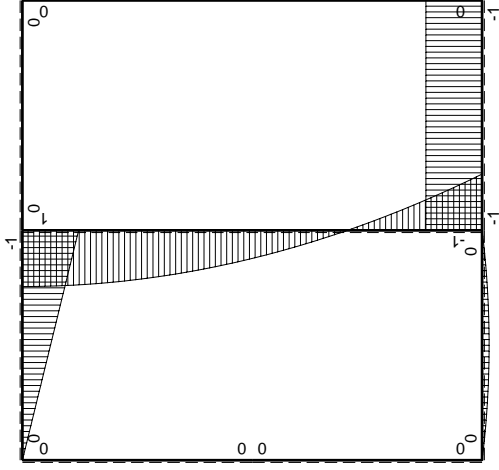

$M_0$  flessione da carichi assegnati

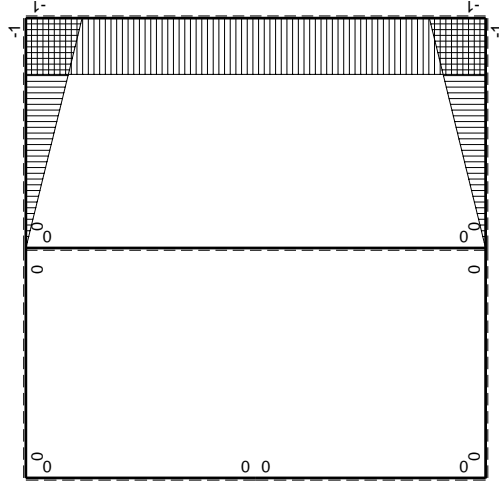

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b         | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b         | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b         | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b         | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b        | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b        | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b        | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali       |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |
|              |          |                      |          |           |                 |                  |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

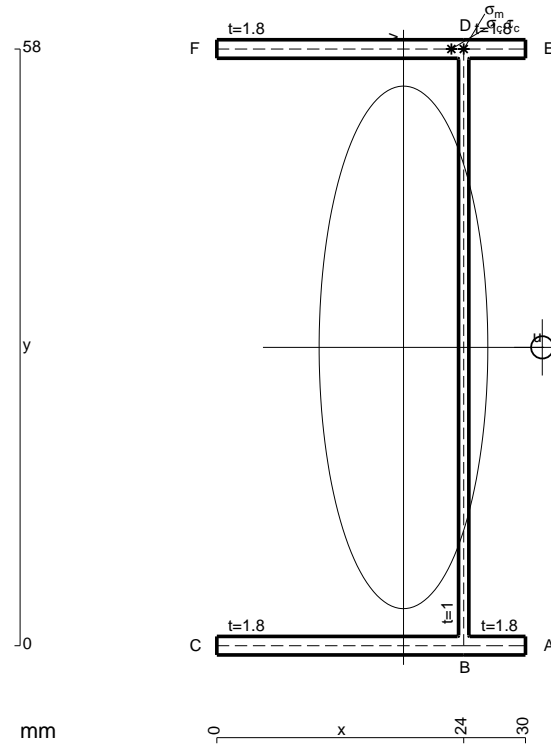

- A = 166. mm<sup>2</sup>
- J<sub>u</sub> = 107087. mm<sup>4</sup>
- J<sub>v</sub> = 11157. mm<sup>4</sup>
- J<sub>t</sub> = 136. mm<sup>4</sup>
- x<sub>o</sub> = 13.49 mm
- x<sub>g</sub> = 18.14 mm
- N = 1838. N
- T<sub>y</sub> = -1960. N
- M<sub>x</sub> = -764400. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 5.855 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 218.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 5.855 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 218.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 362.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.74 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x</sub>t/J<sub>t</sub> = 350. N/mm<sup>2</sup>
- t<sub>c</sub> = 1764. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 665. N/mm<sup>2</sup>




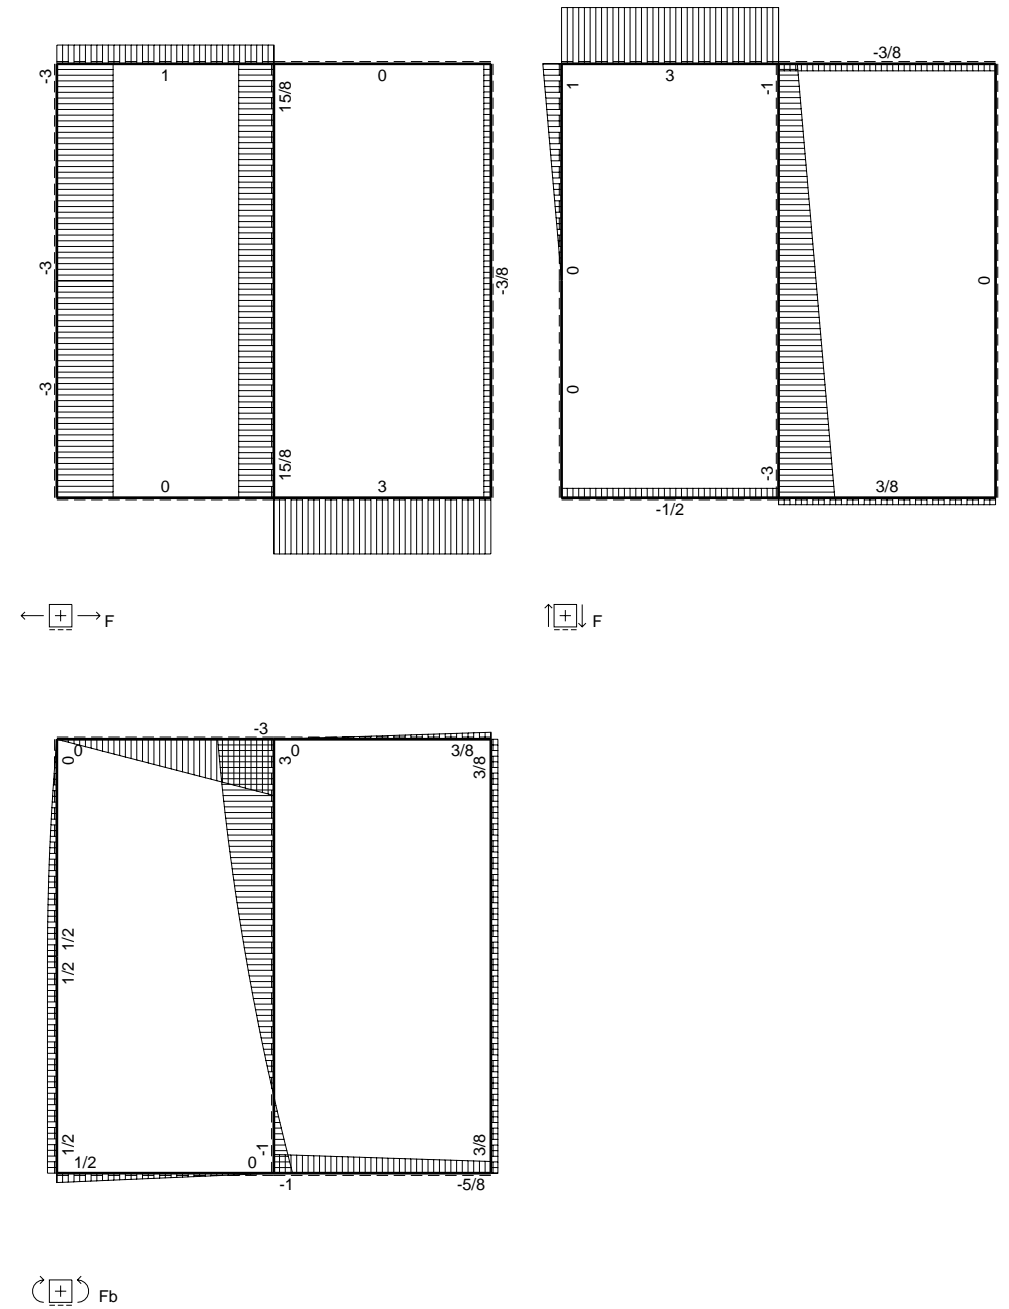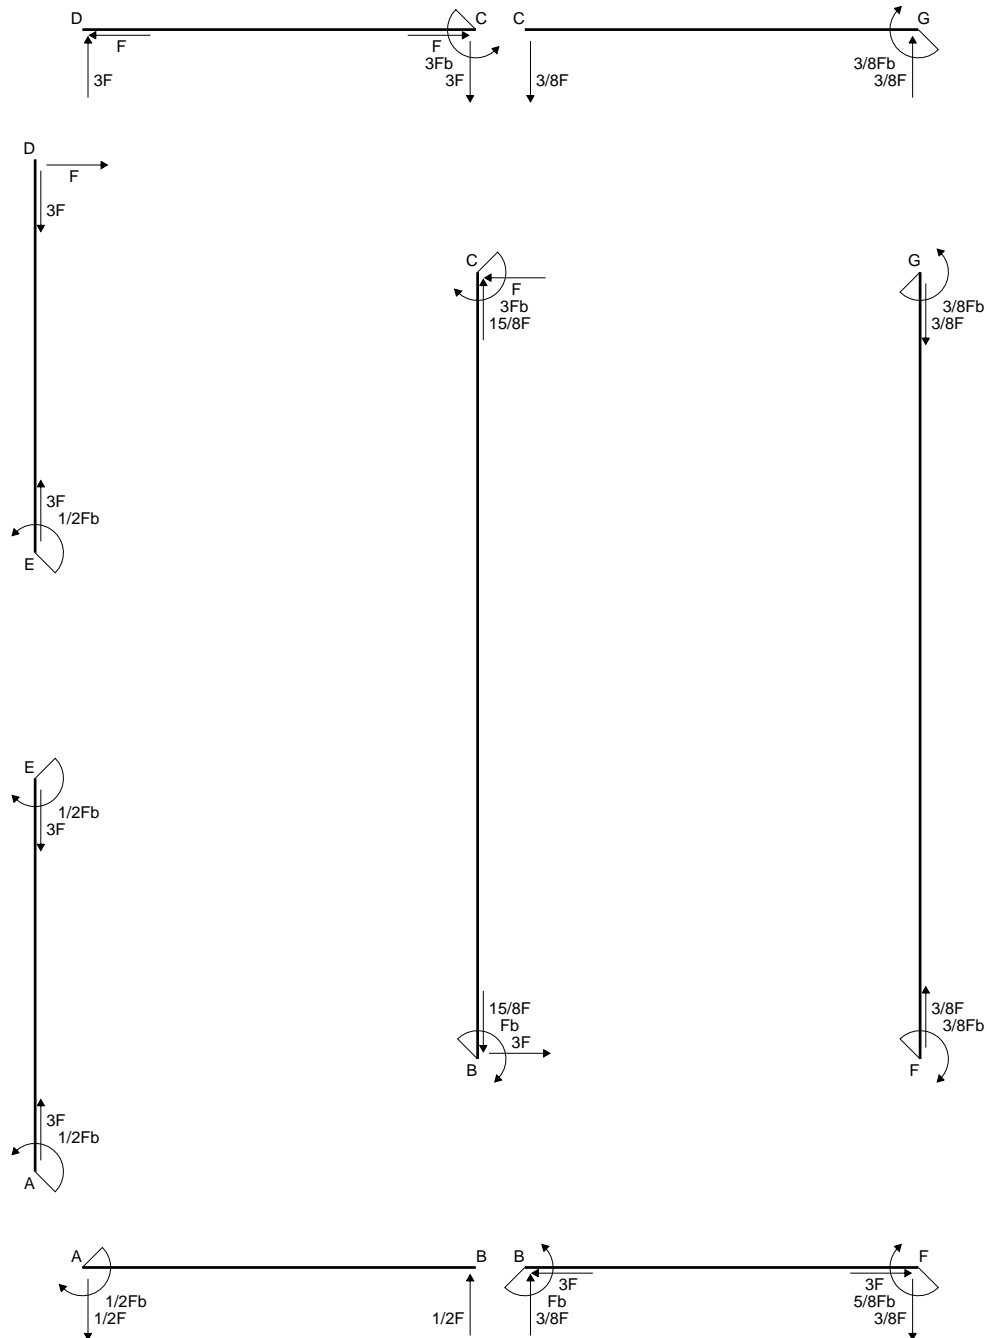

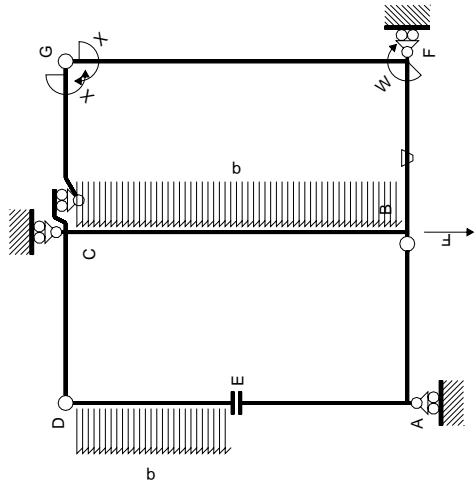

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

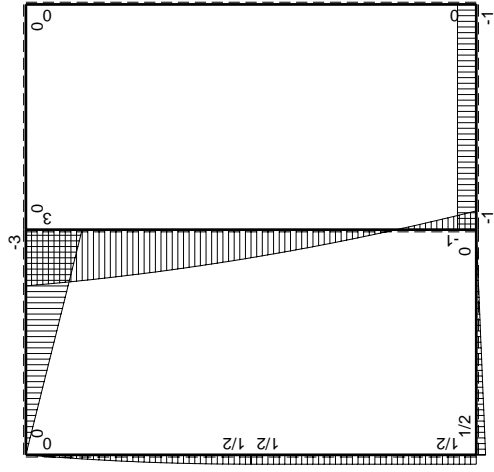

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M^x(x)$ | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$       | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|----------------------|----------|-----------|-----------------|-----------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fb - 1/2Fx$      | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| CD b         | 0        | $-3Fb + 3Fx$         | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DC b         | 0        | $3Fx$                | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DE b         | 0        | $Fx - 1/2qx^2$       | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| ED b         | 0        | $-1/2Fb + 1/2qx^2$   | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| EA b         | 0        | $1/2Fb$              | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| AE b         | 0        | $-1/2Fb$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BF b         | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fx/EJ$         | $(1/2 + 1/2)Fb^2/EJ$            | $1/3x^3/EJ$            |
| FB b         | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$              | $1/3x^3/EJ$            |
| GC b         | $-1+x/b$ | 0                    | 0        | 0         | 0               | 0               | $1-2x/b + x^2/b^2$              | $1/3x^3/EJ$            |
| CG b         | $x/b$    | 0                    | 0        | 0         | 0               | 0               | $x^2/b^2$                       | $1/3x^3/EJ$            |
| FG 2b        | -1       | 0                    | 0        | 0         | 0               | 0               | 0+0                             | $2x^3/EJ$              |
| GF 2b        | 1        | 0                    | 0        | 0         | 0               | 0               | 0+0                             | $2x^3/EJ$              |
| CB 2b        | 0        | $3Fb - Fx - 1/2qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BC 2b        | 0        | $Fb - 3Fx + 1/2qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| totali       |          |                      |          |           |                 |                 |                                 | $8/3x^3/EJ$            |
|              |          |                      |          |           |                 |                 |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{xo} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{xo} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

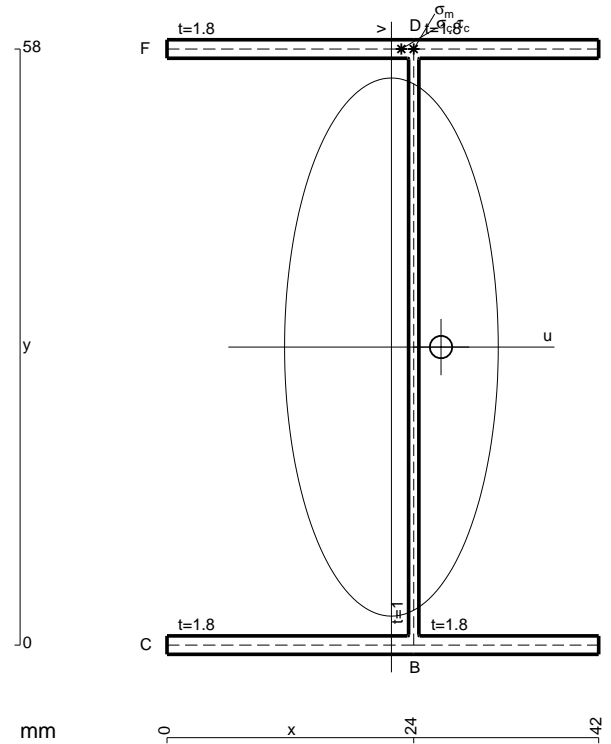

$$A = 209.2 \text{ mm}^2$$

$$J_u = 143419. \text{ mm}^4$$

$$J_v = 22604. \text{ mm}^4$$

$$J_t = 182.6 \text{ mm}^4$$

$$x_o = 4.828 \text{ mm}$$

$$x_g = 21.83 \text{ mm}$$

$$N = 450. \text{ N}$$

$$T_y = 1350. \text{ N}$$

$$M_x = -1107000. \text{ Nmm}$$

$$x_m = 24. \text{ mm}$$

$$y_m = 58. \text{ mm}$$

$$u_m = 2.168 \text{ mm}$$

$$v_m = 29. \text{ mm}$$

$$\sigma_m = N/A - Mv/J_u = 226. \text{ N/mm}^2$$

$$x_c = 24. \text{ mm}$$

$$y_c = 58. \text{ mm}$$

$$u_c = 2.168 \text{ mm}$$

$$v_c = 29. \text{ mm}$$

$$\sigma_c = N/A - Mv/J_u = 226. \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 70.79 \text{ N/mm}^2$$

$$\tau_g = TS/tJ_u = 6.551 \text{ N/mm}^2$$



$$\tau_o = Tx_o t/J_t = 64.24 \text{ N/mm}^2$$


$$t_c = 810. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 257.1 \text{ N/mm}^2$$






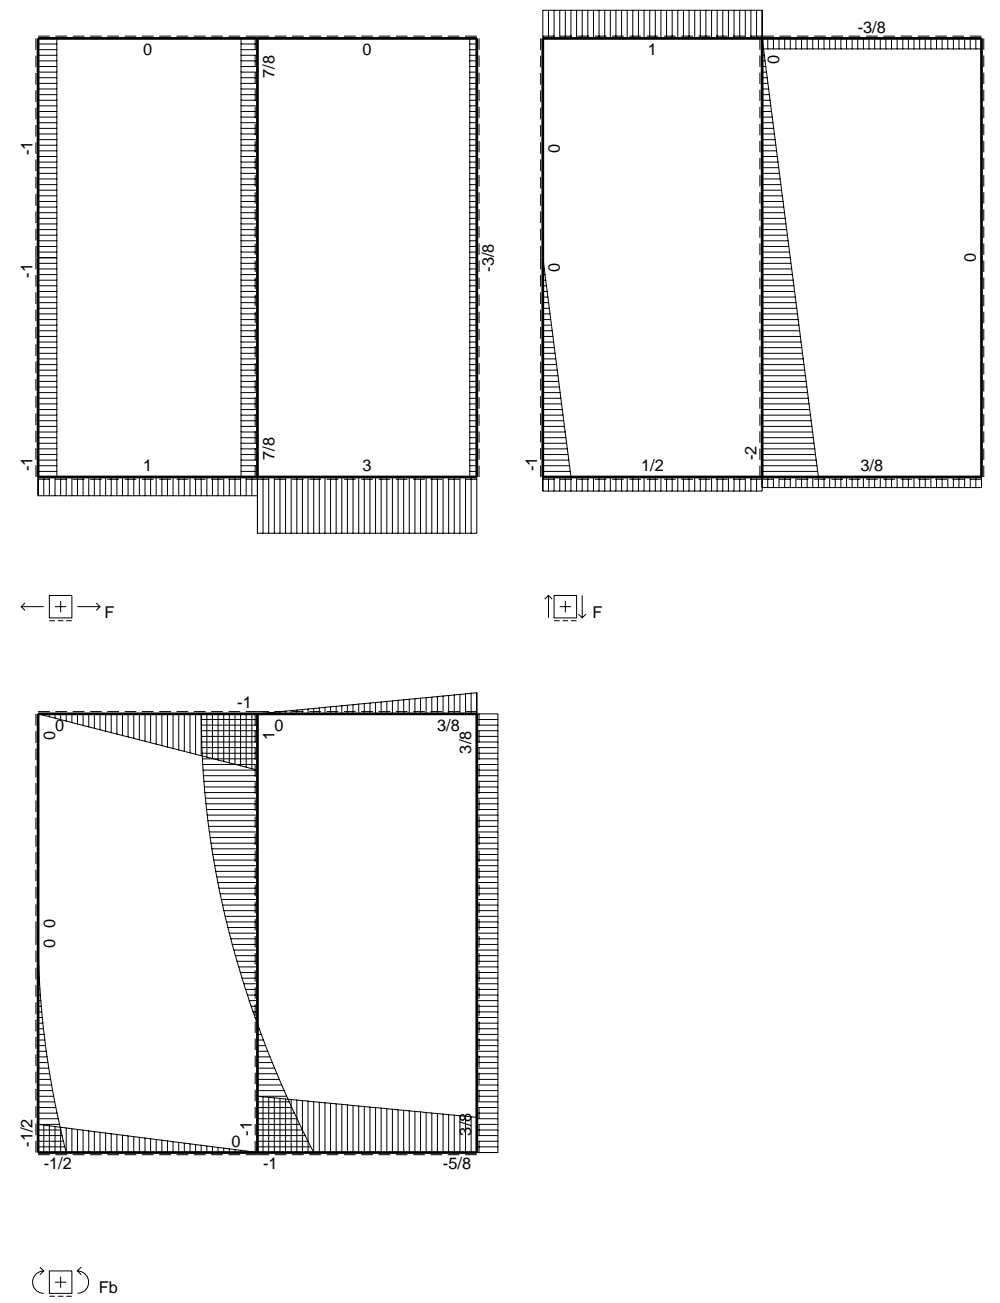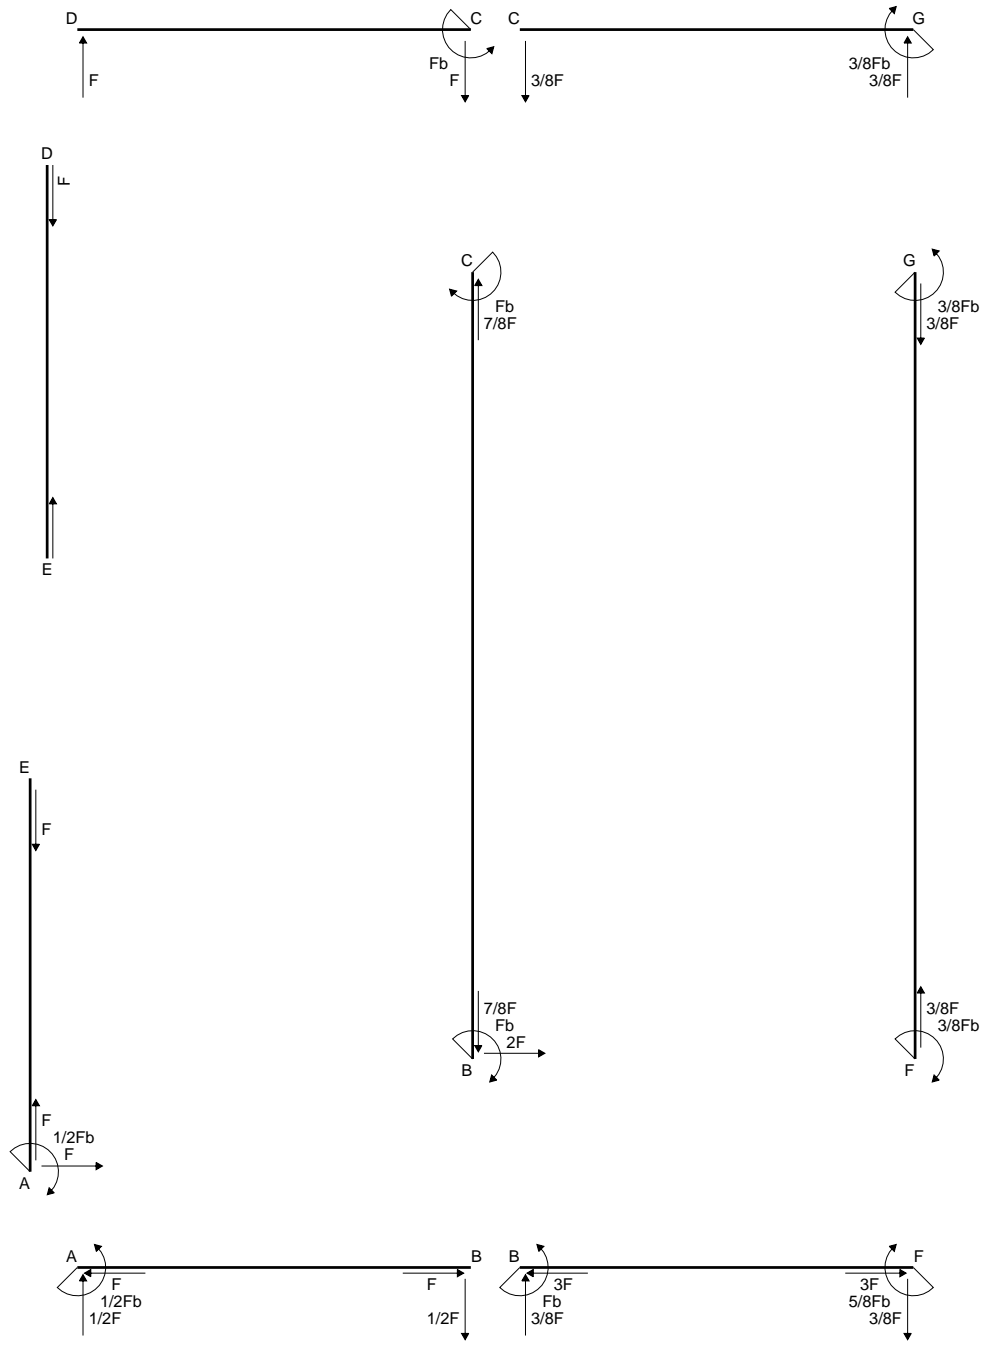


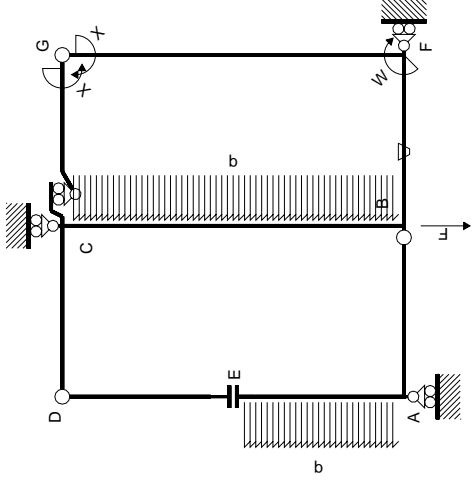

Schema di calcolo iperstatico

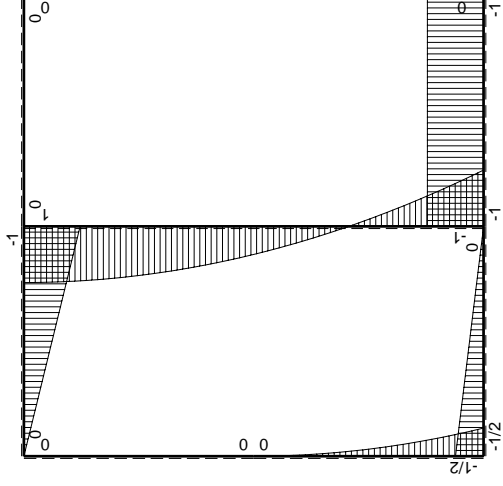

$M_0$  flessione da carichi assegnati

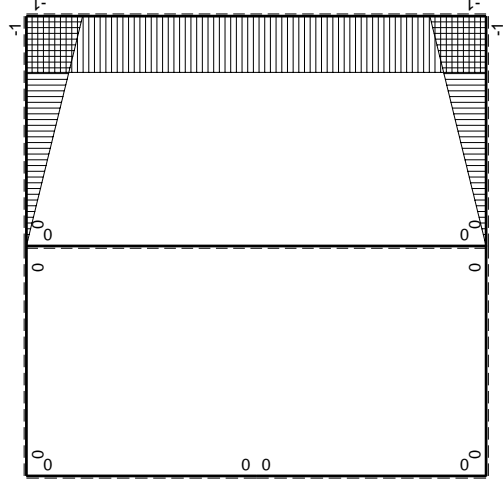

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M(x)$                 | $\theta$     | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|------------------------|--------------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB B          | 0        | $-1/2Fx$               | 0            | 0         | 0             | 0                | 0                           | 0                    |
| BA B          | 0        | $1/2Fx$                | 0            | 0         | 0             | 0                | 0                           | 0                    |
| CD B          | 0        | $-Fb+Fx$               | 0            | 0         | 0             | 0                | 0                           | 0                    |
| DC B          | 0        | $Fx$                   | 0            | 0         | 0             | 0                | 0                           | 0                    |
| DE B          | 0        | 0                      | 0            | 0         | 0             | 0                | 0                           | 0                    |
| EA B          | 0        | $-1/2qx^2$             | 0            | 0         | 0             | 0                | 0                           | 0                    |
| AE B          | 0        | $1/2Fb-Fx+1/2qx^2$     | 0            | 0         | 0             | 0                | 0                           | 0                    |
| BF B          | $-x/b$   | $-Fb$                  | $-Fb/EJ$     | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3x^3/b^3$         |
| FB B          | $1-x/b$  | $Fb$                   | $Fb/EJ$      | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3x^3/b^3$                | $1/3x^3/b^3$         |
| GC B          | $-1+x/b$ | 0                      | 0            | 0         | 0             | $1-2x/b+x^2/b^2$ | 0                           | $1/3x^3/b^3$         |
| CG B          | $x/b$    | 0                      | 0            | 0         | 0             | $x^2/b^2$        | 0                           | 0                    |
| FG 2b         | -1       | 0                      | 0            | 0         | 0             | 1                | 0                           | 0                    |
| GF 2b         | 1        | 0                      | 0            | 0         | 0             | 1                | 0                           | 0                    |
| CB 2b         | 0        | $Fb-1/2qx^2$           | 0            | 0         | 0             | 0                | 0                           | 0                    |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$       | 0            | 0         | 0             | 0                | 0                           | 0                    |
| totali        |          |                        |              |           |               |                  |                             |                      |
|               |          | iperstatica $X=W_{gc}$ |              |           |               |                  |                             |                      |
|               |          | $Fb^2/EJ$              | $8/3x^3/b^3$ |           |               |                  |                             |                      |
|               |          | $-3/8Fb$               |              |           |               |                  |                             |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$





$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

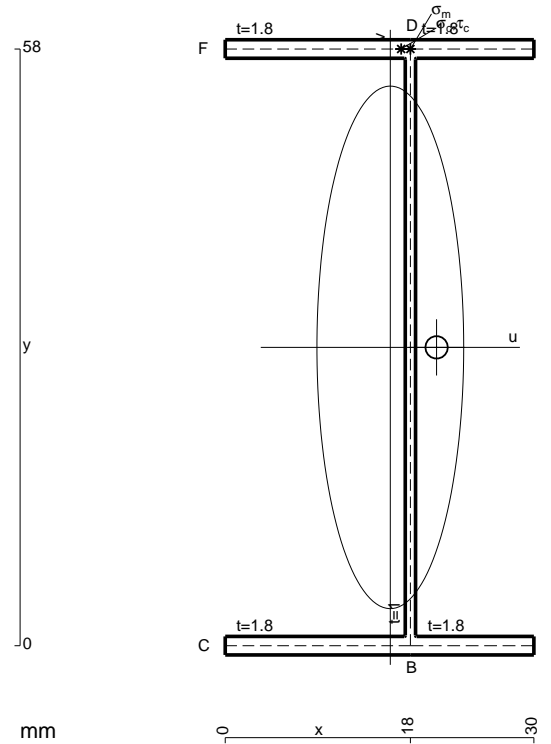


- A = 166. mm<sup>2</sup>
- J<sub>u</sub> = 107087. mm<sup>4</sup>
- J<sub>v</sub> = 8440. mm<sup>4</sup>
- J<sub>t</sub> = 136. mm<sup>4</sup>
- x<sub>o</sub> = 4.496 mm
- x<sub>g</sub> = 16.05 mm
- N = 866.3 N
- T<sub>y</sub> = -1980. N
- M<sub>x</sub> = -861300. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 1.952 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 238.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 1.952 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 238.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 127.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.652 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>t/J<sub>t</sub> = 117.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1782. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 325. N/mm<sup>2</sup>



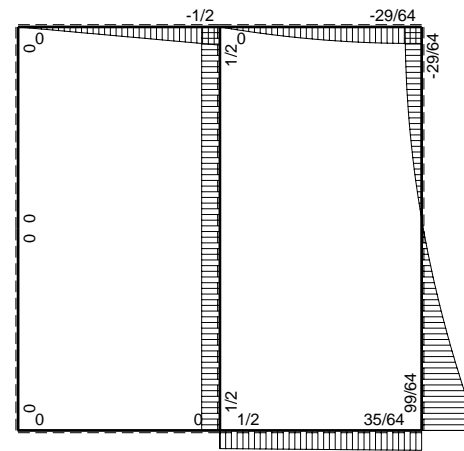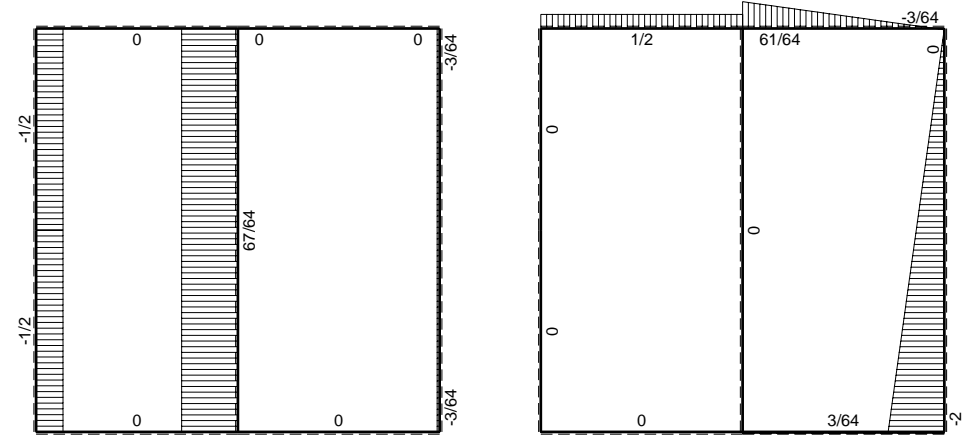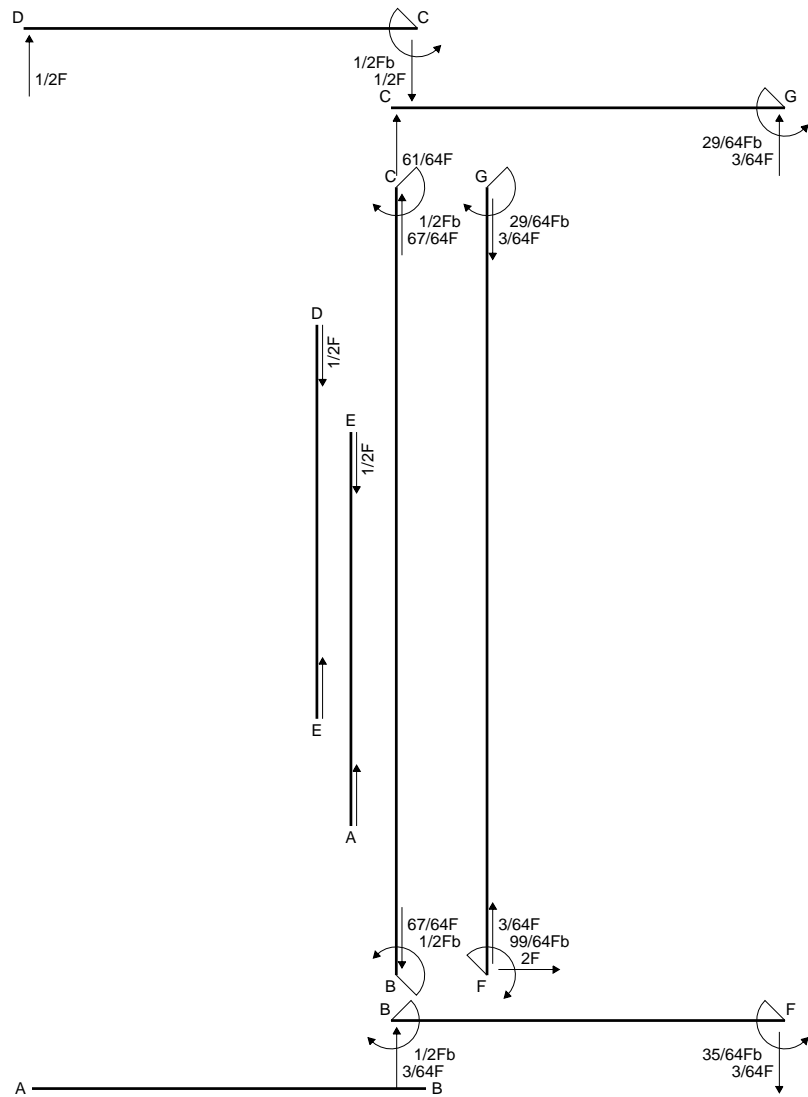

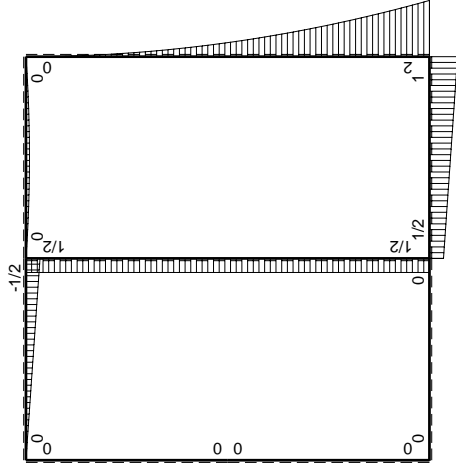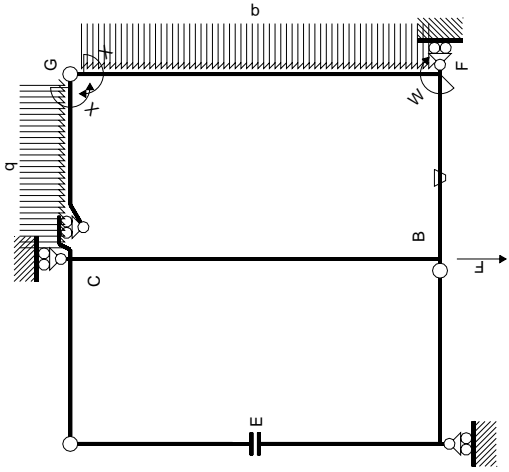

$M_0$  flessione da carichi assegnati

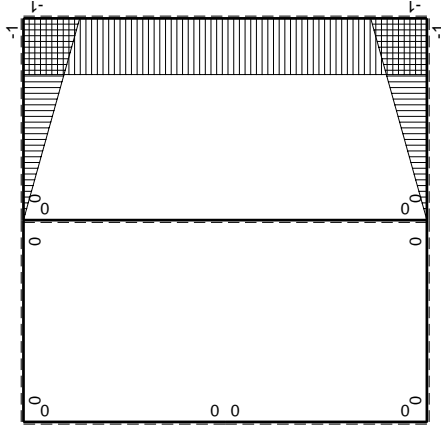

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          |                   |          |                          |               |                  |                             |                      |   |   |           |
|--|----------|-------------------|----------|--------------------------|---------------|------------------|-----------------------------|----------------------|---|---|-----------|
| $\leftarrow$                                     | $M_x(x)$ | $M_0(x)$          | $\theta$ | $M_x M_0$                | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |   |   |           |
| AB b   | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| BA b   | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| CD b   | 0        | $-1/2Fb+1/2Fx$    | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| DC b   | 0        | $1/2Fx$           | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| DE b   | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| EA b   | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| AE b   | 0        | 0                 | 0        | 0                        | 0             | 0                | 0+0                         | 0                    | 0 | 0 | 0         |
| BF b   | $-x/b$   | $1/2Fb+1/2Fx$     | $-Fb/EJ$ | $-1/2Fx-1/2Fx^2/b$       | $Fx/EJ$       | $x^2/b^2$        | $(-5/12+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |   |   |           |
| FB b   | $1-x/b$  | $-Fb+1/2Fx$       | $Fb/EJ$  | $-Fb+3/2Fx-1/2Fx^2/b$    | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |   |   |           |
| GC b   | $-1+x/b$ | $-1/2Fx+1/2qx^2$  | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$ | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |   |   |           |
| CG b   | $x/b$    | $1/2Fx-1/2qx^2$   | 0        | $1/2Fx^2/b-1/2qx^3/b$    | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$           |   |   |           |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$     | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |   |   |           |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$             | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |   |   |           |
| CB 2b  | 0        | $1/2Fb$           | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |   |   |           |
| BC 2b  | 0        | $-1/2Fb$          | 0        | 0                        | 0             | 0                | 0+0                         | 0                    |   |   |           |
| totali   |          |                   |          |                          |               |                  |                             |                      |   |   |           |
|  |          |                   |          |                          |               |                  | $-29/24Fb^2/EJ$             | $8/3xb/EJ$           |   |   | $29/64Fb$ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [-1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + 3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (-b + 3/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 1/12 Fb^2/EJ$$

$$L_{GC}^{x\theta} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x\theta} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

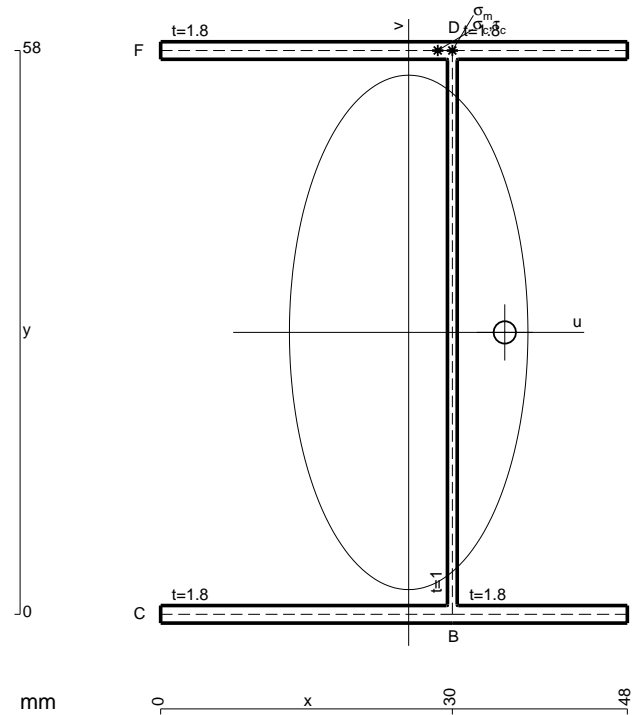


- A = 230.8 mm<sup>2</sup>
- J<sub>u</sub> = 161584. mm<sup>4</sup>
- J<sub>v</sub> = 34741. mm<sup>4</sup>
- J<sub>t</sub> = 206. mm<sup>4</sup>
- x<sub>o</sub> = 9.888 mm
- x<sub>g</sub> = 25.51 mm
- T<sub>y</sub> = 2420. N
- M<sub>x</sub> = -1113200. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 58. mm
- u<sub>m</sub> = 4.492 mm
- v<sub>m</sub> = 29. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 199.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 58. mm
- u<sub>c</sub> = 4.492 mm
- v<sub>c</sub> = 29. mm
- σ<sub>c</sub> = -Mv/J<sub>v</sub> = 199.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 222.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>y</sub>/tJ<sub>u</sub> = 13.03 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 209.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 8712. mm
- σ<sub>o</sub> = √(σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup>) = 433.6 N/mm<sup>2</sup>






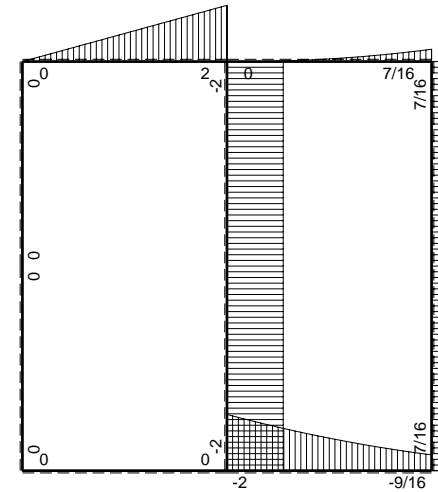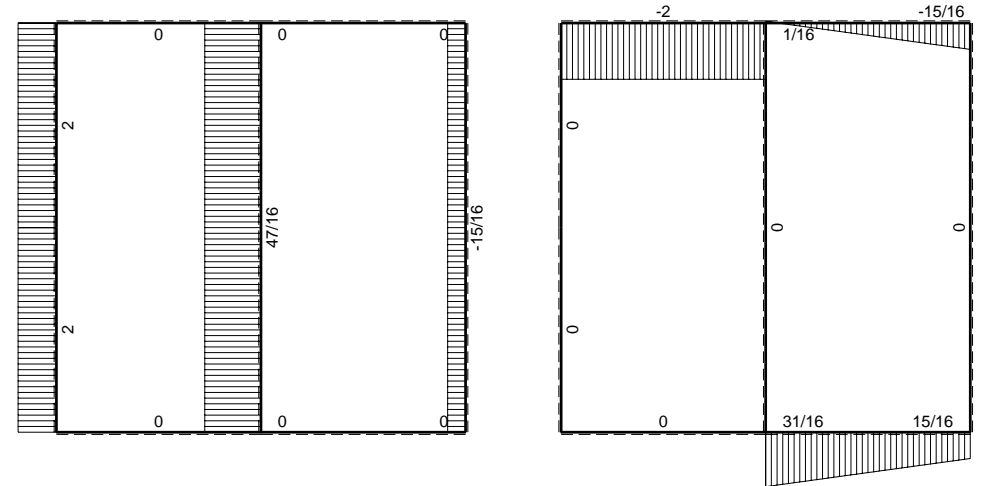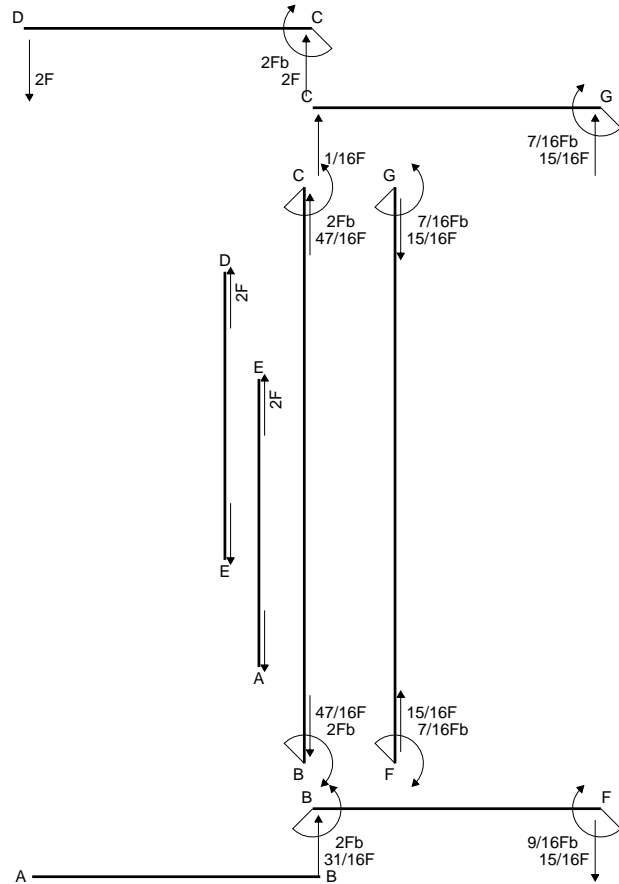


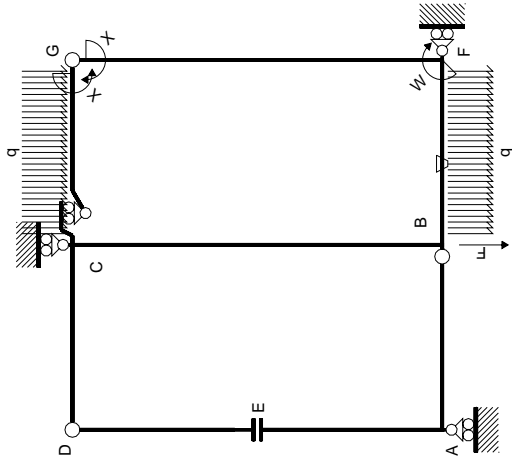

Schema di calcolo iperstatico

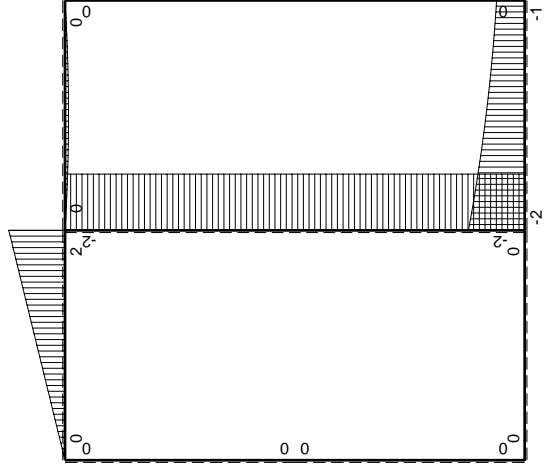

$M_0$  flessione da carichi assegnati

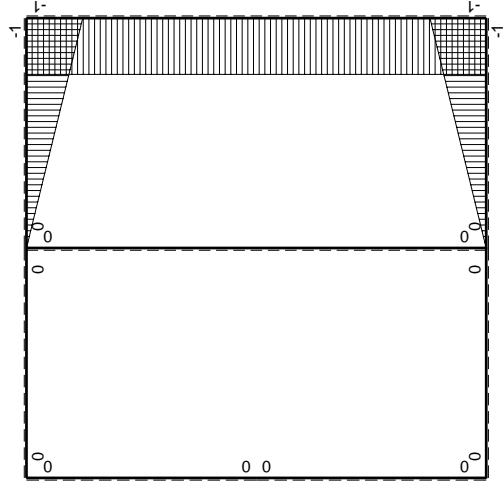

$M_x$  flessione da iperstatica  $X=1$

Quadro contribuiti PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|---------------|----------|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|---------------------|
| AB B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| CD B          | 0        | $2Fb-2Fx$            | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| DC B          | 0        | $-2Fx$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| DE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| EA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| AE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BF B          | $-x/b$   | $-2Fb+3/2Fx-1/2qx^2$ | $-Fb/EJ$ | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FB B          | $1-x/b$  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| GC B          | $-1+x/b$ | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| CG B          | $x/b$    | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx^2/b-1/2qx^3/b$     | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| FG 2b         | -1       | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b         | 1        | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b         | 0        | $-2Fb$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BC 2b         | 0        | $2Fb$                | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| totali        |          |                      |          |                           |               |                  |                             |                     |
|               |          |                      |          |                           |               |                  | $7/6Fb^2/EJ$                | $8/3xb/EJ$          |
|               |          |                      |          |                           |               |                  |                             | $-7/16Fb$           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$






$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$


$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

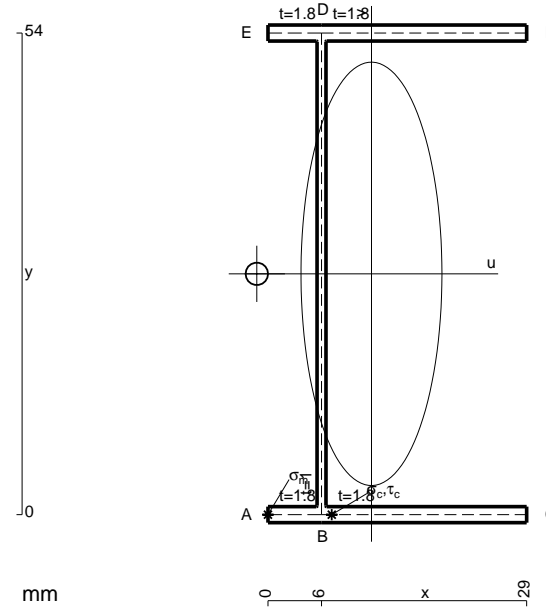


- A = 158.4 mm<sup>2</sup>
- J<sub>u</sub> = 89230. mm<sup>4</sup>
- J<sub>v</sub> = 9888. mm<sup>4</sup>
- J<sub>t</sub> = 130.8 mm<sup>4</sup>
- x<sub>o</sub> = -12.85 mm
- x<sub>g</sub> = 11.6 mm
- T<sub>y</sub> = -1460. N
- M<sub>x</sub> = 686200. Nmm
- u<sub>m</sub> = -11.6 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 207.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -5.602 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 207.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 268.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.16 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 258.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 1314. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 509.3 N/mm<sup>2</sup>



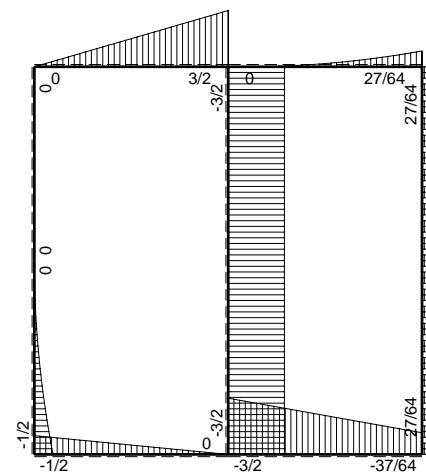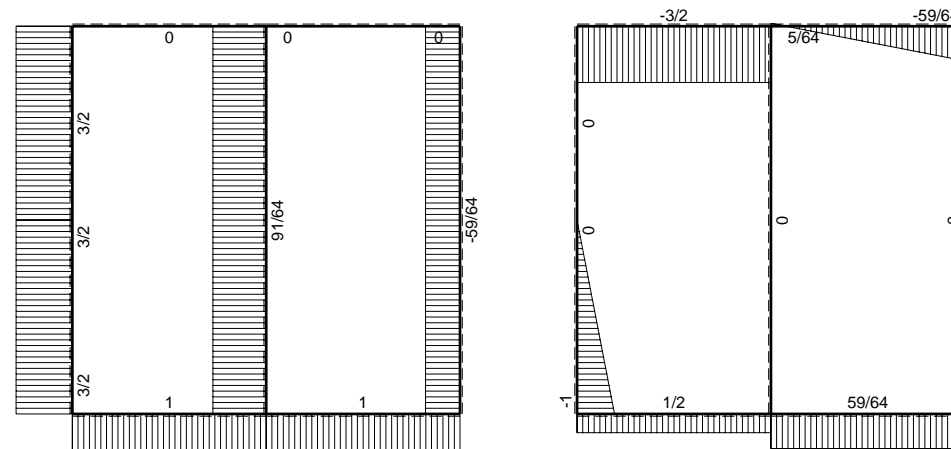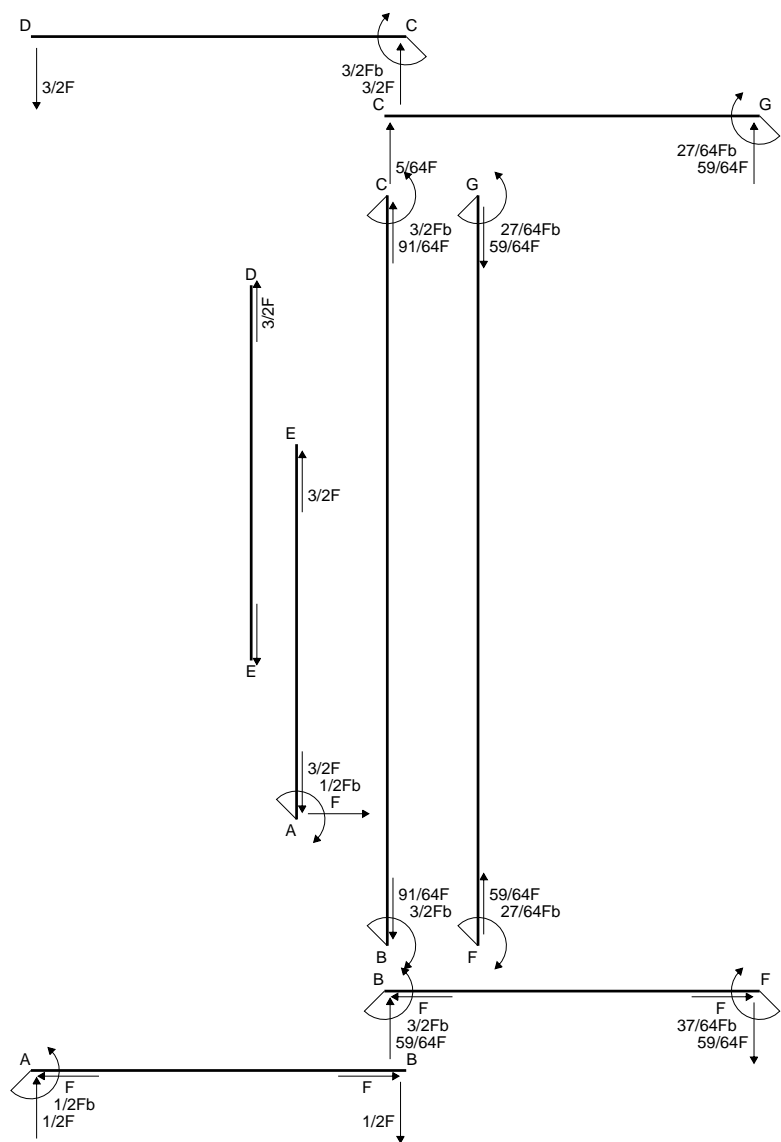


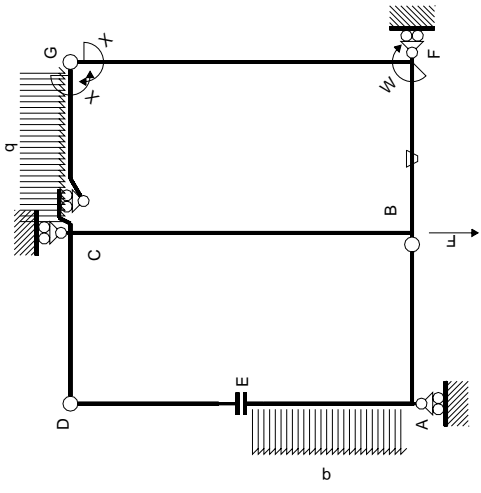

Schema di calcolo iperstatico

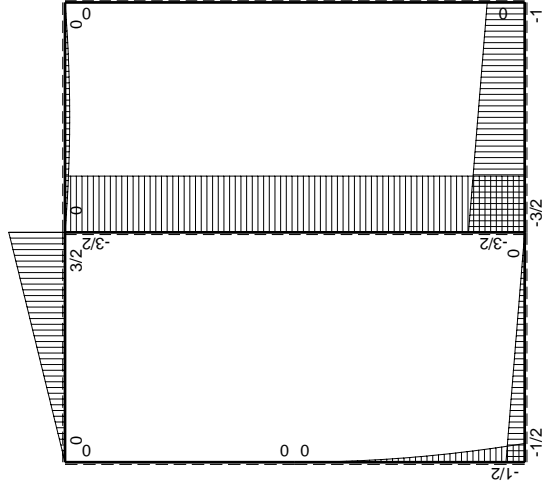

$M_0$  flessione da carichi assegnati

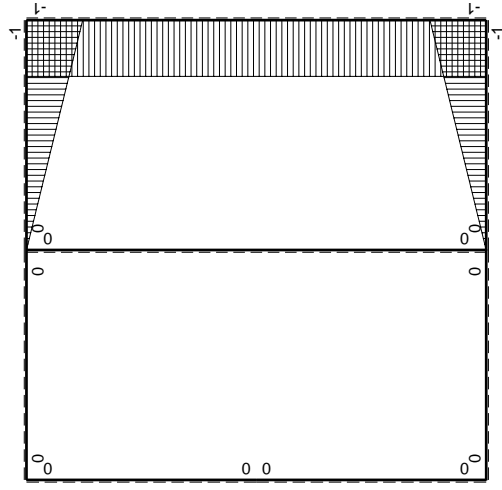

$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |            | $M^x(x)$               | $M^0(x)$         | $\theta$ | $M^x M_0$                    | $M^x \theta$    | $M^x M_x$            | $\int M^x (M^0/EJ + \theta) dx$ | $\int X M^x M_x / E dx$ |
|--|------------|------------------------|------------------|----------|------------------------------|-----------------|----------------------|---------------------------------|-------------------------|
| AB B   | 0          | $-1/2Fb + 1/2Fx$       | $1/2Fx$          | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| BA B   | 0          | $1/2Fx$                | $3/2Fb - 3/2Fx$  | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| CD B   | 0          | $3/2Fb - 3/2Fx$        | $-3/2Fx$         | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| DE B   | 0          | 0                      | 0                | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| EA B   | 0          | $-1/2qx^2$             | 0                | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| AE B   | 0          | $1/2Fb - Fx + 1/2qx^2$ | $-3/2Fb + 1/2Fx$ | $-Fb/EJ$ | $3/2Fx - 1/2Fx^2/b$          | $Fx/EJ$         | $x^2/b^2$            | $(7/12 + 1/2)Fb^2/EJ$           | $1/3Xb/EJ$              |
| FB B   | $-x/b$     | $-3/2Fb + 1/2Fx$       | $Fb + 1/2Fx$     | $Fb/EJ$  | $Fb - 1/2Fx - 1/2Fx^2/b$     | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(7/12 + 1/2)Fb^2/EJ$           | $1/3Xb/EJ$              |
| GC B   | $-1 + x/b$ | $-1/2Fx + 1/2qx^2$     | $0$              | 0        | $1/2Fx - Fx^2/b + 1/2qx^3/b$ | 0               | $1 - 2x/b + x^2/b^2$ | $(1/24 + 0)Fb^2/EJ$             | $1/3Xb/EJ$              |
| CG B   | $x/b$      | $1/2Fx - 1/2qx^2$      | 0                | 0        | $1/2Fx^2/b - 1/2qx^3/b$      | 0               | $x^2/b^2$            | $(1/24 + 0)Fb^2/EJ$             | $1/3Xb/EJ$              |
| FG 2b  | -1         | 0                      | 0                | 0        | 0                            | 0               | 1                    | 0+0                             | $2Xb/EJ$                |
| GF 2b  | 1          | 0                      | 0                | 0        | 0                            | 0               | 1                    | 0+0                             | $2Xb/EJ$                |
| CB 2b  | 0          | $-3/2Fb$               | 0                | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| BC 2b  | 0          | $3/2Fb$                | 0                | 0        | 0                            | 0               | 0                    | 0+0                             | 0                       |
| totali   |            |                        |                  |          |                              |                 |                      | $9/8Fb^2/EJ$                    | $8/3Xb/EJ$              |
|  |            |                        |                  |          |                              |                 |                      | $-27/64Fb$                      |                         |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$






$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$


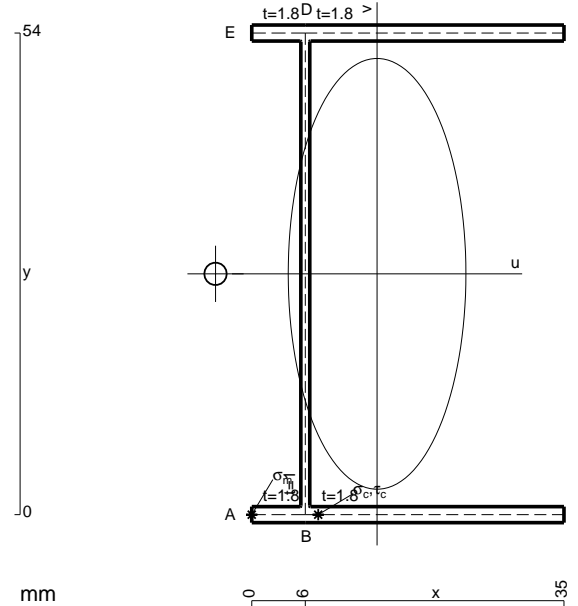


- A = 180. mm<sup>2</sup>
- J<sub>u</sub> = 104976. mm<sup>4</sup>
- J<sub>v</sub> = 17862. mm<sup>4</sup>
- J<sub>t</sub> = 154.1 mm<sup>4</sup>
- x<sub>o</sub> = -18.11 mm
- x<sub>g</sub> = 14.05 mm
- T<sub>y</sub> = -1665. N
- M<sub>x</sub> = 849150. Nmm
- u<sub>m</sub> = -14.05 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -8.05 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 364.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 12.42 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 352.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 1998. mm
- σ<sub>o</sub> = √σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup> = 668.4 N/mm<sup>2</sup>






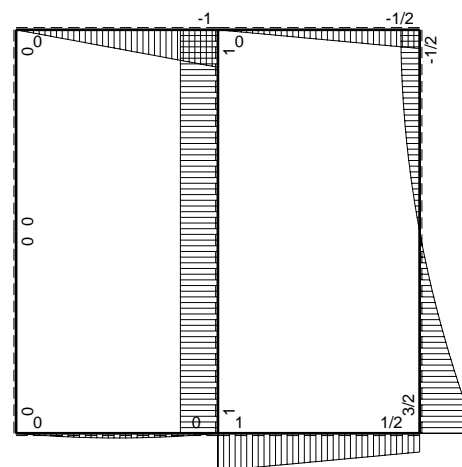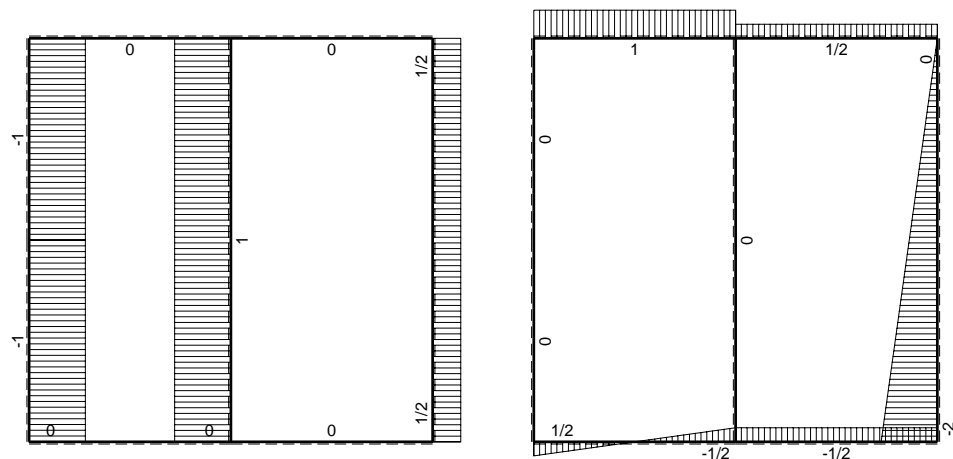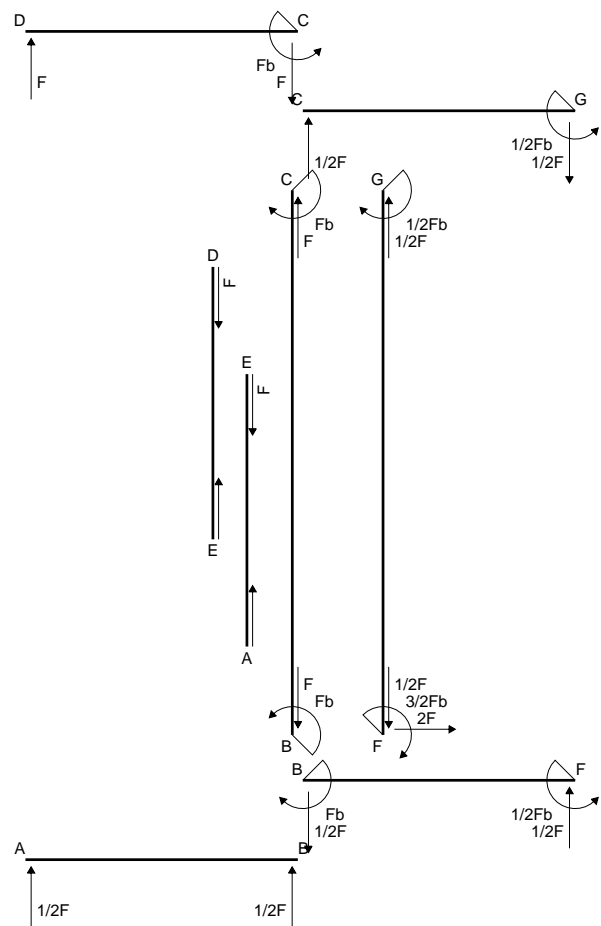

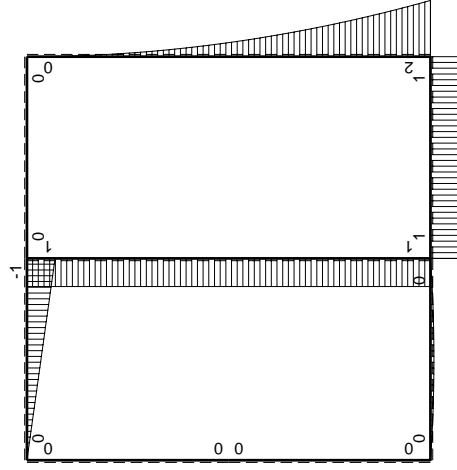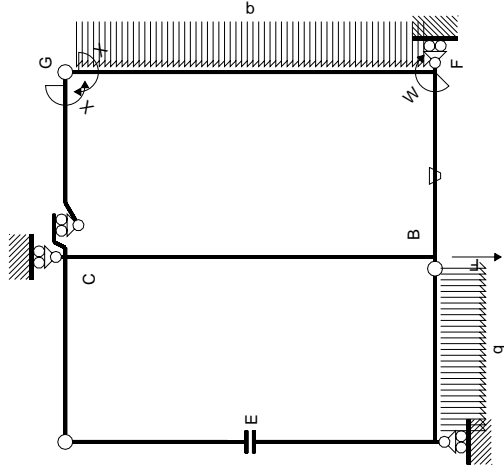

$M_0$  flessione da carichi assegnati

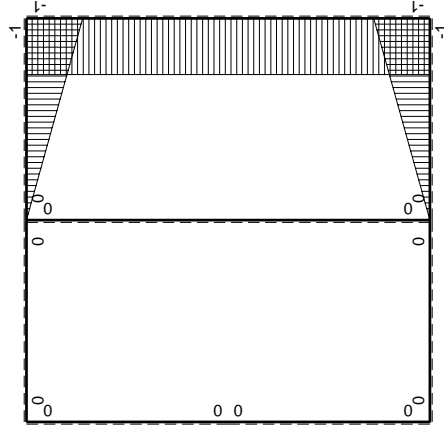

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | iperstatica X=W <sub>gc</sub> |        |                                |                  |                                |                             |                     |
|---|--------------------|-------------------------------|--------|--------------------------------|------------------|--------------------------------|-----------------------------|---------------------|
| ←   | M <sup>0</sup> (x) | M <sup>0</sup> (x)            | θ      | M <sup>x</sup> M <sub>0</sub>  | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>  | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
| AB b  | 0                  | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| BA b  | 0                  | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| CD b  | 0                  | -b+Fx                         | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| DC b  | 0                  | Fx                            | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| DE b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| ED b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| EA b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| AE b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| BF b  | -x/b               | Fb                            | -Fb/EJ | -Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup> | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| FB b  | 1-x/b              | -Fb                           | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$               | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| GC b  | -1+x/b             | 0                             | 0      | 0                              | 0                | $1-2x/b+x^2/b^2$               | 0+0                         | 1/3xb/EJ            |
| CG b  | x/b                | 0                             | 0      | 0                              | 0                | x <sup>2</sup> /b <sup>2</sup> | 0+0                         | 1/3xb/EJ            |
| FG 2b   | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup>    | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| GF 2b   | 1                  | -1/2qx <sup>2</sup>           | 0      | -1/2Fx <sup>2</sup> /b         | 0                | 1                              | 0+0                         | 0                   |
| CB 2b   | 0                  | Fb                            | 0      | 0                              | 0                | 0                              | 0+0                         | 0                   |
| BC 2b   | 0                  | -Fb                           | 0      | 0                              | 0                | 0                              | -4/3Fb <sup>2</sup> /EJ     | 8/3xb/EJ            |
| totali  |                    |                               |        |                                |                  |                                |                             |                     |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$






$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

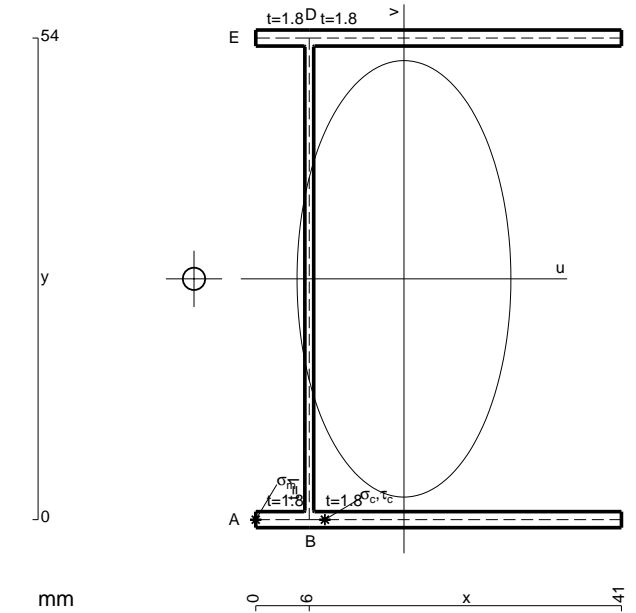


- A = 201.6 mm<sup>2</sup>
- J<sub>u</sub> = 120722. mm<sup>4</sup>
- J<sub>v</sub> = 28989. mm<sup>4</sup>
- J<sub>t</sub> = 177.4 mm<sup>4</sup>
- x<sub>o</sub> = -23.54 mm
- x<sub>g</sub> = 16.62 mm
- T<sub>y</sub> = 1860. N
- M<sub>x</sub> = -1023000. Nmm
- u<sub>m</sub> = -16.62 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -228.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -10.62 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -228.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 458.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 14.56 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 444.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 3348. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 826.9 N/mm<sup>2</sup>



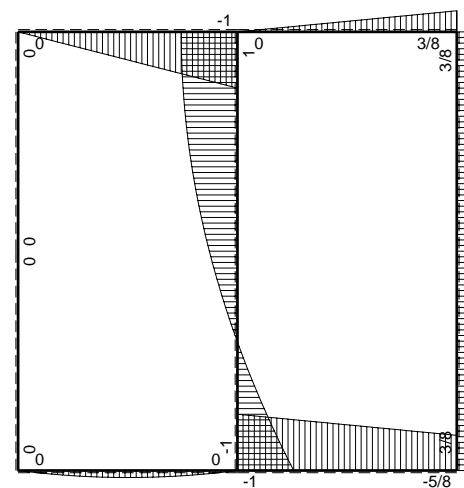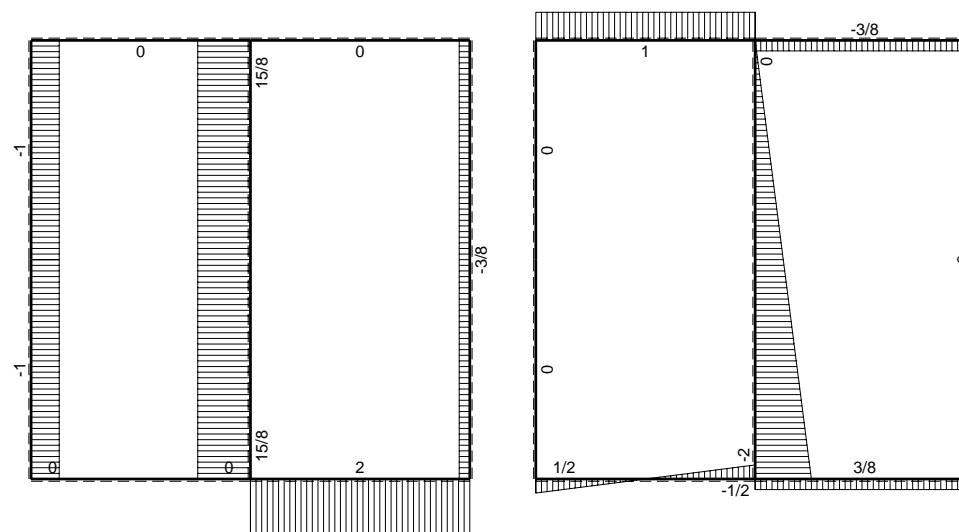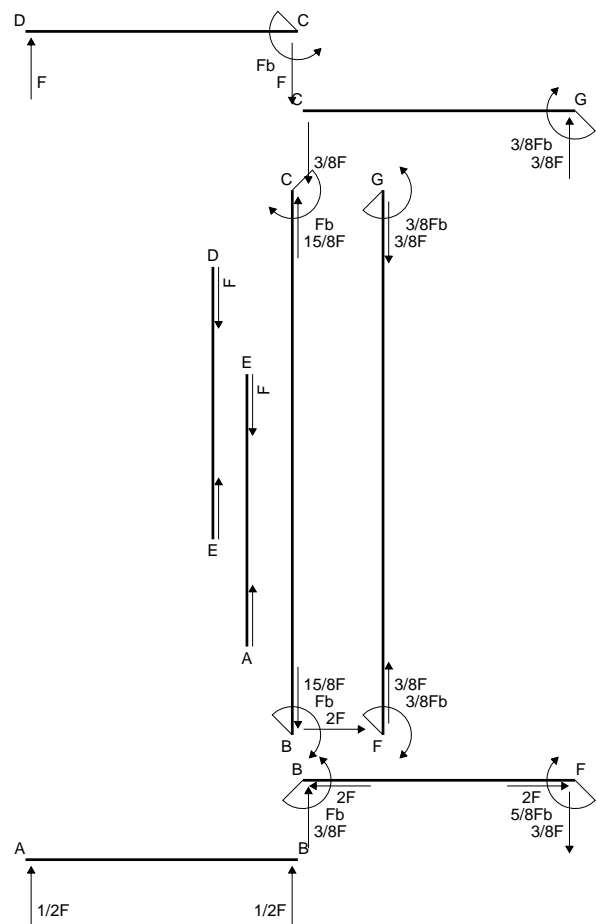


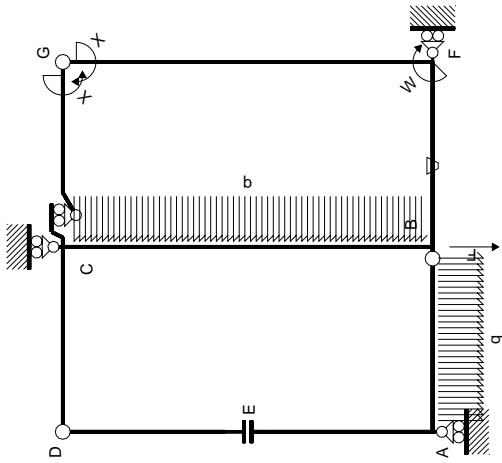

Schema di calcolo iperstatico

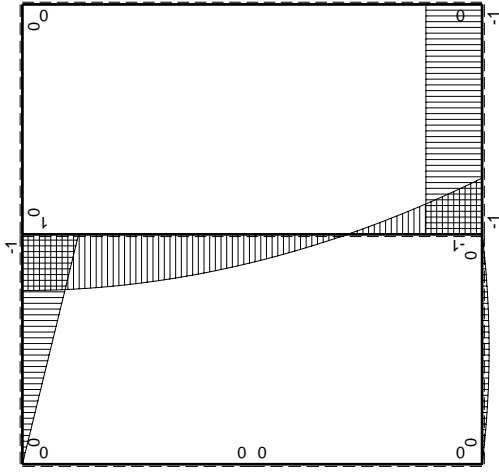

$M_0$  flessione da carichi assegnati

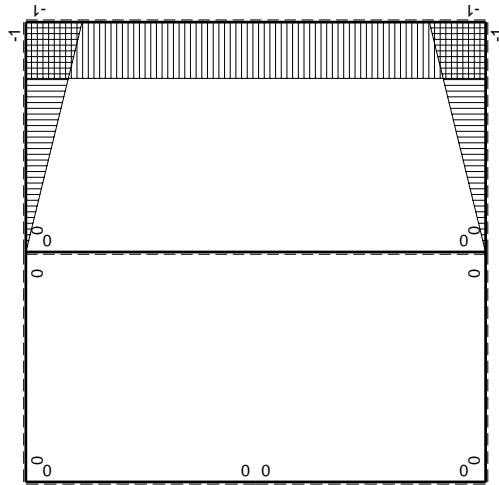

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|--------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b         | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b         | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b         | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b         | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| ED b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b         | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b         | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b         | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b         | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b         | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b        | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b        | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b        | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b        | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali       |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

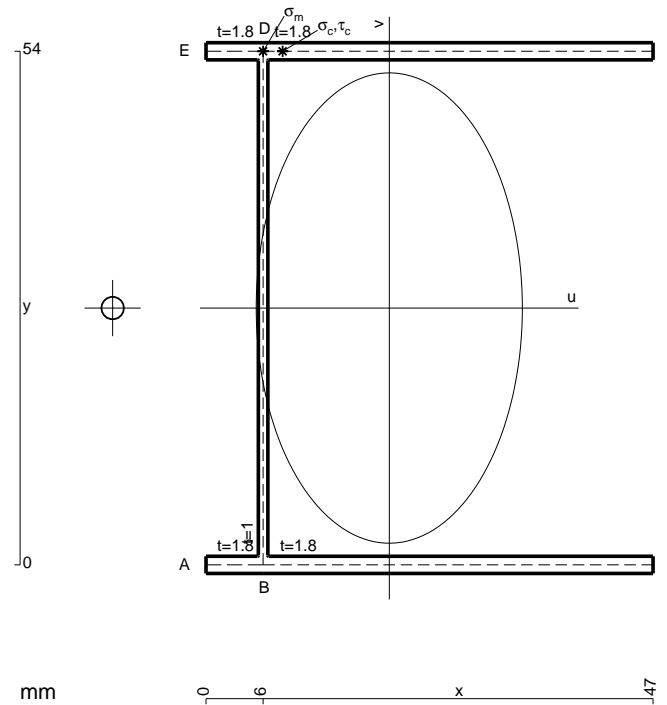


- A = 223.2 mm<sup>2</sup>
- J<sub>u</sub> = 136469. mm<sup>4</sup>
- J<sub>v</sub> = 43683. mm<sup>4</sup>
- J<sub>t</sub> = 200.7 mm<sup>4</sup>
- x<sub>o</sub> = -29.08 mm
- x<sub>g</sub> = 19.27 mm
- N = 3525. N
- T<sub>y</sub> = -3760. N
- M<sub>x</sub> = -1128000. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = -13.27 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 239. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = -13.27 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 239. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 1011. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 30.5 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 980.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 3384. mm
- σ<sub>o</sub> = √(σ<sup>2</sup>+3τ<sup>2</sup>) = 1767. N/mm<sup>2</sup>






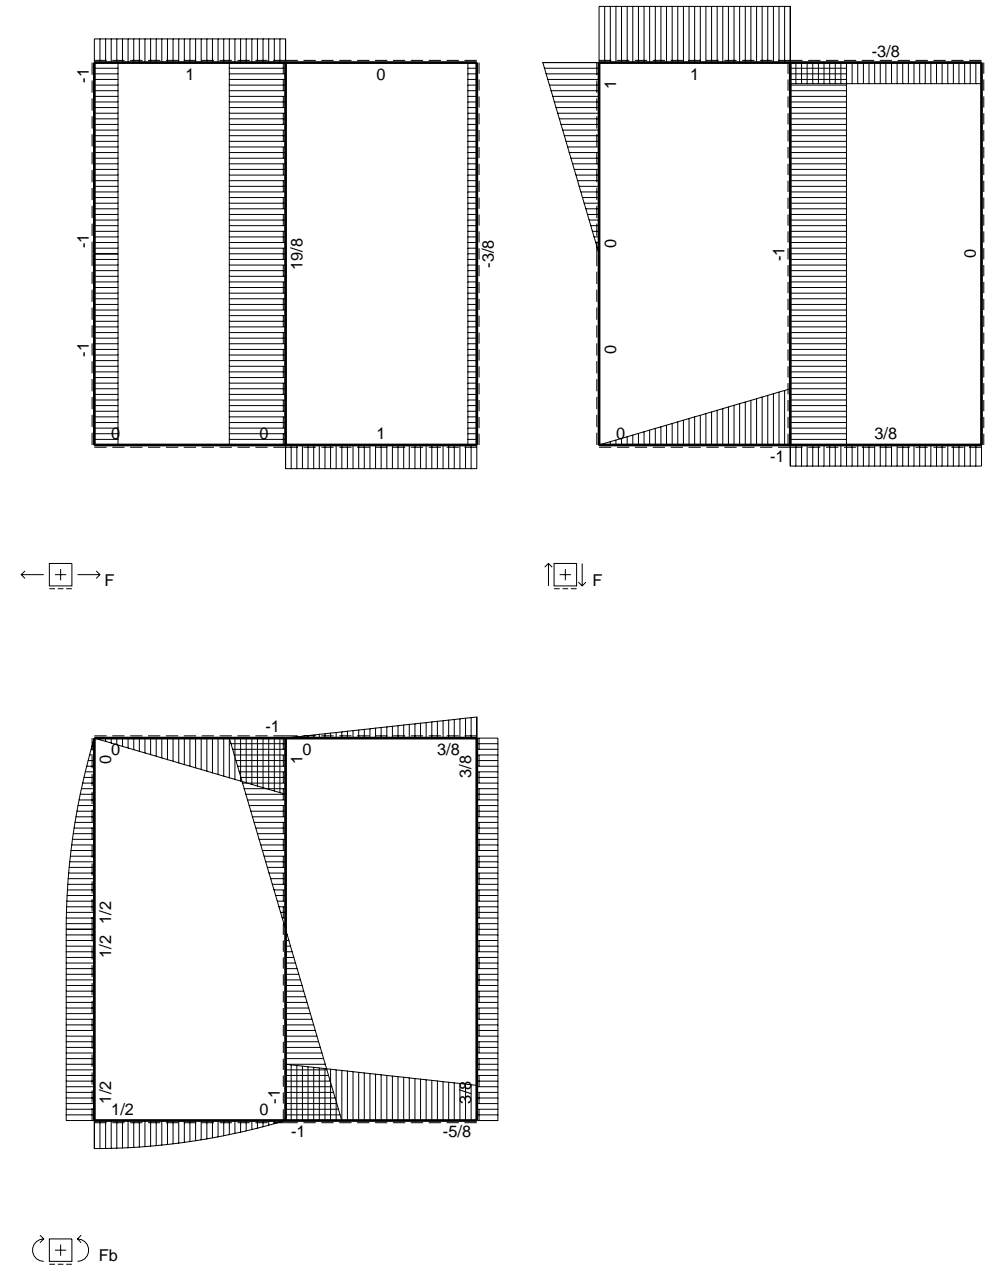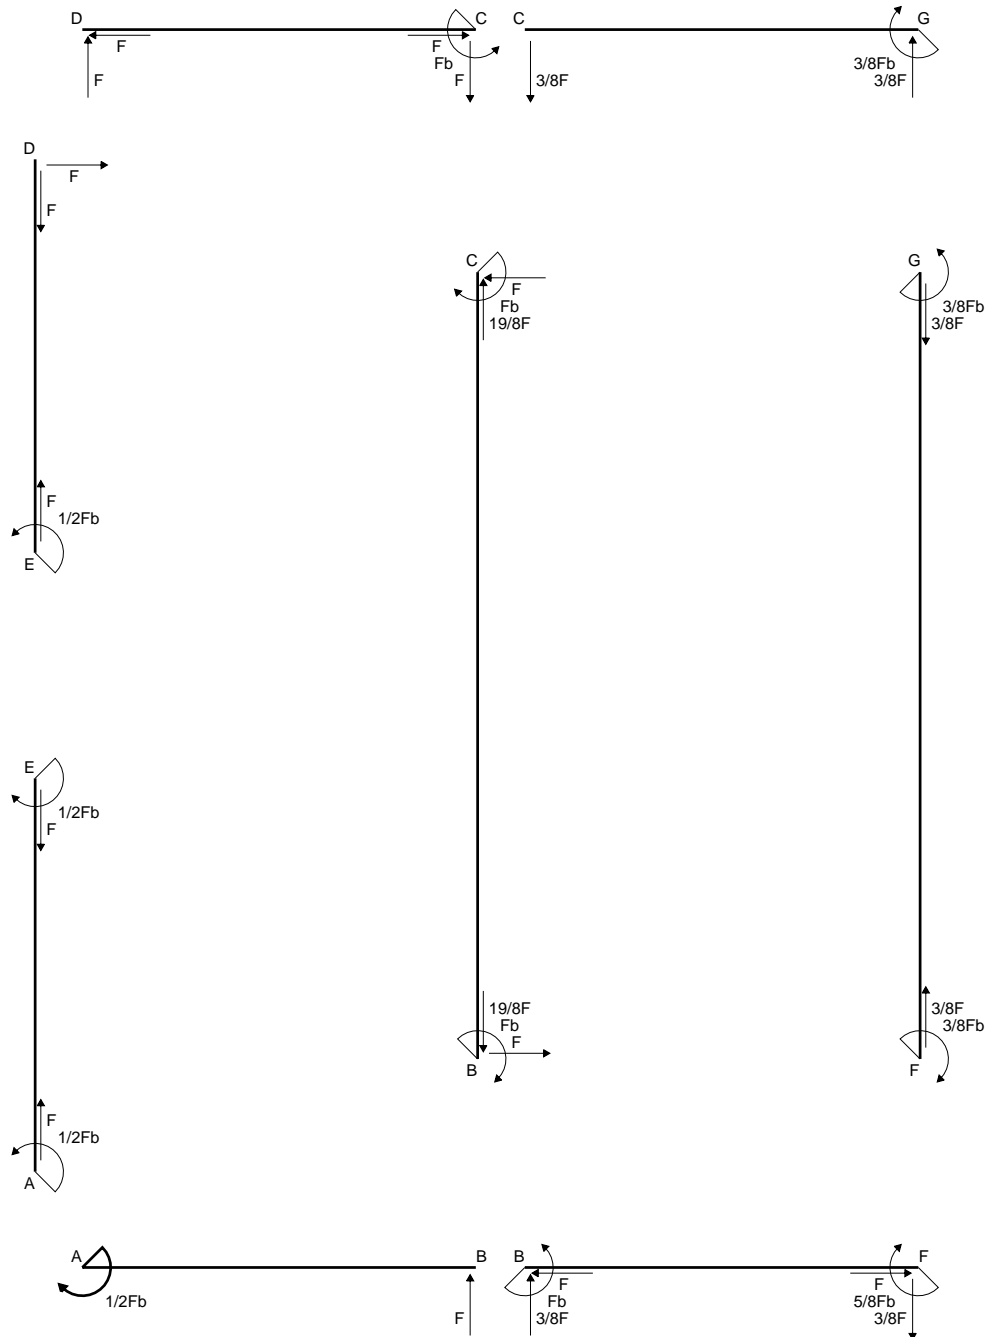


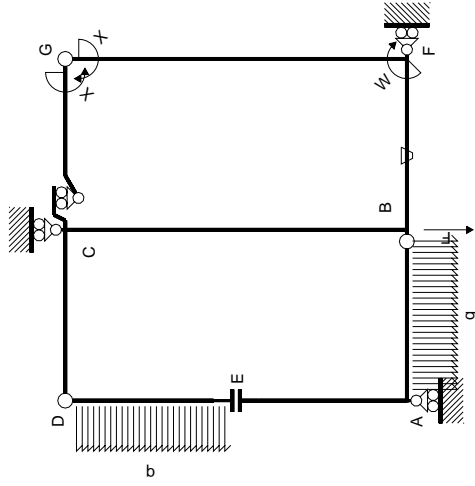

Schema di calcolo iperstatico

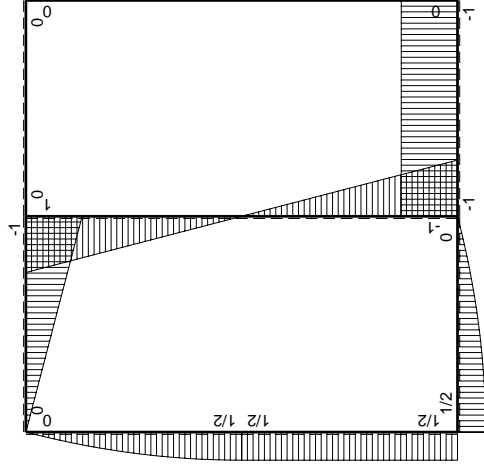

$M_0$  flessione da carichi assegnati

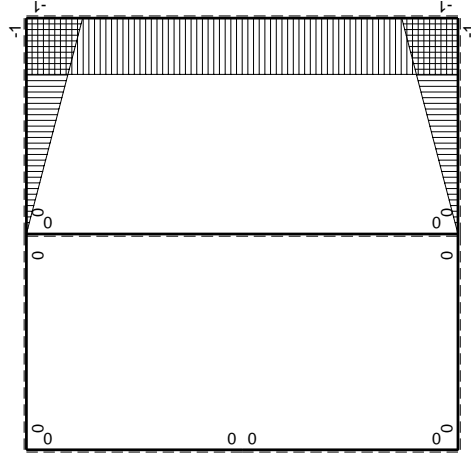

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$  | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|-----------------------|-----------|----------|-----------|-----------------|----------------------|---------------------------------|-----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| BA b          | $-Fx + 1/2 q x^2$     | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| CD b          | $-Fb + Fx$            | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| DC b          | $Fx$                  | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| DE b          | $Fx - 1/2 q x^2$      | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| EA b          | $1/2 Fb$              | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| AE b          | $-1/2 Fb$             | 0         | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| BF b          | $-x/b$                | $-Fb$     | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$            | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b^3/EJ$        |
| FB b          | $1-x/b$               | $Fb$      | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/3 x b^3/EJ$                  | $1/3 x b^3/EJ$        |
| GC b          | $-1+x/b$              | 0         | 0        | 0         | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3 x b^3/EJ$        |
| CG b          | $x/b$                 | 0         | 0        | 0         | 0               | $x^2/b^2$            | 0+0                             | $1/3 x b^3/EJ$        |
| FG 2b         | -1                    | 0         | 0        | 0         | 0               | 1                    | 0+0                             | $2x b^3/EJ$           |
| GF 2b         | 1                     | 0         | 0        | 0         | 0               | 1                    | 0+0                             | $2x b^3/EJ$           |
| CB 2b         | 0                     | $Fb - Fx$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| BC 2b         | 0                     | $Fb - Fx$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                     |
| totali        |                       |           |          |           |                 |                      |                                 | $8/3 x b^3/EJ$        |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

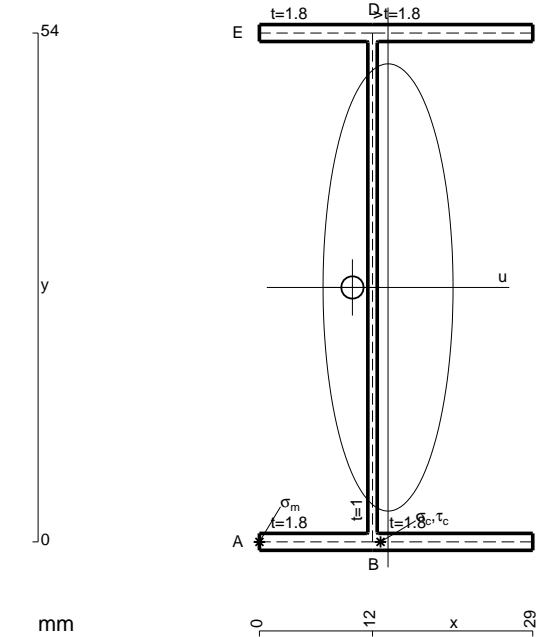


- A = 158.4 mm<sup>2</sup>
- J<sub>u</sub> = 89230. mm<sup>4</sup>
- J<sub>v</sub> = 7539. mm<sup>4</sup>
- J<sub>t</sub> = 130.8 mm<sup>4</sup>
- x<sub>o</sub> = -3.78 mm
- x<sub>g</sub> = 13.65 mm
- N = 2256. N
- T<sub>y</sub> = -950. N
- M<sub>x</sub> = 608000. Nmm
- u<sub>m</sub> = -13.65 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 198.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -1.648 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 198.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 54.32 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 4.887 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 49.44 N/mm<sup>2</sup>
- t<sub>c</sub> = 1710. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 219.4 N/mm<sup>2</sup>



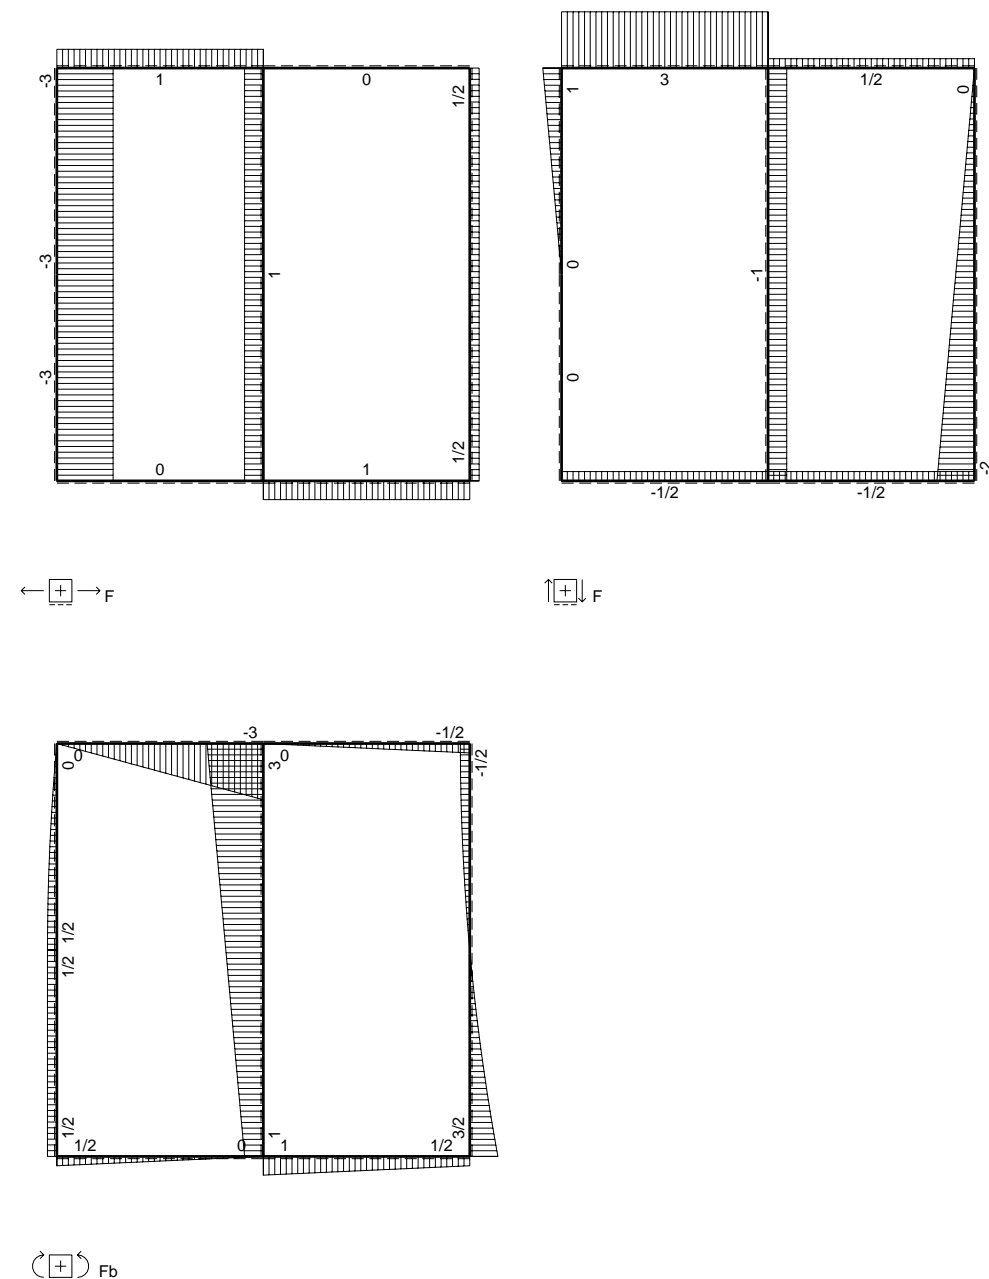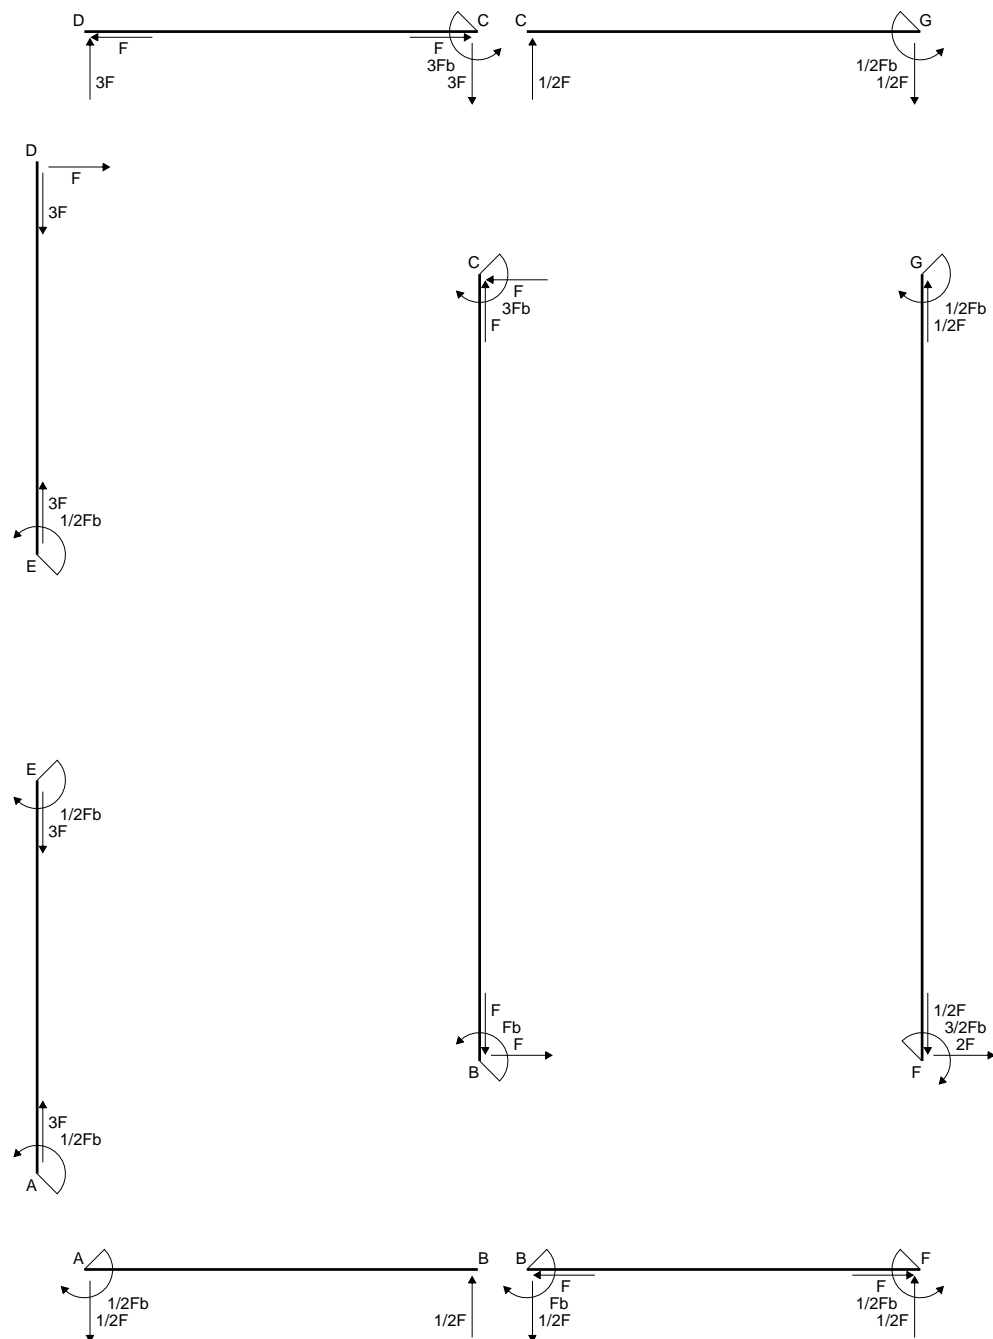

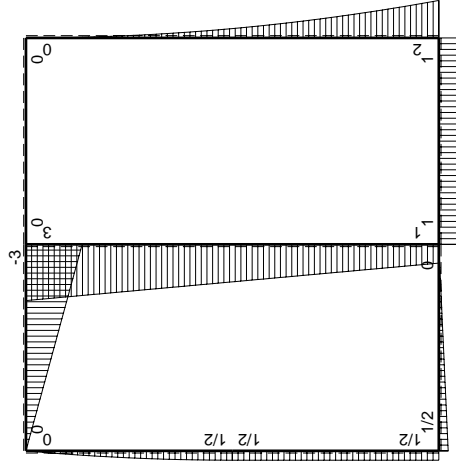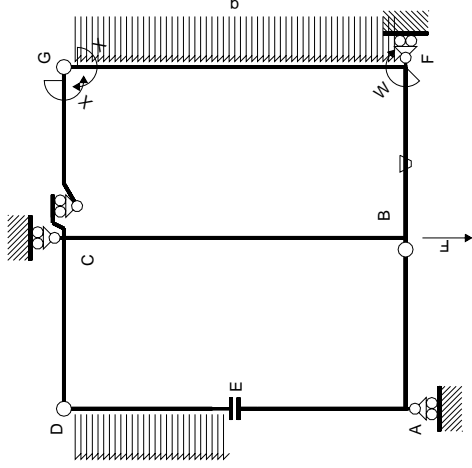

$M_0$  flessione da carichi assegnati

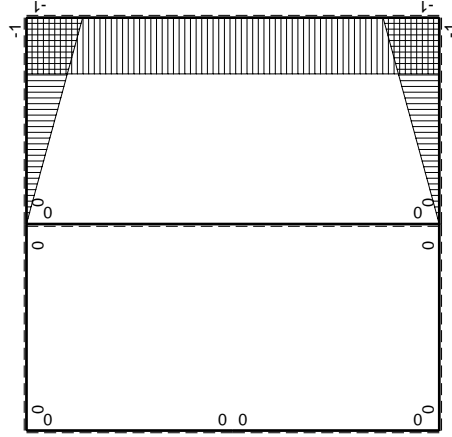

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$          | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|-------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | $1/2Fb-1/2Fx$     | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BA b          | 0        | $-1/2Fx$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| CD b          | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DC b          | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DE b          | 0        | $Fx-1/2qx^2$      | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| ED b          | 0        | $-1/2Fb+1/2qx^2$  | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| EA b          | 0        | $1/2Fb$           | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| AE b          | 0        | $-1/2Fb$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$   | $Fb$              | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b         | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b         | 0        | $3Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $-Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                   |          |                      |               |                  | $-4/3Fb^2/EJ$               | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

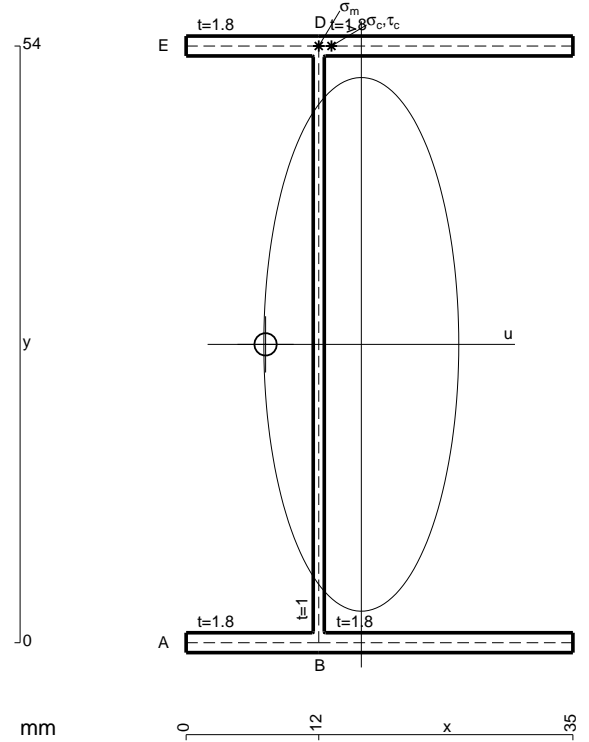

- A = 180. mm<sup>2</sup>
- J<sub>u</sub> = 104976. mm<sup>4</sup>
- J<sub>v</sub> = 14006. mm<sup>4</sup>
- J<sub>t</sub> = 154.1 mm<sup>4</sup>
- x<sub>o</sub> = -8.663 mm
- x<sub>g</sub> = 15.85 mm
- N = 390. N
- T<sub>y</sub> = 1170. N
- M<sub>x</sub> = -795600. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = -3.85 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 206.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = -3.85 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - M<sub>v</sub>/J<sub>u</sub> = 206.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 125.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = T<sub>S</sub>/t<sub>J</sub><sub>u</sub> = 6.921 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/t<sub>J</sub><sub>t</sub> = 118.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 702. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 299.8 N/mm<sup>2</sup>






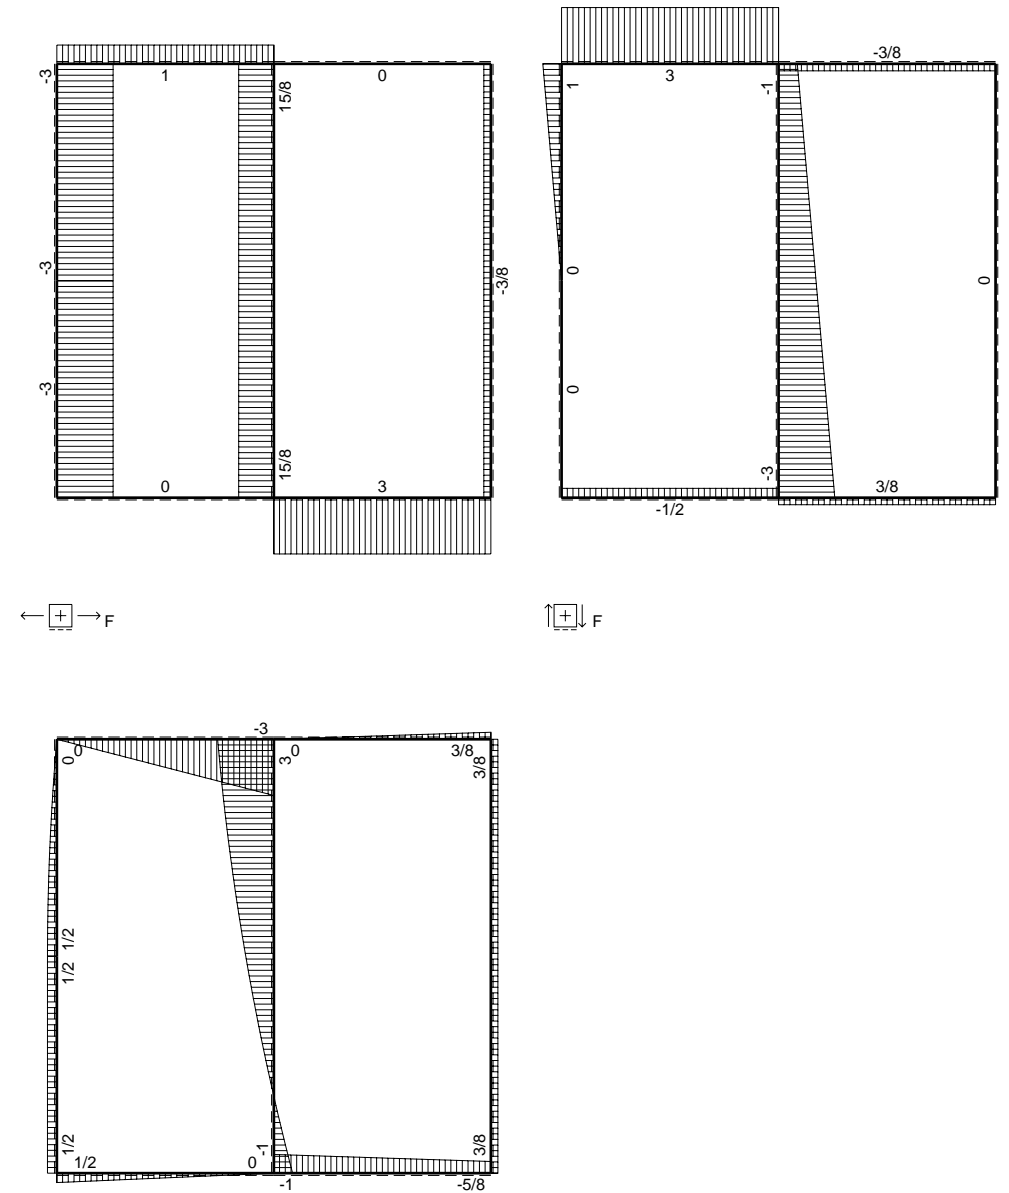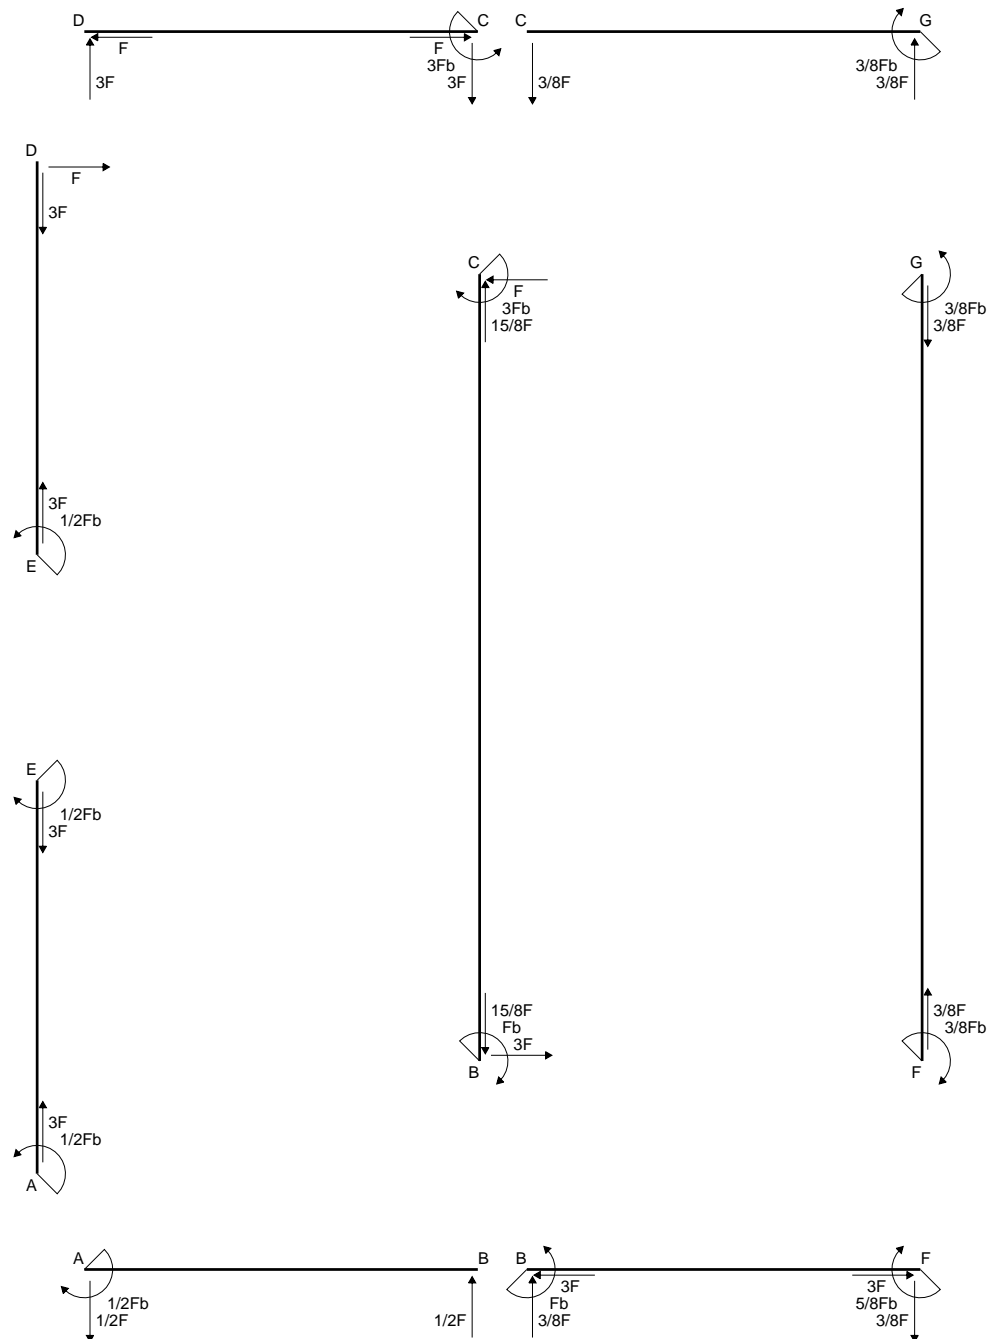


← ⊕ → F

↑ ⊕ ↓ F

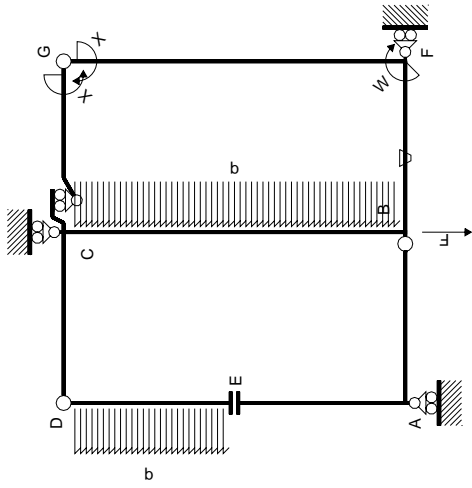

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

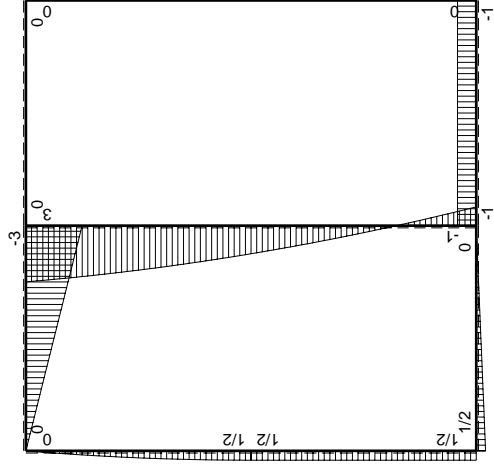

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$         | $\theta$ | $M^x M^0$ | $M^x \theta$  | $M^x M^x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M^x/EJ dx$ |
|---------------|----------|------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | $1/2Fb-1/2Fx$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | 0        | $-1/2Fx$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | 0        | $-3Fb+3Fx$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | 0        | $3Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | 0        | $Fx-1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | 0        | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | 0        | $1/2Fb$          | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | 0        | $-1/2Fb$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$   | $-Fb$            | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $Fb$             | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $3Fb-Fx-1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-3Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                  |          |           |               |                  |                             | $Fb^2/EJ$            |
|               |          |                  |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

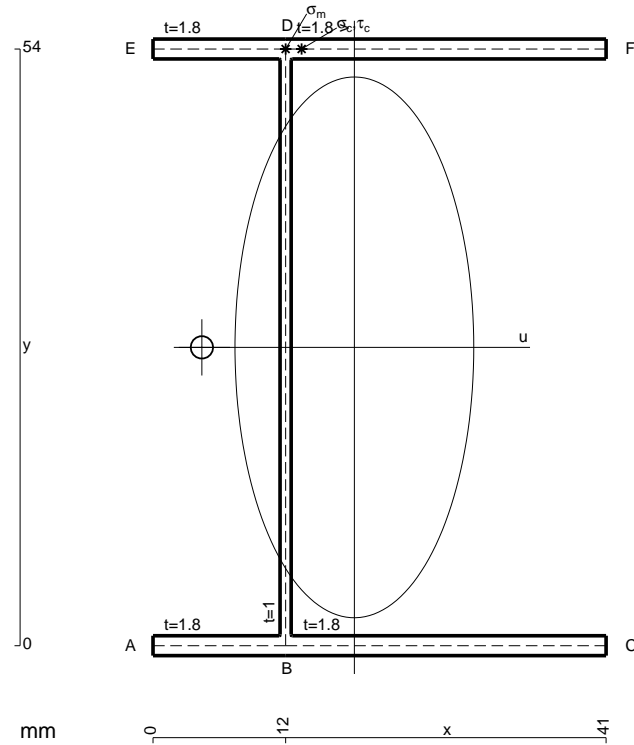

- A = 201.6 mm<sup>2</sup>
- J<sub>u</sub> = 120722. mm<sup>4</sup>
- J<sub>v</sub> = 23533. mm<sup>4</sup>
- J<sub>t</sub> = 177.4 mm<sup>4</sup>
- x<sub>o</sub> = -13.8 mm
- x<sub>g</sub> = 18.22 mm
- N = 440. N
- T<sub>y</sub> = 1320. N
- M<sub>x</sub> = -963600. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = -6.223 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 217.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = -6.223 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 217.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 193.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 8.561 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 184.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 792. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 399.5 N/mm<sup>2</sup>




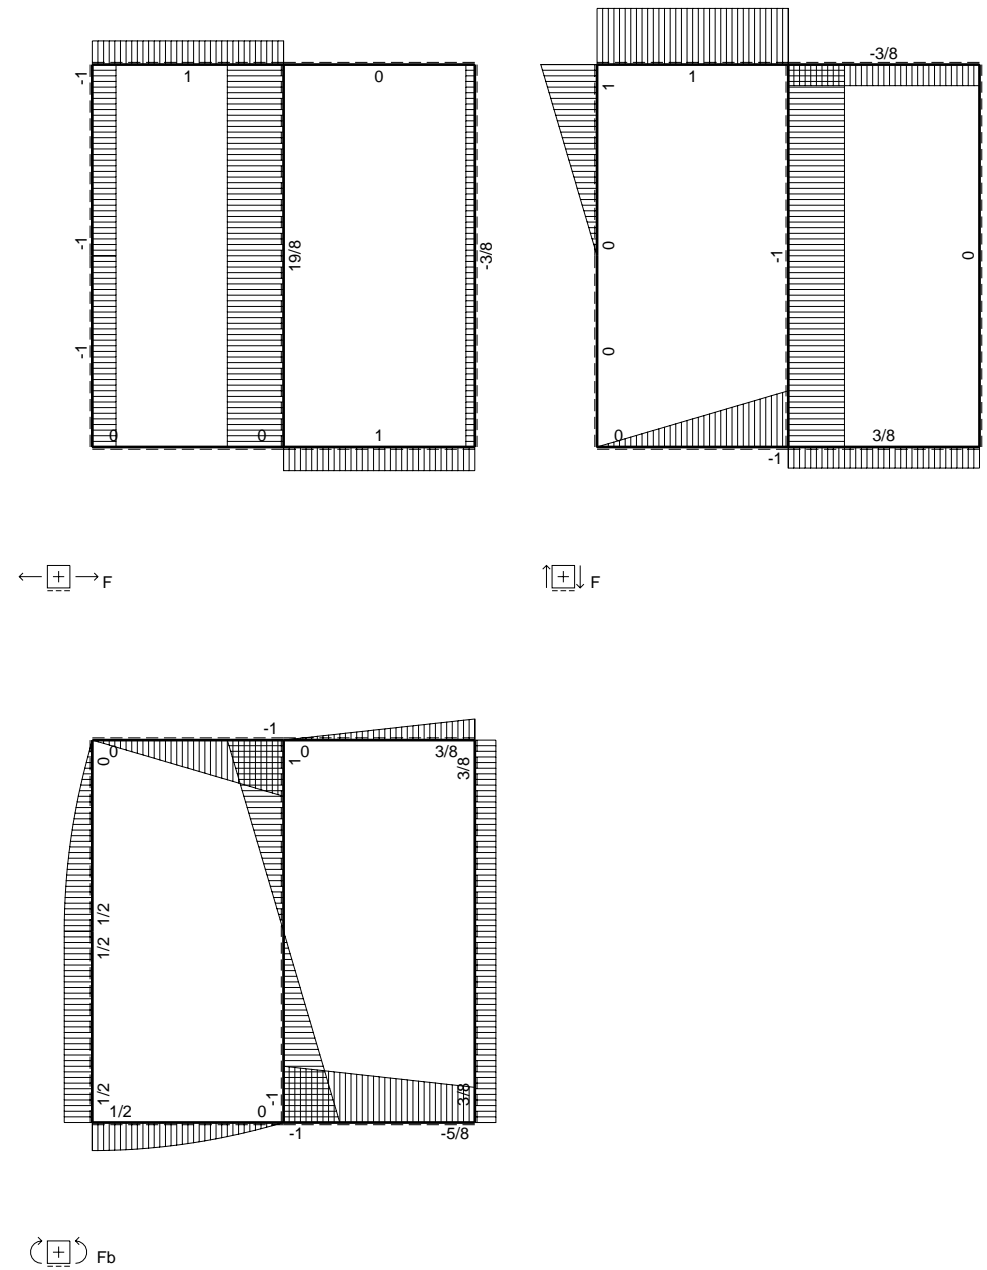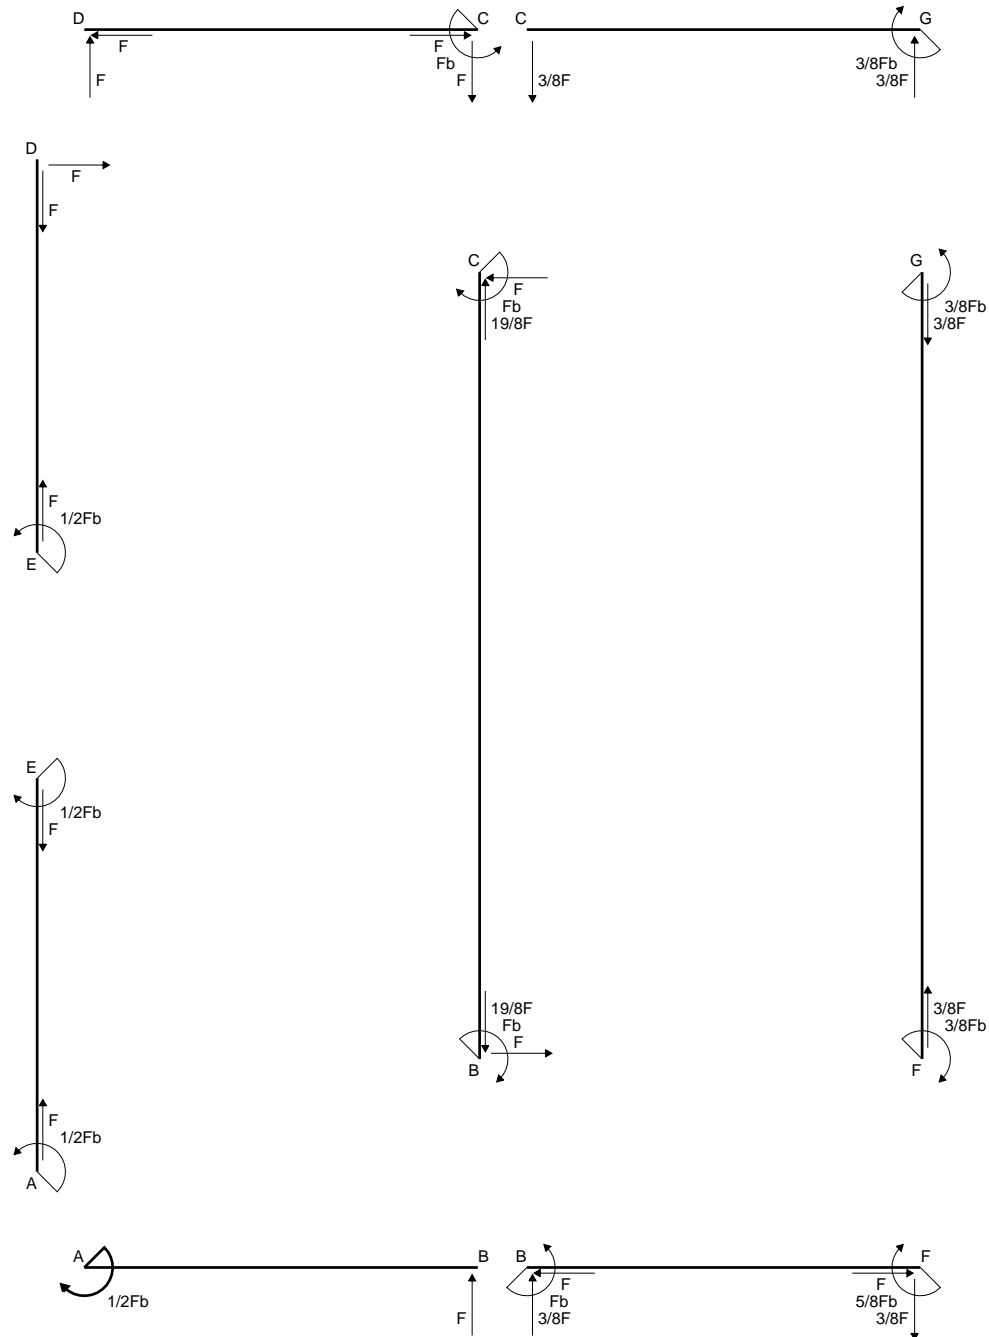

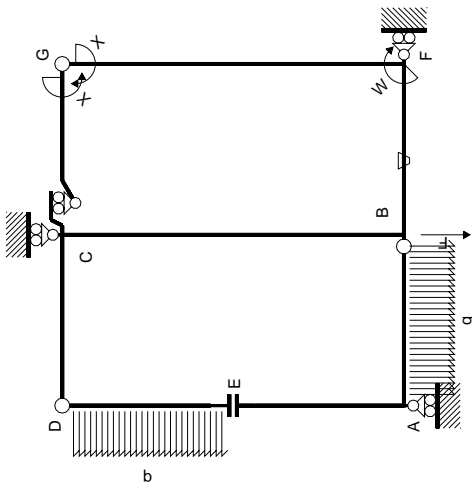

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

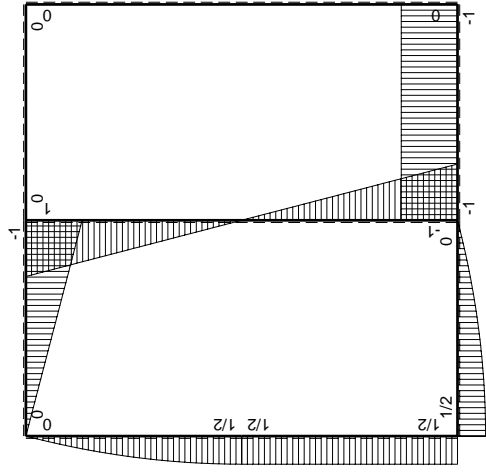

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$           | $M_0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|------------------|----------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | $1/2Fb-1/2qx^2$  | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | $-Fx+1/2qx^2$    | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | $-Fb+Fx$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | $Fx$             | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | $Fx-1/2qx^2$     | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | $-1/2Fb+1/2qx^2$ | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | $1/2Fb$          | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | $-1/2Fb$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$           | $-Fb$    | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$          | $Fb$     | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | $-1+x/b$         | 0        | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$            | 0        | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1               | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1                | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |                  |          |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

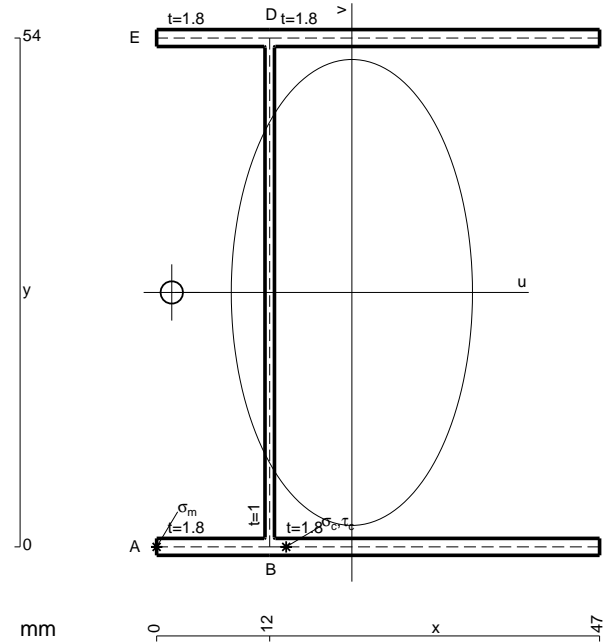


- A = 223.2 mm<sup>2</sup>
- J<sub>u</sub> = 136469. mm<sup>4</sup>
- J<sub>v</sub> = 36561. mm<sup>4</sup>
- J<sub>t</sub> = 200.7 mm<sup>4</sup>
- x<sub>o</sub> = -19.11 mm
- x<sub>g</sub> = 20.72 mm
- N = 3349. N
- T<sub>y</sub> = -1410. N
- M<sub>x</sub> = 1085700. Nmm
- u<sub>m</sub> = -20.72 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 229.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -8.718 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 229.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 251.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.764 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 241.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 2538. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 492.4 N/mm<sup>2</sup>






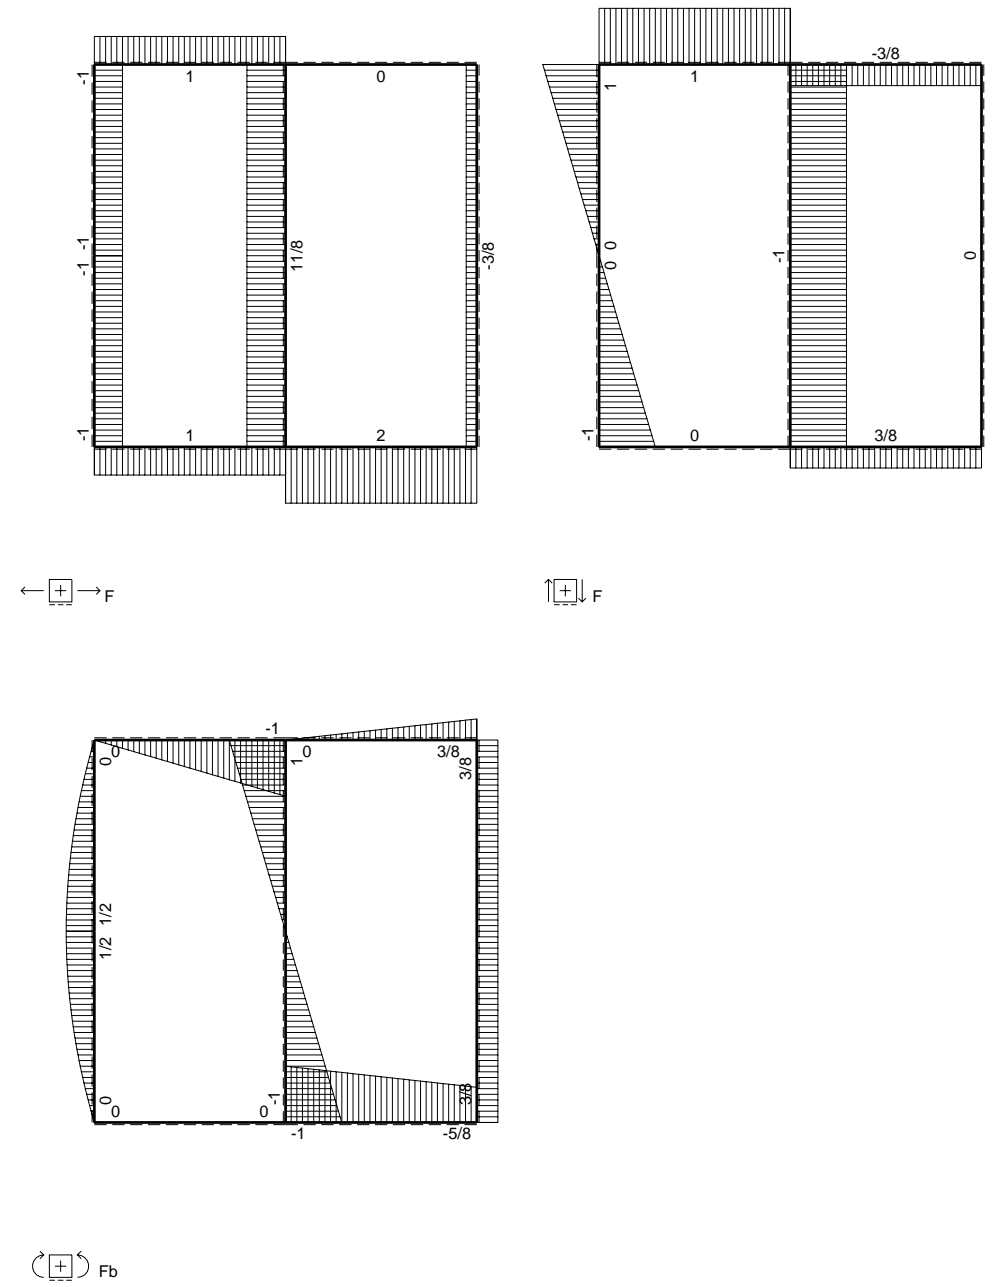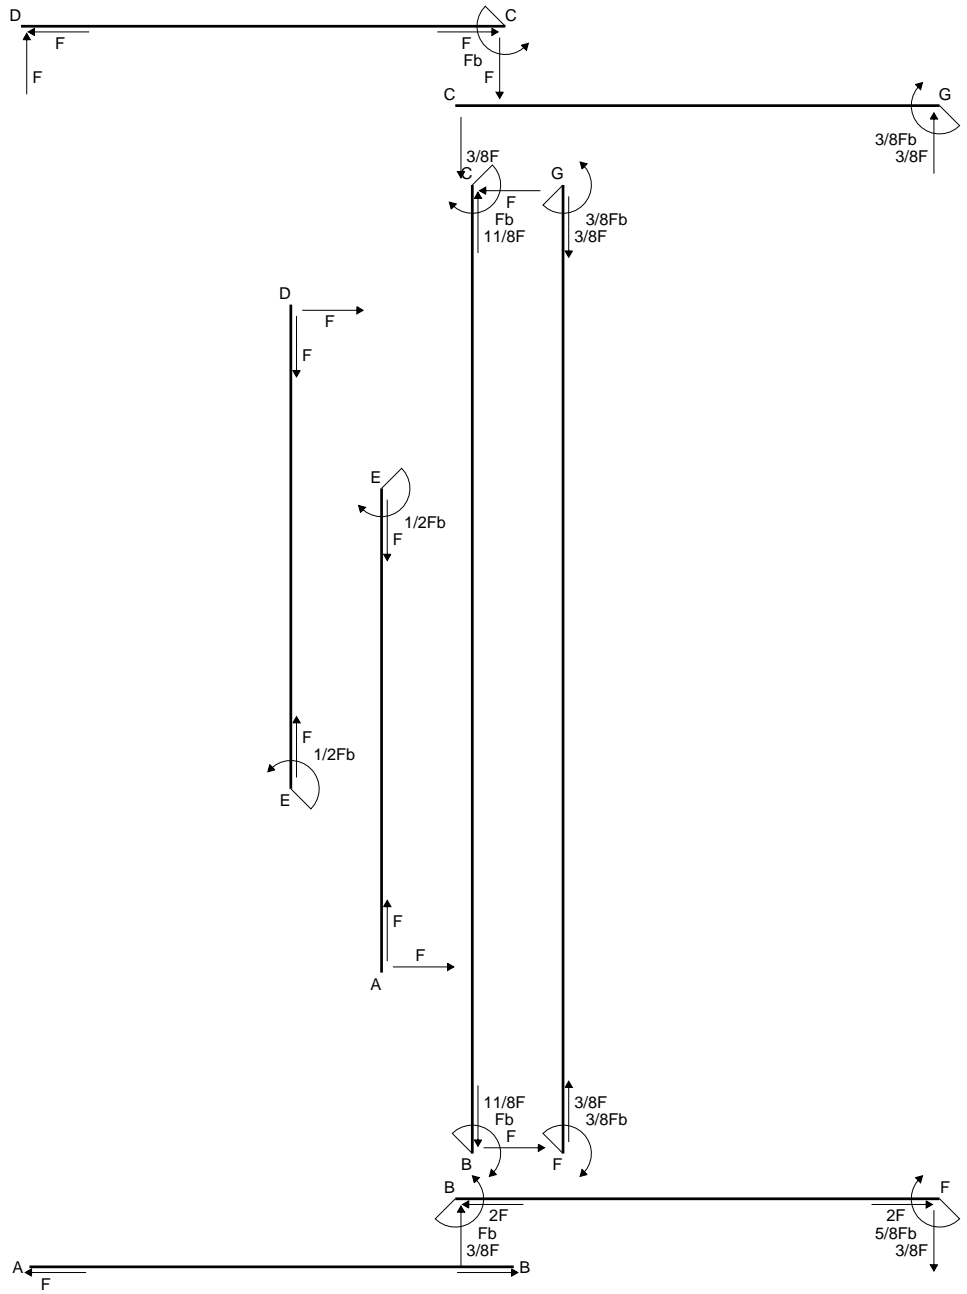


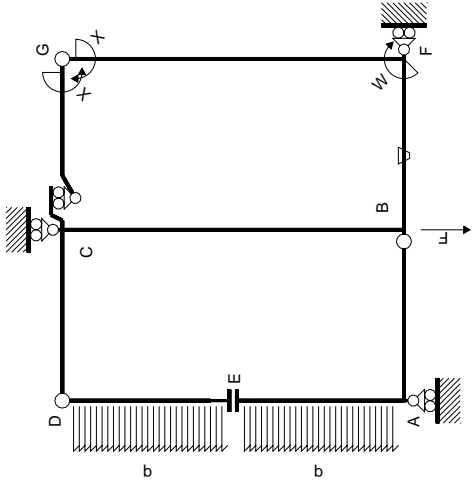

Schema di calcolo iperstatico

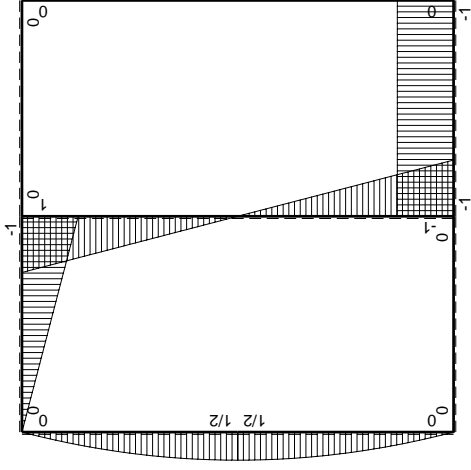

$M_0$  flessione da carichi assegnati

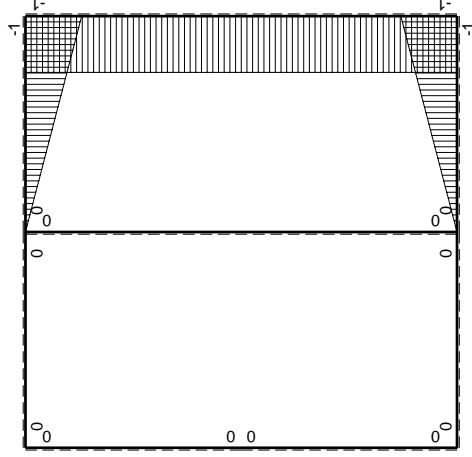

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| →      | M <sup>x</sup> (x) | M <sub>0</sub> (x)        | θ      | M <sub>0</sub> M <sub>0</sub> | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | $\int M_x(M_0/EJ+\theta)dx$  | $\int M_x M_x/EJ dx$ |
|--------|--------------------|---------------------------|--------|-------------------------------|------------------|---------------------------------------|------------------------------|----------------------|
| AB b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BA b   | 0                  | 0                         | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| CD b   | 0                  | -Fb+Fx                    | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| DC b   | 0                  | Fx                        | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| DE b   | 0                  | Fx-1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| ED b   | 0                  | -1/2Fb+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| EA b   | 0                  | 1/2Fb-1/2qx <sup>2</sup>  | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| AE b   | 0                  | -Fx+1/2qx <sup>2</sup>    | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BF b   | -x/b               | -Fb                       | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ             |
| FB b   | 1-x/b              | Fb                        | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                     | 1/3xb/EJ             |
| GC b   | -1+x/b             | 0                         | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                          | 1/3xb/EJ             |
| CG b   | x/b                | 0                         | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                          | 2xb/EJ               |
| FG 2b  | -1                 | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                    |
| GF 2b  | 1                  | 0                         | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                    |
| CB 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BC 2b  | 0                  | Fb-Fx                     | 0      | 0                             | 0                | 0                                     | 0+0                          | 8/3xb/EJ             |
| totali |                    |                           |        |                               |                  |                                       |                              |                      |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


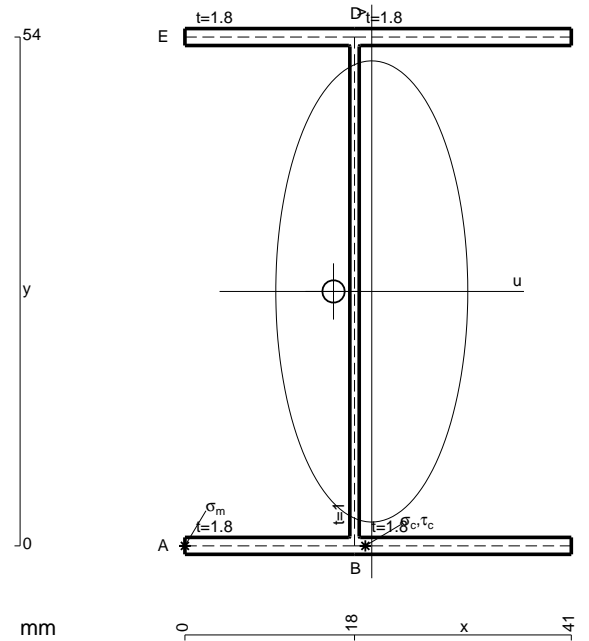


- A = 201.6 mm<sup>2</sup>
- J<sub>u</sub> = 120722. mm<sup>4</sup>
- J<sub>v</sub> = 20923. mm<sup>4</sup>
- J<sub>t</sub> = 177.4 mm<sup>4</sup>
- x<sub>o</sub> = -4.059 mm
- x<sub>g</sub> = 19.83 mm
- N = 1746. N
- T<sub>y</sub> = -1270. N
- M<sub>x</sub> = 1028700. Nmm
- u<sub>m</sub> = -19.83 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 238.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -1.83 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 238.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 58.83 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.533 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 52.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 2286. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 259.6 N/mm<sup>2</sup>




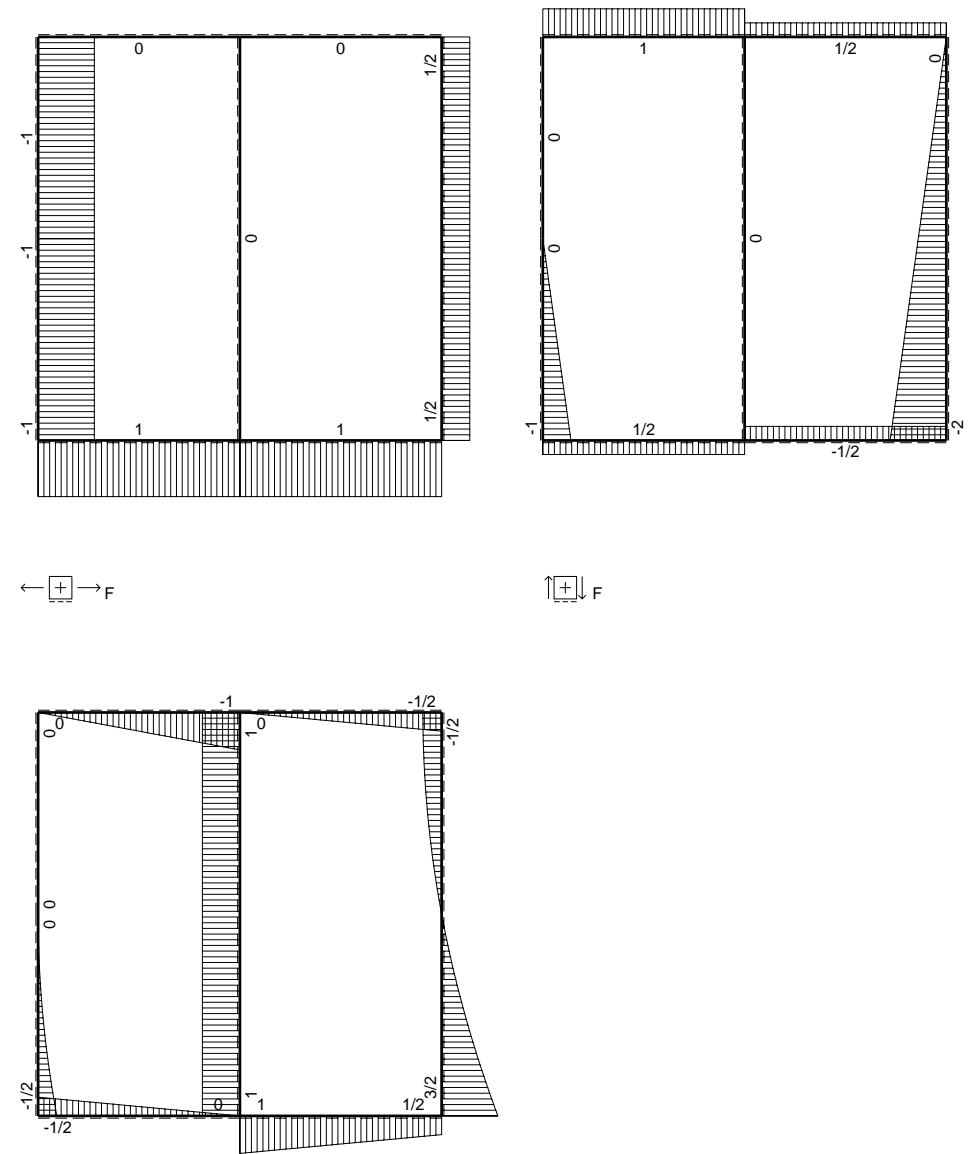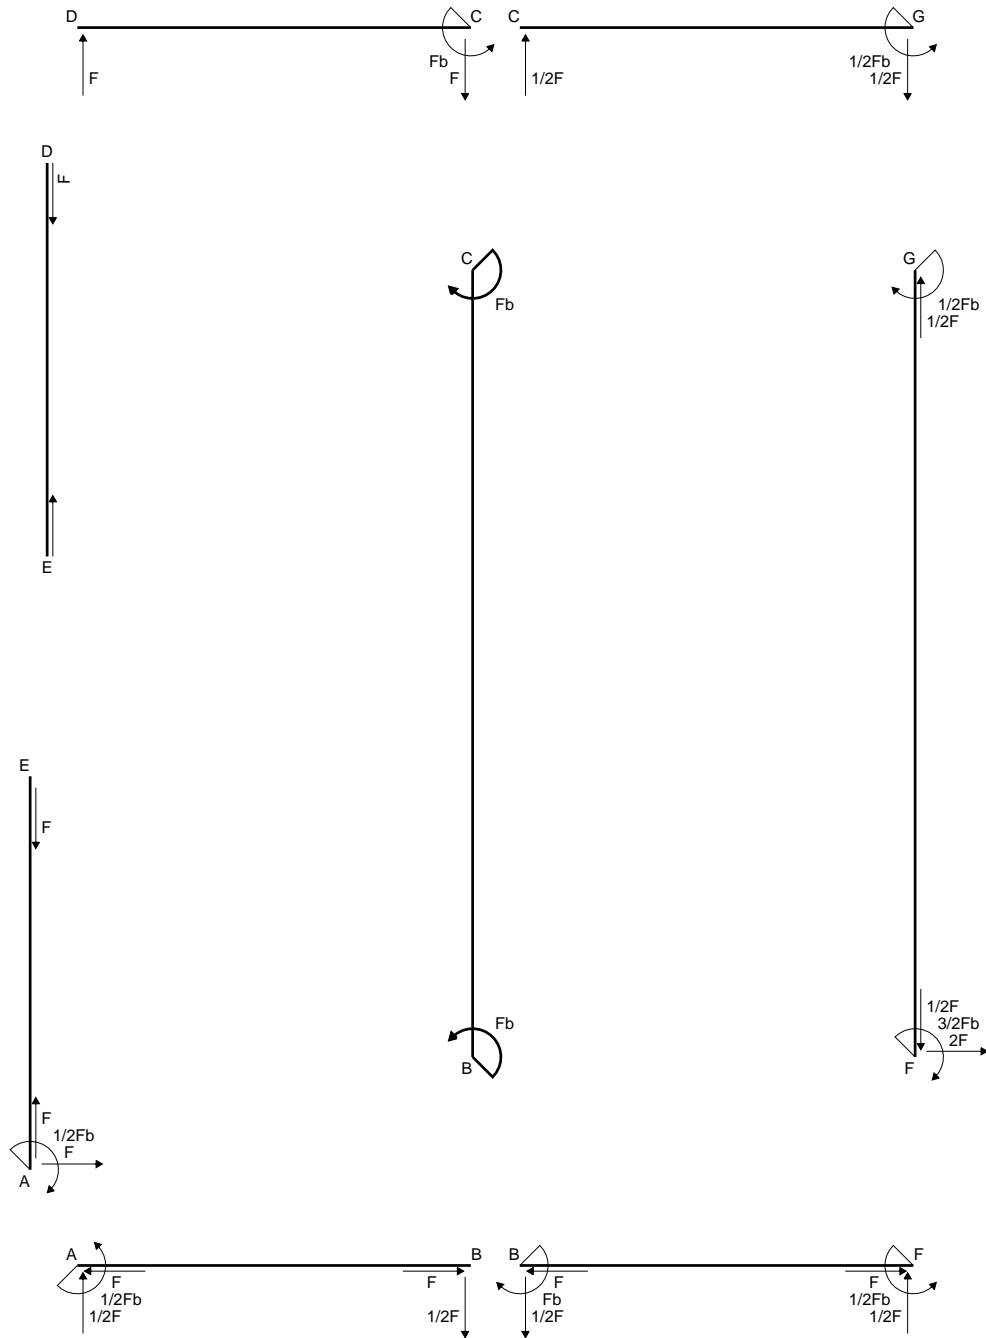

⊕ Fb

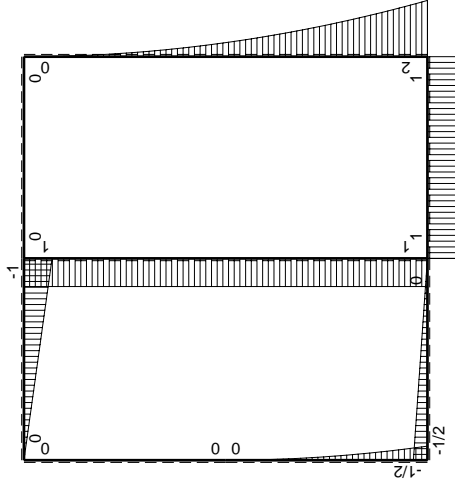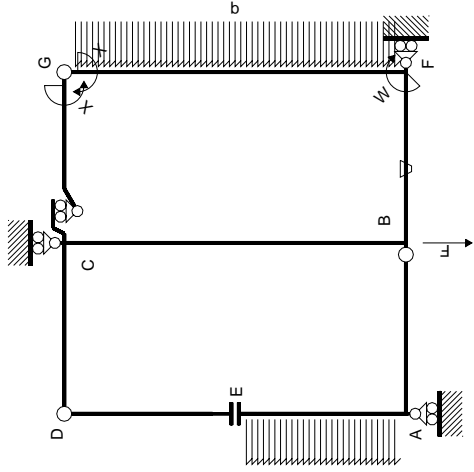

$M_0$  flessione da carichi assegnati

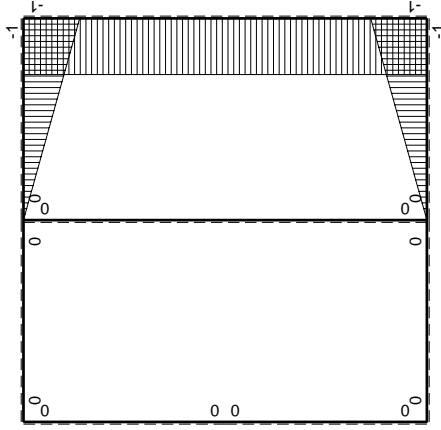

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|----------|------------------------|----------|--------------------------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BA b          | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| CD b          | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| DC b          | 0        | $Fx$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| ED b          | 0        | 0                      | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| EAB           | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BAE           | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BF b          | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$          | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b          | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b          | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$          | 0+0                             | $1/3xb/EJ$            |
| FG 2b         | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                  | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0        | $Fb$                   | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| BC 2b         | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                  | 0+0                             | 0                     |
| totali        |          |                        |          |                          |                 |                    | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

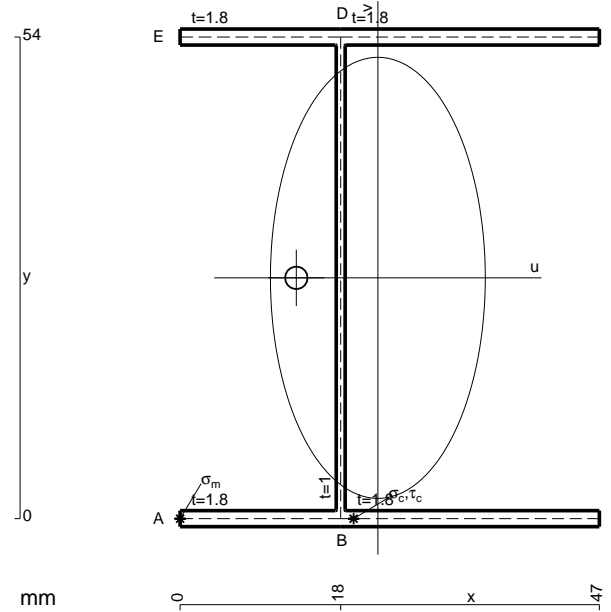

- A = 223.2 mm<sup>2</sup>
- J<sub>u</sub> = 136469. mm<sup>4</sup>
- J<sub>v</sub> = 32385. mm<sup>4</sup>
- J<sub>t</sub> = 200.7 mm<sup>4</sup>
- x<sub>o</sub> = -9.141 mm
- x<sub>g</sub> = 22.17 mm
- T<sub>y</sub> = 2350. N
- M<sub>x</sub> = -1010500. Nmm
- u<sub>m</sub> = -22.17 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -4.169 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -199.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 206.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 13.48 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 192.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 4230. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 409.1 N/mm<sup>2</sup>







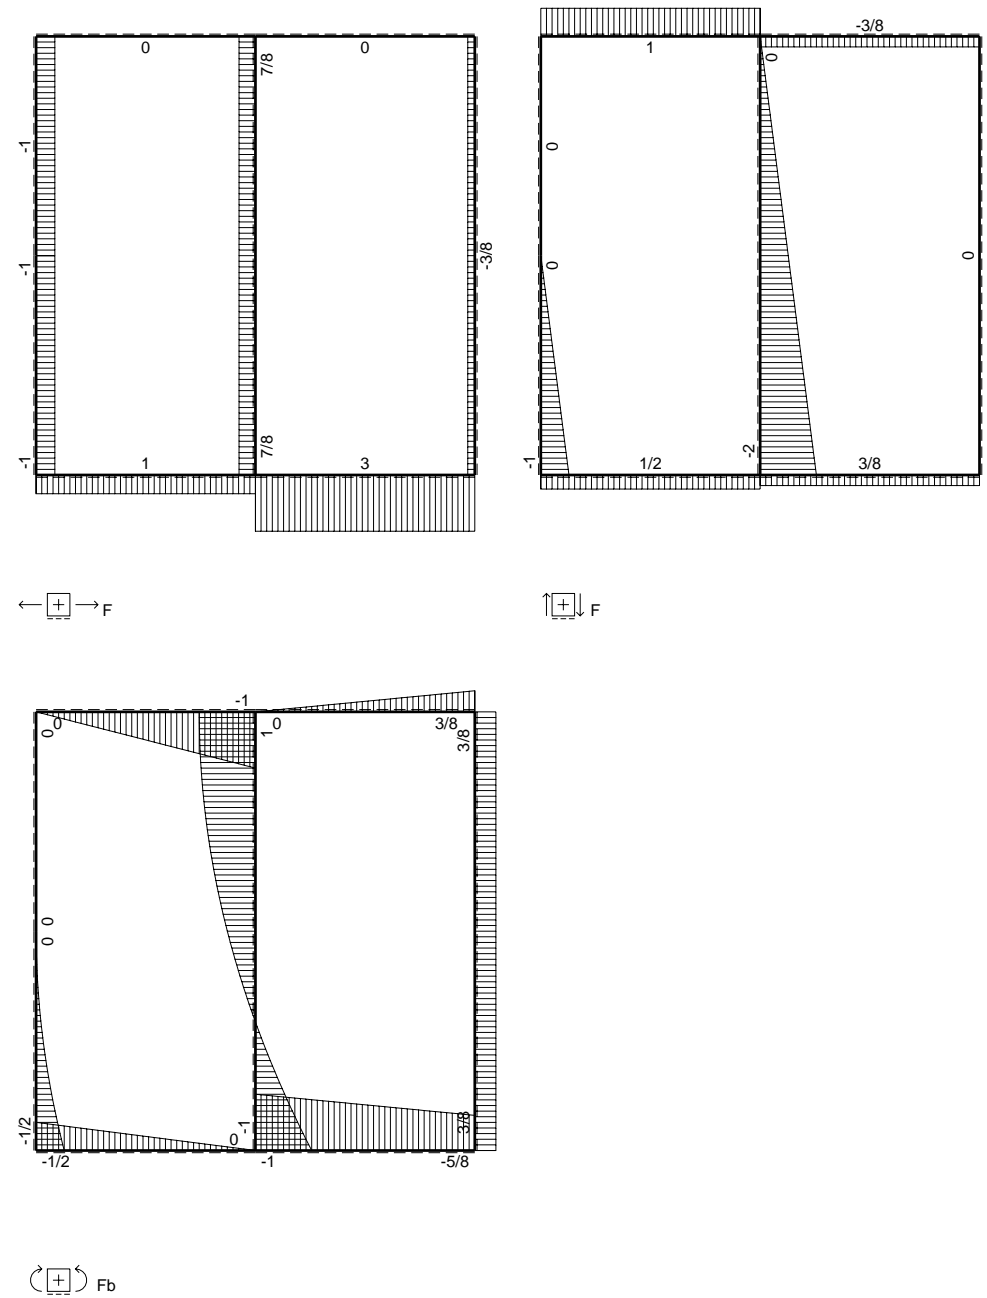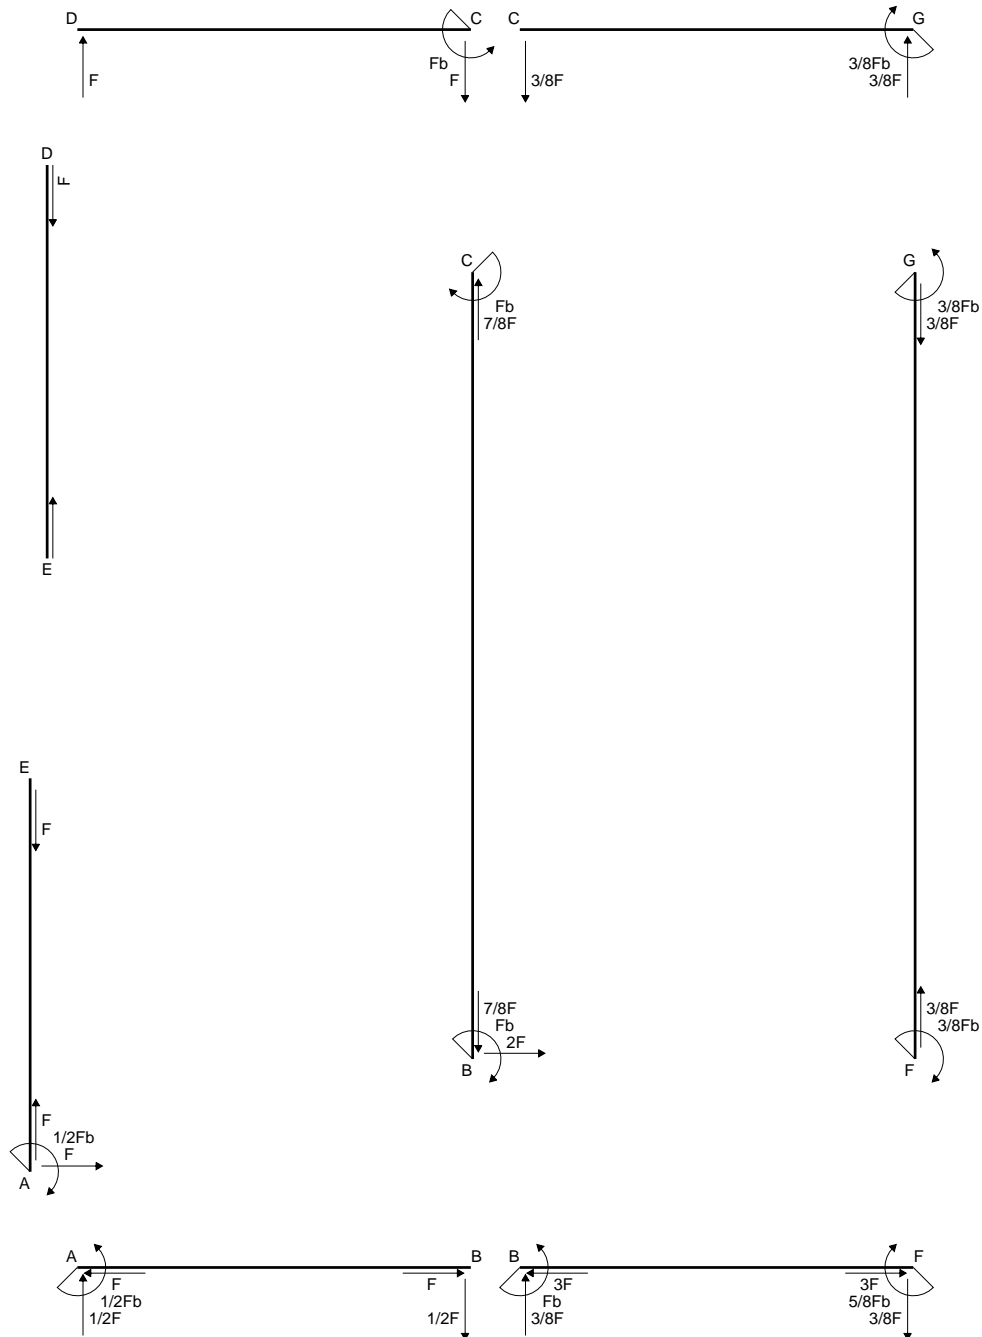








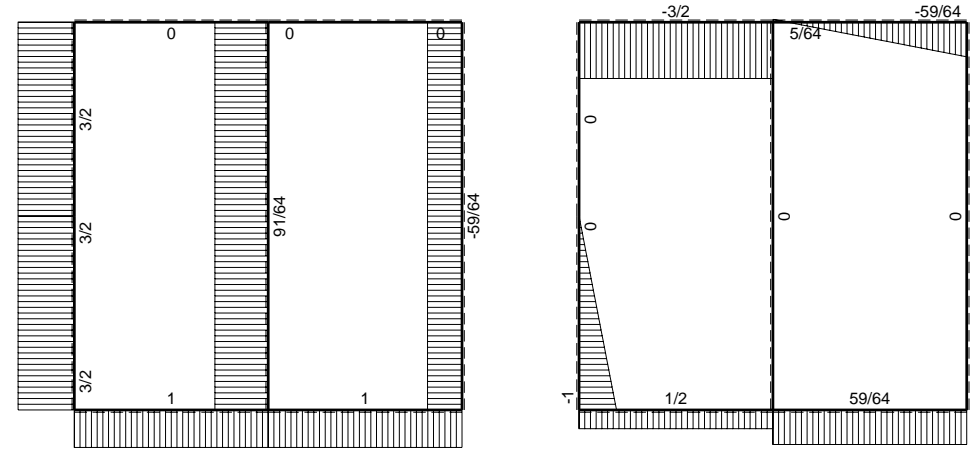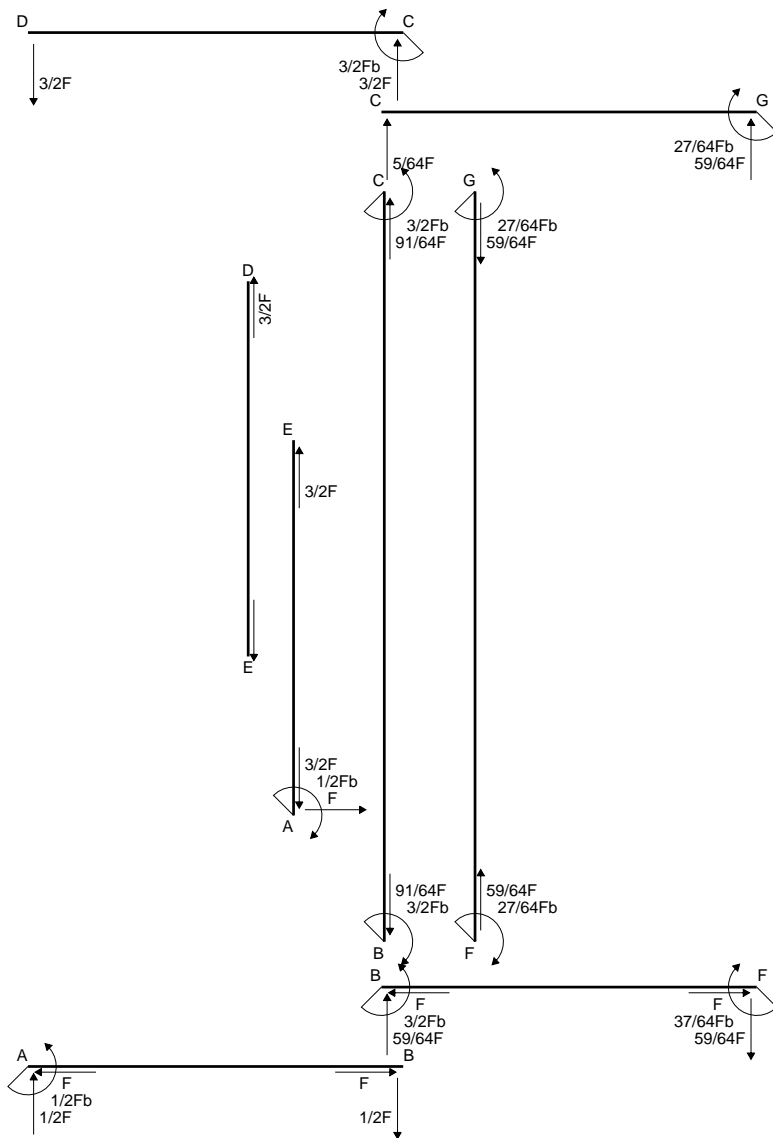


← ⊕ → F


↑ ⊕ ↓ F

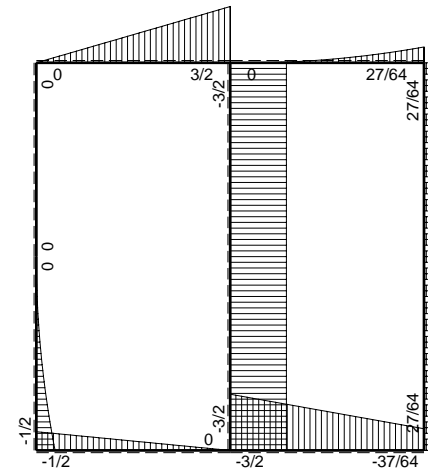


⊕ ⊖ F<sub>b</sub>

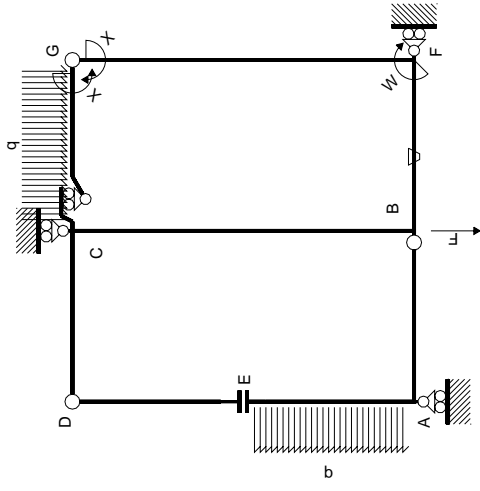

Schema di calcolo iperstatico

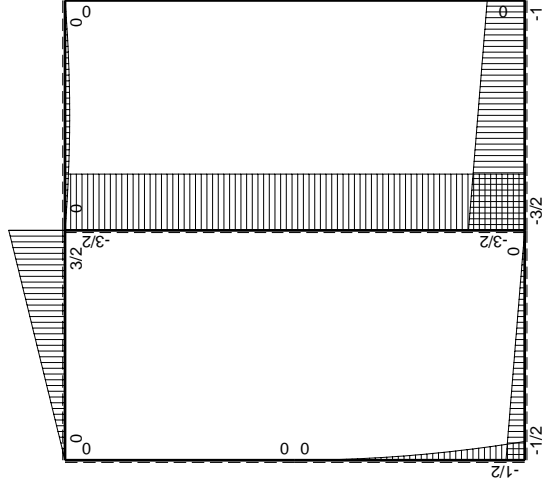

$M_0$  flessione da carichi assegnati

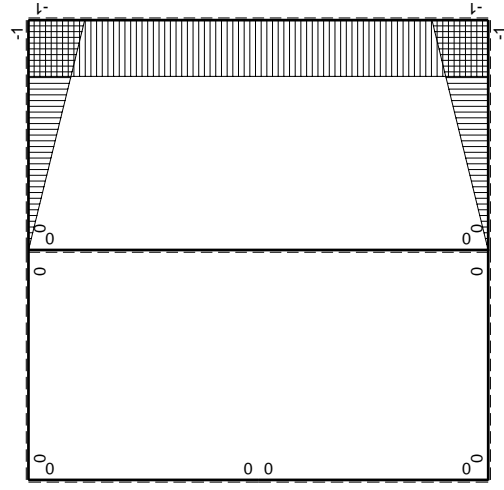

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | Sviluppi di calcolo iperstatica |        |  |                  |                                       |   |
|---|--------------------|---------------------------------|--------|--|------------------|---------------------------------------|---|
| ←   | M <sub>0</sub> (x) | M <sub>0</sub> (x)              | θ      | M <sub>0</sub> M <sub>0</sub>                  | M <sub>0</sub> θ | M <sub>0</sub> M <sub>x</sub>         | ∫ M <sub>0</sub> (M <sub>0</sub> /EJ+θ)dx |
| AB B  | 0                  | -1/2Fb+1/2Fx                    | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BA B  | 0                  | 1/2Fx                           | 0      | 0  | 0                | 0                                     | 0+0                                       |
| CD B  | 0                  | 3/2Fb-3/2Fx                     | 0      | 0  | 0                | 0                                     | 0+0                                       |
| DC B  | 0                  | -3/2Fx                          | 0      | 0  | 0                | 0                                     | 0+0                                       |
| DE B  | 0                  | 0                               | 0      | 0  | 0                | 0                                     | 0+0                                       |
| EA B  | 0                  | -1/2qx <sup>2</sup>             | 0      | 0  | 0                | 0                                     | 0+0                                       |
| AE B  | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup>     | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BF B  | -x/b               | -3/2Fb+1/2Fx                    | -Fb/EJ | 3/2Fx-1/2Fx <sup>2</sup> /b                    | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (7/12+1/2)Fb <sup>2</sup> /EJ             |
| FB B  | 1-x/b              | Fb+1/2Fx                        | Fb/EJ  | Fb-1/2Fx-1/2Fx <sup>2</sup> /b                 | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (7/12+1/2)Fb <sup>2</sup> /EJ             |
| GC B  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>       | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ               |
| CG B  | x/b                | 1/2Fx-1/2qx <sup>2</sup>        | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b    | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ               |
| FG 2b   | -1                 | 0                               | 0      | 0  | 0                | 1                                     | 0+0                                       |
| GF 2b   | 1                  | 0                               | 0      | 0  | 0                | 1                                     | 0+0                                       |
| CB 2b   | 0                  | -3/2Fb                          | 0      | 0  | 0                | 0                                     | 0+0                                       |
| BC 2b   | 0                  | 3/2Fb                           | 0      | 0  | 0                | 0                                     | 0+0                                       |
| totali  |                    |                                 |        |  |                  |                                       |   |
|   |                    |                                 |        |  |                  |                                       | 9/8Fb <sup>2</sup> /EJ                    |
|   |                    |                                 |        |  |                  |                                       | -27/64Fb                                  |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (3/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [3/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/6 b) Fb 1/EJ + (1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{FB}^{x\theta} = \int_0^b (1 - 1/2 x/b - 1/2 x^2/b^2) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/6 x^3/b^2]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/6 b) Fb 1/EJ + (-b + 1/2 b) \theta = 13/12 Fb^2/EJ$$

$$L_{GC}^{x\theta} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x\theta} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

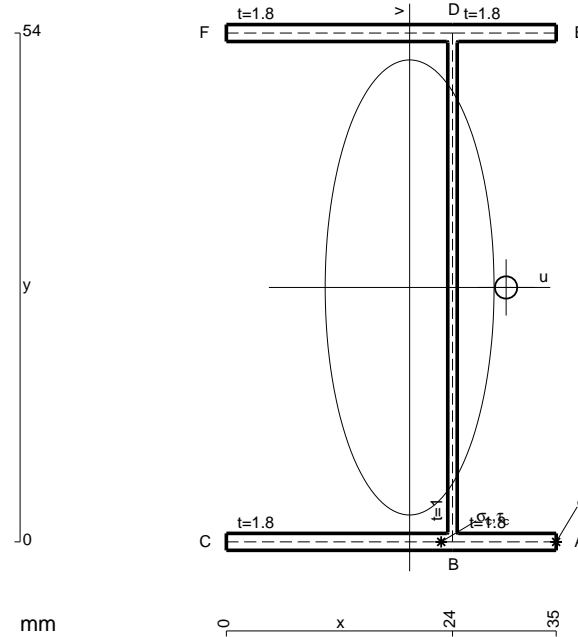


- A = 180. mm<sup>2</sup>
- J<sub>u</sub> = 104976. mm<sup>4</sup>
- J<sub>v</sub> = 14460. mm<sup>4</sup>
- J<sub>t</sub> = 154.1 mm<sup>4</sup>
- x<sub>o</sub> = 10.24 mm
- x<sub>g</sub> = 19.45 mm
- T<sub>y</sub> = -1665. N
- M<sub>x</sub> = 849150. Nmm
- x<sub>m</sub> = 35. mm
- u<sub>m</sub> = 15.55 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 4.55 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 218.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 209.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.28 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 199.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 1998. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 423.4 N/mm<sup>2</sup>







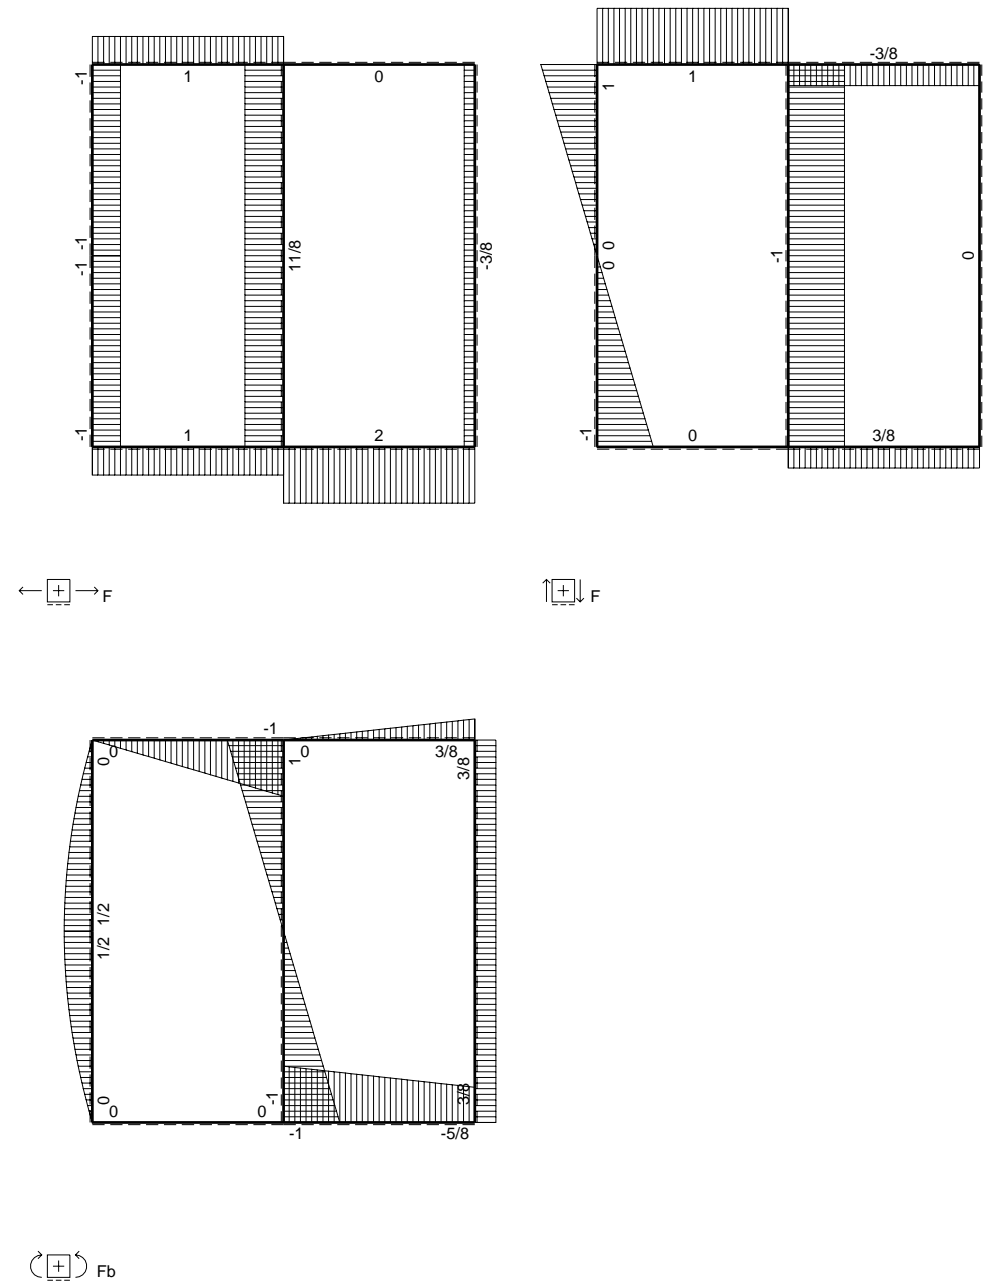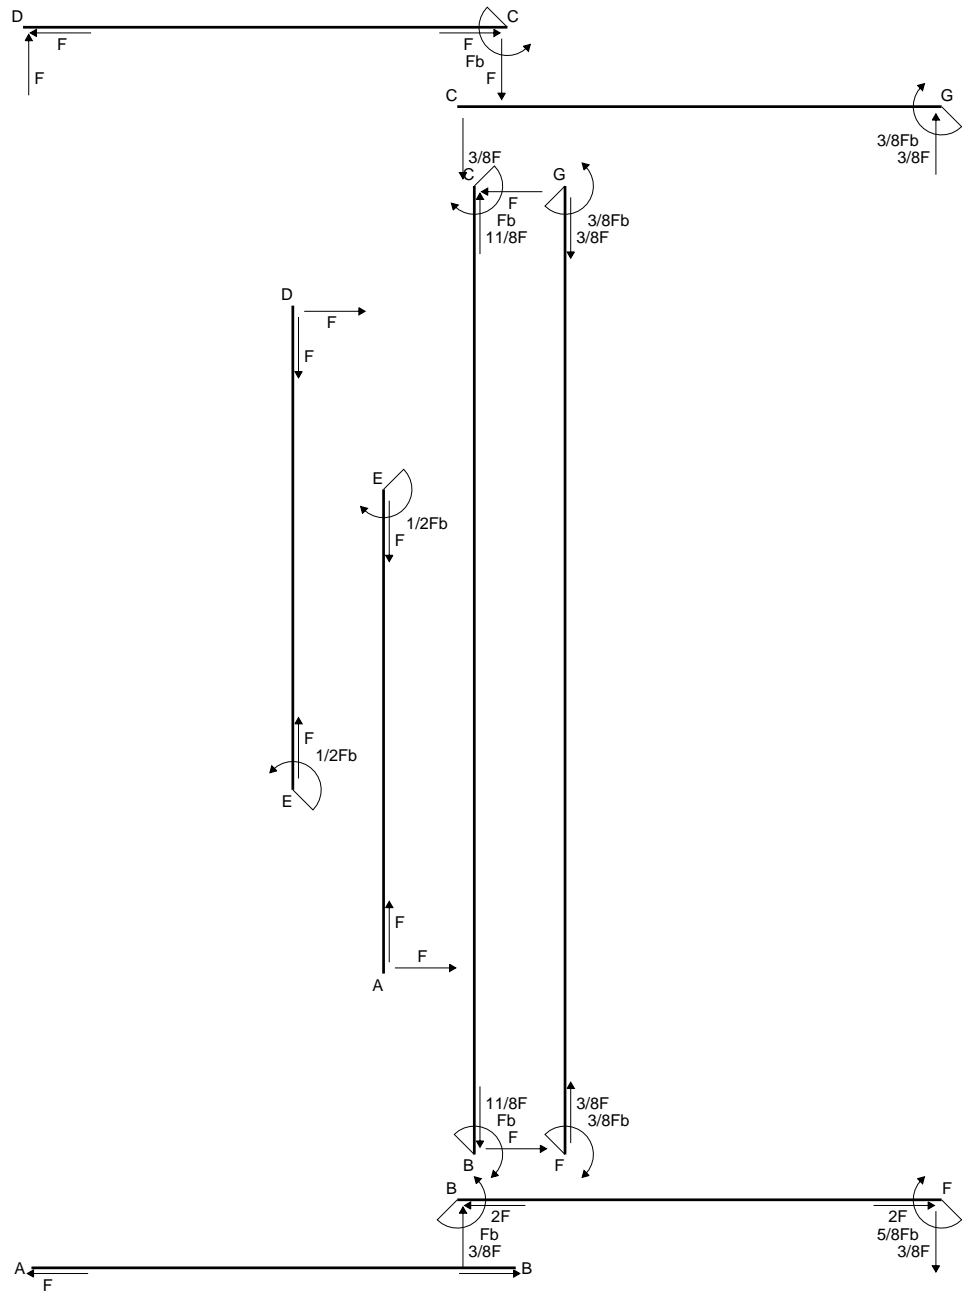

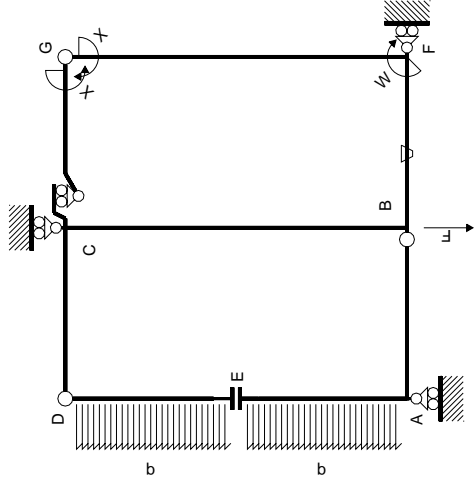

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

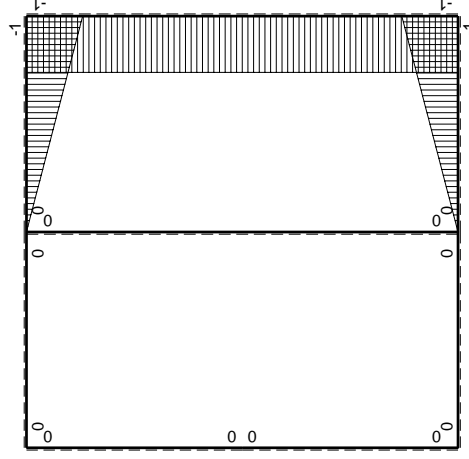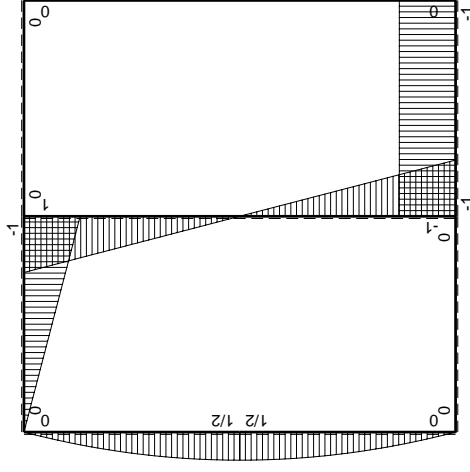

$M_x$  flessione da iperstatica  $X=1$

| $\rightarrow$ | $M_x(x)$ | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|---------------|----------|------------------|----------|-----------|--------------|------------------|-----------------------------|---------------------|
| AB b          | 0        | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BA b          | 0        | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| CD b          | 0        | -Fb+Fx           | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DC b          | 0        | Fx               | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| DE b          | 0        | $Fx-1/2qx^2$     | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| ED b          | 0        | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| EA b          | 0        | $1/2Fb-1/2qx^2$  | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| AE b          | 0        | $-Fx+1/2qx^2$    | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BF b          | -x/b     | -Fb              | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FB b          | 1-x/b    | Fb               | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$          |
| GC b          | -1+x/b   | 0                | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$          |
| CG b          | x/b      | 0                | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$          |
| FG 2b         | -1       | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b         | 1        | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b         | 0        | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| BC 2b         | 0        | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                   |
| totali        |          |                  |          |           |              |                  |                             | $8/3xb/EJ$          |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$





$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

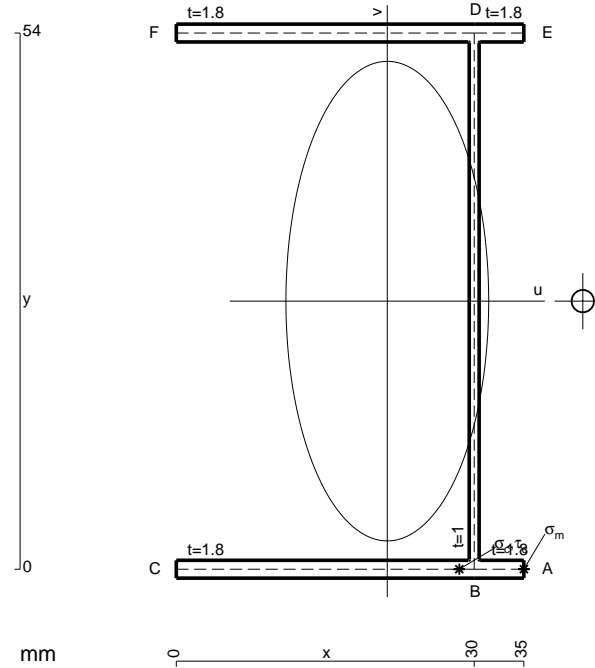


- A = 180. mm<sup>2</sup>
- J<sub>u</sub> = 104976. mm<sup>4</sup>
- J<sub>v</sub> = 18769. mm<sup>4</sup>
- J<sub>t</sub> = 154.1 mm<sup>4</sup>
- x<sub>o</sub> = 19.69 mm
- x<sub>g</sub> = 21.25 mm
- N = 2118. N
- T<sub>y</sub> = -1540. N
- M<sub>x</sub> = 847000. Nmm
- x<sub>m</sub> = 35. mm
- u<sub>m</sub> = 13.75 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 229.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 8.75 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 229.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 366.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.88 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 354.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 2772. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 674.4 N/mm<sup>2</sup>



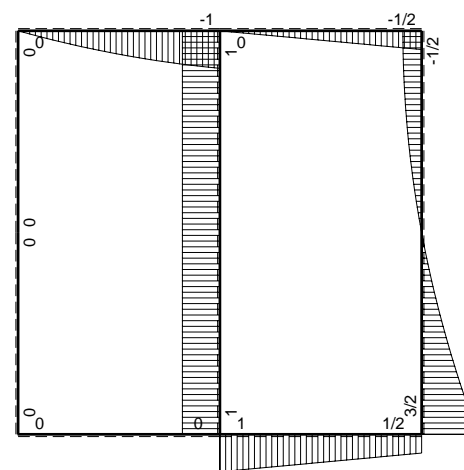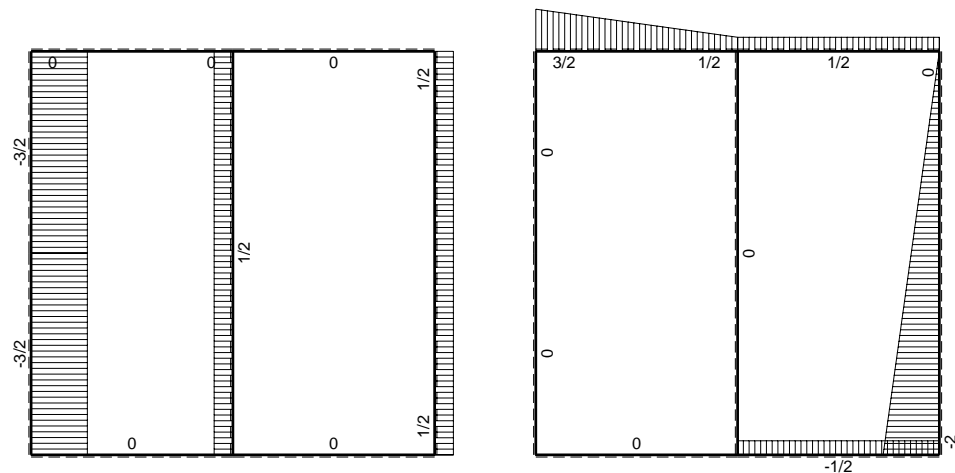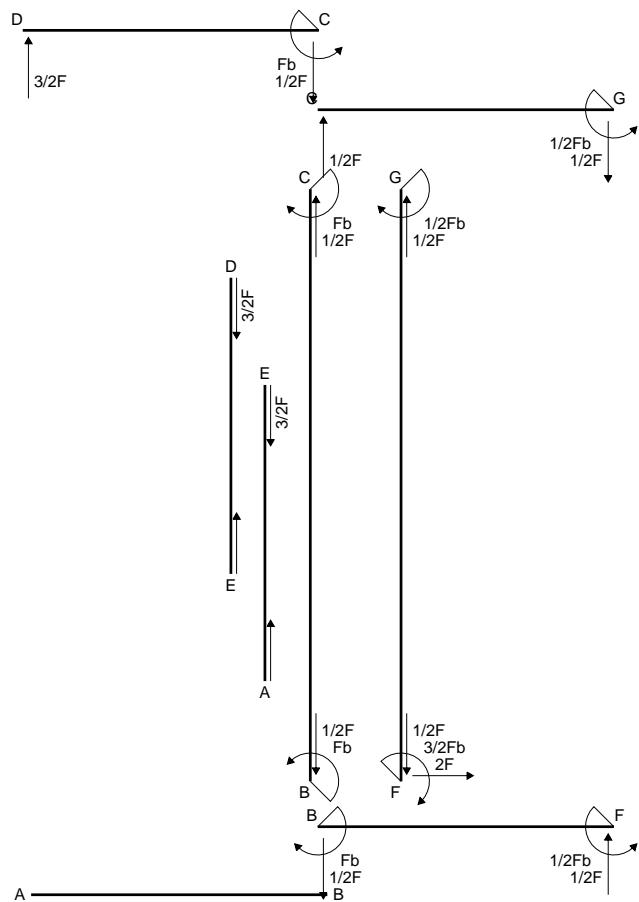

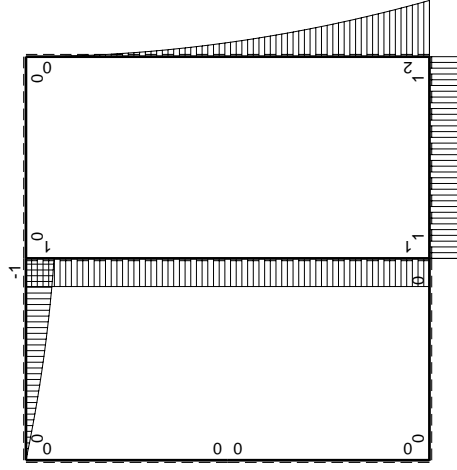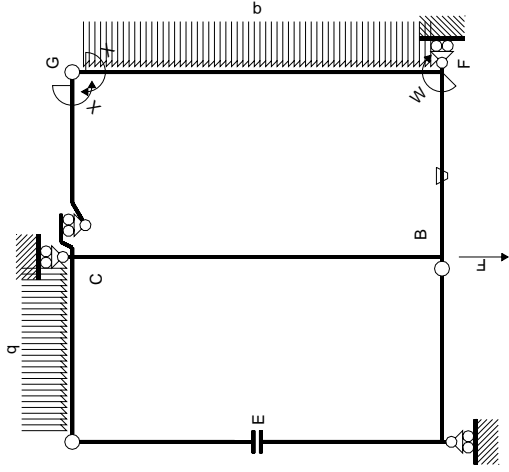

$M_0$  flessione da carichi assegnati

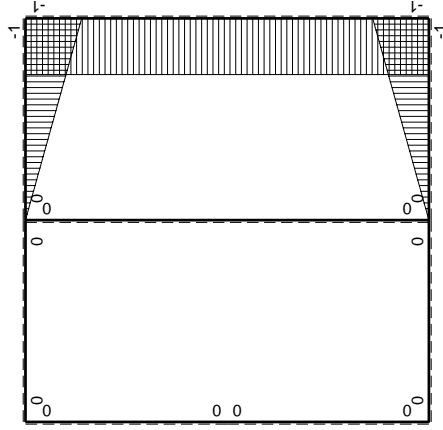

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sub>x</sub> (x)           | M <sub>0</sub> (x)         | θ      | M <sub>x</sub> M <sub>0</sub>  | M <sub>x</sub> θ | M <sub>x</sub> M <sub>x</sub>  | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------|------------------------------|----------------------------|--------|--------------------------------|------------------|--------------------------------|-----------------------------|---------------------|
| AB b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| BA b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| CD b   | -Fb+1/2Fx+1/2qx <sup>2</sup> | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| DC b   | 0                            | 3/2Fx-1/2qx <sup>2</sup>   | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| DE b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| ED b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| EA b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| AE b   | 0                            | 0                          | 0      | 0                              | 0                | 0                              | 0                           | 0                   |
| BF b   | -x/b                         | Fb                         | -Fb/EJ | -Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup> | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| FB b   | 1-x/b                        | -Fb                        | Fb/EJ  | -Fb+Fx                         | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$               | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ            |
| GC b   | -1+x/b                       | 0                          | 0      | 0                              | 0                | $1-2x/b+x^2/b^2$               | 0+0                         | 1/3xb/EJ            |
| CG b   | x/b                          | 0                          | 0      | 0                              | 0                | x <sup>2</sup> /b <sup>2</sup> | 0+0                         | 1/3xb/EJ            |
| FG 2b  | -1                           | 2Fb-2Fx+1/2qx <sup>2</sup> | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| GF 2b  | 1                            | -1/2qx <sup>2</sup>        | 0      | -1/2Fx <sup>2</sup> /b         | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ              |
| CB 2b  | 0                            | Fb                         | 0      | 0                              | 0                | 0                              | 0+0                         | 0                   |
| BC 2b  | 0                            | -Fb                        | 0      | 0                              | 0                | 0                              | 0+0                         | 0                   |
| totali |                              |                            |        |                                |                  |                                | -4/3Fb <sup>2</sup> /EJ     | 8/3xb/EJ            |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

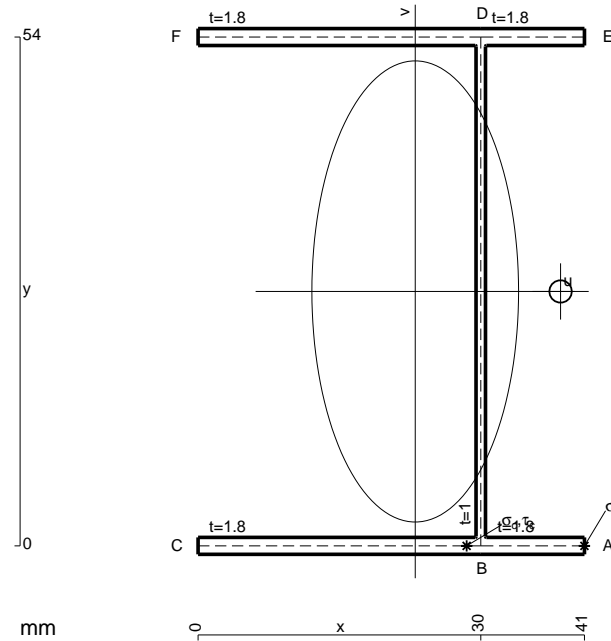

- A = 201.6 mm<sup>2</sup>
- J<sub>u</sub> = 120722. mm<sup>4</sup>
- J<sub>v</sub> = 24244. mm<sup>4</sup>
- J<sub>t</sub> = 177.4 mm<sup>4</sup>
- x<sub>o</sub> = 15.42 mm
- x<sub>g</sub> = 23.04 mm
- T<sub>y</sub> = 2860. N
- M<sub>x</sub> = -1072500. Nmm
- x<sub>m</sub> = 41. mm
- u<sub>m</sub> = 17.96 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 6.955 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -239.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 466.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 19.19 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 447.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 5148. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 843.2 N/mm<sup>2</sup>






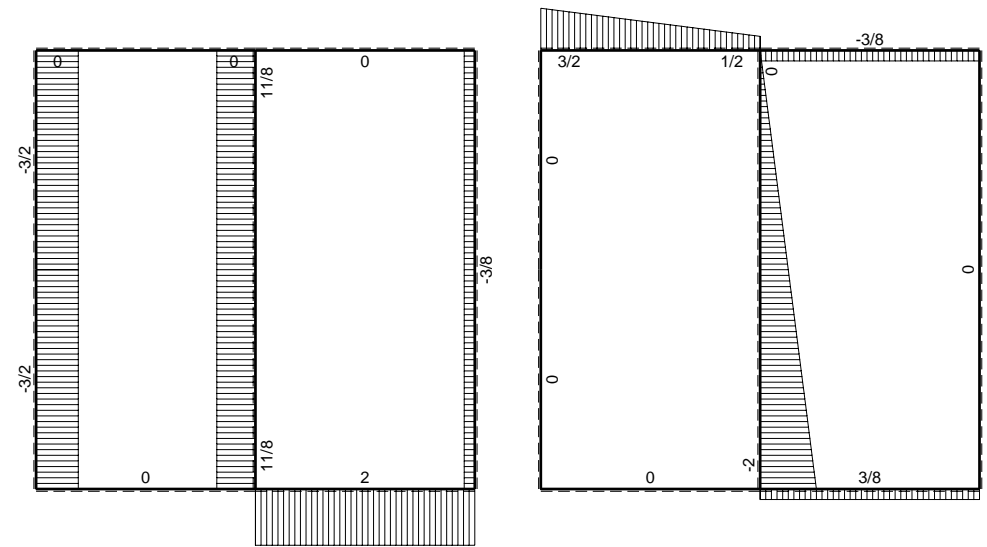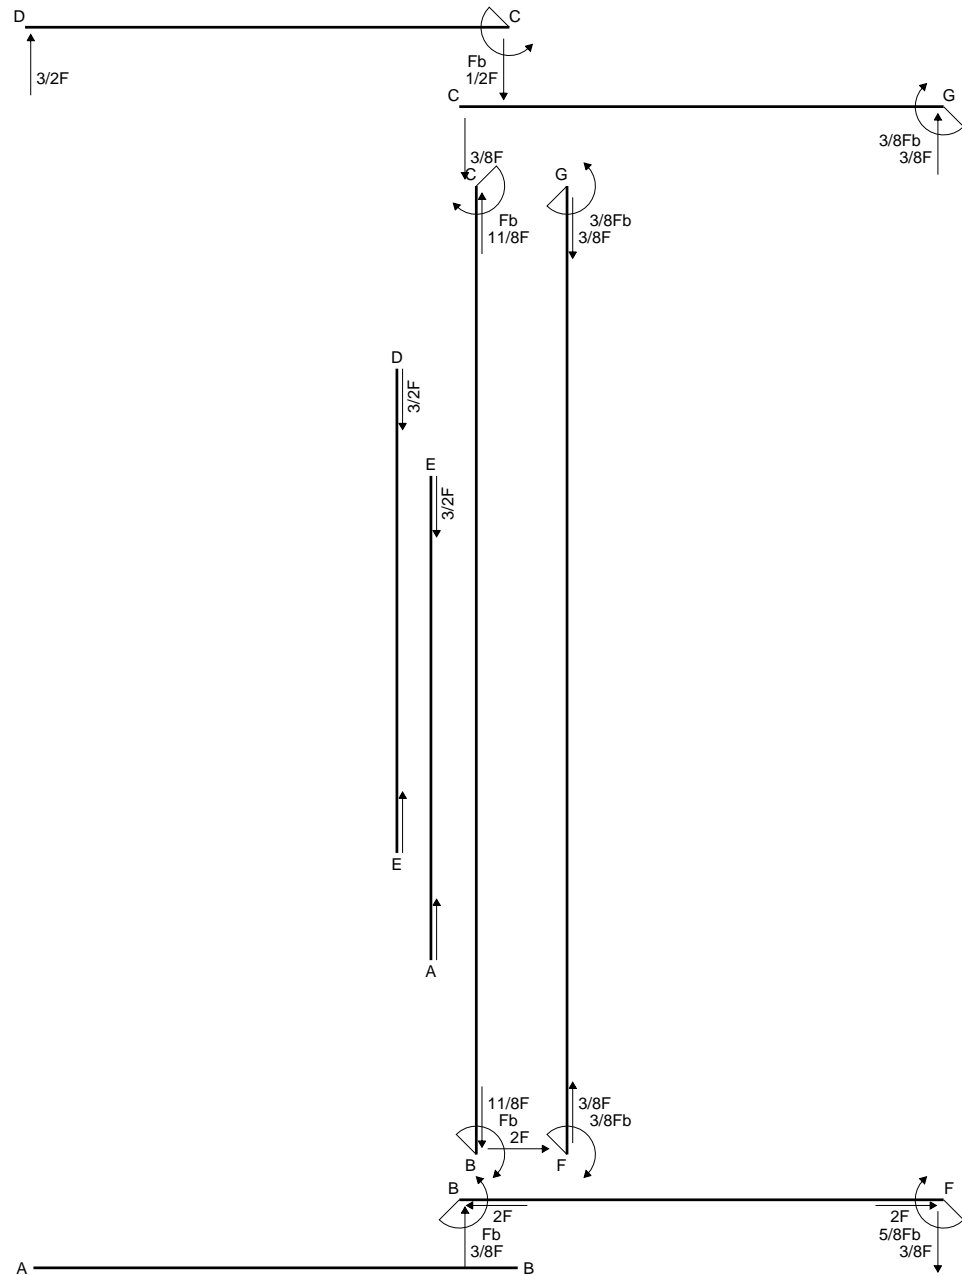


← ⊕ → F

↑ ⊕ ↓ F

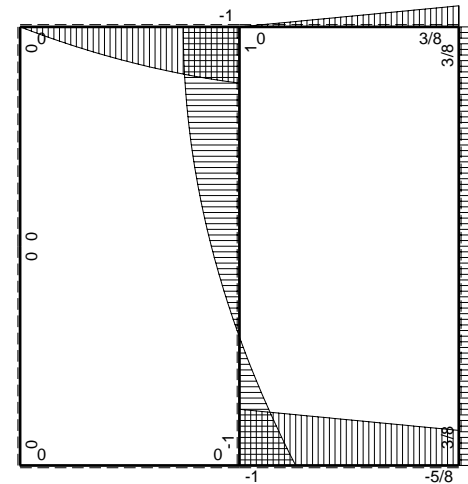


⊕ ⊖ Fb

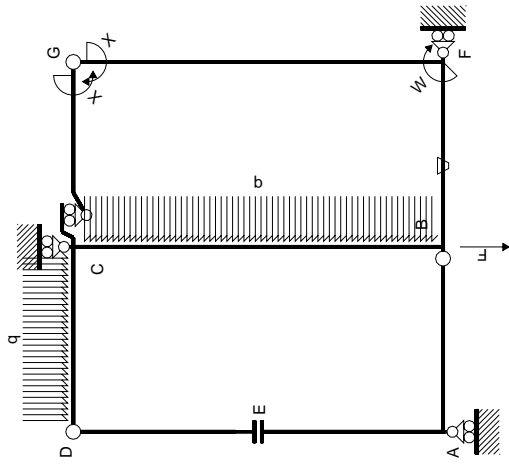

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

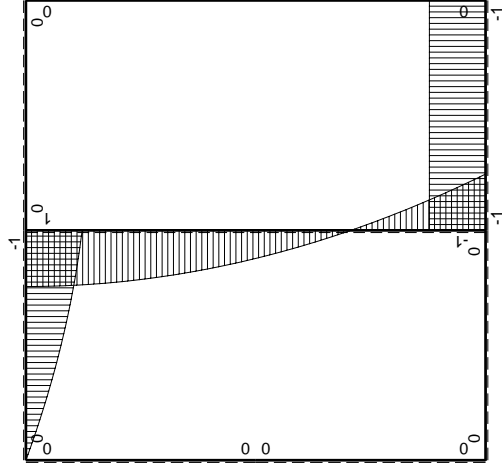



Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$               | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |  |
|---------------|----------|------------------------|----------|-----------|---------------|------------------|-----------------------------|---------------------|--|
| AB b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| BA b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| CD b          | 0        | $-b+1/2Fx+1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| DC b          | 0        | $3/2Fx-1/2qx^2$        | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| DE b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| ED b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| EA b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| AE b          | 0        | 0                      | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| BF b          | $-x/b$   | $-Fb$                  | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |  |
| FBB b         | $1-x/b$  | $Fb$                   | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$          |  |
| GCB b         | $-1+x/b$ | 0                      | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$          |  |
| CG b          | $x/b$    | 0                      | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$          |  |
| FG 2b         | -1       | 0                      | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$            |  |
| GF 2b         | 1        | 0                      | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$            |  |
| CB 2b         | 0        | $Fb-1/2qx^2$           | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                   |  |
| totali        |          |                        |          |           |               |                  |                             | $8/3xb/EJ$          |  |
|               |          | iperstatica $X=W_{gc}$ |          |           |               |                  |                             |                     |  |

Sviluppi di calcolo iperstatica





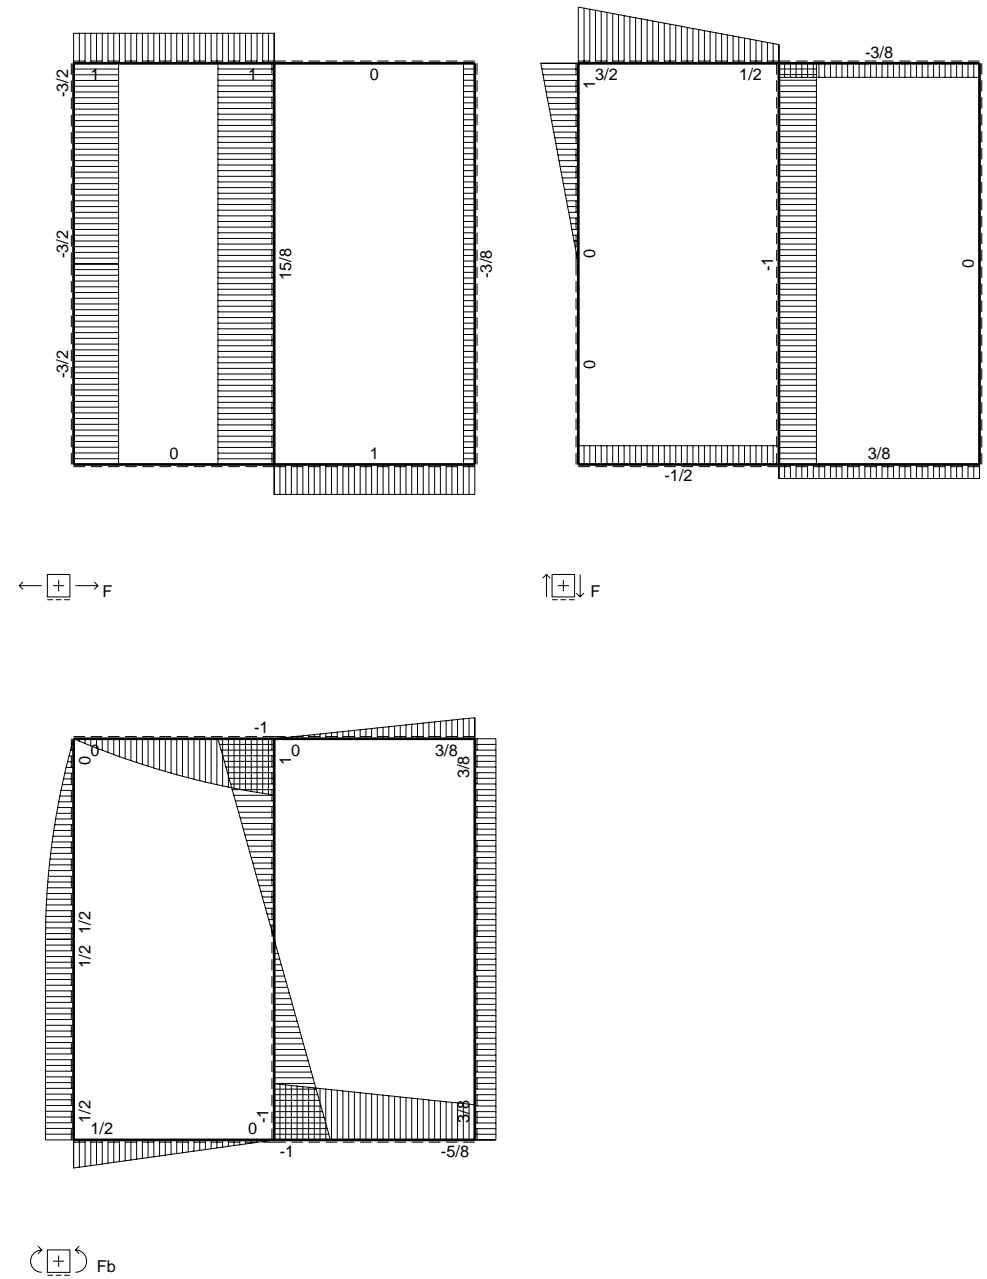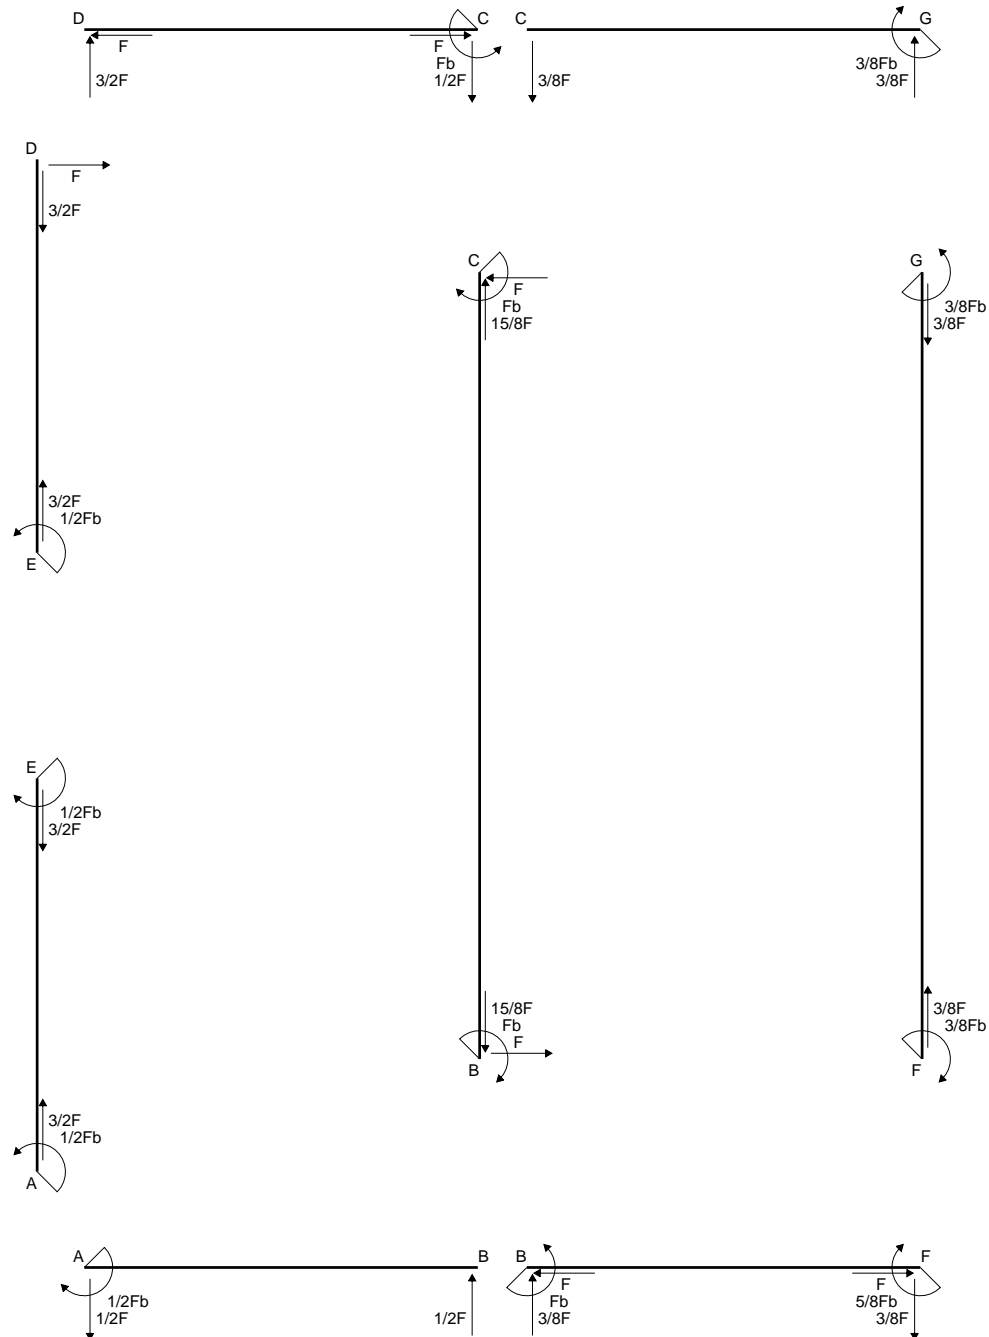



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


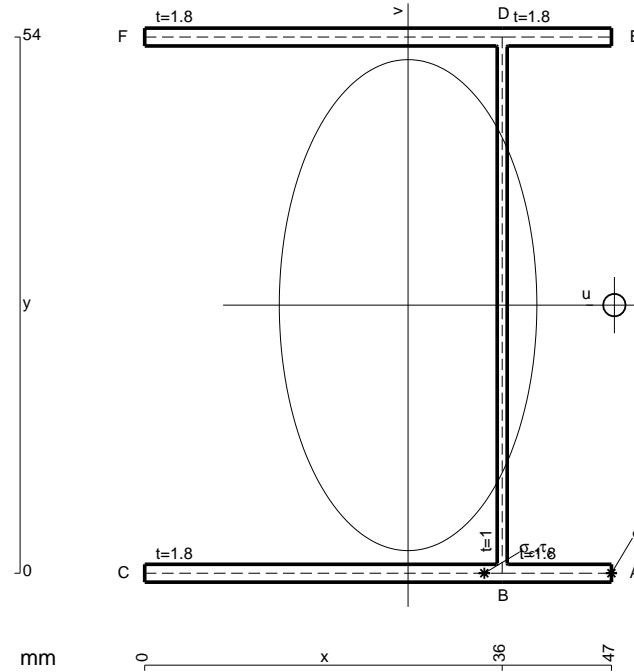


- A = 223.2 mm<sup>2</sup>
- J<sub>u</sub> = 136469. mm<sup>4</sup>
- J<sub>v</sub> = 37543. mm<sup>4</sup>
- J<sub>t</sub> = 200.7 mm<sup>4</sup>
- x<sub>o</sub> = 20.77 mm
- x<sub>g</sub> = 26.52 mm
- N = 2738. N
- T<sub>y</sub> = -1460. N
- M<sub>x</sub> = 992800. Nmm
- x<sub>m</sub> = 47. mm
- u<sub>m</sub> = 20.48 mm
- v<sub>m</sub> = -27. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 208.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.476 mm
- v<sub>c</sub> = -27. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 208.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 282.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.4 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 272. N/mm<sup>2</sup>
- t<sub>c</sub> = 2628. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 531.7 N/mm<sup>2</sup>








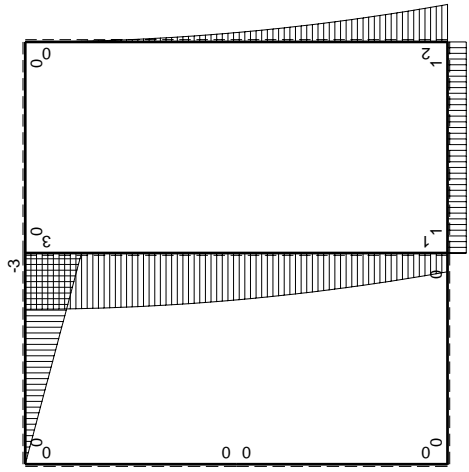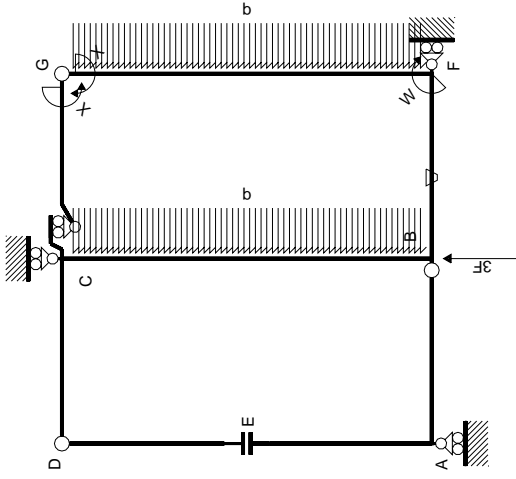

$M_0$  flessione da carichi assegnati

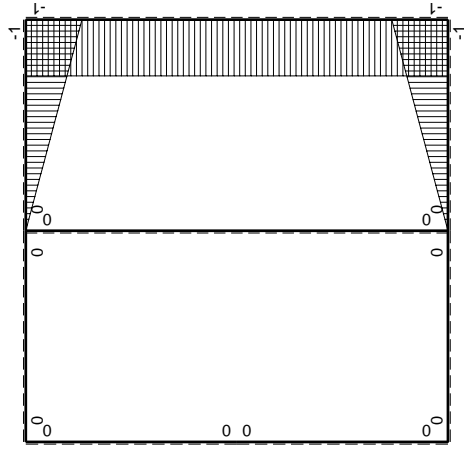

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x(M_0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|--------------|----------|-------------------|----------|----------------------|--------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| BA b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| CD b         | 0        | -3Fb+3Fx          | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| DC b         | 0        | 3Fx               | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| DE b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| ED b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| EA b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| AE b         | 0        | 0                 | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| BF b         | -x/b     | Fb                | -Fb/EJ   | -Fx                  | Fx/EJ        | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b         | 1-x/b    | -Fb               | Fb/EJ    | -Fb+Fx               | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b         | -1+x/b   | 0                 | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | x/b      | 0                 | 0        | 0                    | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b        | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b        | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                | 0+0                         | 0                    |
| totali       |          |                   |          |                      |              |                  | $-4/3Fb^2/EJ$               | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

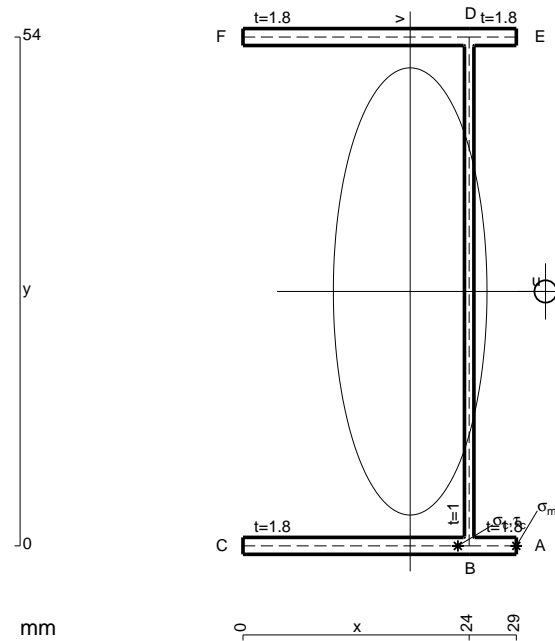

$$A = 158.4 \text{ mm}^2$$

$$J_u = 89230. \text{ mm}^4$$

$$J_v = 10529. \text{ mm}^4$$

$$J_t = 130.8 \text{ mm}^4$$

$$x_o = 14.36 \text{ mm}$$

$$x_g = 17.74 \text{ mm}$$

$$T_y = 990. \text{ N}$$

$$M_x = -722700. \text{ Nmm}$$

$$x_m = 29. \text{ mm}$$

$$u_m = 11.26 \text{ mm}$$

$$v_m = -27. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -218.7 \text{ N/mm}^2$$

$$x_c = 24. \text{ mm}$$

$$u_c = 6.261 \text{ mm}$$

$$v_c = -27. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -218.7 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 203. \text{ N/mm}^2$$




$$\tau_g = TS/tJ_u = 7.19 \text{ N/mm}^2$$

$$\tau_o = Tx_o/tJ_t = 195.8 \text{ N/mm}^2$$

$$t_c = 594. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 414. \text{ N/mm}^2$$



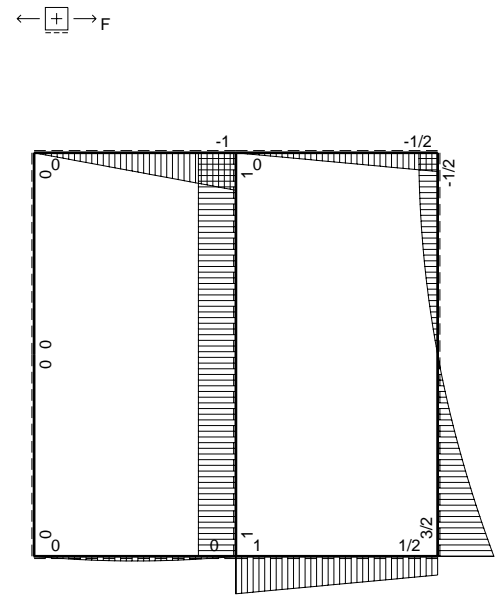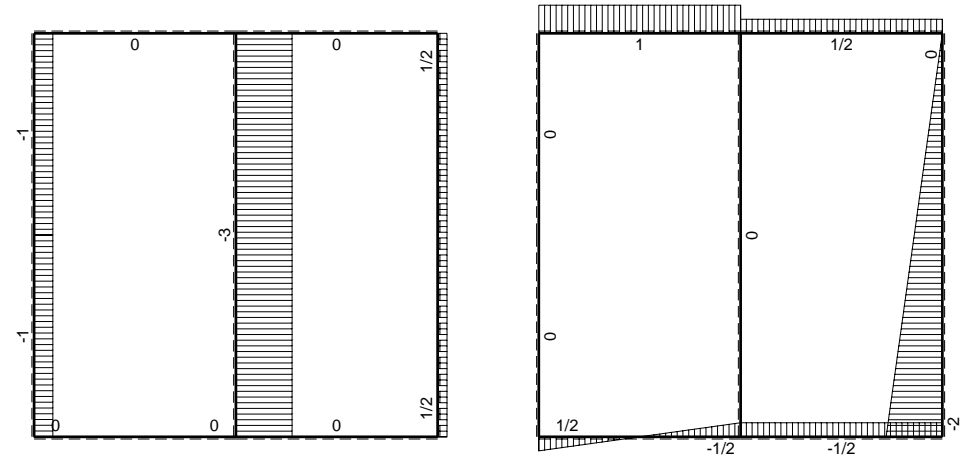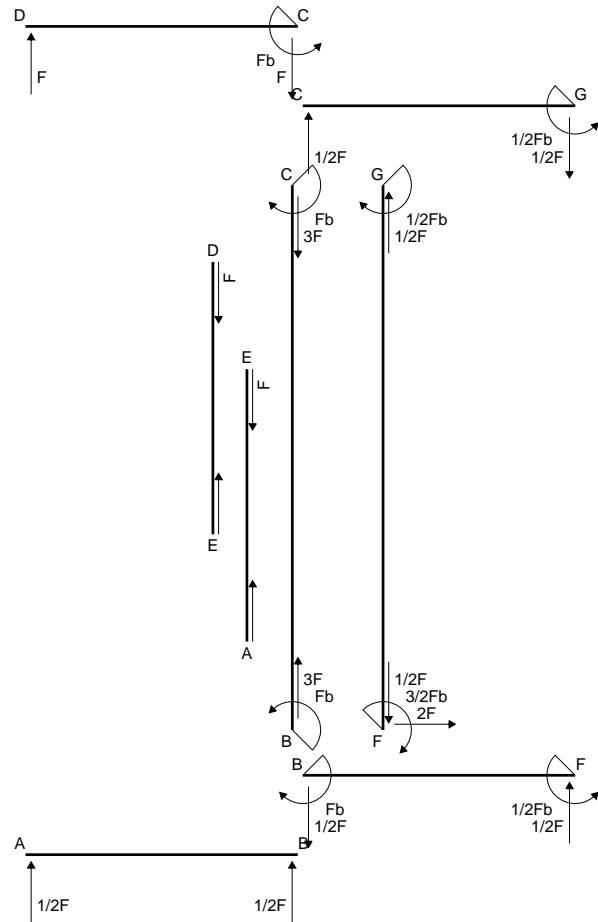



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


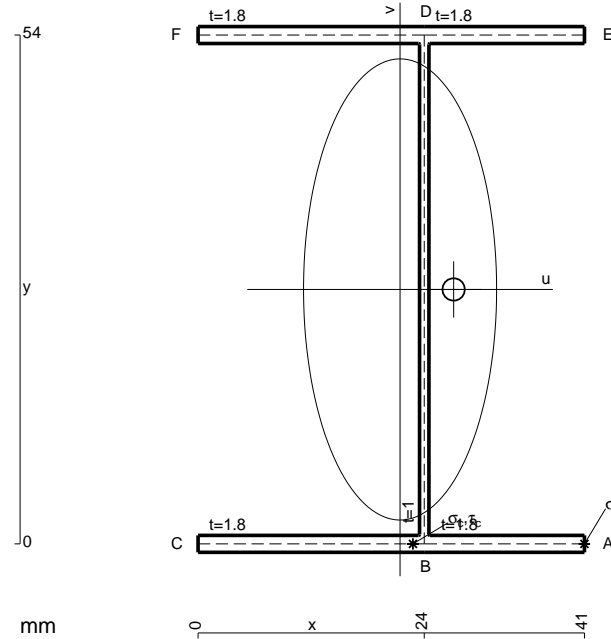


$A = 201.6 \text{ mm}^2$   
 $J_u = 120722. \text{ mm}^4$   
 $J_v = 21161. \text{ mm}^4$   
 $J_t = 177.4 \text{ mm}^4$   
 $x_o = 5.682 \text{ mm}$   
 $x_g = 21.44 \text{ mm}$   
 $T_y = 1330. \text{ N}$   
 $M_x = -1024100. \text{ Nmm}$   
 $x_m = 41. \text{ mm}$   
 $u_m = 19.56 \text{ mm}$   
 $v_m = -27. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -229. \text{ N/mm}^2$   
 $x_c = 24. \text{ mm}$   
 $u_c = 2.563 \text{ mm}$   
 $v_c = -27. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -229. \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 83.81 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 7.139 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 76.68 \text{ N/mm}^2$   
 $t_c = 2394. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 271.2 \text{ N/mm}^2$






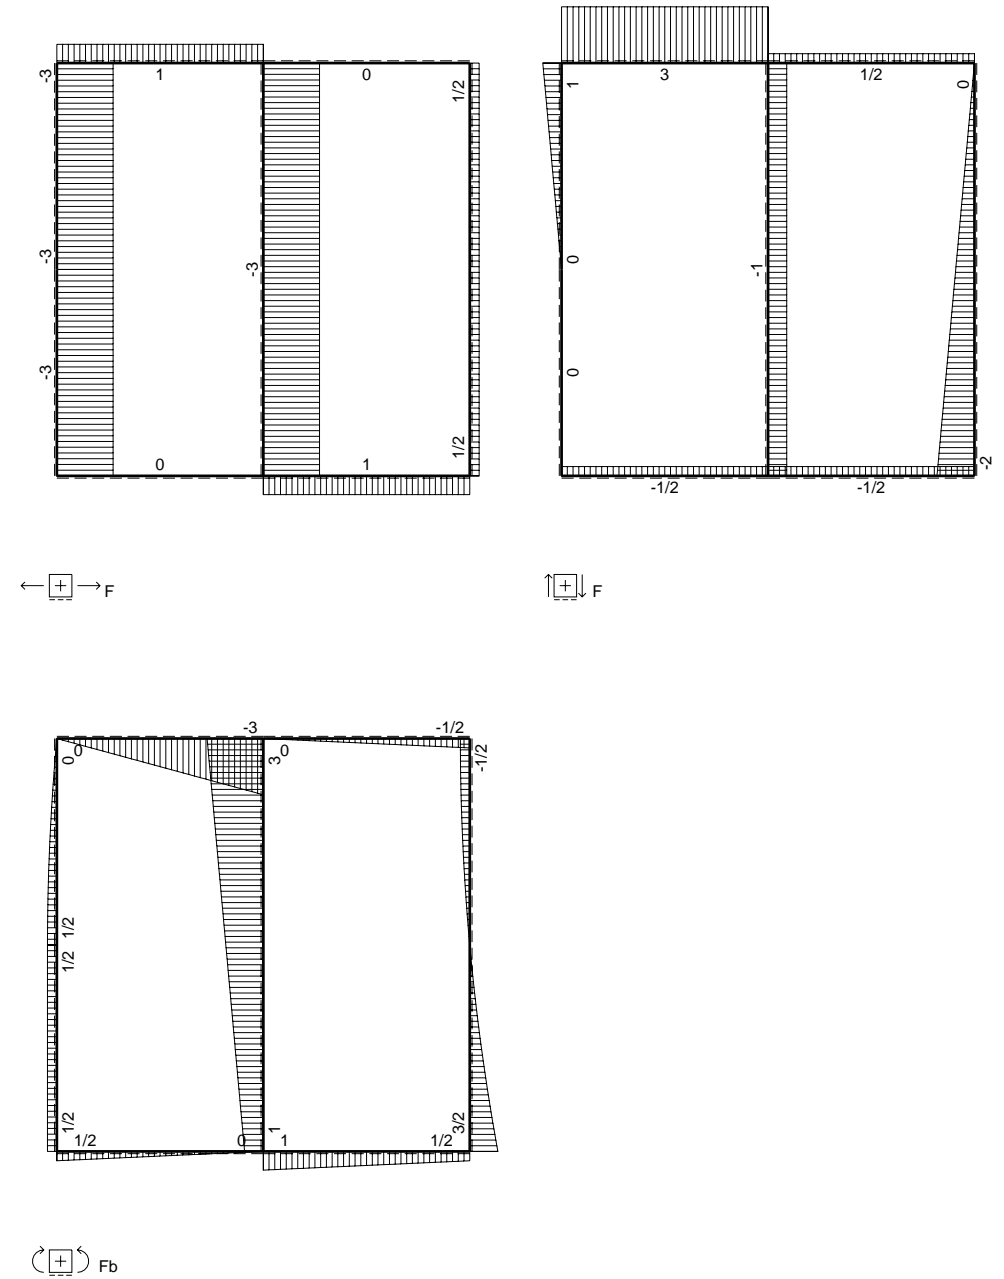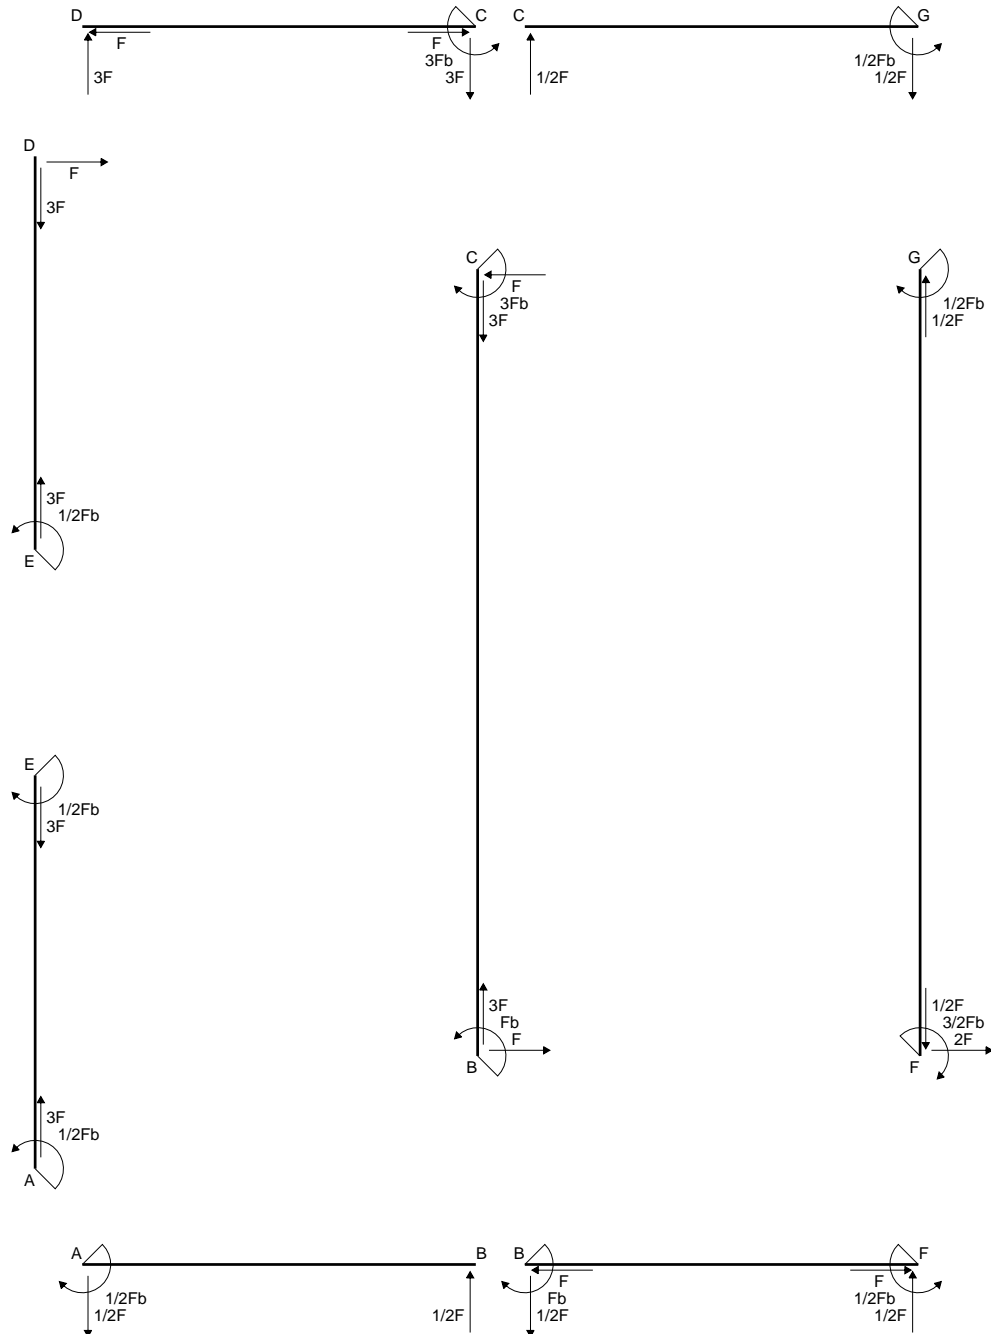

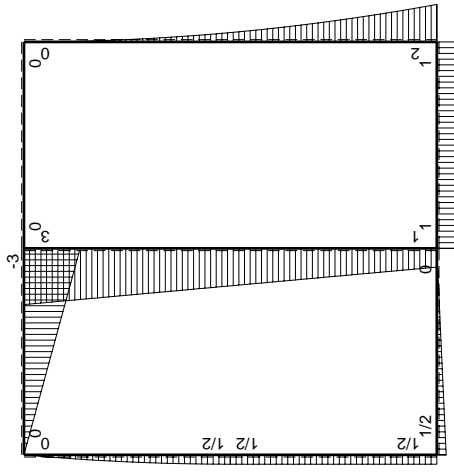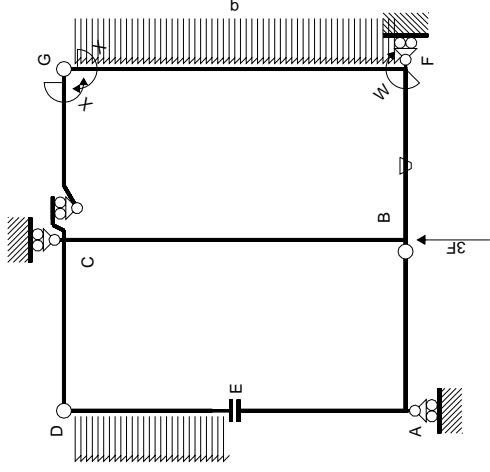

$M_0$  flessione da carichi assegnati

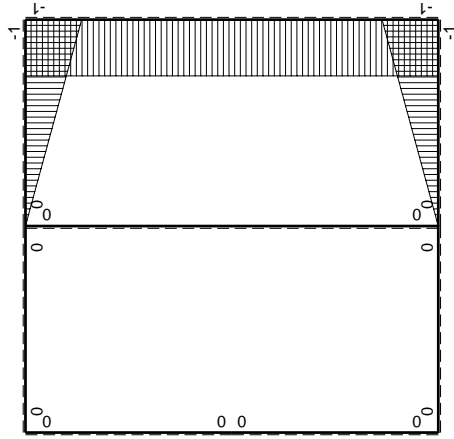

| ←      |         | $M^0(x)$               | $M(x)$ | $\theta$                 | $M_x M_0$     | $M_x \theta$       | $M_x M_x$ | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|--------|---------|------------------------|--------|--------------------------|---------------|--------------------|-----------|---------------------------------|-----------------------|
| AB b   | 0       | $1/2Fb - 1/2Fx$        | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| BA b   | 0       | $-1/2Fx$               | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| CD b   | 0       | $-3Fb + 3Fx$           | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| DC b   | 0       | $3Fx$                  | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| DE b   | 0       | $Fx - 1/2qx^2$         | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| ED b   | 0       | $-1/2Fb + 1/2qx^2$     | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| EA b   | 0       | $1/2Fb$                | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| AE b   | 0       | $-1/2Fb$               | 0      | 0                        | 0             | 0                  | 0         | 0+0                             | 0                     |
| BF b   | -x/b    | Fb                     | -Fb/EJ | -Fb/EJ                   | -Fx           | Fx/EJ              | $x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b   | $1-x/b$ | -Fb                    | Fb/EJ  | -Fb+Fx                   | Fb/EJ - Fx/EJ | $1-2x/b + x^2/b^2$ | $x^2/b^2$ | $-1/2 + 1/2)Fb^2/EJ$            | $1/3xb/EJ$            |
| GC b   | -1+x/b  | 0                      | 0      | 0                        | 0             | $1-2x/b + x^2/b^2$ | 0+0       | $1/3xb/EJ$                      |                       |
| CG b   | x/b     | 0                      | 0      | 0                        | 0             | $x^2/b^2$          | 0+0       | $1/3xb/EJ$                      |                       |
| FG 2b  | -1      | $2Fb - 2Fx + 1/2qx^2$  | 0      | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0             | 0                  | 1         | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b  | 1       | $-1/2qx^2$             | 0      | $-1/2Fx^2/b$             | 0             | 0                  | 1         | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b  | 0       | $3Fb - Fx$             | 0      | 0                        | 0             | 0                  | 0+0       | 0                               |                       |
| BC 2b  | 0       | $-Fb - Fx$             | 0      | 0                        | 0             | 0                  | 0         | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |
| totali |         |                        |        |                          |               |                    |           |                                 |                       |
|        |         | iperstatica $X=W_{gc}$ |        |                          |               |                    |           |                                 |                       |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

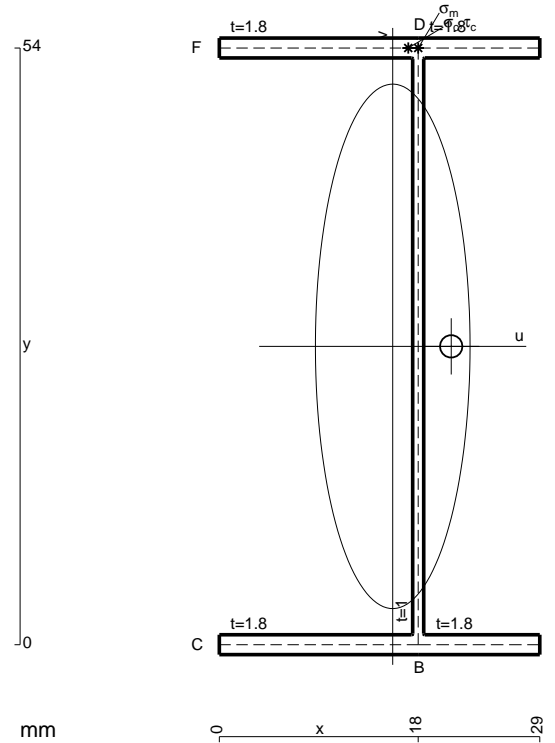


- A = 158.4 mm<sup>2</sup>
- J<sub>u</sub> = 89230. mm<sup>4</sup>
- J<sub>v</sub> = 7753. mm<sup>4</sup>
- J<sub>t</sub> = 130.8 mm<sup>4</sup>
- x<sub>o</sub> = 5.292 mm
- x<sub>g</sub> = 15.69 mm
- N = 320. N
- T<sub>y</sub> = 960. N
- M<sub>x</sub> = -777600. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 54. mm
- u<sub>m</sub> = 2.307 mm
- v<sub>m</sub> = 27. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 237.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 54. mm
- u<sub>c</sub> = 2.307 mm
- v<sub>c</sub> = 27. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 237.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 75.17 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.229 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 69.94 N/mm<sup>2</sup>
- t<sub>c</sub> = 576. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 270.7 N/mm<sup>2</sup>



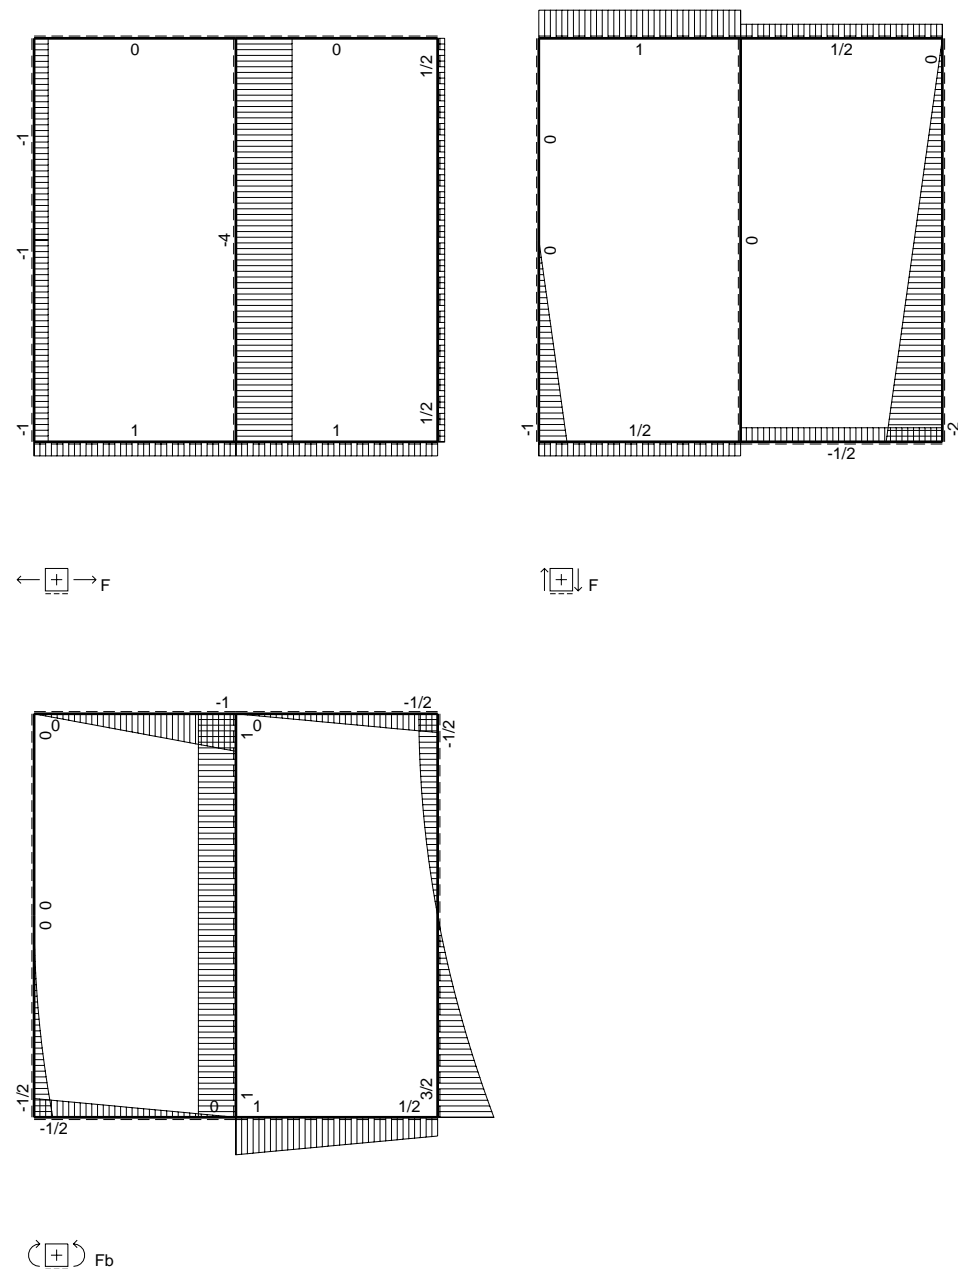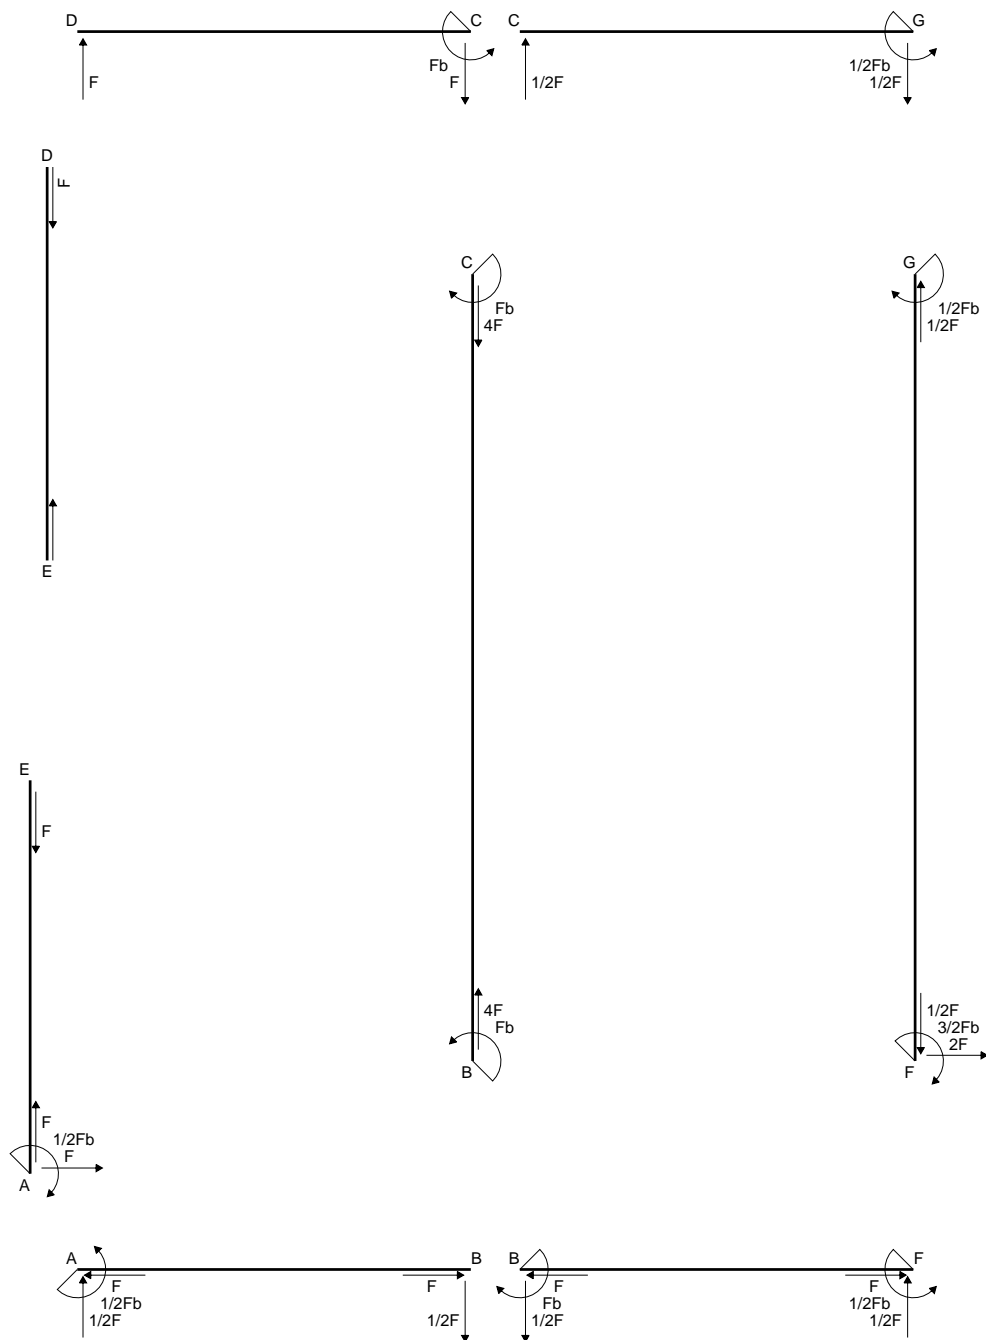

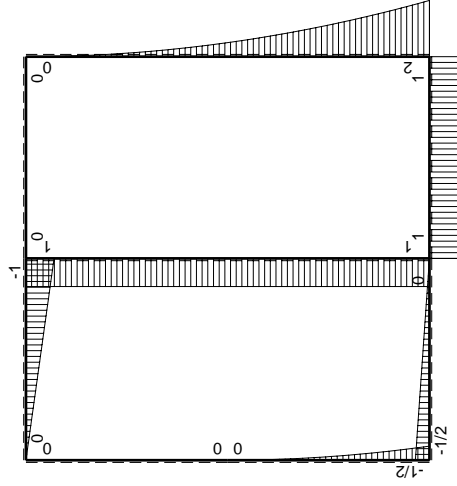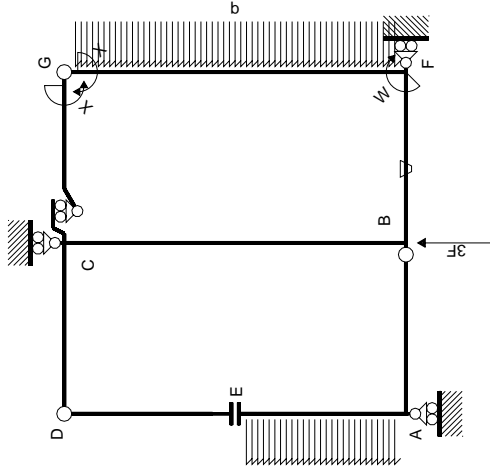

$M_0$  flessione da carichi assegnati

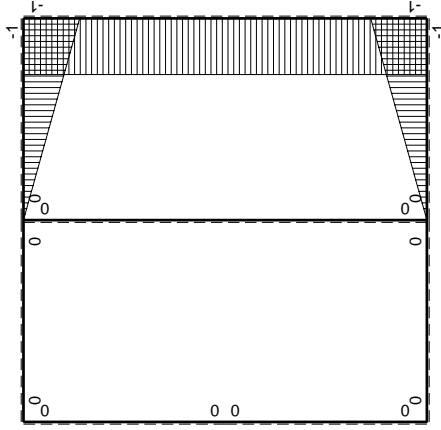

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M^0(x)$               | $\theta$ | $M_x M_0$                | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|--------------|----------|------------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-----------------------|
| AB b         | 0        | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BA b         | 0        | $1/2Fx$                | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| CD b         | 0        | $-Fb + Fx$             | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| DC b         | 0        | $Fx$                   | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| ED b         | 0        | 0                      | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| EA b         | 0        | $-1/2qx^2$             | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| AE b         | 0        | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BF b         | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b         | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b         | $-1+x/b$ | 0                      | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |
| CG b         | $x/b$    | 0                      | 0        | 0                        | 0               | $x^2/b^2$            | 0+0                             | $1/3xb/EJ$            |
| FG 2b        | -1       | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b        | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b        | 0        | $Fb$                   | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| BC 2b        | 0        | $-Fb$                  | 0        | 0                        | 0               | 0                    | 0+0                             | 0                     |
| totali       |          |                        |          |                          |                 |                      | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

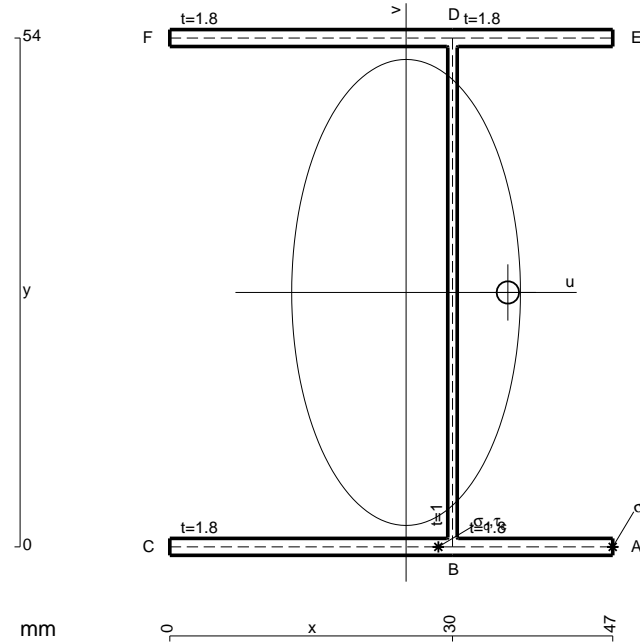


$A = 223.2 \text{ mm}^2$   
 $J_u = 136469. \text{ mm}^4$   
 $J_v = 32876. \text{ mm}^4$   
 $J_t = 200.7 \text{ mm}^4$   
 $x_o = 10.8 \text{ mm}$   
 $x_g = 25.07 \text{ mm}$   
 $T_y = 2350. \text{ N}$   
 $M_x = -1010500. \text{ Nmm}$   
 $x_m = 47. \text{ mm}$   
 $u_m = 21.93 \text{ mm}$   
 $v_m = -27. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -199.9 \text{ N/mm}^2$   
 $x_c = 30. \text{ mm}$   
 $u_c = 4.927 \text{ mm}$   
 $v_c = -27. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -199.9 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 241.6 \text{ N/mm}^2$   
 $\tau_g = TS/tJ_u = 13.95 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 227.6 \text{ N/mm}^2$   
 $t_c = 4230. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 463.7 \text{ N/mm}^2$






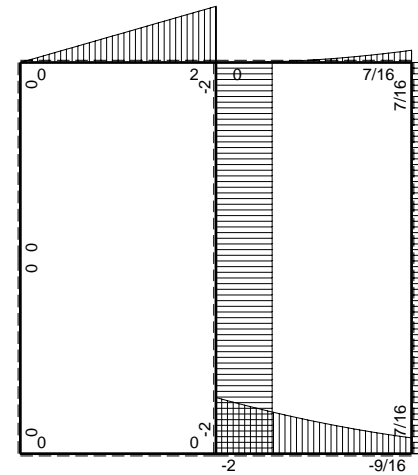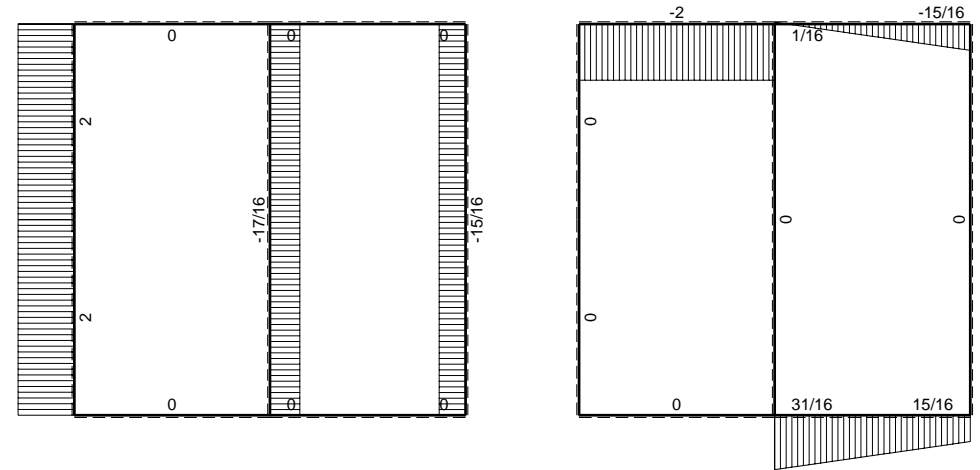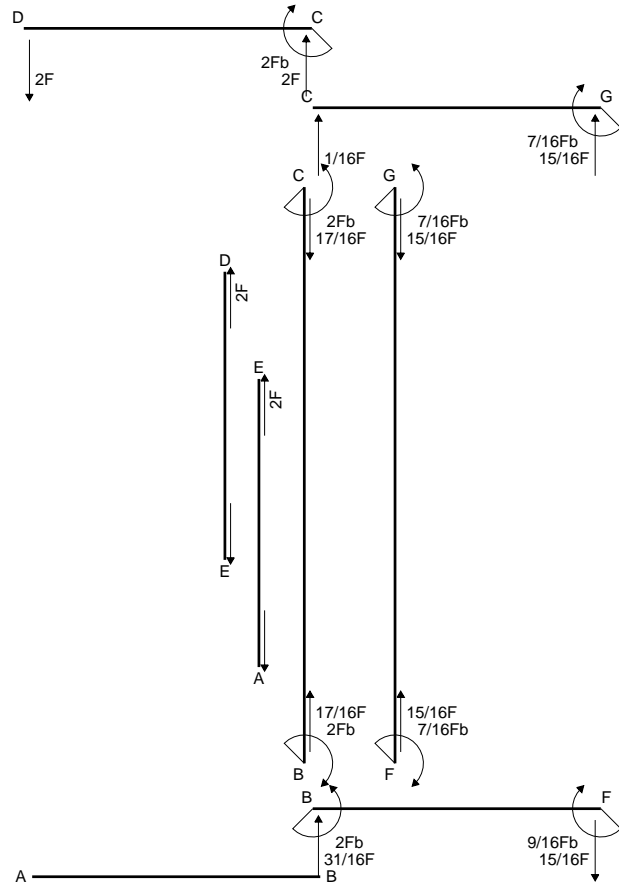


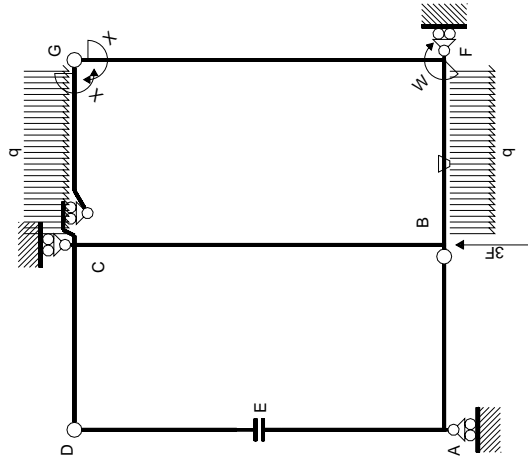

Schema di calcolo iperstatico

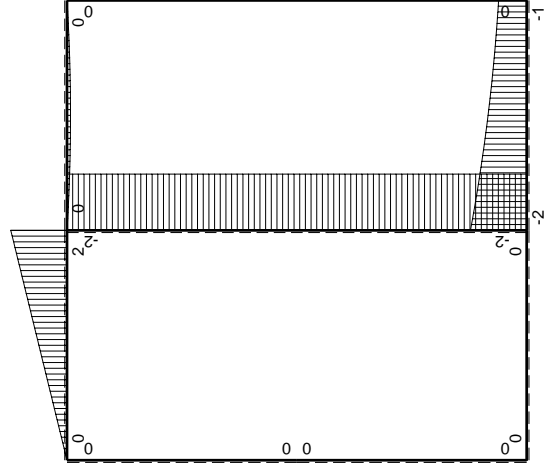

$M_0$  flessione da carichi assegnati

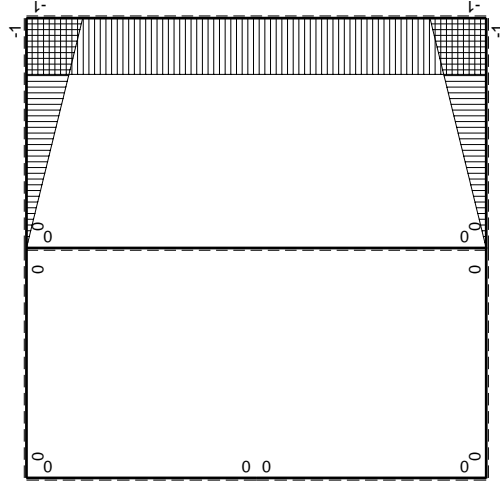

$M_x$  flessione da iperstatica  $X=1$

Quadro contribuiti PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$             | $\theta$ | $M_x M_0$                 | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|---------------|----------|----------------------|----------|---------------------------|---------------|------------------|-----------------------------|---------------------|
| AB B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| CD B          | 0        | $2Fb-2Fx$            | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| DC B          | 0        | $-2Fx$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| DE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| EA B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| AE B          | 0        | 0                    | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BF B          | $-x/b$   | $-2Fb+3/2Fx-1/2qx^2$ | $-Fb/EJ$ | $2Fx-3/2Fx^2/b+1/2qx^3/b$ | $Fx/EJ$       | $x^2/b^2$        | $(5/8+1/2)Fb^2/EJ$          | $1/3xb/EJ$          |
| FB B          | $1-x/b$  | $Fb+1/2Fx+1/2qx^2$   | $Fb/EJ$  | $Fb-1/2Fx-1/2qx^3/b$      | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| GC B          | $-1+x/b$ | $-1/2Fx+1/2qx^2$     | 0        | $1/2Fx-Fx^2/b+1/2qx^3/b$  | 0             | $1-2x/b+x^2/b^2$ | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| CG B          | $x/b$    | $1/2Fx-1/2qx^2$      | 0        | $1/2Fx^2/b-1/2qx^3/b$     | 0             | $x^2/b^2$        | $(1/24+0)Fb^2/EJ$           | $1/3xb/EJ$          |
| FG 2b         | -1       | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| GF 2b         | 1        | 0                    | 0        | 0                         | 0             | 1                | 0+0                         | $2xb/EJ$            |
| CB 2b         | 0        | $-2Fb$               | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| BC 2b         | 0        | $2Fb$                | 0        | 0                         | 0             | 0                | 0+0                         | 0                   |
| totali        |          |                      |          |                           |               |                  |                             |                     |
|               |          |                      |          |                           |               |                  | $7/6Fb^2/EJ$                | $8/3xb/EJ$          |
|               |          |                      |          |                           |               |                  |                             | $-7/16Fb$           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$




$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

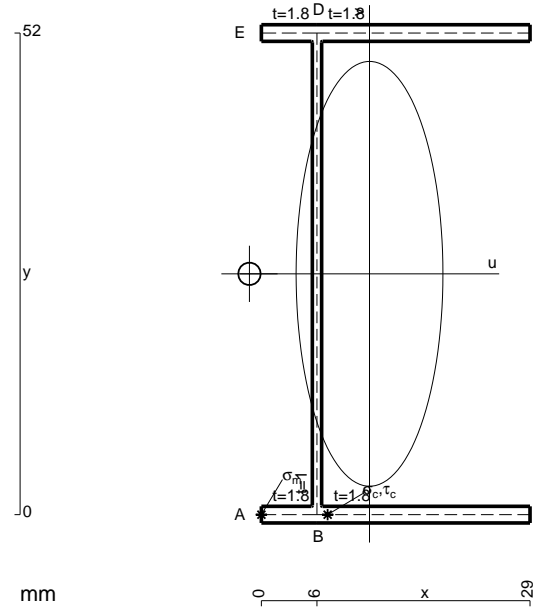


- A = 156.4 mm<sup>2</sup>
- J<sub>u</sub> = 82292. mm<sup>4</sup>
- J<sub>v</sub> = 9825. mm<sup>4</sup>
- J<sub>t</sub> = 130.1 mm<sup>4</sup>
- x<sub>o</sub> = -12.96 mm
- x<sub>g</sub> = 11.67 mm
- T<sub>y</sub> = -1460. N
- M<sub>x</sub> = 657000. Nmm
- u<sub>m</sub> = -11.67 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 207.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -5.674 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 207.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 272.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/tJ<sub>u</sub> = 10.61 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 261.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1314. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 515.6 N/mm<sup>2</sup>



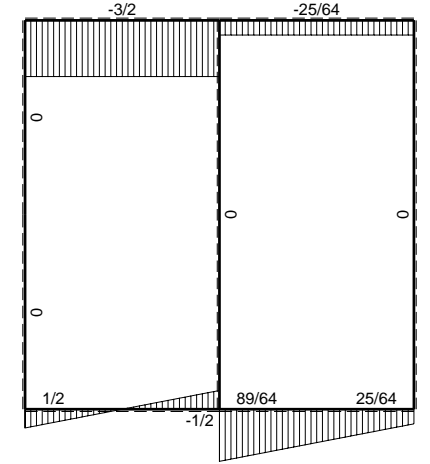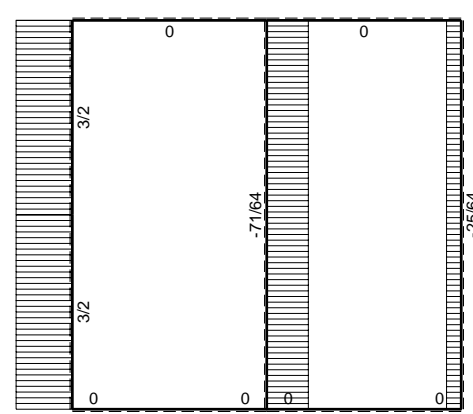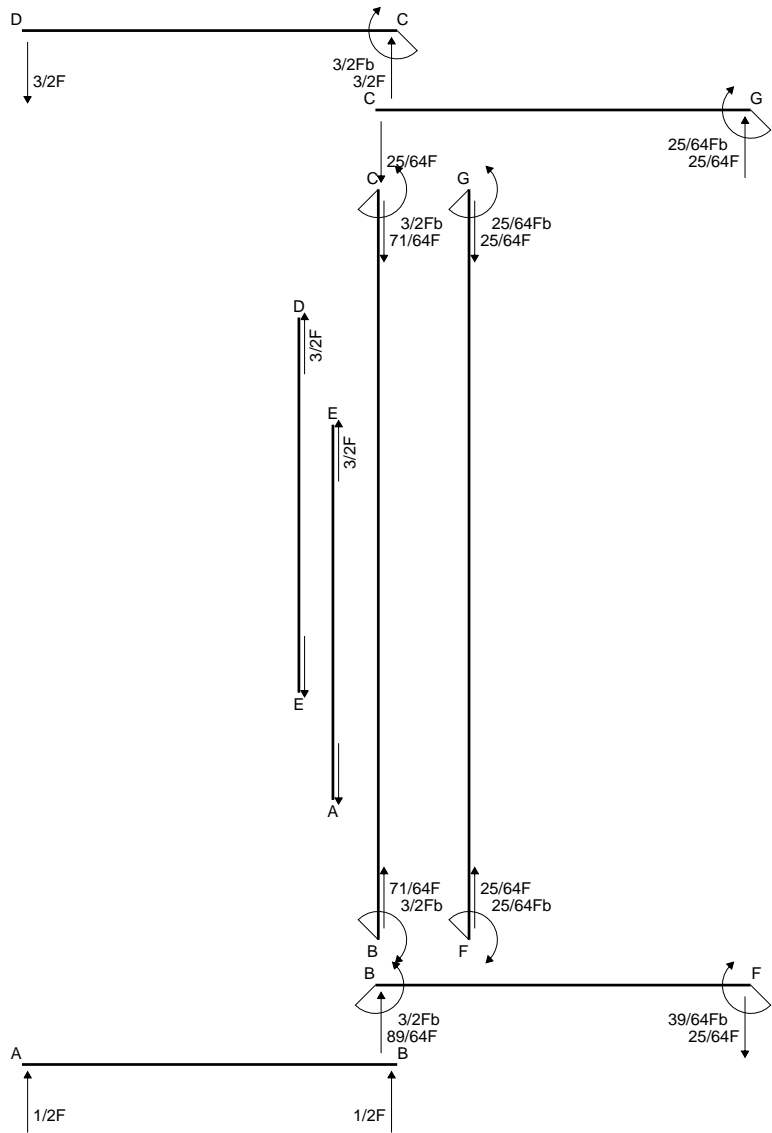


← ⊕ → F


↑ ⊕ ↓ F

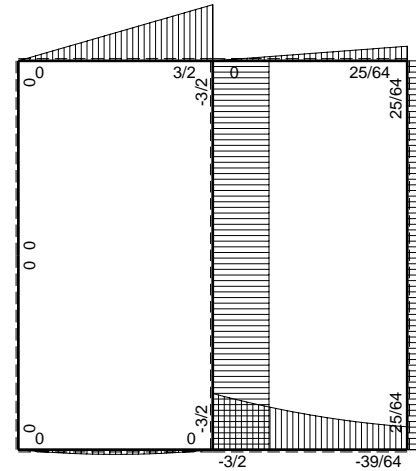

⊕ ⊖ F<sub>b</sub>

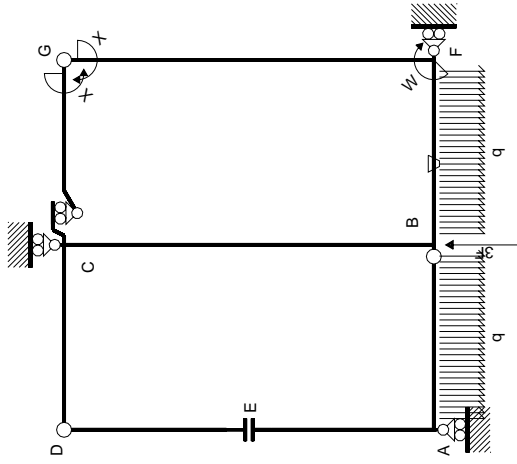

Schema di calcolo iperstatico

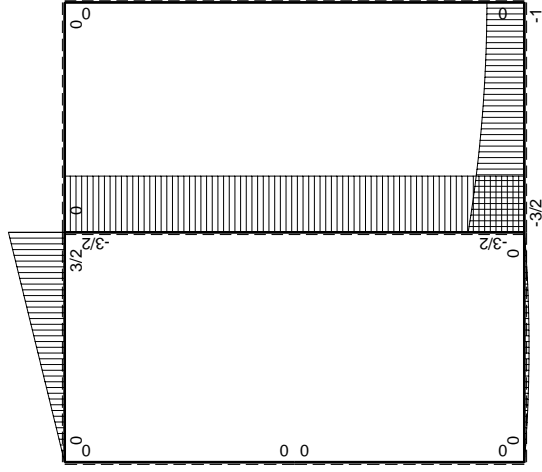

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$          | $M^x(x)$ | $M^0(x)$            | $\theta$ | $M^x M_0$                   | $M^x \theta$  | $M^x M_x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|------------------------|----------|---------------------|----------|-----------------------------|---------------|------------------|-----------------------------|----------------------|
| AB b                   | 0        | $1/2Fx-1/2qx^2$     | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BA b                   | 0        | $-1/2Fx+1/2qx^2$    | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| CD b                   | 0        | $3/2Fb-3/2Fx$       | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| DC b                   | 0        | $-3/2Fx$            | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| DE b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| ED b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| EAB b                  | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| AE b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BF b                   | $-x/b$   | $-3/2Fb+Fx-1/2qx^2$ | $-Fb/EJ$ | $3/2Fx-Fx^2/b+1/2qx^3/b$    | $Fx/EJ$       | $x^2/b^2$        | $(1/3/24+1/2)Fb^2/EJ$       | $1/3xb/EJ$           |
| FBB b                  | $1-x/b$  | $Fb+1/2qx^2$        | $Fb/EJ$  | $Fb-Fx+1/2Fx^2/b-1/2qx^3/b$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3/24+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| GCB b                  | $-1+x/b$ | 0                   | 0        | 0                           | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| CG b                   | $x/b$    | 0                   | 0        | 0                           | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b                  | -1       | 0                   | 0        | 0                           | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b                  | 1        | 0                   | 0        | 0                           | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b                  | 0        | $-3/2Fb$            | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BC 2b                  | 0        | $3/2Fb$             | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| totali                 |          |                     |          |                             |               |                  |                             |                      |
| iperstatica $X=W_{gc}$ |          |                     |          |                             |               |                  |                             |                      |
|                        |          |                     |          |                             |               |                  | $-25/64Fb$                  | $8/3xb/EJ$           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$


$$= [3/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 25/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 25/24 Fb^2/EJ$$

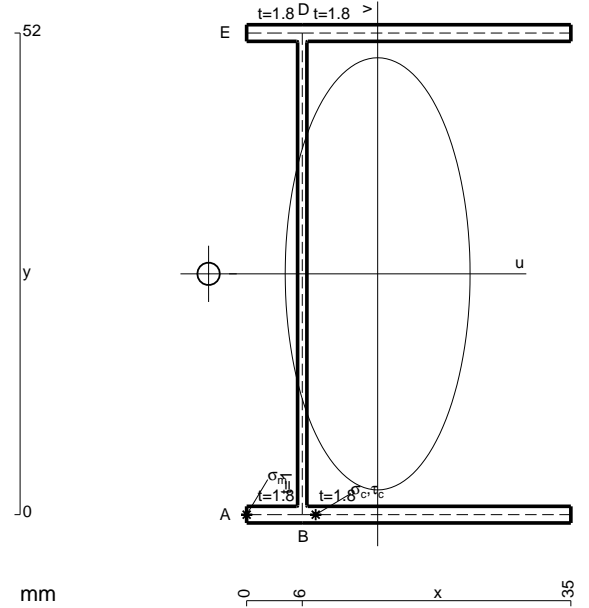

- A = 178. mm<sup>2</sup>
- J<sub>u</sub> = 96893. mm<sup>4</sup>
- J<sub>v</sub> = 17731. mm<sup>4</sup>
- J<sub>t</sub> = 153.4 mm<sup>4</sup>
- x<sub>o</sub> = -18.25 mm
- x<sub>g</sub> = 14.14 mm
- T<sub>y</sub> = -1665. N
- M<sub>x</sub> = 815850. Nmm
- u<sub>m</sub> = -14.14 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 218.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -8.14 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 218.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 369.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 12.96 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t/J<sub>t</sub> = 356.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 1998. mm
- σ<sub>o</sub> = √σ<sub>c</sub><sup>2</sup> + 3τ<sub>c</sub><sup>2</sup> = 676.4 N/mm<sup>2</sup>






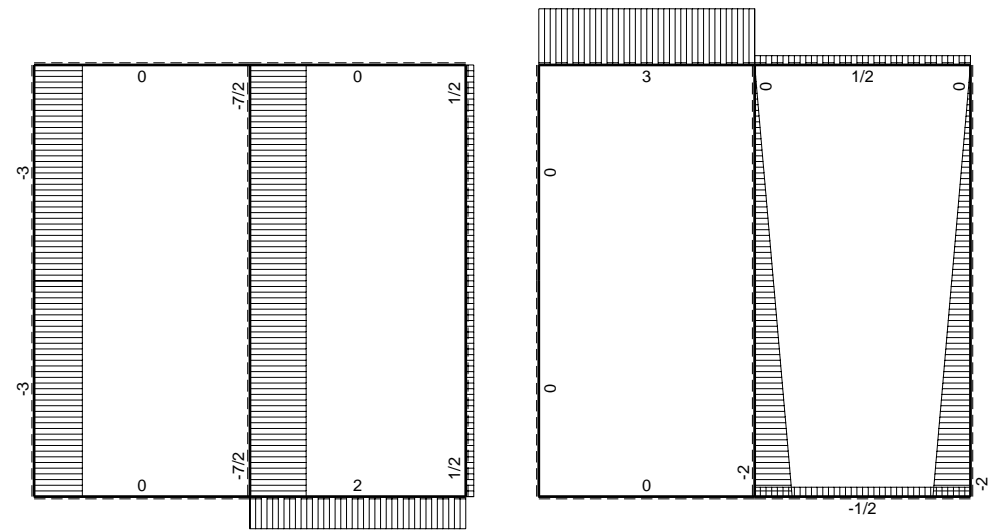
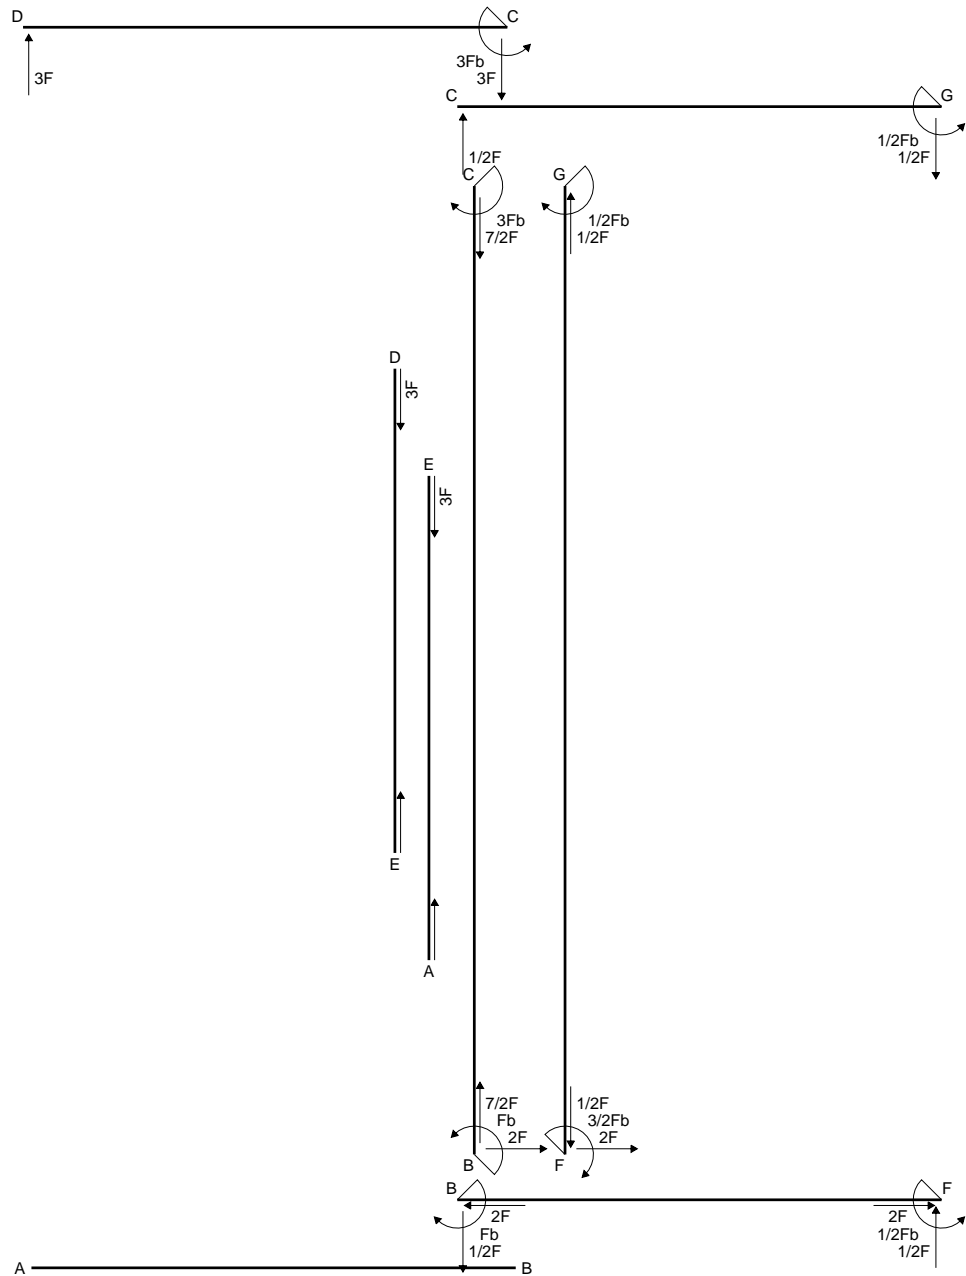


← ⊕ → F


↑ ⊕ ↓ F

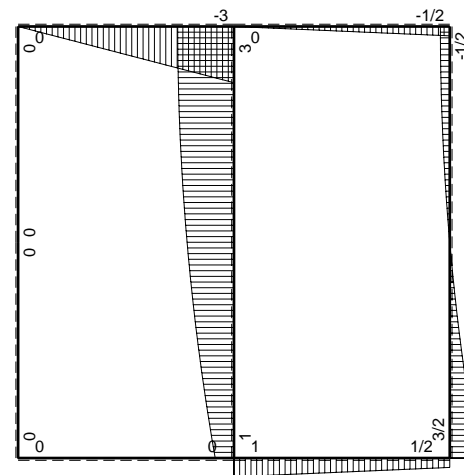

⊕ ⊖ F<sub>b</sub>

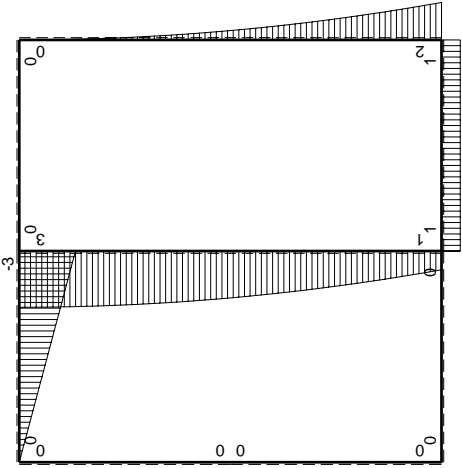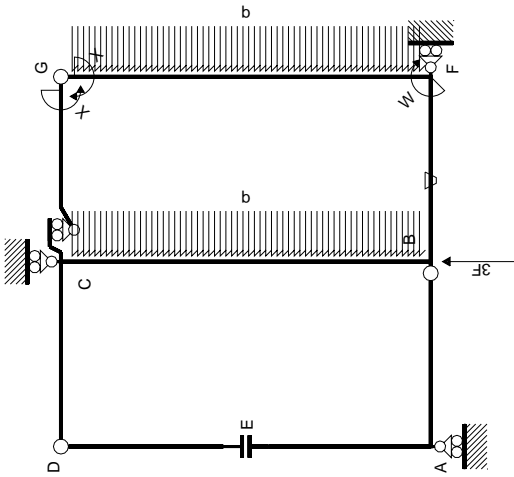

$M_0$  flessione da carichi assegnati

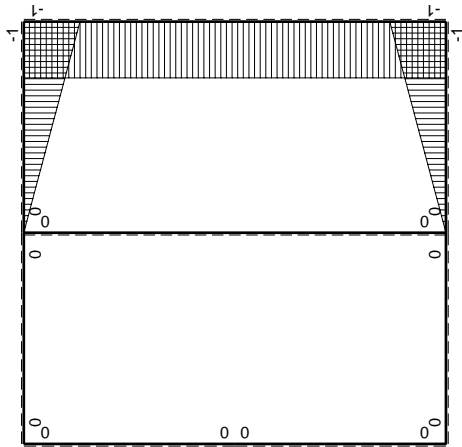

$M_x$  flessione da iperstatica X=1

| ←      | $M^x(x)$ |                   | $M^0(x)$ | $\theta$             | $M^x M_0$ | $M^x \theta$  | $M^x M_x$ | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x/EJ dx$ | iperstatica X=W <sub>gc</sub> |              | totali     |
|--------|----------|-------------------|----------|----------------------|-----------|---------------|-----------|---------------------------------|----------------------|-------------------------------|--------------|------------|
|        | $M^x(x)$ | $M^0(x)$          |          |                      |           |               |           |                                 |                      | $M^x M_0$                     | $M^x \theta$ |            |
| AB b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| BA b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| CD b   | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| DC b   | 0        | $3Fx$             | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| DE b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| ED b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| EA b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| AE b   | 0        | 0                 | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0                             | 0            | 0          |
| BF b   | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $-Fb+Fx$  | $Fb/EJ-Fx/EJ$ | $x^2/b^2$ | $1-2x/b+x^2/b^2$                | $1-2x/b+x^2/b^2$     | $1/3xb/EJ$                    | $1/3xb/EJ$   | $1/3xb/EJ$ |
| FB b   | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fx$                | $-Fb+Fx$  | $Fb/EJ-Fx/EJ$ | $x^2/b^2$ | $1-2x/b+x^2/b^2$                | $1-2x/b+x^2/b^2$     | $1/3xb/EJ$                    | $1/3xb/EJ$   | $1/3xb/EJ$ |
| GC b   | $-1+x/b$ | 0                 | 0        | 0                    | 0         | 0             | 0         | $1-2x/b+x^2/b^2$                | $x^2/b^2$            | 0+0                           | 0+0          | 0          |
| CG b   | $x/b$    | 0                 | 0        | 0                    | 0         | 0             | 0         | $x^2/b^2$                       | $x^2/b^2$            | 0+0                           | 0+0          | 0          |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0         | 0             | 1         | 1                               | $(-4/3+0)Fb^2/EJ$    | $2Xb/EJ$                      | $2Xb/EJ$     | 0          |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0         | 0             | 1         | 1                               | $(-4/3+0)Fb^2/EJ$    | $2Xb/EJ$                      | $2Xb/EJ$     | 0          |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0+0                           | 0+0          | 0          |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0         | 0             | 0         | 0                               | 0                    | 0+0                           | 0+0          | 0          |
| totali |          |                   |          |                      |           |               |           |                                 |                      | $-4/3Fb^2/EJ$                 | $8/3Xb/EJ$   | $1/2Fb$    |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$





$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

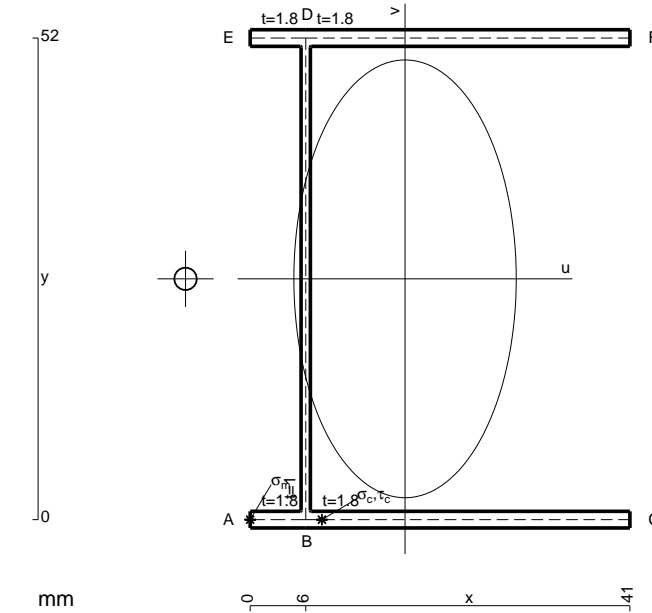

- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 28761. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = -23.7 mm
- x<sub>g</sub> = 16.72 mm
- T<sub>y</sub> = 1860. N
- M<sub>x</sub> = -985800. Nmm
- u<sub>m</sub> = -16.72 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -10.72 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 464.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 15.18 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 448.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1116. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 836.1 N/mm<sup>2</sup>




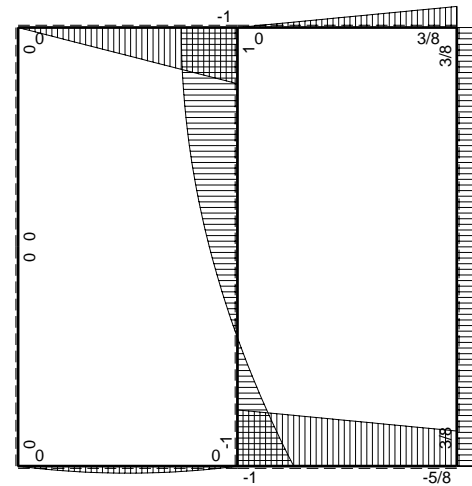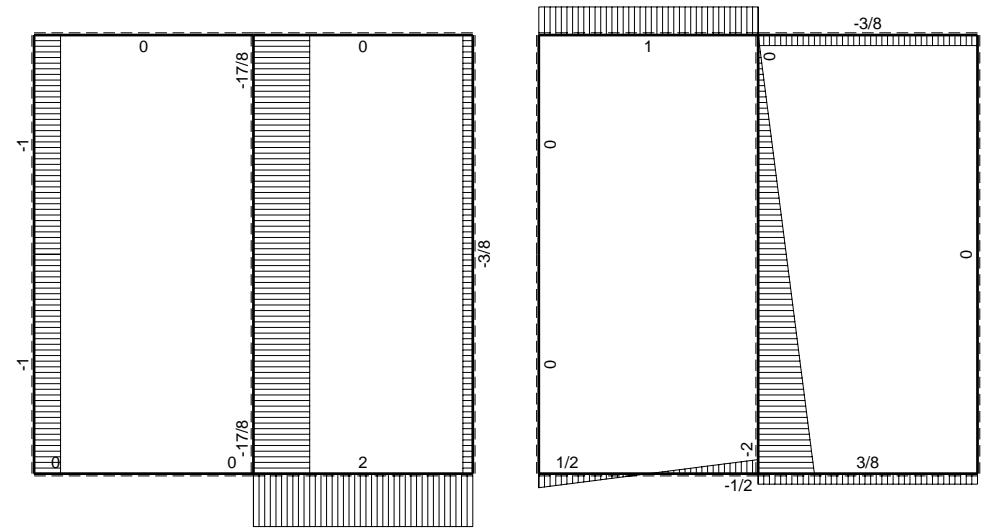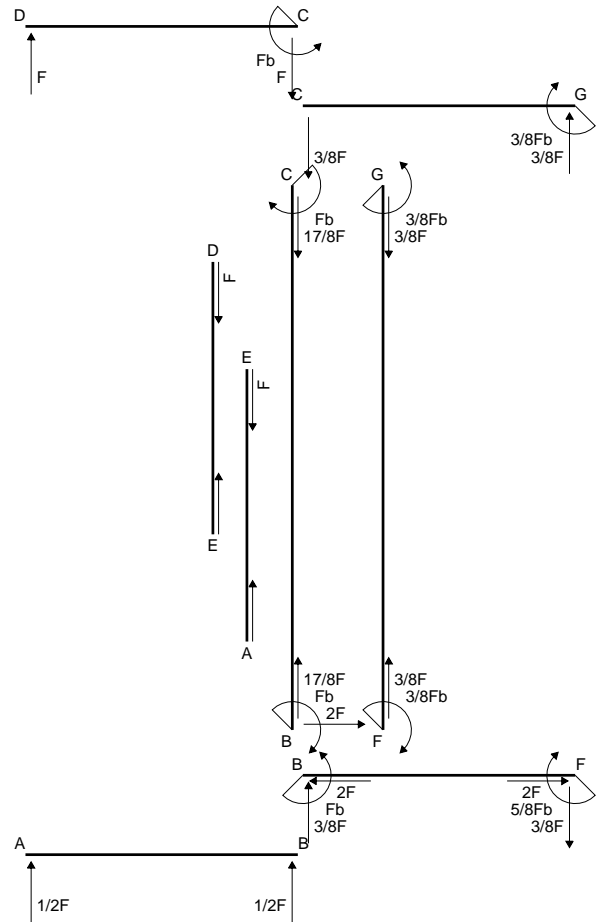

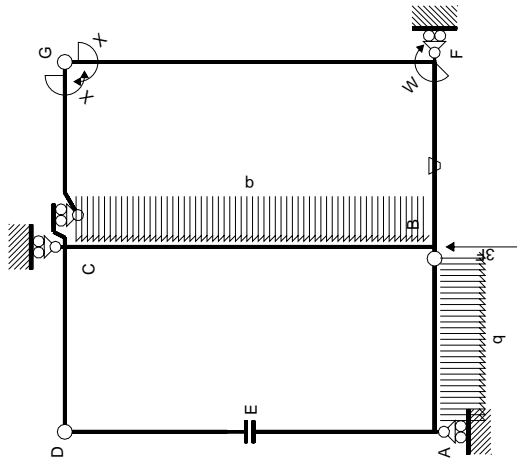


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

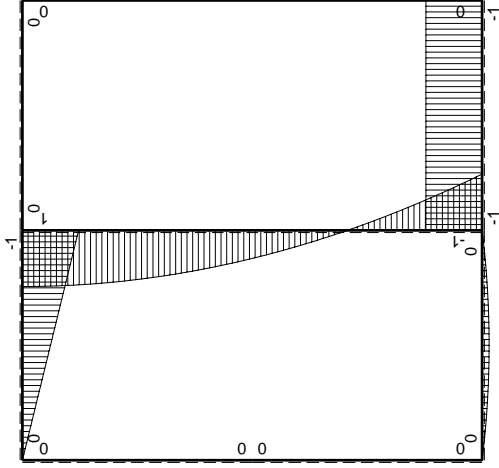

$M_x$  flessione da iperstatica  $X=1$

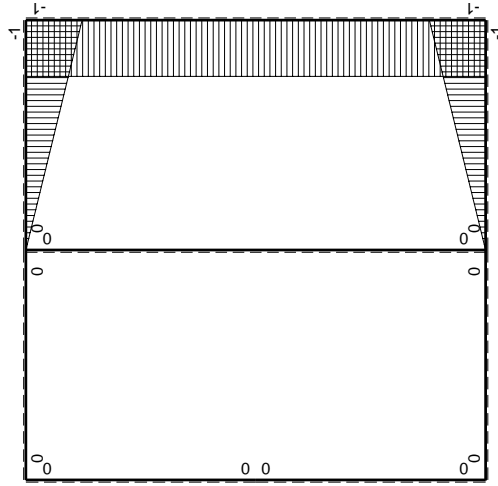

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| ED b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                  |                                 | $Fb^2/EJ$              |
|               |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

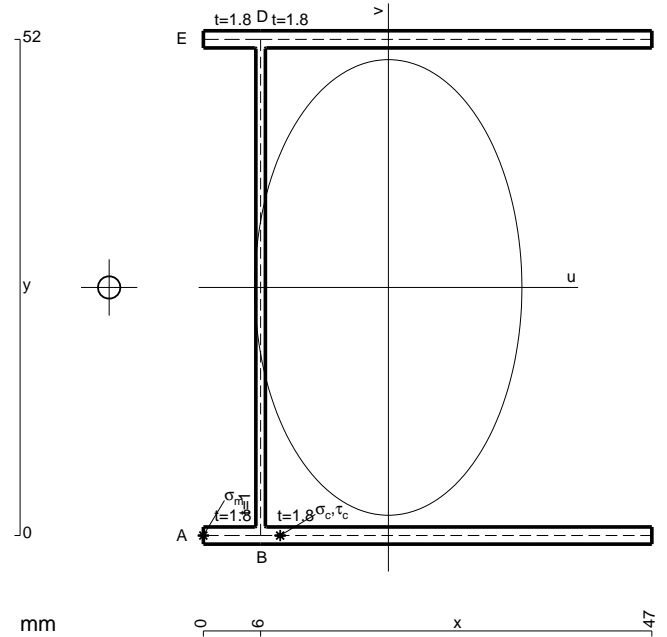


- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 43328. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>0</sub> = -29.26 mm
- x<sub>g</sub> = 19.39 mm
- N = -3995. N
- T<sub>y</sub> = -3760. N
- M<sub>x</sub> = -1071600. Nmm
- u<sub>m</sub> = -19.39 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = -239. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -13.39 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = -239. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 1022. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 31.79 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>/tJ<sub>t</sub> = 989.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 3384. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 1786. N/mm<sup>2</sup>







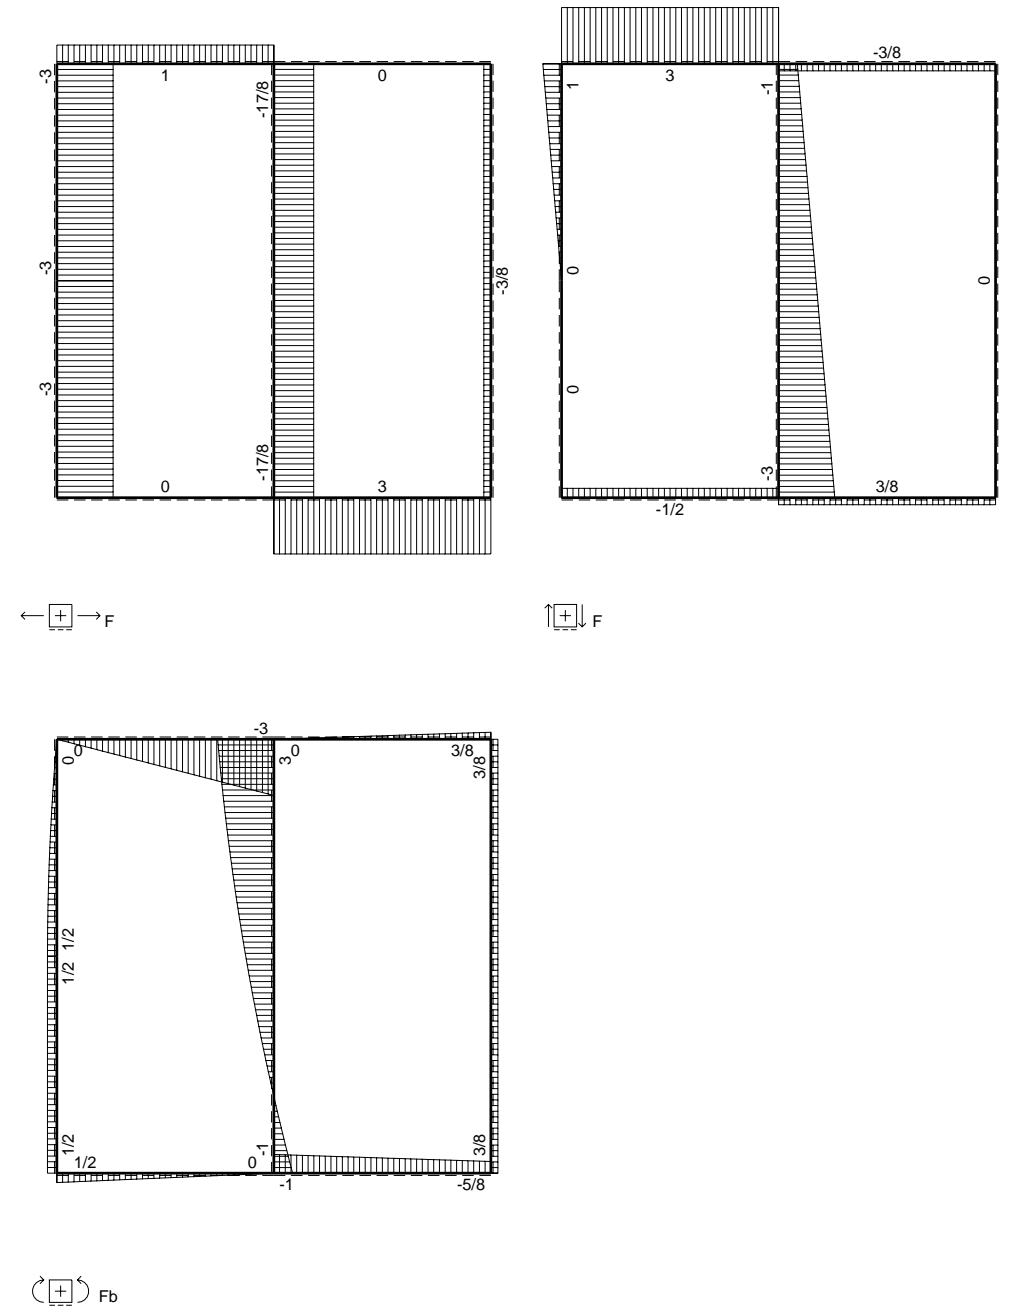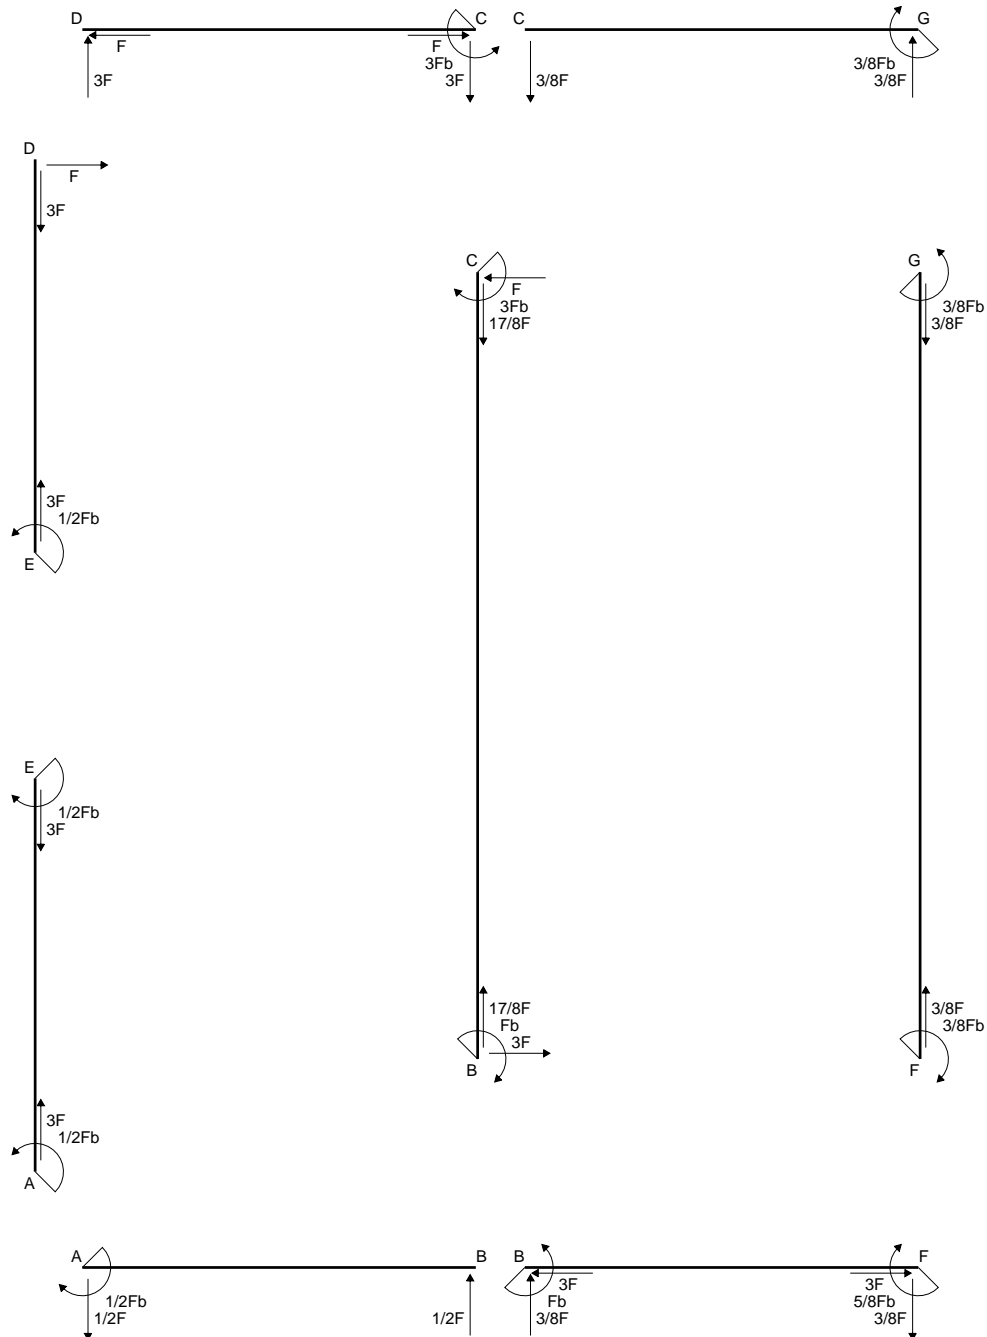

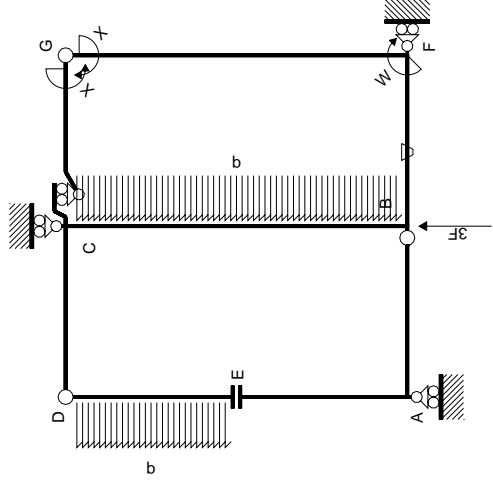

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

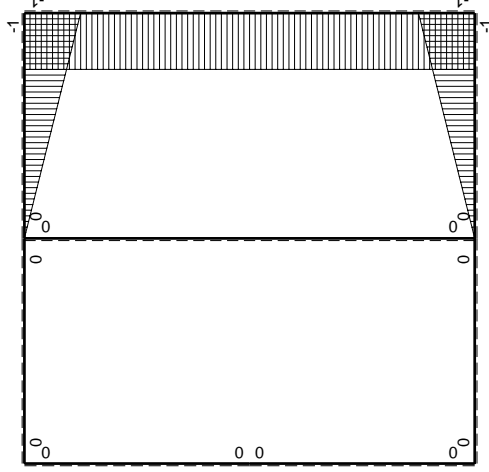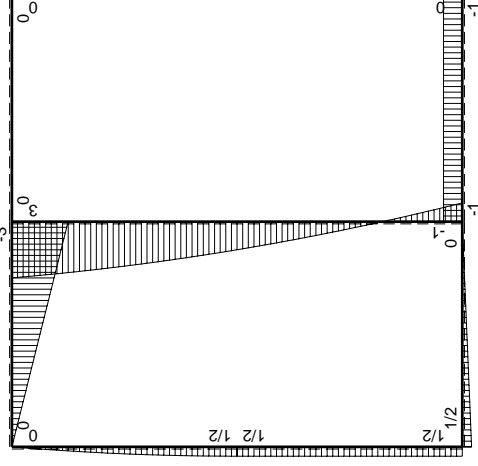

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | $1/2Fb-1/2Fx$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | 0        | $-1/2Fx$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | 0        | $-3Fb+3Fx$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | 0        | $3Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | 0        | $Fx-1/2qx^2$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | 0        | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | 0        | $1/2Fb$          | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | 0        | $-1/2Fb$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$   | $-Fb$            | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $Fb/EJ-Fx/EJ$    | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $Fb$             | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                | 0        | 0         | 0             | 0                | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                | 0        | 0         | 0             | 0                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                | 0        | 0         | 0             | 0                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $3Fb-Fx-1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-3Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                  |          |           |               |                  |                             | $8/3xb/EJ$           |
|               |          |                  |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

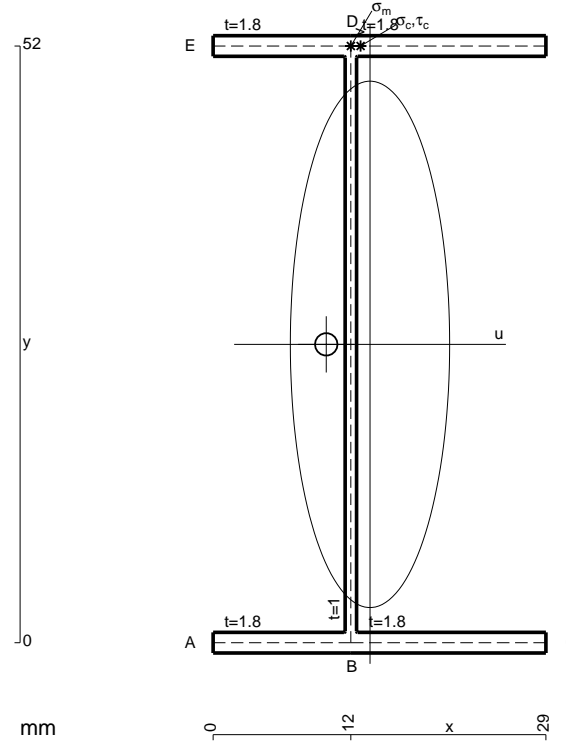


- A = 156.4 mm<sup>2</sup>
- J<sub>u</sub> = 82292. mm<sup>4</sup>
- J<sub>v</sub> = 7534. mm<sup>4</sup>
- J<sub>t</sub> = 130.1 mm<sup>4</sup>
- x<sub>o</sub> = -3.813 mm
- x<sub>g</sub> = 13.67 mm
- N = 340. N
- T<sub>y</sub> = 1020. N
- M<sub>x</sub> = -622200. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = -1.669 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = -1.669 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 198.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 59.29 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.479 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 53.81 N/mm<sup>2</sup>
- t<sub>c</sub> = 612. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 223.7 N/mm<sup>2</sup>



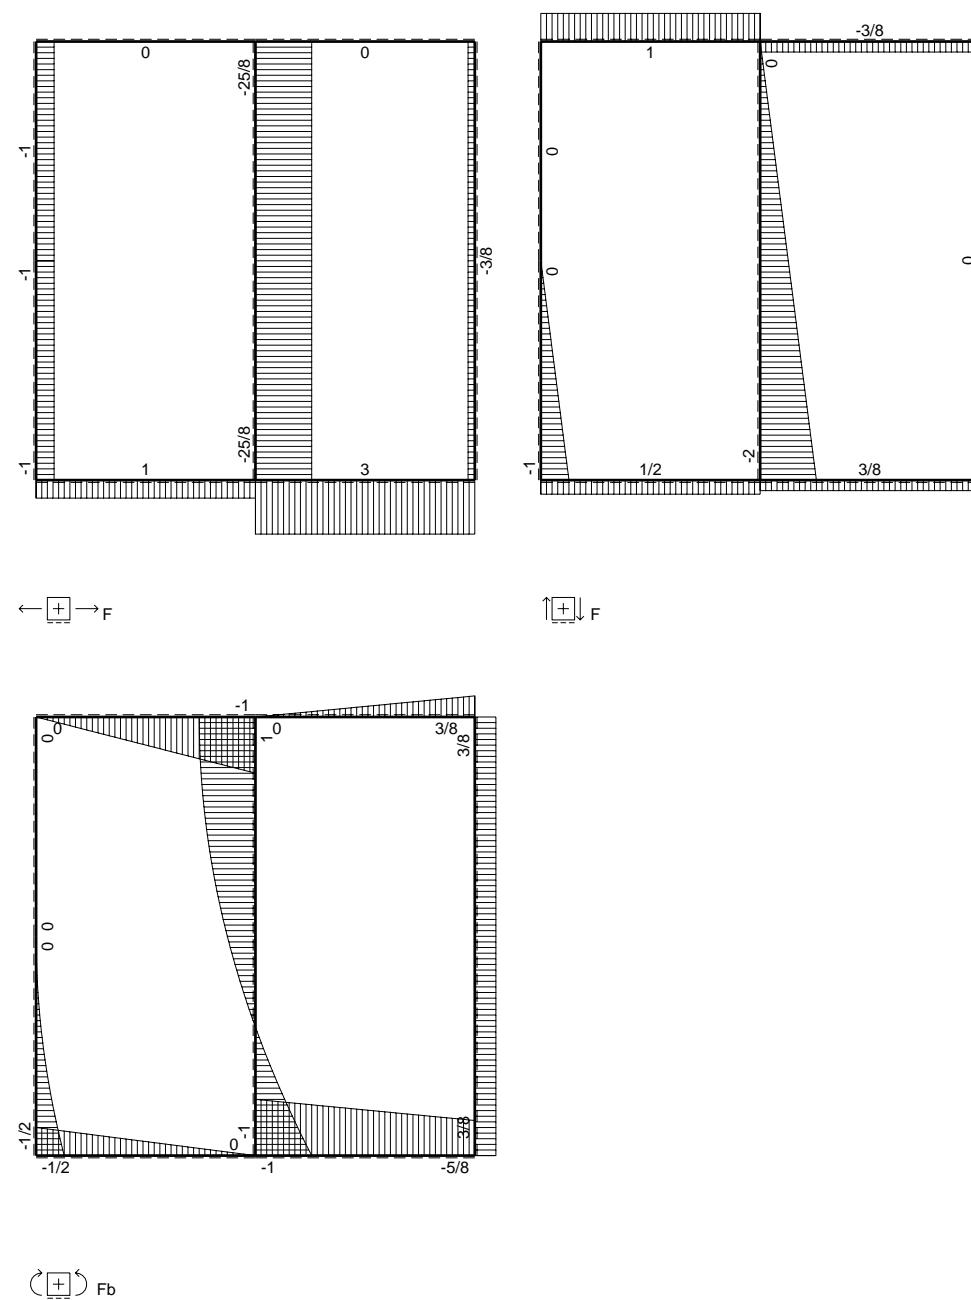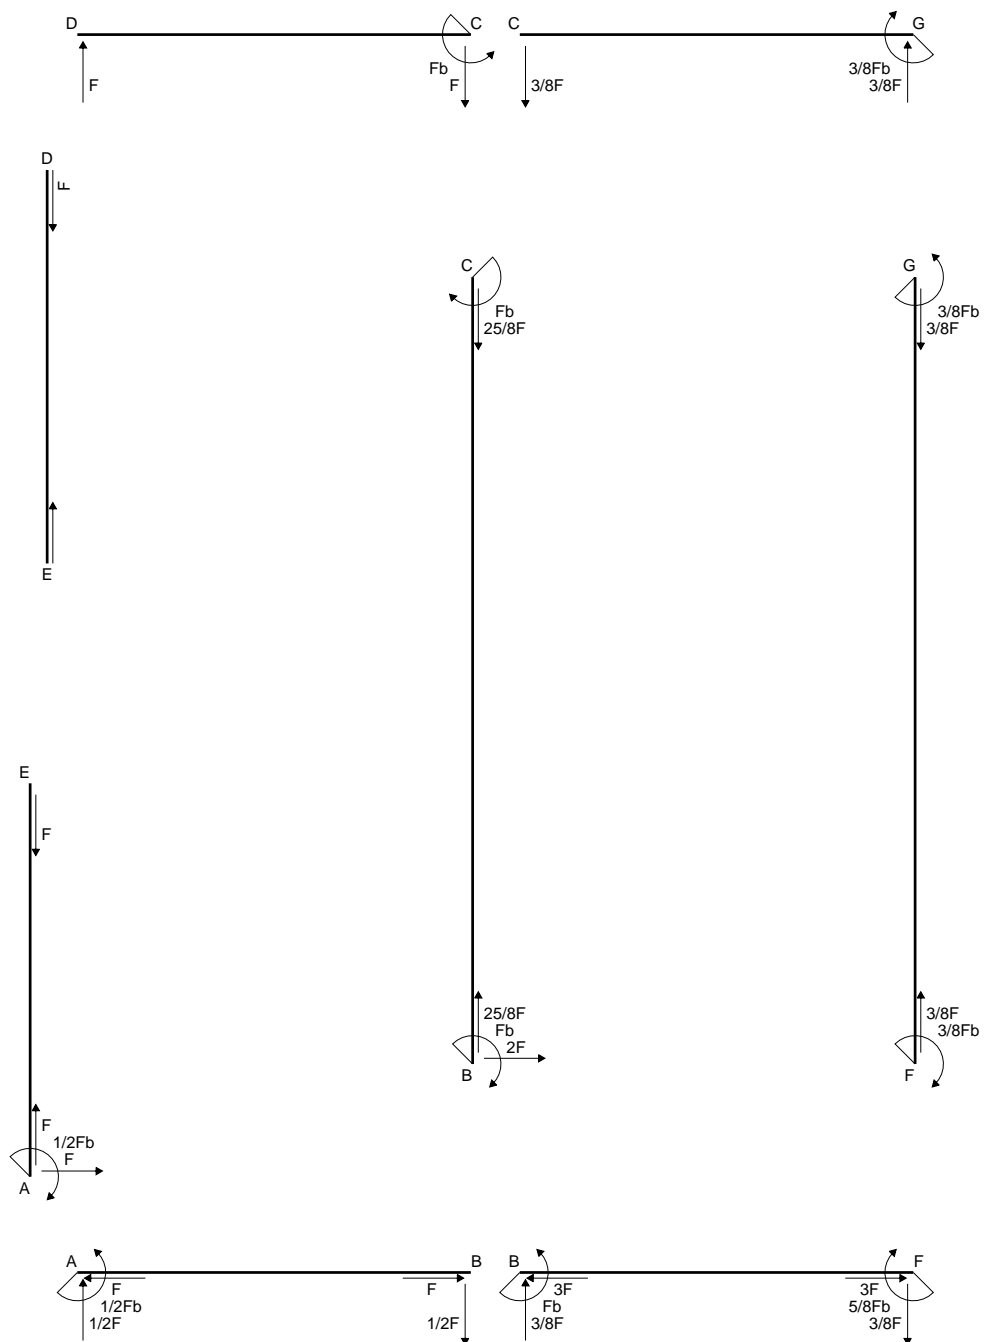


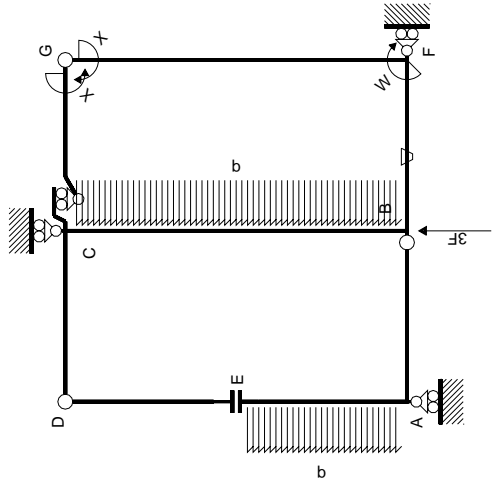

Schema di calcolo iperstatico

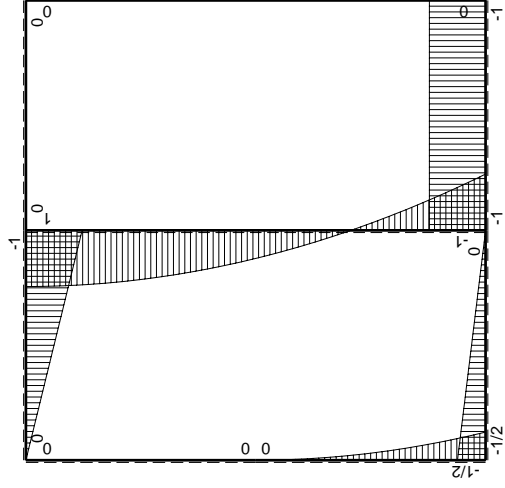

M<sub>0</sub> flessione da carichi assegnati

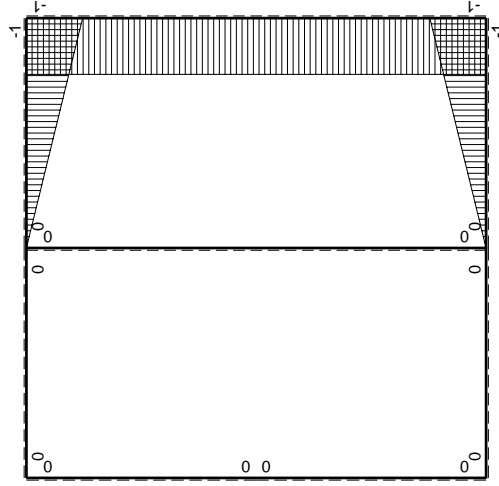

M<sub>x</sub> flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sup>gc</sup>

| ←      | M <sup>x(x)</sup> | M <sup>(x)</sup>            | θ      | M <sup>x</sup> M <sub>0</sub> | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub> | ∫M <sup>x</sup> (M <sub>0</sub> /EJ+θ)dx | ∫M <sup>x</sup> M <sub>x</sub> /EJdx |
|--------|-------------------|-----------------------------|--------|-------------------------------|------------------|-------------------------------|--|--------------------------------------|
| AB B   | 0                 | -1/2Fb+1/2Fx                | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| BA B   | 0                 | 1/2Fx                       | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| CD B   | 0                 | -Fb+Fx                      | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| DC B   | 0                 | Fx                          | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| DE B   | 0                 | 0                           | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| EA B   | 0                 | -1/2qx <sup>2</sup>         | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| AE B   | 0                 | 1/2Fb-Fx+1/2qx <sup>2</sup> | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| BF B   | -x/b              | -Fb                         | -Fb/EJ | Fx                            | Fx/EJ            | Fb/EJ-Fx/EJ                   | (1/2+1/2)Fb <sup>2</sup> /EJ             | 1/3xb/EJ                             |
| FB B   | 1-x/b             | Fb                          | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | Fb/EJ-Fx/EJ                   | 1-2x/b+x <sup>2</sup> /b <sup>2</sup>    | 1/3xb/EJ                             |
| GC B   | -1+x/b            | 0                           | 0      | 0                             | 0                | 0                             | 1-2x/b+x <sup>2</sup> /b <sup>2</sup>    | 1/3xb/EJ                             |
| CG B   | x/b               | 0                           | 0      | 0                             | 0                | 0                             | x <sup>2</sup> /b <sup>2</sup>           | 1/3xb/EJ                             |
| FG 2b  | -1                | 0                           | 0      | 0                             | 0                | 0                             | 1  | 2xb/EJ                               |
| GF 2b  | 1                 | 0                           | 0      | 0                             | 0                | 0                             | 1  | 2xb/EJ                               |
| CB 2b  | 0                 | Fb-1/2qx <sup>2</sup>       | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| BC 2b  | 0                 | Fb-2Fx+1/2qx <sup>2</sup>   | 0      | 0                             | 0                | 0                             | 0+0                                      | 0                                    |
| totali |                   |                             |        |                               |                  |                               |  | 8/3xb/EJ                             |

iperstatica X=W<sup>gc</sup>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$






$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

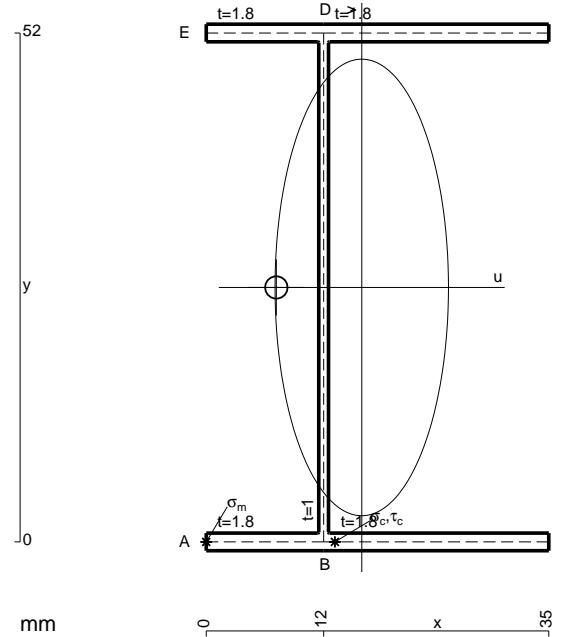


- A = 178. mm<sup>2</sup>
- J<sub>u</sub> = 96893. mm<sup>4</sup>
- J<sub>v</sub> = 13976. mm<sup>4</sup>
- J<sub>t</sub> = 153.4 mm<sup>4</sup>
- x<sub>o</sub> = -8.728 mm
- x<sub>g</sub> = 15.89 mm
- N = -3406. N
- T<sub>y</sub> = -2180. N
- M<sub>x</sub> = -708500. Nmm
- u<sub>m</sub> = -15.89 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = -209.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -3.893 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = -209.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 236.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.45 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 223.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 1962. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 460.3 N/mm<sup>2</sup>






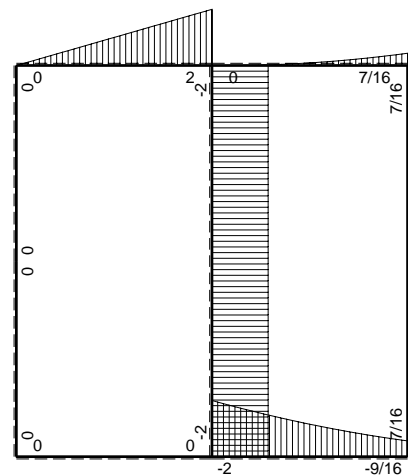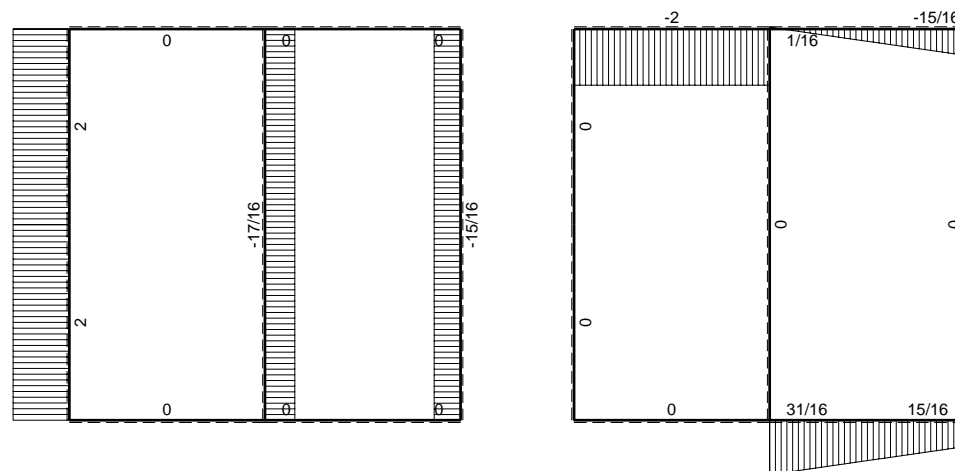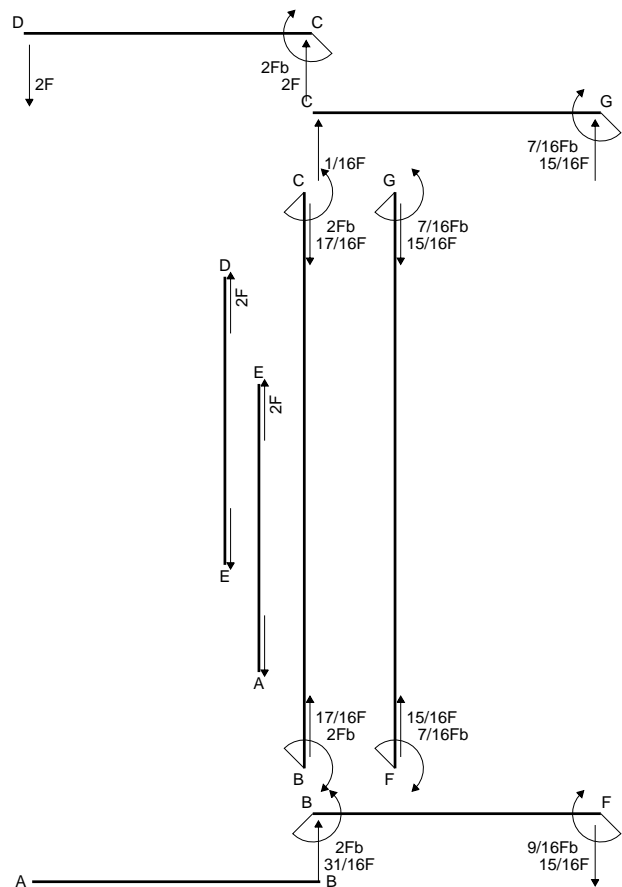


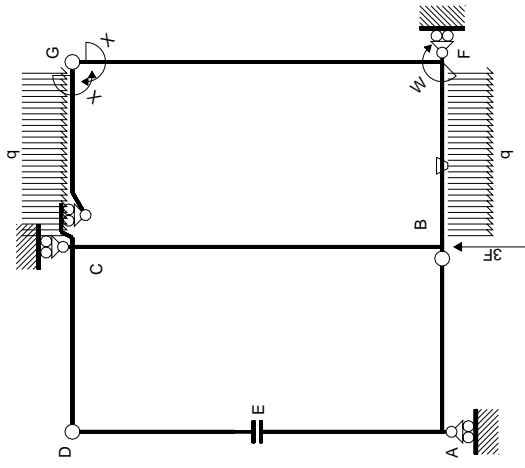

Schema di calcolo iperstatico

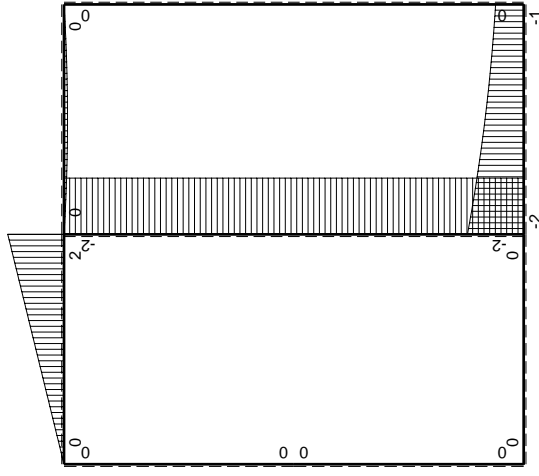

M<sub>0</sub> flessione da carichi assegnati

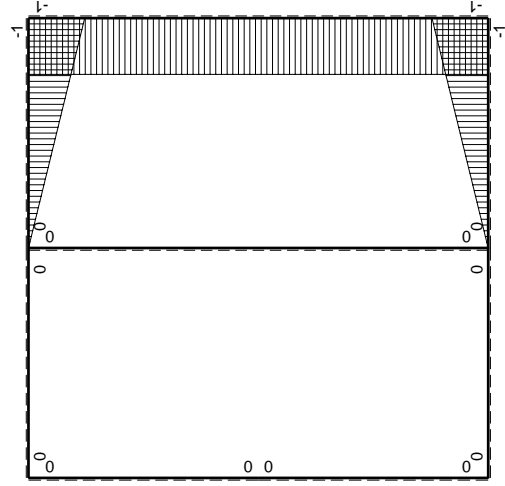

M<sub>x</sub> flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | Sviluppi di calcolo iperstatica |        |   |                  |                                       |  |                                      |  |
|---|--------------------|---------------------------------|--------|---|------------------|---------------------------------------|--|--------------------------------------|--|
| →   | M <sup>x</sup> (x) | M <sub>0</sub> (x)              | θ      | M <sub>x</sub> M <sub>0</sub>                   | M <sub>x</sub> θ | M <sub>x</sub> M <sub>x</sub>         | ∫M <sub>x</sub> (M <sub>0</sub> /EJ+θ)dx | ∫M <sub>x</sub> M <sub>x</sub> /EJdx |  |
| AB B  | 0                  | 0                               | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| BA B  | 0                  | 0                               | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| CD B  | 0                  | 2Fb-2Fx                         | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| DC B  | 0                  | -2Fx                            | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| DE B  | 0                  | 0                               | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| EA B  | 0                  | 0                               | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| AE B  | 0                  | 0                               | 0      | 0   | 0                | 0                                     | 0  | 0                                    |  |
| BF B  | -x/b               | -2Fb+3/2Fx-1/2qx <sup>2</sup>   | -Fb/EJ | 2Fx-3/2Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (5/8+1/2)Fb <sup>2</sup> /EJ             | 1/3xb/EJ                             |  |
| FB B  | 1-x/b              | Fb+1/2Fx+1/2qx <sup>2</sup>     | Fb/EJ  | Fb-1/2Fx-1/2qx <sup>3</sup> /b                  | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ              | 1/3xb/EJ                             |  |
| GC B  | -1+x/b             | -1/2Fx+1/2qx <sup>2</sup>       | 0      | 1/2Fx-Fx <sup>2</sup> /b+1/2qx <sup>3</sup> /b  | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | (1/24+0)Fb <sup>2</sup> /EJ              | 1/3xb/EJ                             |  |
| CG B  | x/b                | 1/2Fx-1/2qx <sup>2</sup>        | 0      | 1/2Fx <sup>2</sup> /b-1/2qx <sup>3</sup> /b     | 0                | x <sup>2</sup> /b <sup>2</sup>        | (1/24+0)Fb <sup>2</sup> /EJ              | 1/3xb/EJ                             |  |
| FG 2b   | -1                 | 0                               | 0      | 0   | 0                | 1                                     | 0+0                                      | 2xb/EJ                               |  |
| GF 2b   | 1                  | 0                               | 0      | 0   | 0                | 1                                     | 0+0                                      | 2xb/EJ                               |  |
| CB 2b   | 0                  | -2Fb                            | 0      | 0   | 0                | 0                                     | 0+0                                      | 7/6Fb <sup>2</sup> /EJ               |  |
| BC 2b   | 0                  | 2Fb                             | 0      | 0   | 0                | 0                                     | 0+0                                      | 7/6Fb <sup>2</sup> /EJ               |  |
| totali  |                    |                                 |        |   |                  |                                       |  | 8/3xb/EJ                             |  |
|   |                    |                                 |        | iperstatica X=W <sub>gc</sub>                   |                  |                                       |  |                                      |  |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$






$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

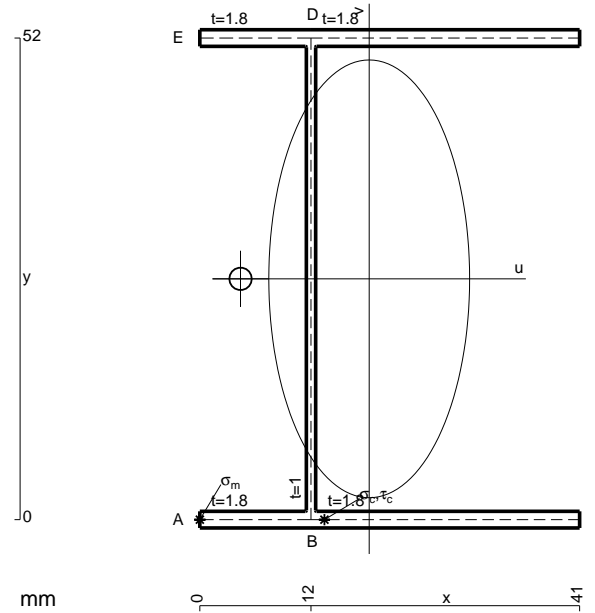


- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 23455. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = -13.89 mm
- x<sub>g</sub> = 18.29 mm
- T<sub>y</sub> = -1360. N
- M<sub>x</sub> = 938400. Nmm
- u<sub>m</sub> = -18.29 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 218.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -6.286 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 218.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 201.6 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 9.197 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 192.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 1224. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 412.1 N/mm<sup>2</sup>



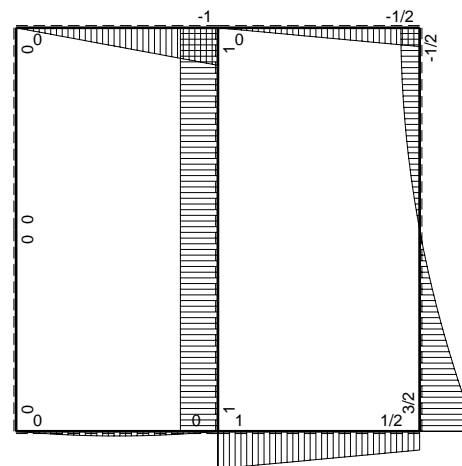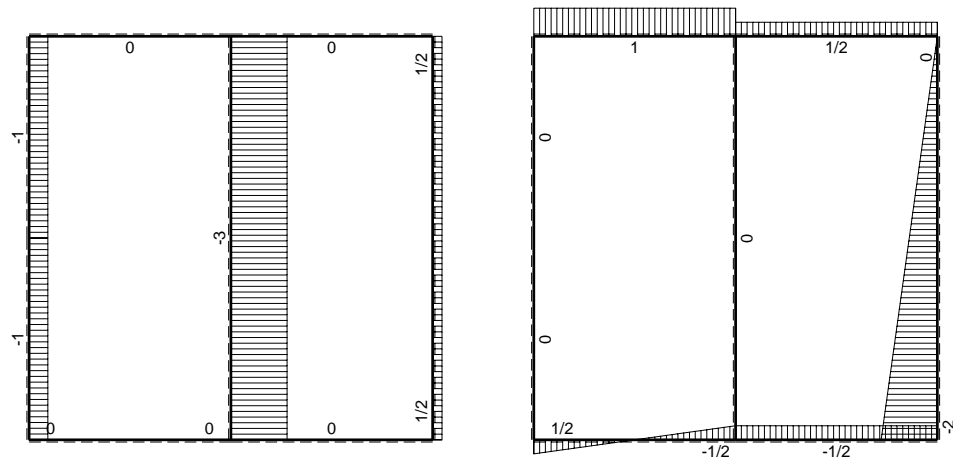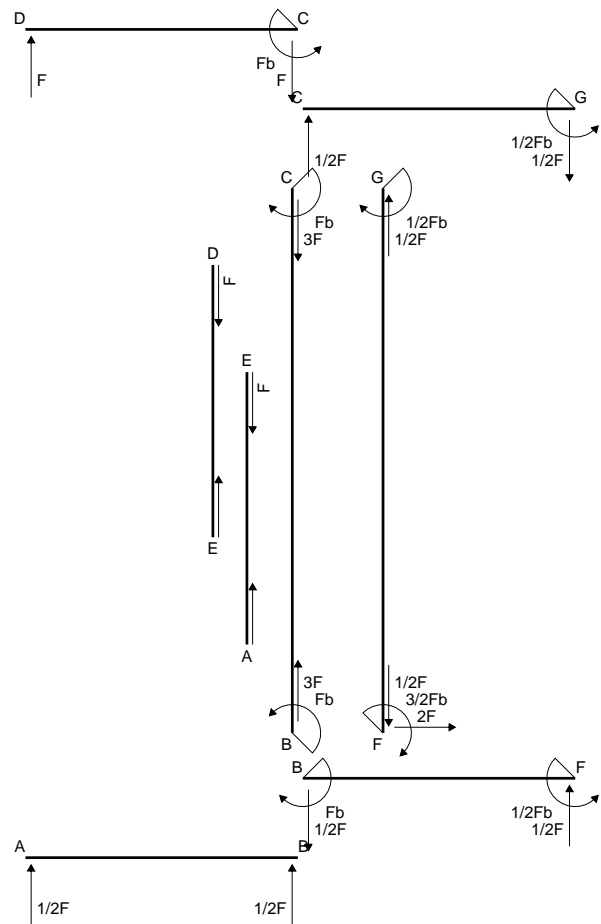

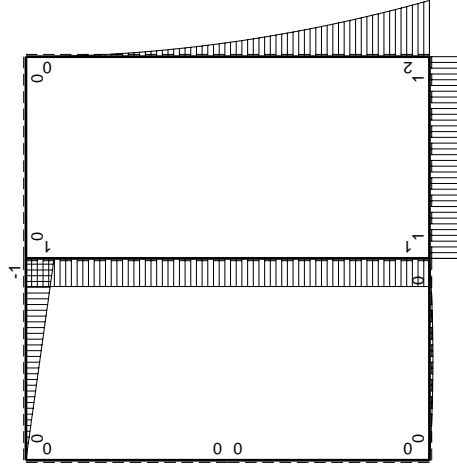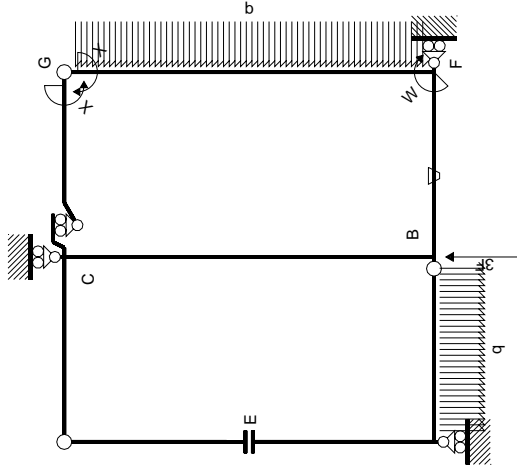

$M_0$  flessione da carichi assegnati

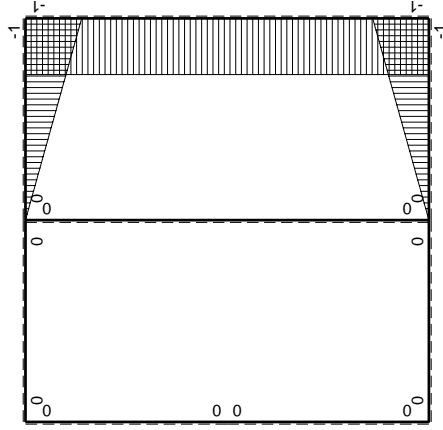

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>gc</sub> |                    | iperstatica X=W <sub>gc</sub> |        |                                |                  |                                |                             |                         |          |
|---|--------------------|-------------------------------|--------|--------------------------------|------------------|--------------------------------|-----------------------------|-------------------------|----------|
| ←   | M <sup>0</sup> (x) | M <sup>0</sup> (x)            | θ      | M <sup>x</sup> M <sub>0</sub>  | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub>  | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$     |          |
| AB b  | 0                  | 1/2Fx-1/2qx <sup>2</sup>      | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| BA b  | 0                  | -1/2Fx+1/2qx <sup>2</sup>     | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| CD b  | 0                  | -b+Fx                         | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| DC b  | 0                  | Fx                            | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| DE b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| ED b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| EA b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| AE b  | 0                  | 0                             | 0      | 0                              | 0                | 0                              | 0                           | 0                       |          |
| BF b  | -x/b               | Fb                            | -Fb/EJ | -Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup> | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ                |          |
| FB b  | 1-x/b              | -Fb                           | Fb/EJ  | -Fx                            | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$               | $(-1/2+1/2)Fb^2/EJ$         | 1/3xb/EJ                |          |
| GC b  | -1+x/b             | 0                             | 0      | 0                              | 0                | $1-2x/b+x^2/b^2$               | 0+0                         | 1/3xb/EJ                |          |
| CG b  | x/b                | 0                             | 0      | 0                              | 0                | x <sup>2</sup> /b <sup>2</sup> | 0+0                         | 1/3xb/EJ                |          |
| FG 2b   | -1                 | 2Fb-2Fx+1/2qx <sup>2</sup>    | 0      | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ                  |          |
| GF 2b   | 1                  | -1/2qx <sup>2</sup>           | 0      | -1/2Fx <sup>2</sup> /b         | 0                | 1                              | $(-4/3+0)Fb^2/EJ$           | 2xb/EJ                  |          |
| CB 2b   | 0                  | Fb                            | 0      | 0                              | 0                | 0                              | 0+0                         | 0                       |          |
| BC 2b   | 0                  | -Fb                           | 0      | 0                              | 0                | 0                              | 0+0                         | 0                       |          |
| totali  |                    |                               |        |                                |                  |                                |                             | -4/3Fb <sup>2</sup> /EJ | 8/3xb/EJ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$




$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

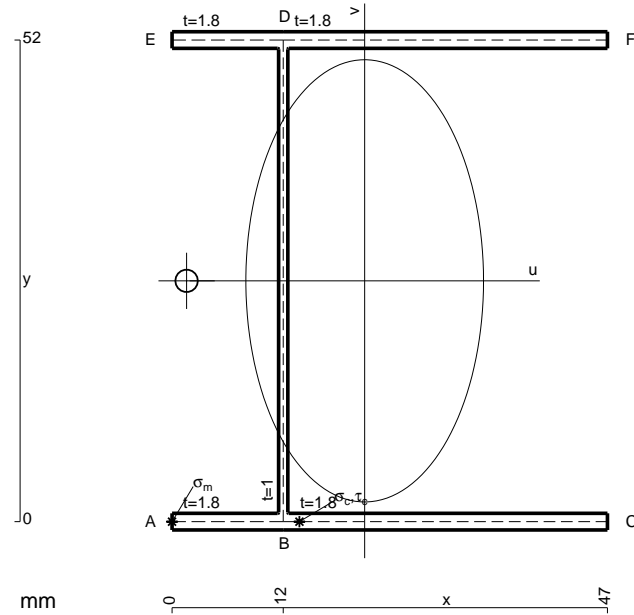

- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 36407. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>o</sub> = -19.23 mm
- x<sub>g</sub> = 20.8 mm
- T<sub>y</sub> = 1520. N
- M<sub>x</sub> = -1109600. Nmm
- u<sub>m</sub> = -20.8 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -228.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -8.797 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -228.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 273.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 10.97 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 262.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 2736. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 526.7 N/mm<sup>2</sup>






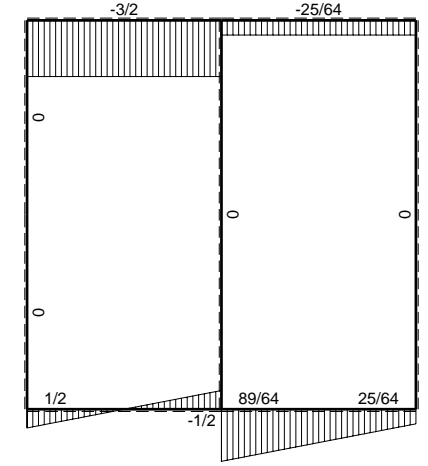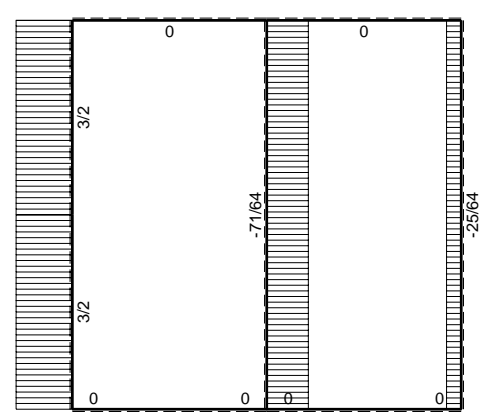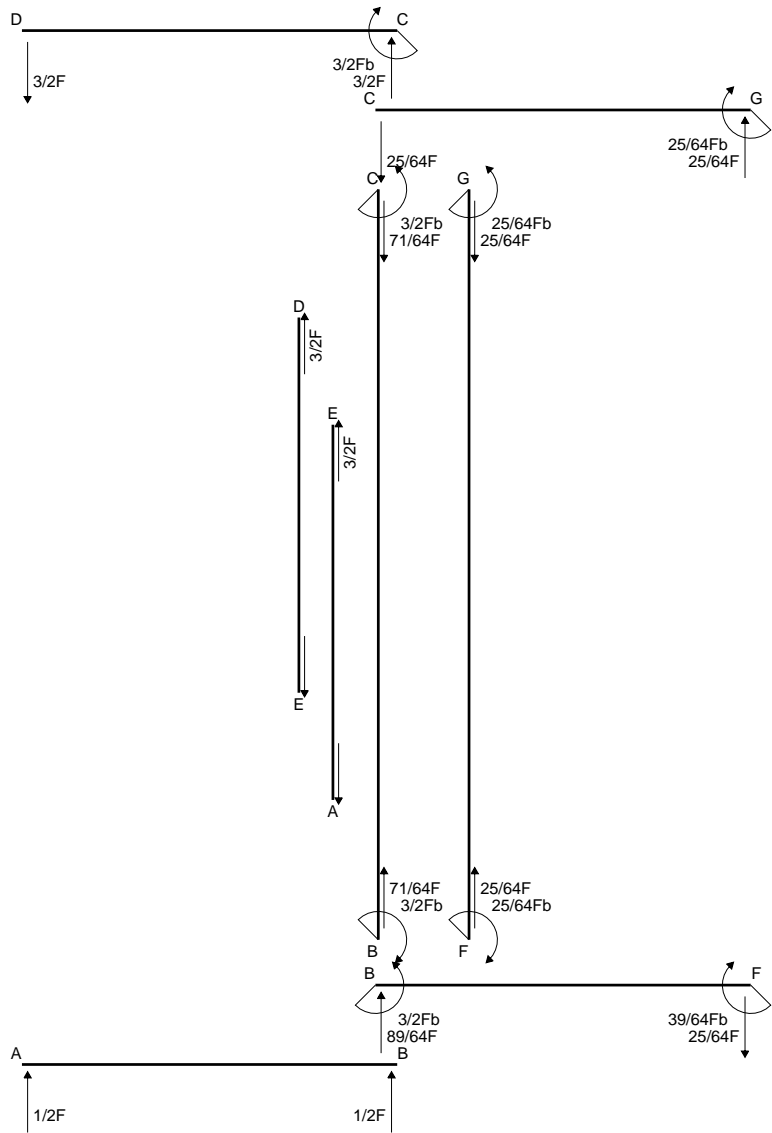


← ⊕ → F

↑ ⊕ ↓ F

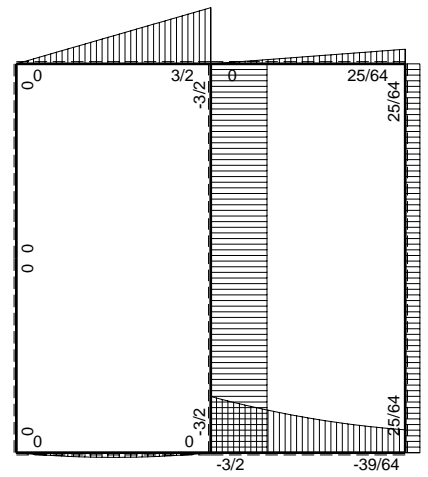


⊕ ⊖ F<sub>b</sub>

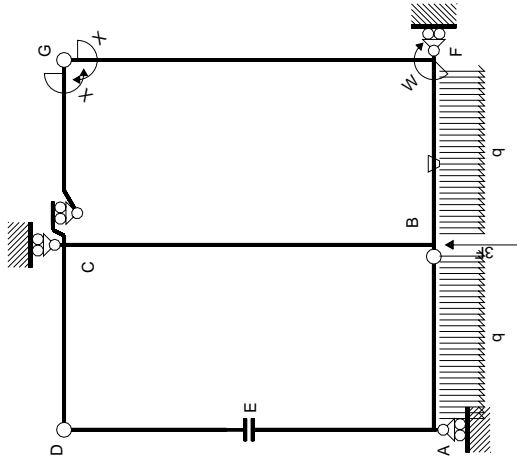


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

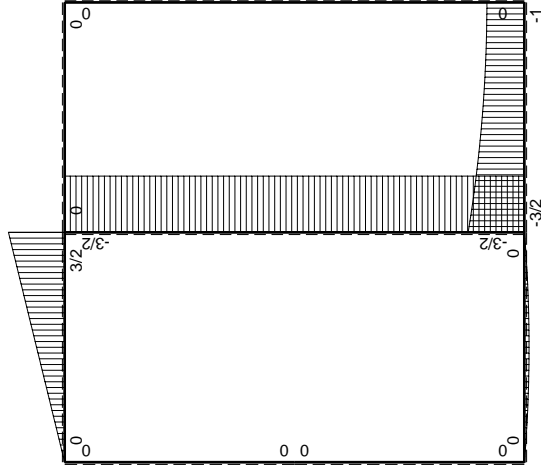

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$          | $M^x(x)$ | $M^0(x)$            | $\theta$ | $M^x M_0$                   | $M^x \theta$  | $M^x M_x$        | $\int M^x(M^0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|------------------------|----------|---------------------|----------|-----------------------------|---------------|------------------|-----------------------------|----------------------|
| AB b                   | 0        | $1/2Fx-1/2qx^2$     | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BA b                   | 0        | $-1/2Fx+1/2qx^2$    | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| CD b                   | 0        | $3/2Fb-3/2Fx$       | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| DC b                   | 0        | $-3/2Fx$            | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| DE b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| ED b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| EAB b                  | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| AE b                   | 0        | 0                   | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BF b                   | $-x/b$   | $-3/2Fb+Fx-1/2qx^2$ | $-Fb/EJ$ | $3/2Fx-Fx^2/b+1/2qx^3/b$    | $Fx/EJ$       | $x^2/b^2$        | $(13/24+1/2)Fb^2/EJ$        | $1/3xb/EJ$           |
| FBB b                  | $1-x/b$  | $Fb+1/2qx^2$        | $Fb/EJ$  | $Fb-Fx+1/2Fx^2/b-1/2qx^3/b$ | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GCB b                  | $-1+x/b$ | 0                   | 0        | 0                           | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| CG b                   | $x/b$    | 0                   | 0        | 0                           | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| FG 2b                  | -1       | 0                   | 0        | 0                           | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b                  | 1        | 0                   | 0        | 0                           | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b                  | 0        | $-3/2Fb$            | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| BC 2b                  | 0        | $3/2Fb$             | 0        | 0                           | 0             | 0                | 0+0                         | 0                    |
| totali                 |          |                     |          |                             |               |                  |                             |                      |
| iperstatica $X=W_{gc}$ |          |                     |          |                             |               |                  |                             |                      |
|                        |          |                     |          |                             |               |                  | $25/24Fb^2/EJ$              | $8/3xb/EJ$           |
|                        |          |                     |          |                             |               |                  | $-25/64Fb$                  |                      |

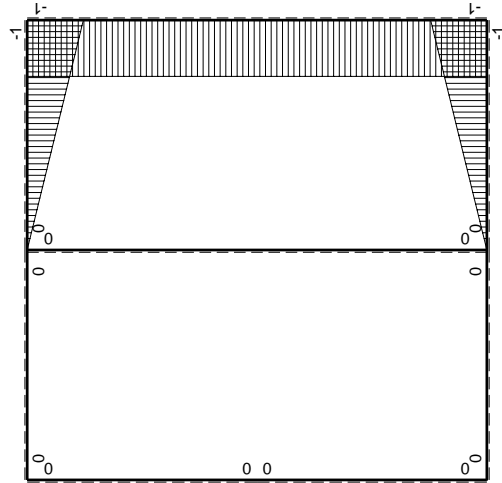

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (3/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$


$$= [3/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (3/4 b - 1/3 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 25/24 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b + 1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$






$$= [x - 1/2 x^2/b + 1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b + 1/6 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 25/24 Fb^2/EJ$$

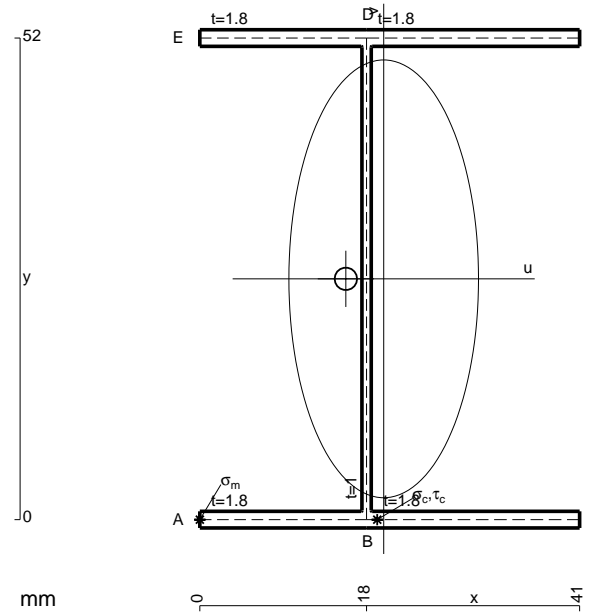


- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 20917. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = -4.086 mm
- x<sub>g</sub> = 19.85 mm
- T<sub>y</sub> = -1335. N
- M<sub>x</sub> = 1027950. Nmm
- u<sub>m</sub> = -19.85 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 239.7 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -1.849 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 239.7 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 62.71 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 7.16 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 55.55 N/mm<sup>2</sup>
- t<sub>c</sub> = 1602. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 263.2 N/mm<sup>2</sup>



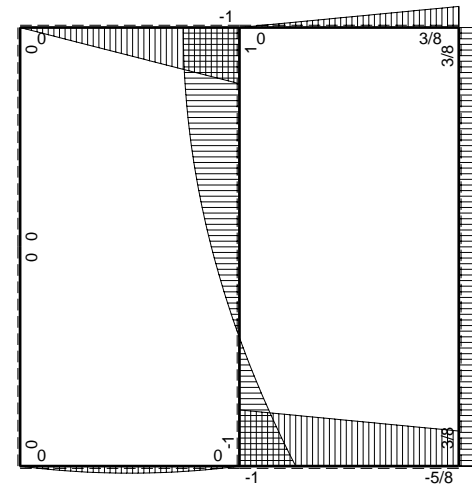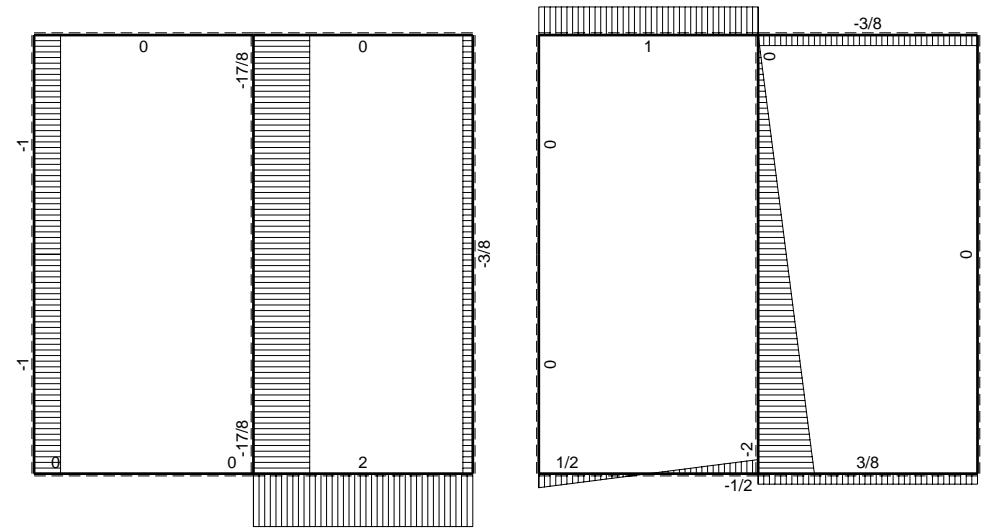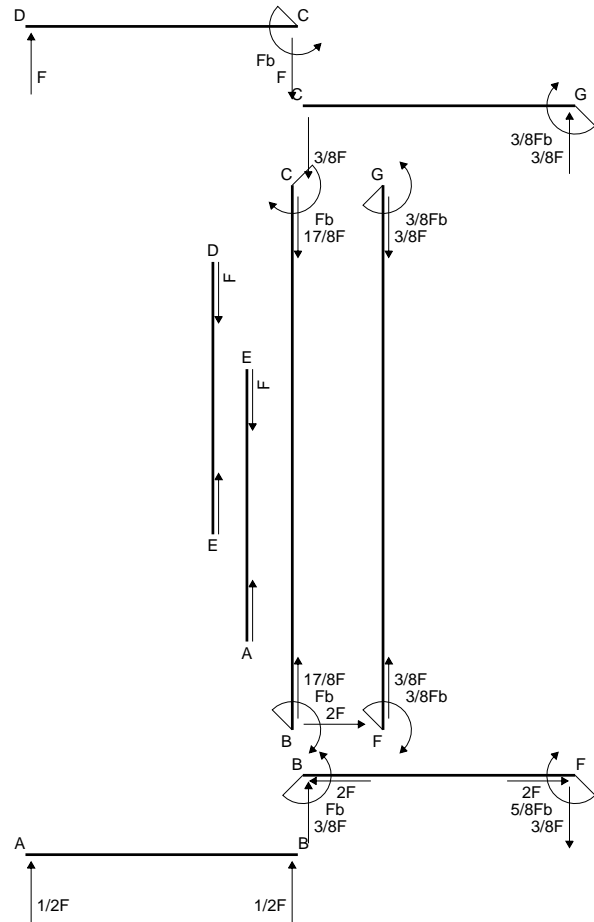


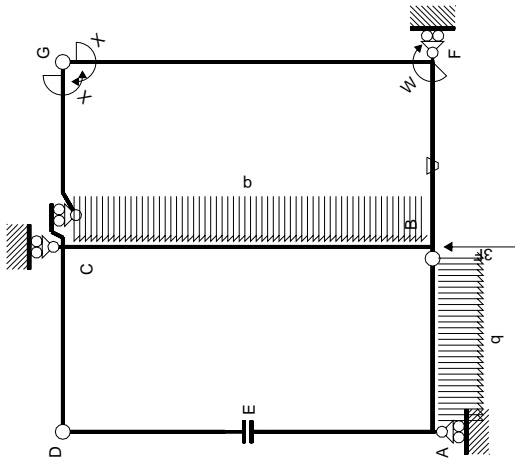

Schema di calcolo iperstatico

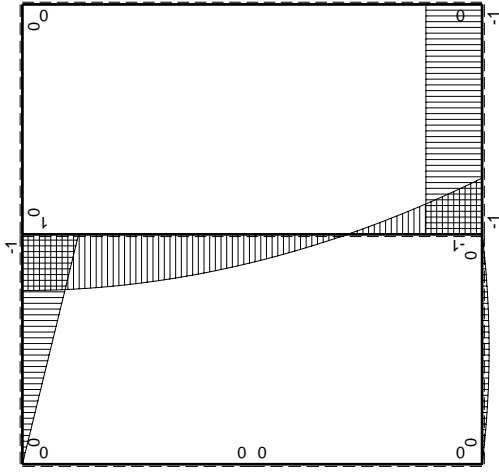

$M_0$  flessione da carichi assegnati

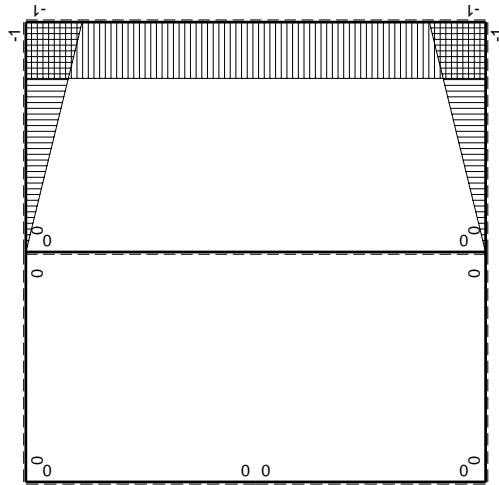

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| ED b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                  |                                 | $Fb^2/EJ$              |
|               |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

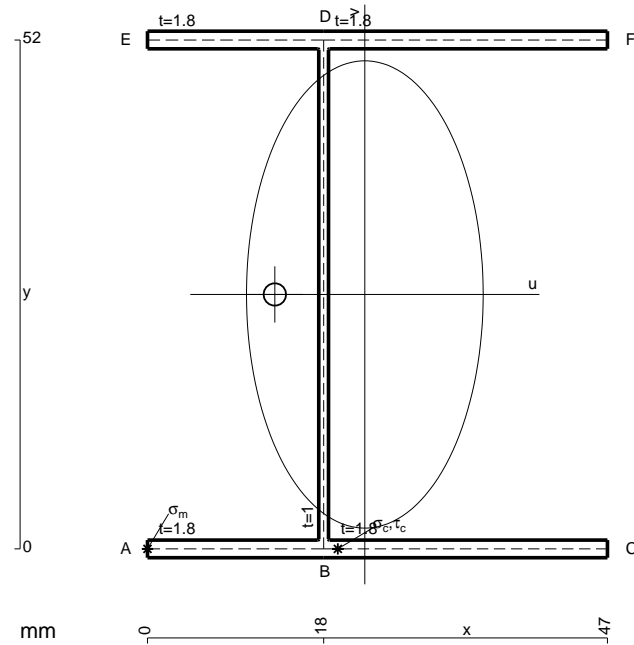


- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 32350. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>o</sub> = -9.196 mm
- x<sub>g</sub> = 22.21 mm
- N = -4505. N
- T<sub>y</sub> = -4240. N
- M<sub>x</sub> = -869200. Nmm
- u<sub>m</sub> = -22.21 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = -4.207 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 376.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 25.35 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 350.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 3816. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 681.4 N/mm<sup>2</sup>






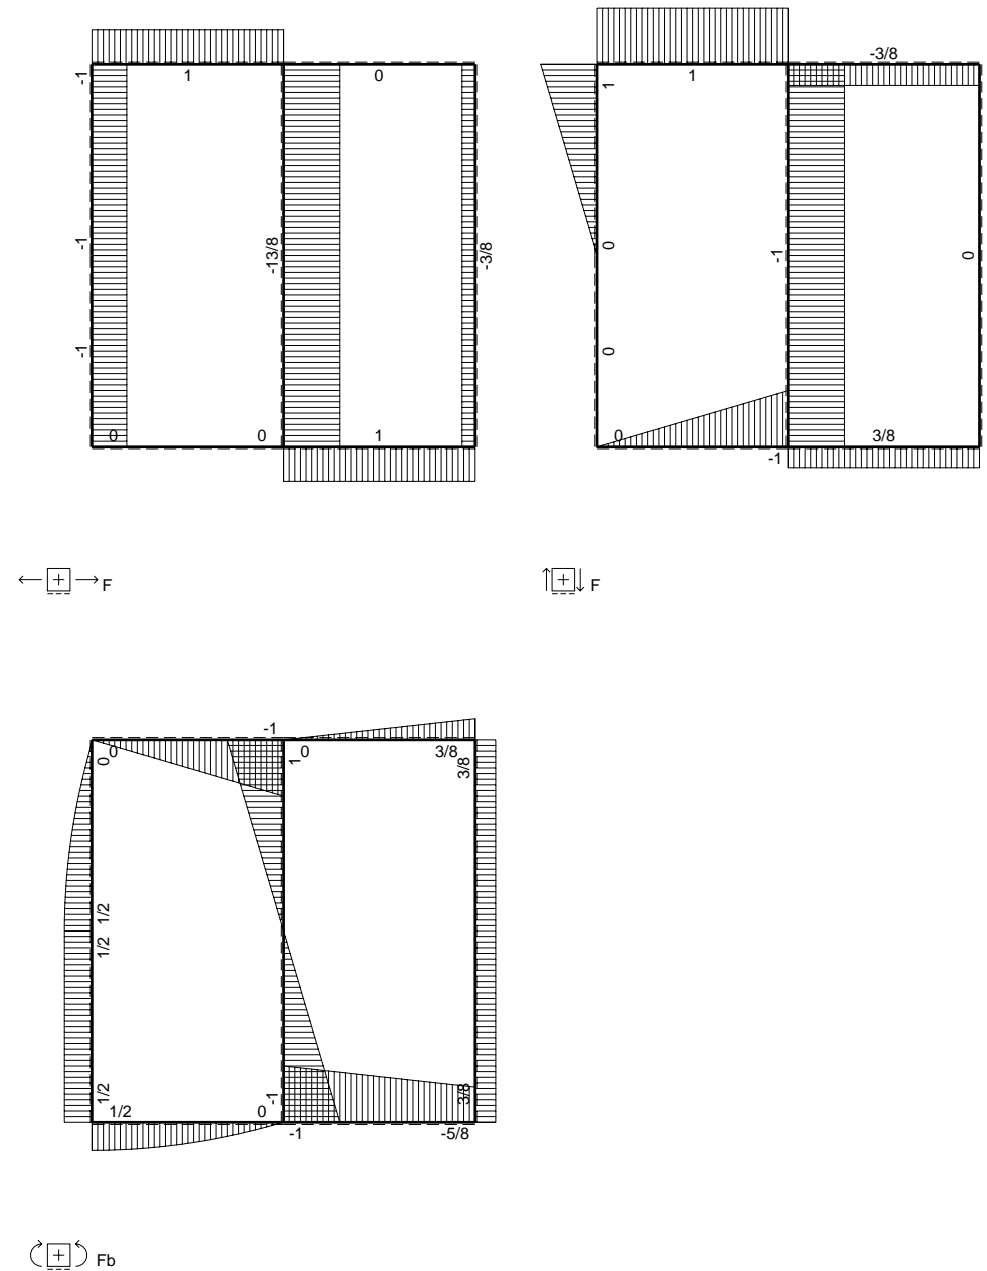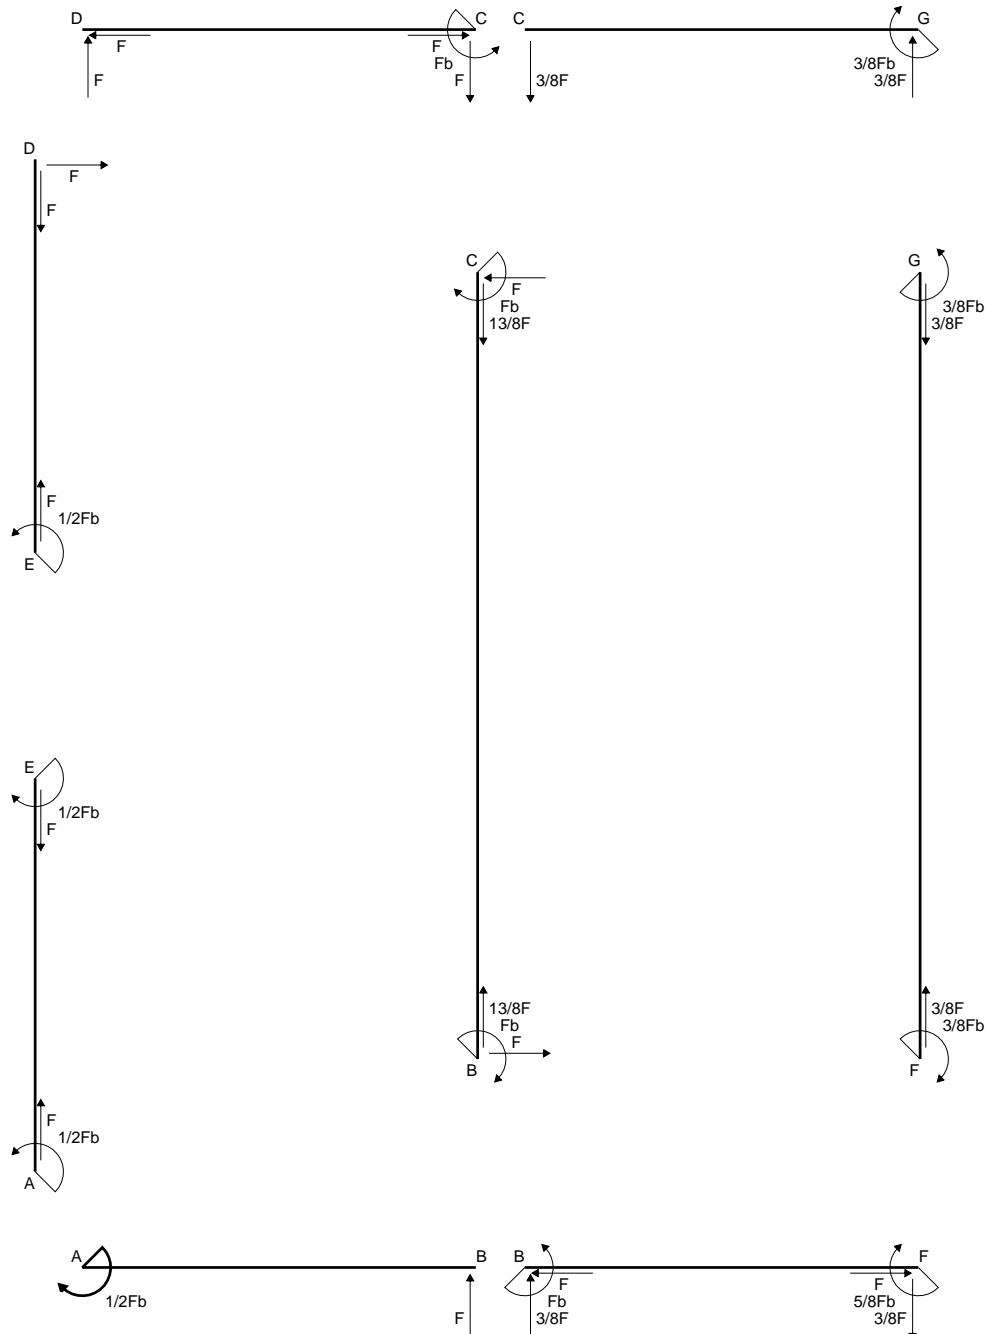

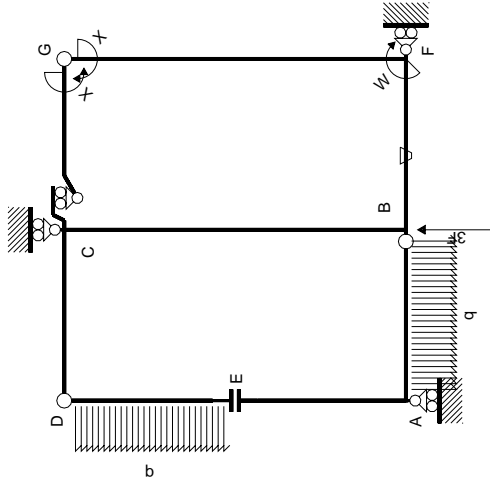

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

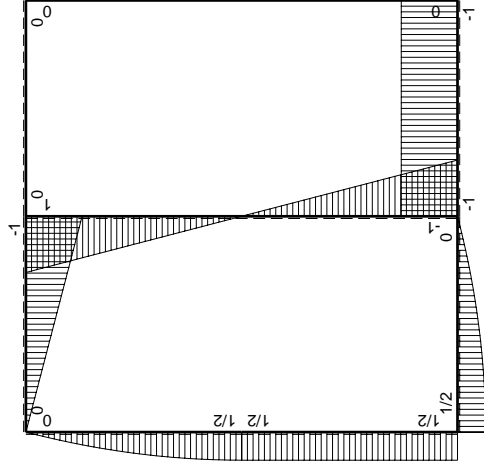

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$           | $M_0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|------------------|----------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | $1/2Fb-1/2qx^2$  | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | $-Fx+1/2qx^2$    | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | $-Fb+Fx$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | $Fx$             | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | $Fx-1/2qx^2$     | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | $-1/2Fb+1/2qx^2$ | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | $1/2Fb$          | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | $-1/2Fb$         | 0        | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$           | $-Fb$    | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$          | $Fb$     | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | $-1+x/b$         | 0        | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$            | 0        | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1               | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1                | 0        | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0                | $Fb-Fx$  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |                  |          |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

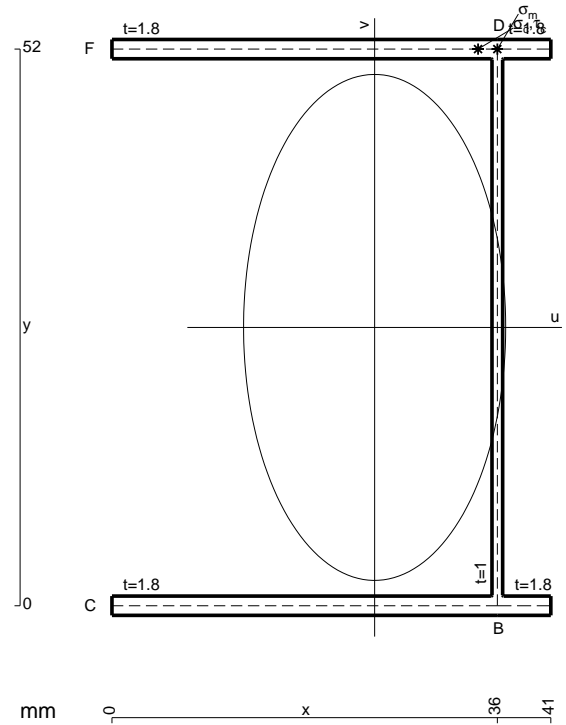


- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 29915. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = 25.33 mm
- x<sub>g</sub> = 24.54 mm
- N = -3006. N
- T<sub>y</sub> = -1850. N
- M<sub>x</sub> = 832500. Nmm
- x<sub>m</sub> = 36. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 11.46 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -209.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 11.46 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -209.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 492.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.53 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 477.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 3330. mm
- σ<sub>o</sub> = √(σ<sup>2</sup>+3τ<sup>2</sup>) = 878.9 N/mm<sup>2</sup>



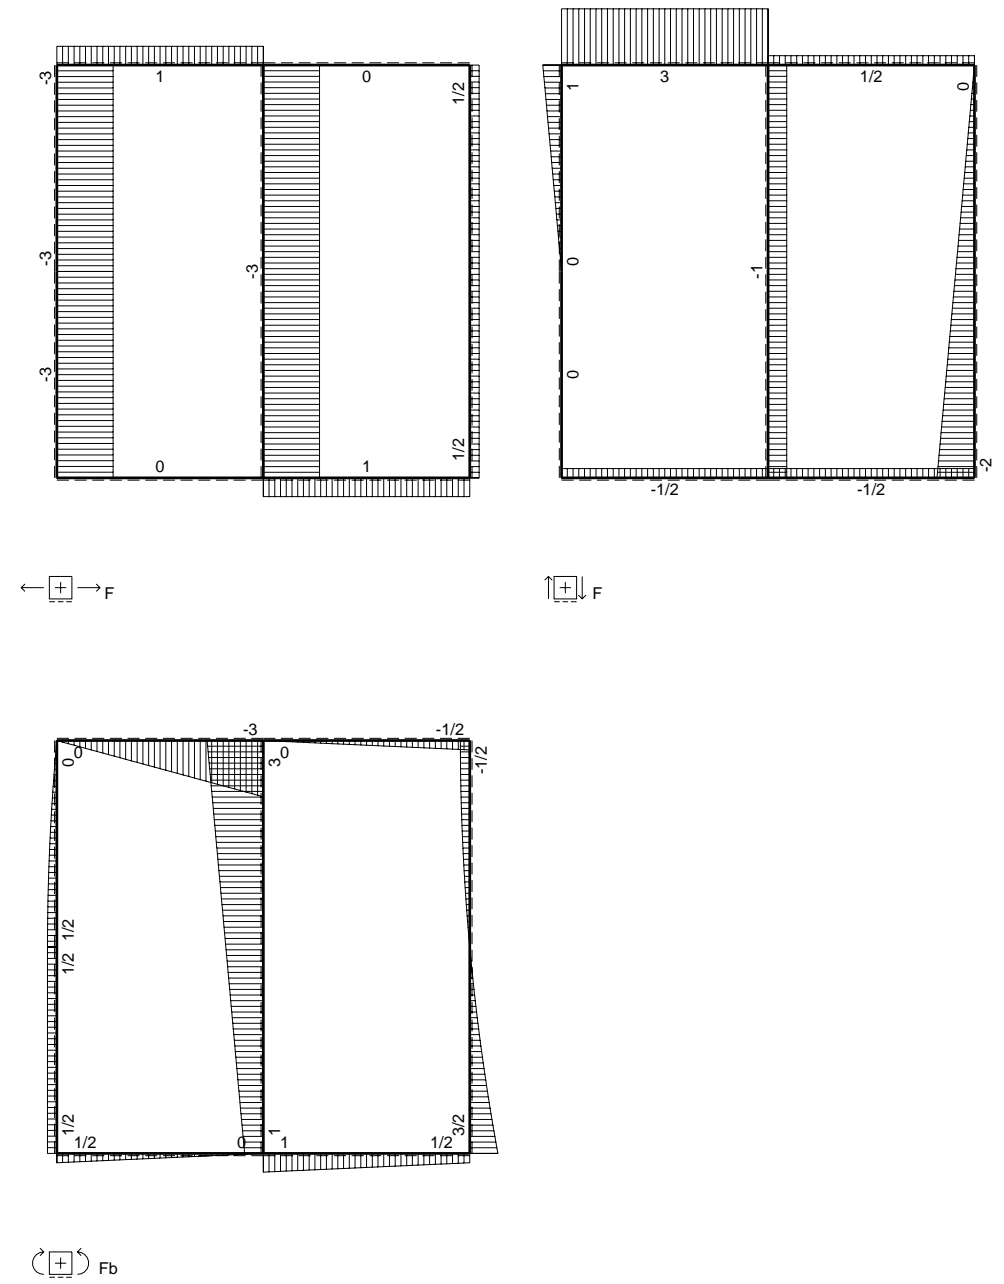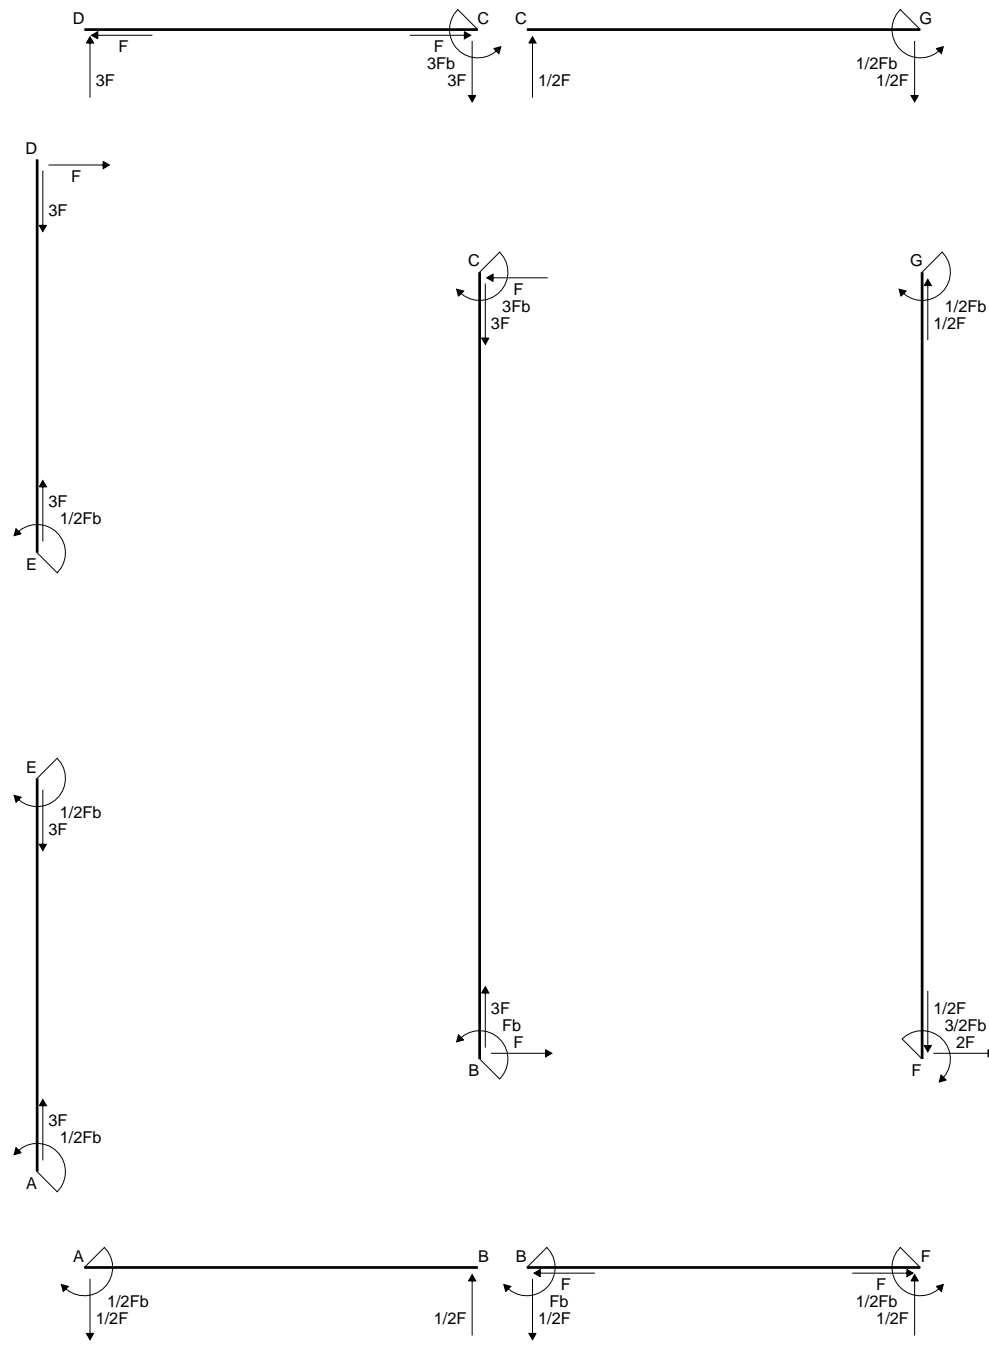

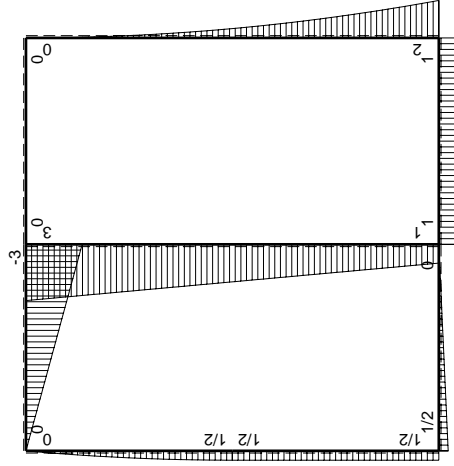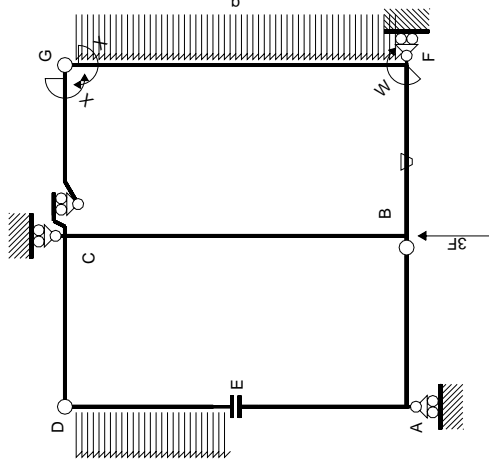

$M_0$  flessione da carichi assegnati

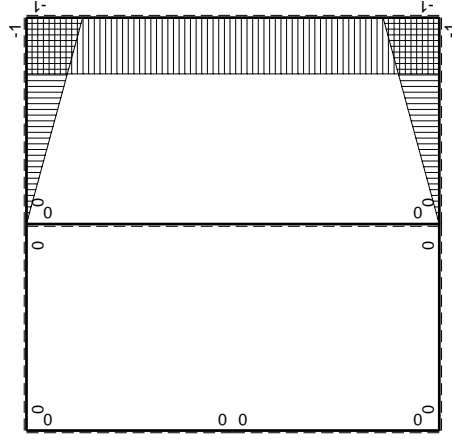

$M_x$  flessione da iperstatica  $X=1$

| $\rightarrow$ | $M(x)$   | $M_0(x)$          | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x/EJ dx$ | Quadro contributi PLV per iperstatica $X=W_{gc}$ |      |      |      |   |   |   |   |   |   |
|---------------|----------|-------------------|----------|----------------------|---------------|------------------|---------------------------------|----------------------|--|------|------|------|---|---|---|---|---|---|
|               |          |                   |          |                      |               |                  |                                 |                      | AB b   | BA b | CD b | DC b |   |   |   |   |   |   |
|               | 0        | $1/2Fb-1/2Fx$     | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    |      |   |   |   |   |   |   |
| AB b          | 0        | $1/2Fb-1/2Fx$     | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| BA b          | 0        | $-1/2Fx$          | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| CD b          | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| DC b          | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| DE b          | 0        | $Fx-1/2qx^2$      | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| ED b          | 0        | $-1/2Fb+1/2qx^2$  | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| EA b          | 0        | $1/2Fb$           | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| AE b          | 0        | $-1/2Fb$          | 0        | 0                    | 0             | 0                | 0                               | 0                    | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| BF b          | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $-(1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| FB b          | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| GC b          | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| CG b          | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| FG 2b         | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$             | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| GF 2b         | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$             | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| CB 2b         | 0        | $3Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                             | $8/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| BC 2b         | 0        | $-Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                             | $8/3xb/EJ$           | 0  | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| totali        |          |                   |          |                      |               |                  |                                 |                      |  |      |      |      |   |   |   |   |   |   |
|               |          |                   |          |                      |               |                  |                                 |                      | iperstatica $X=W_{gc}$                           |      |      |      |   |   |   |   |   |   |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

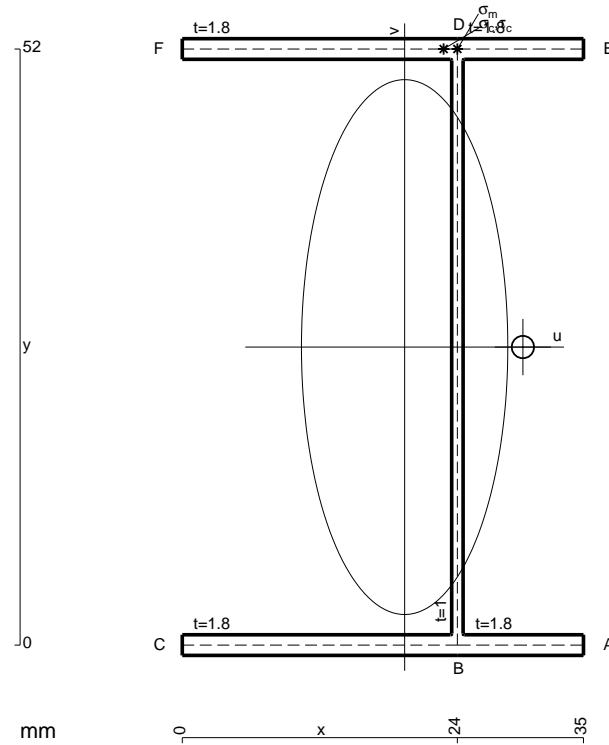


- A = 178. mm<sup>2</sup>
- J<sub>u</sub> = 96893. mm<sup>4</sup>
- J<sub>v</sub> = 14418. mm<sup>4</sup>
- J<sub>t</sub> = 153.4 mm<sup>4</sup>
- x<sub>o</sub> = 10.32 mm
- x<sub>g</sub> = 19.4 mm
- N = 540. N
- T<sub>y</sub> = 1620. N
- M<sub>x</sub> = -793800. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 4.601 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 216. N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 4.601 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 216. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 206.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.43 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 196.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 972. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 417.8 N/mm<sup>2</sup>






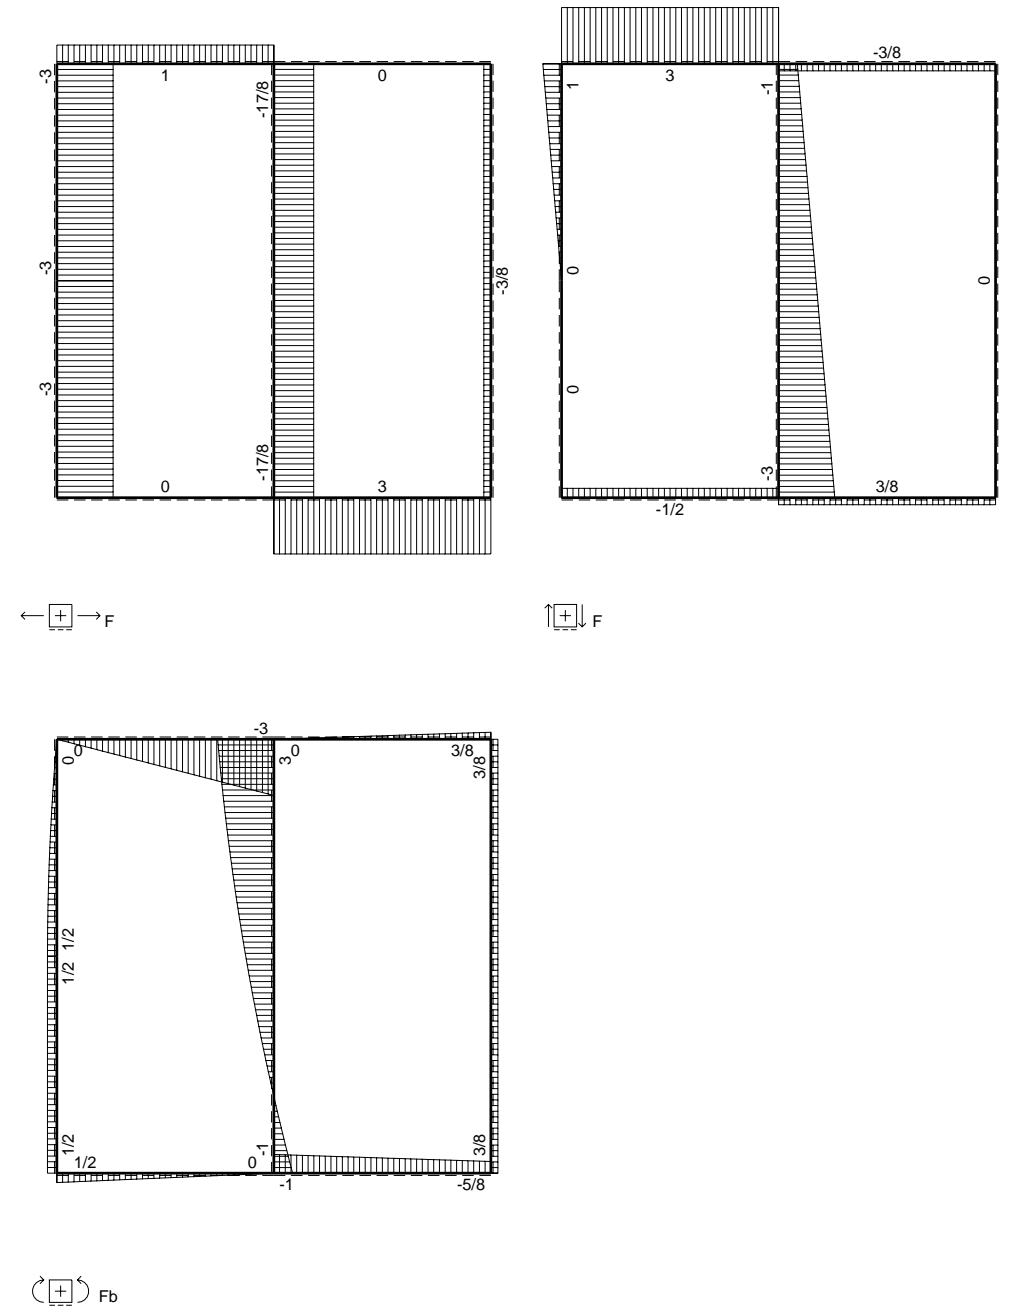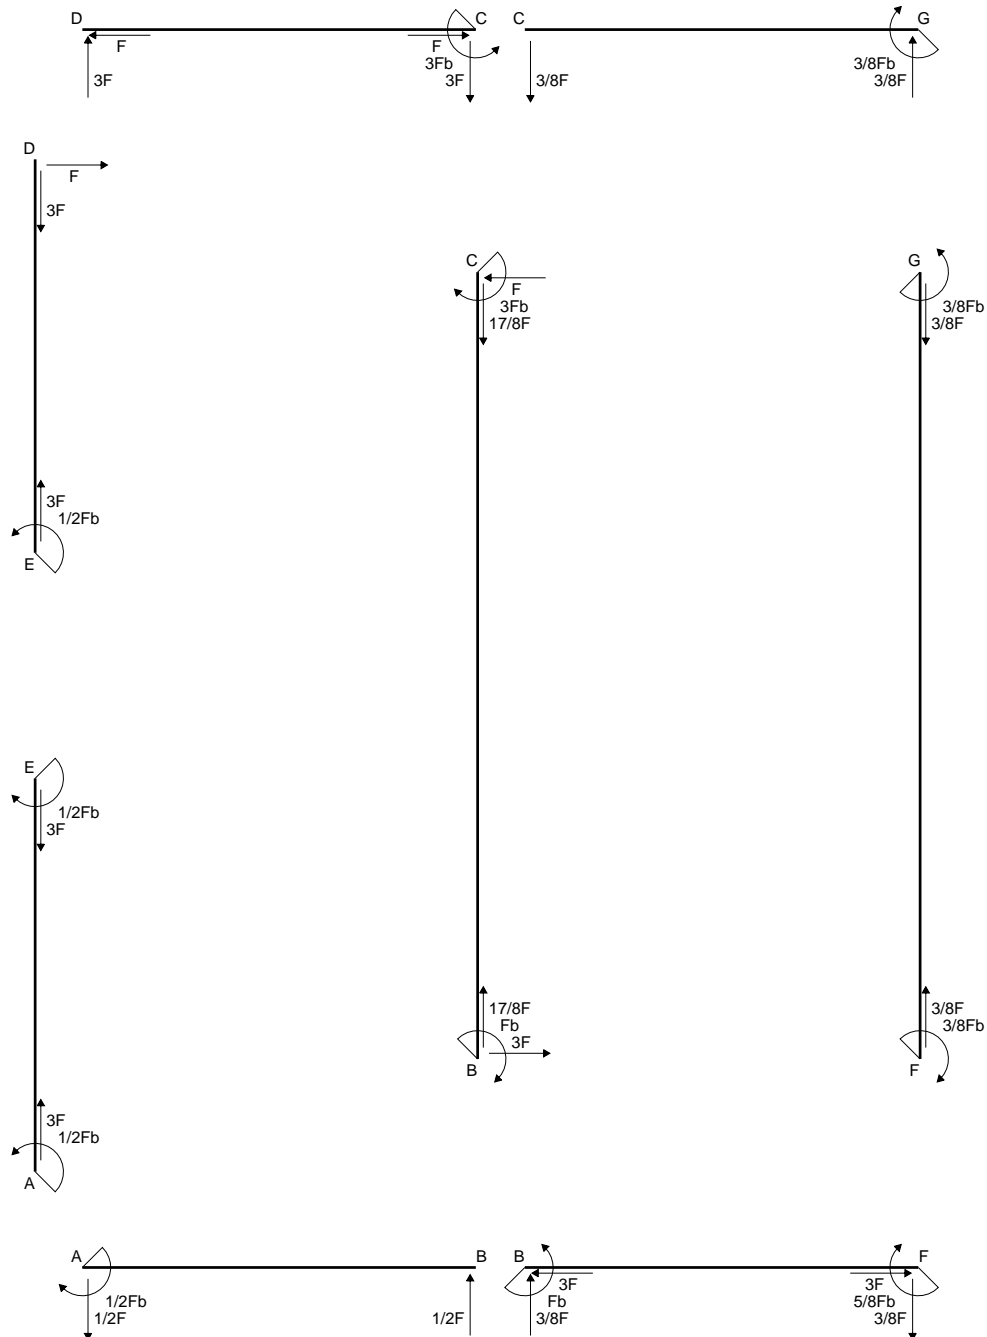

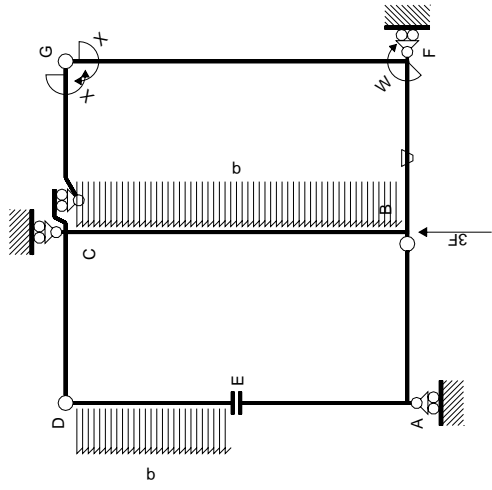

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

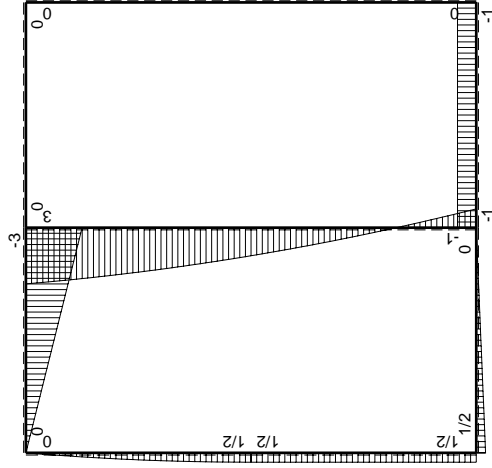

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$              | $\theta$ | $M^x M^0$ | $M^x \theta$    | $M^x M^x$            | $\int M^x (M^0/EJ + \theta) dx$ | $\int M^x M^x / EJ dx$ |
|---------------|----------|-----------------------|----------|-----------|-----------------|----------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 Fb - 1/2 Fx$     | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 Fx$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DC b          | 0        | $3Fx$                 | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DE b          | 0        | $Fx - 1/2 qx^2$       | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 Fb + 1/2 qx^2$  | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| EA b          | 0        | $1/2 Fb$              | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 Fb$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$            | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b^3/EJ$         |
| FB b          | $1-x/b$  | $Fb$                  | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/2 + 1/2 Fb^2/EJ$             | $1/3 x b^3/EJ$         |
| GC b          | $-1+x/b$ | 0                     | 0        | 0         | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3 x b^3/EJ$         |
| CG b          | $x/b$    | 0                     | 0        | 0         | 0               | $x^2/b^2$            | 0+0                             | $1/3 x b^3/EJ$         |
| FG 2b         | -1       | 0                     | 0        | 0         | 0               | 1                    | 0+0                             | $2x b^2/EJ$            |
| GF 2b         | 1        | 0                     | 0        | 0         | 0               | 1                    | 0+0                             | $2x b^2/EJ$            |
| CB 2b         | 0        | $3Fb - Fx - 1/2 qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 3Fx + 1/2 qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| totali        |          |                       |          |           |                 |                      |                                 |                        |
|               |          |                       |          |           |                 |                      |                                 | $Fb^2/EJ$              |
|               |          |                       |          |           |                 |                      |                                 | $8/3 x b^3/EJ$         |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

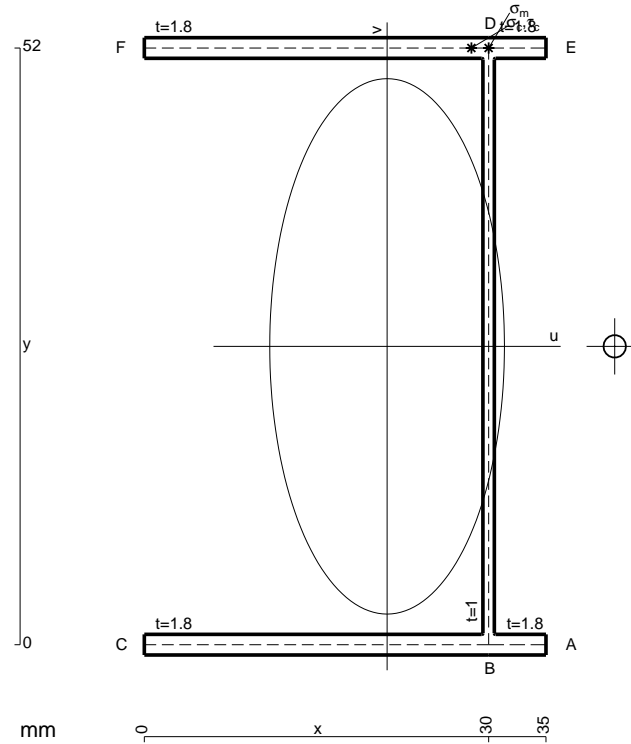

- A = 178. mm<sup>2</sup>
- J<sub>u</sub> = 96893. mm<sup>4</sup>
- J<sub>v</sub> = 18614. mm<sup>4</sup>
- J<sub>t</sub> = 153.4 mm<sup>4</sup>
- x<sub>o</sub> = 19.84 mm
- x<sub>g</sub> = 21.15 mm
- N = 530. N
- T<sub>y</sub> = 1590. N
- M<sub>x</sub> = -842700. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 8.848 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 229.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 8.848 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 229.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 382.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.8 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 370.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 954. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 701.6 N/mm<sup>2</sup>




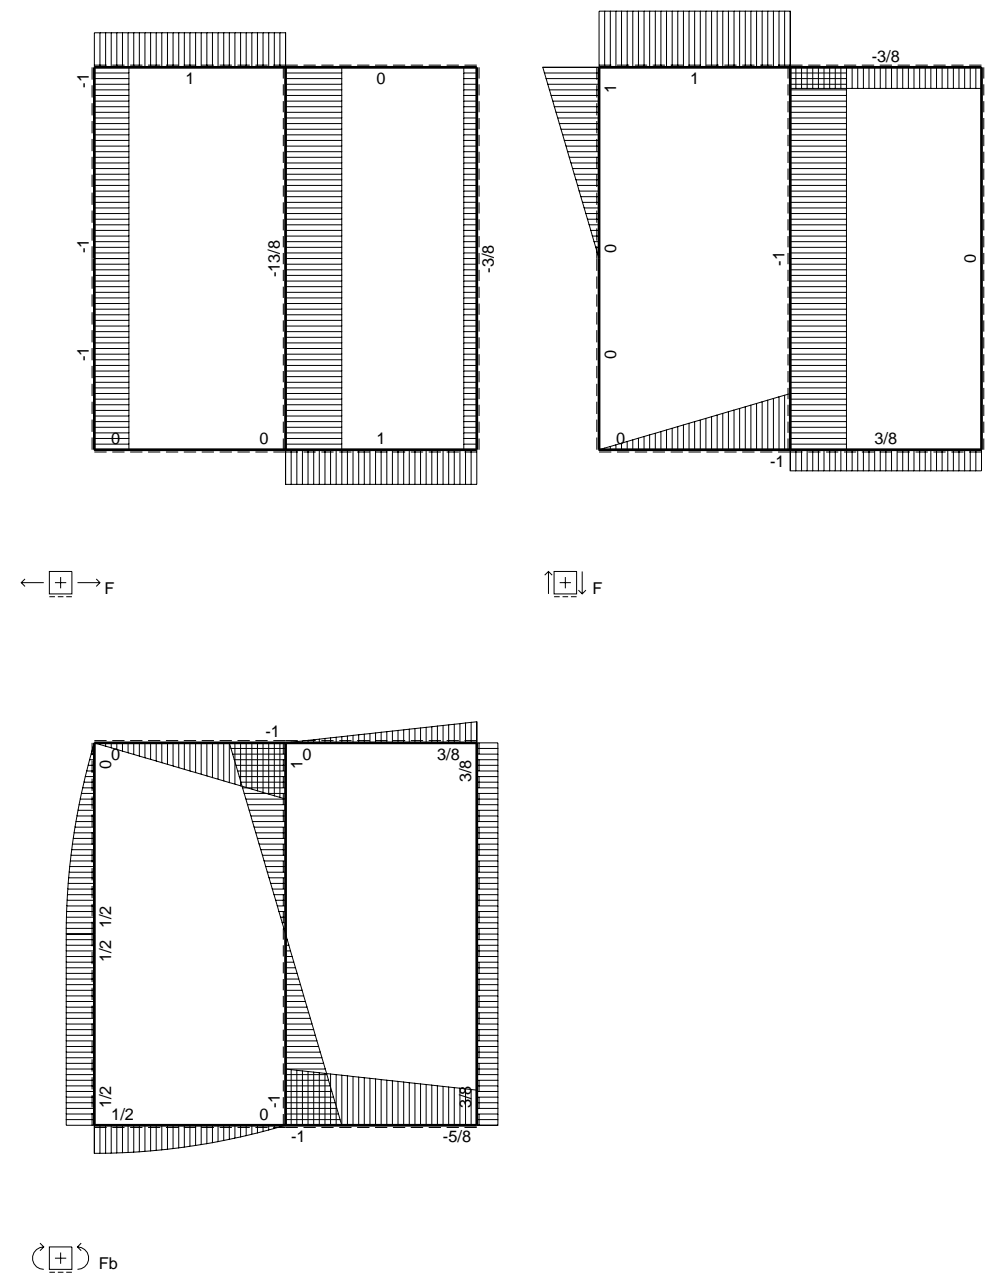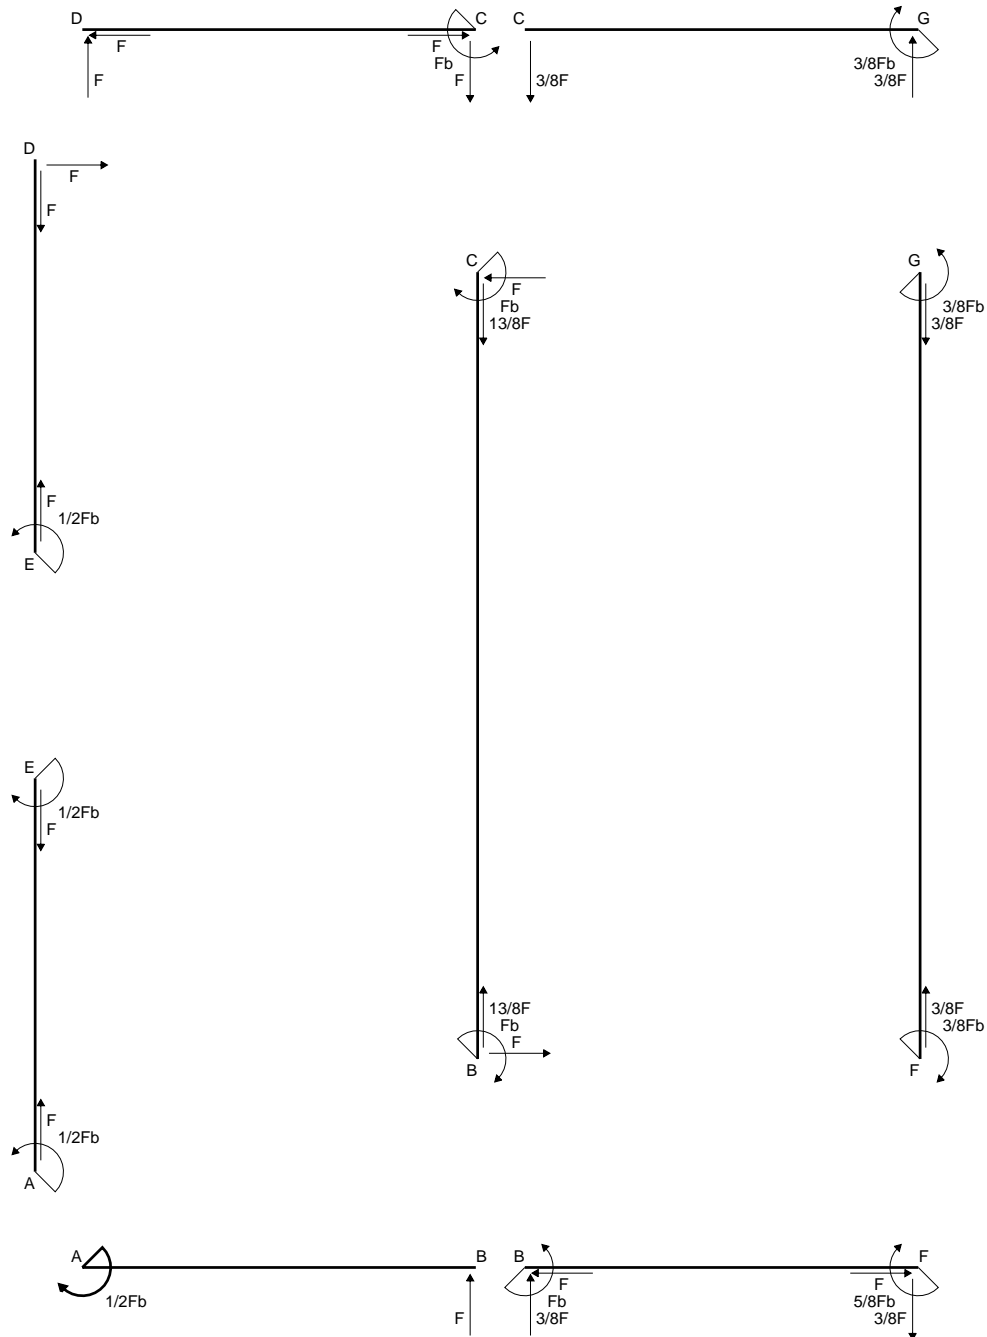

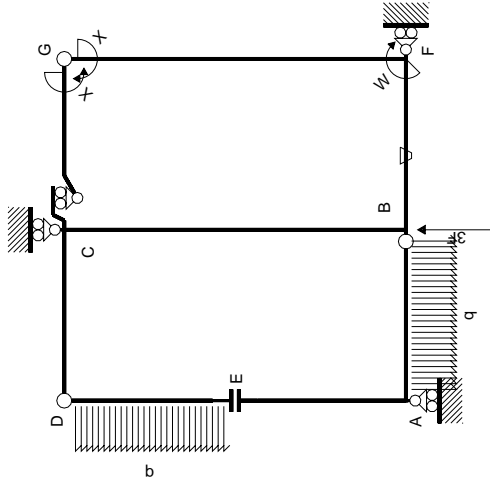


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

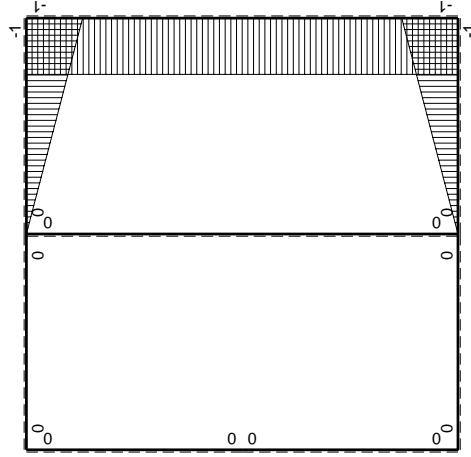

$M_x$  flessione da iperstatica  $X=1$

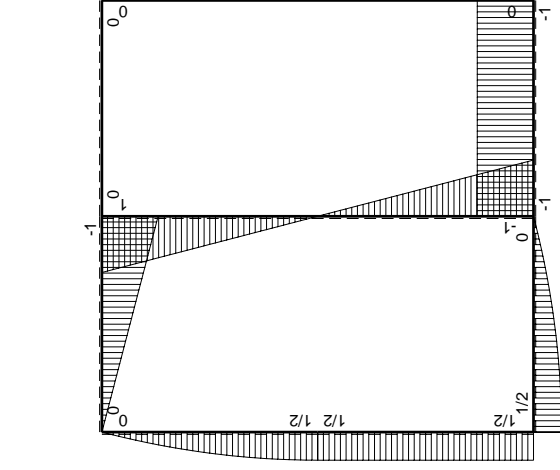

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ |
|---------------|-----------------------|----------|----------|-----------|-----------------|--------------------|---------------------------------|-----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| BA b          | $-Fx + 1/2 q x^2$     | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| CD b          | $-Fb + Fx$            | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| DC b          | $Fx$                  | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| DE b          | $Fx - 1/2 q x^2$      | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| EA b          | $1/2 Fb$              | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| AE b          | $-1/2 Fb$             | 0        | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| BF b          | $-x/b$                | $-Fb$    | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$          | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b^3/EJ$        |
| FB b          | $1-x/b$               | $Fb$     | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $1/2 + 1/2 Fb^2/EJ$             | $1/3 x b^3/EJ$        |
| GC b          | $-1+x/b$              | 0        | 0        | 0         | 0               | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3 x b^3/EJ$        |
| CG b          | $x/b$                 | 0        | 0        | 0         | 0               | $x^2/b^2$          | 0+0                             | $1/3 x b^3/EJ$        |
| FG 2b         | -1                    | 0        | 0        | 0         | 0               | 1                  | 0+0                             | $2x b^3/EJ$           |
| GF 2b         | 1                     | 0        | 0        | 0         | 0               | 1                  | 0+0                             | $2x b^3/EJ$           |
| CB 2b         | 0                     | $Fb-Fx$  | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| BC 2b         | 0                     | $Fb-Fx$  | 0        | 0         | 0               | 0                  | 0+0                             | 0                     |
| totali        |                       |          |          |           |                 |                    |                                 | $8/3 x b^3/EJ$        |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

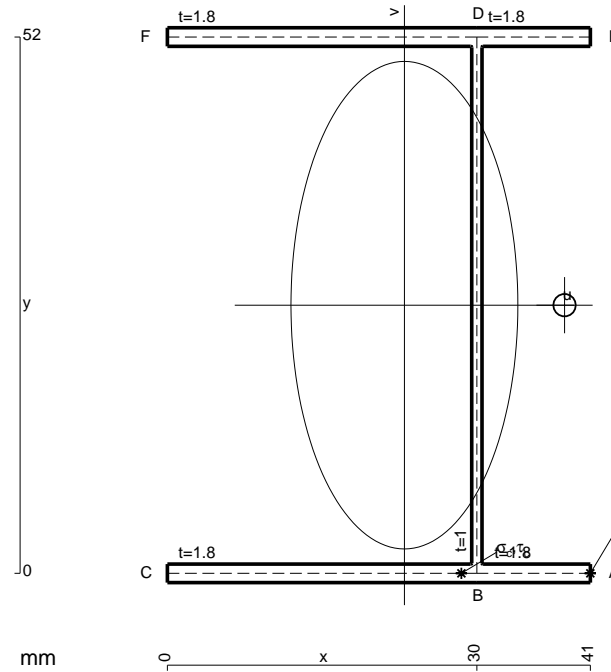

- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 24147. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = 15.53 mm
- x<sub>g</sub> = 22.98 mm
- N = -2763. N
- T<sub>y</sub> = -1700. N
- M<sub>x</sub> = -969000. Nmm
- x<sub>m</sub> = 41. mm
- u<sub>m</sub> = 18.02 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -239.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 7.025 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -239.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 280.7 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.89 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 268.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 3060. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 542.1 N/mm<sup>2</sup>





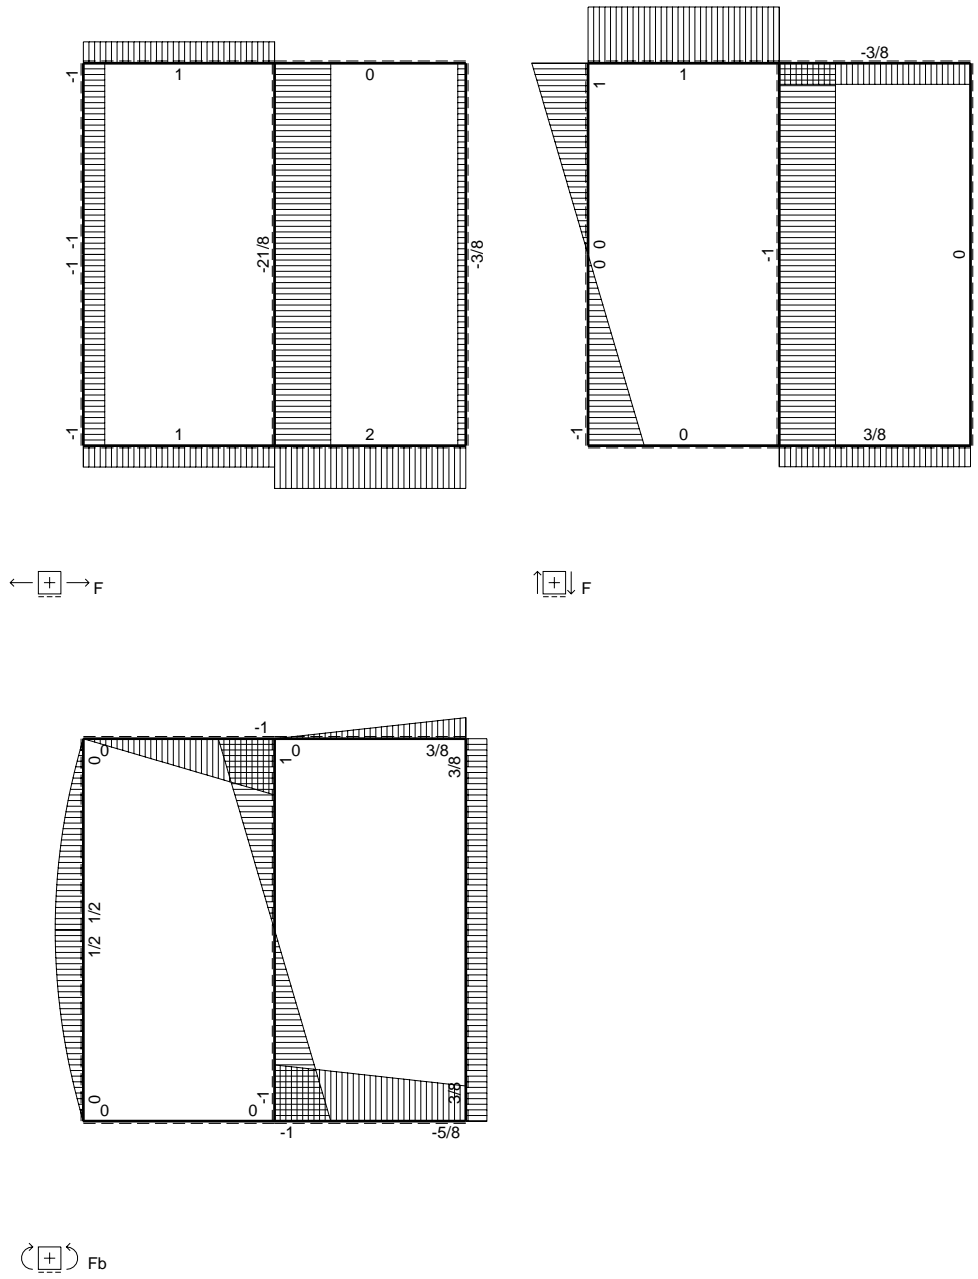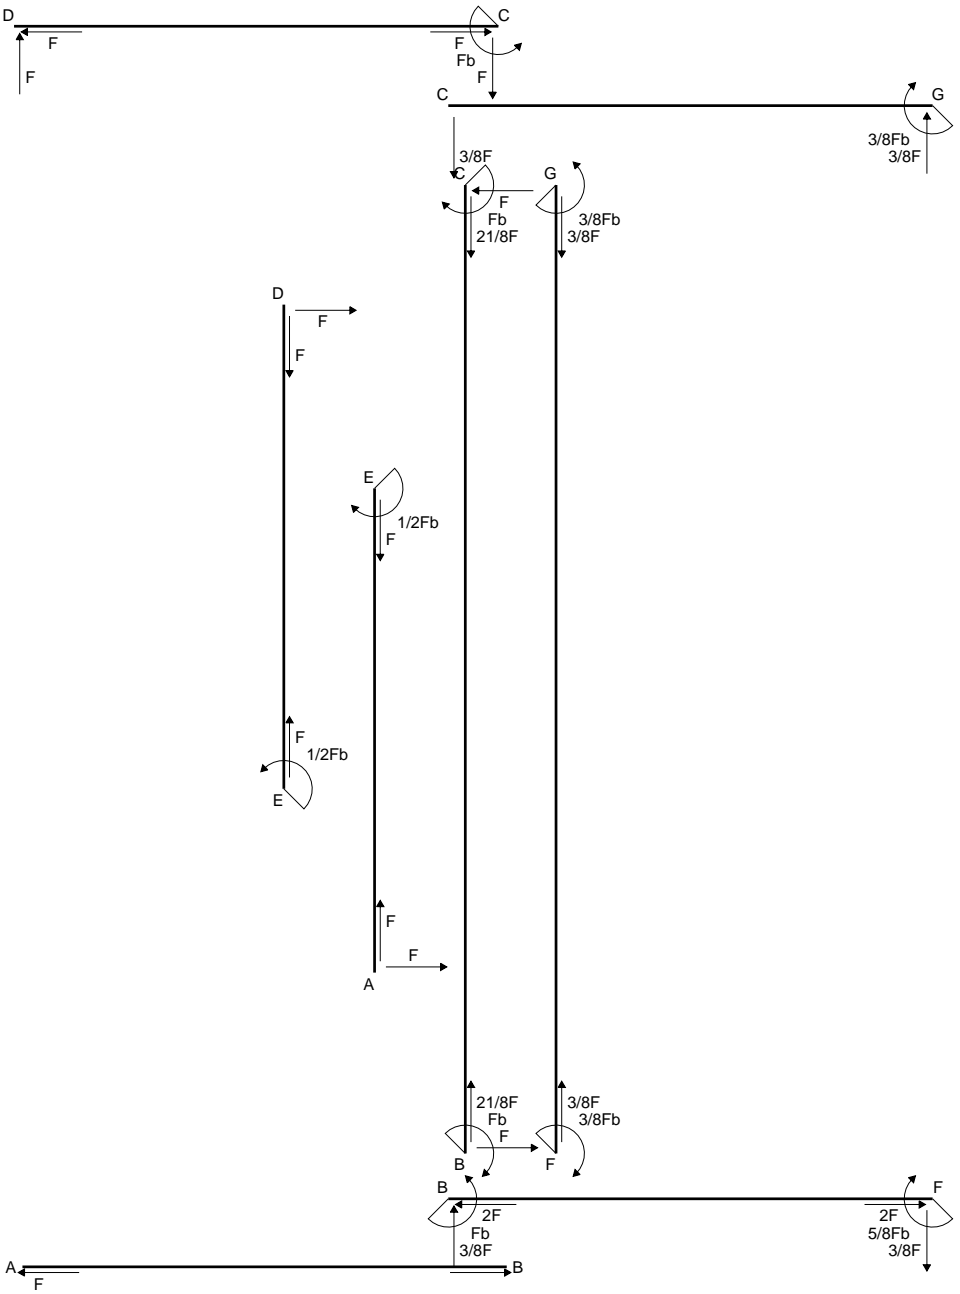



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

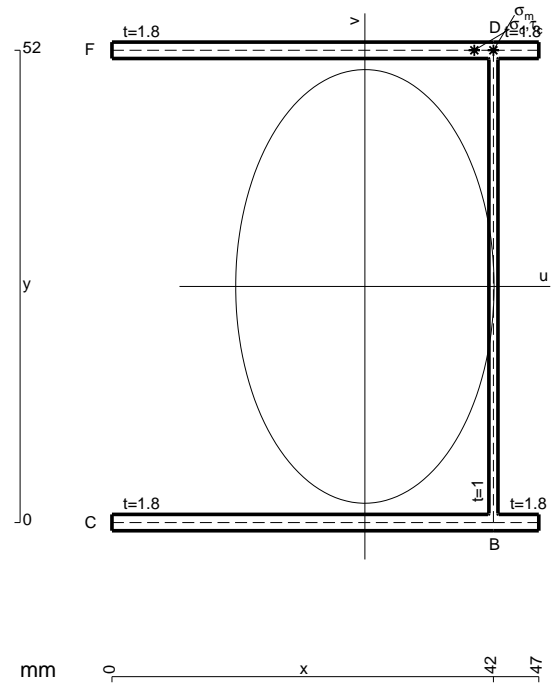


- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 44760. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>o</sub> = 30.93 mm
- x<sub>g</sub> = 27.85 mm
- N = -3806. N
- T<sub>y</sub> = -1450. N
- M<sub>x</sub> = 884500. Nmm
- x<sub>m</sub> = 42. mm
- y<sub>m</sub> = 52. mm
- u<sub>m</sub> = 14.15 mm
- v<sub>m</sub> = 26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 42. mm
- y<sub>c</sub> = 52. mm
- u<sub>c</sub> = 14.15 mm
- v<sub>c</sub> = 26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 416.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.56 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 403.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 2610. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 747.8 N/mm<sup>2</sup>



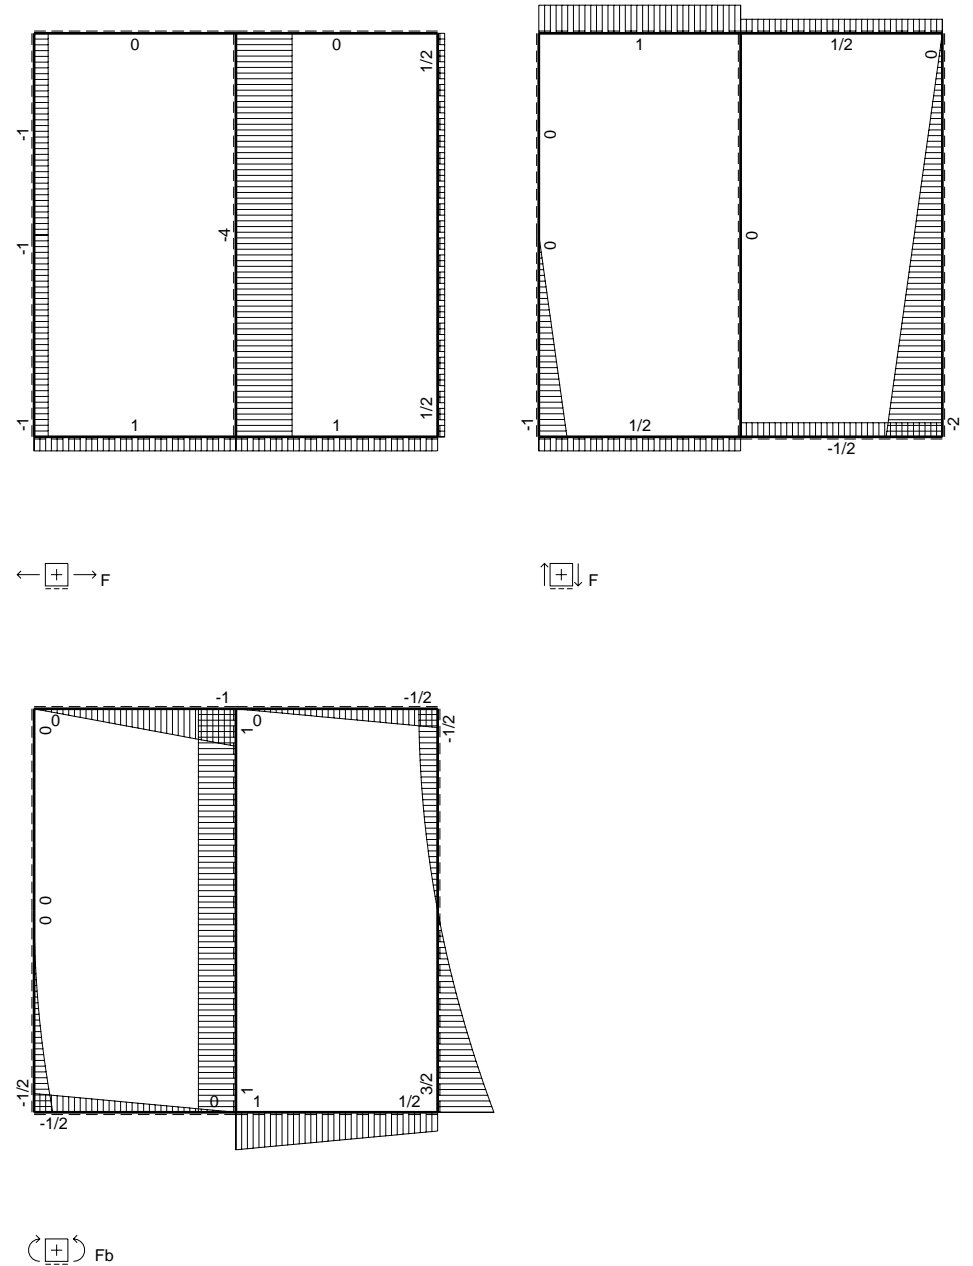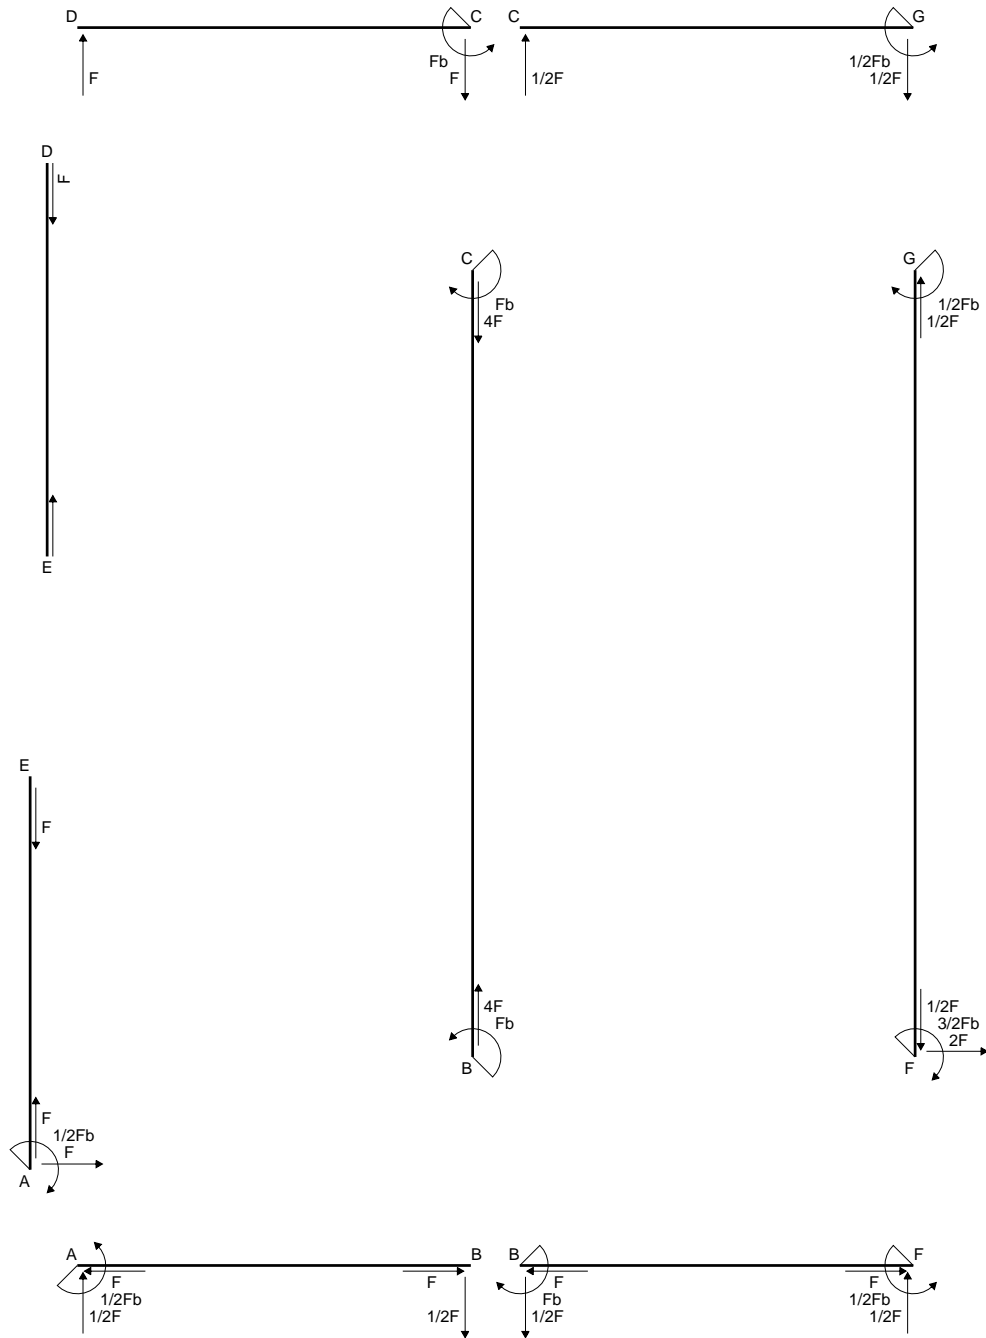

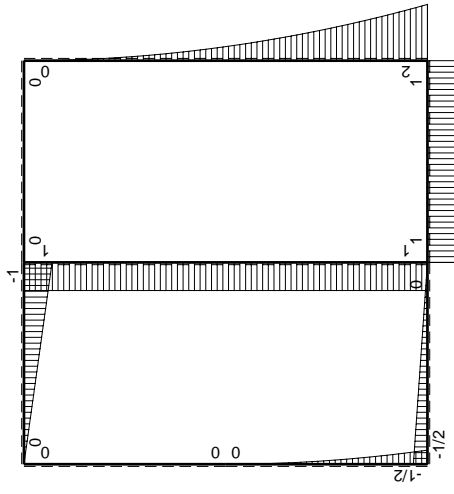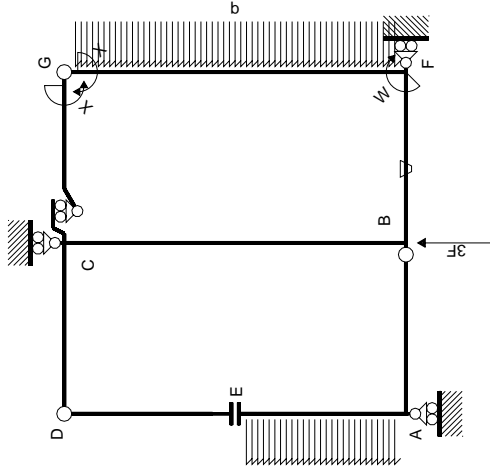

$M_0$  flessione da carichi assegnati

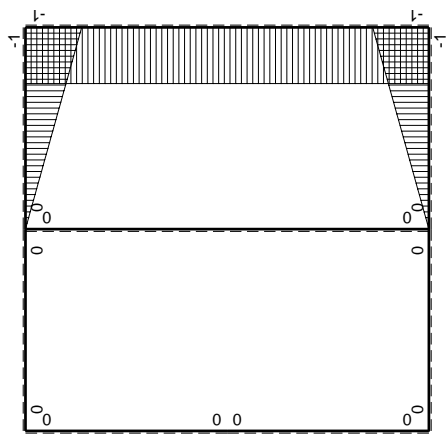

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$   | $M^0(x)$               | $\theta$ | $M^x M_0$                | $M^x \theta$    | $M^x M_x$            | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ |
|---------------|------------|------------------------|----------|--------------------------|-----------------|----------------------|---------------------------------|-----------------------|
| AB b          | 0          | $-1/2Fb + 1/2Fx$       | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BA b          | 0          | $1/2Fx$                | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| CD b          | 0          | $-Fb + Fx$             | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| DC b          | 0          | $Fx$                   | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| DE b          | 0          | 0                      | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| ED b          | 0          | 0                      | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| EA b          | 0          | $-1/2qx^2$             | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| AE b          | 0          | $1/2Fb - Fx + 1/2qx^2$ | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BF b          | $-x/b$     | $Fb$                   | $-Fb/EJ$ | $-Fx$                    | $Fx/EJ$         | $x^2/b^2$            | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| FB b          | $1-x/b$    | $-Fb$                  | $Fb/EJ$  | $-Fb + Fx$               | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $(-1/2 + 1/2)Fb^2/EJ$           | $1/3xb/EJ$            |
| GC b          | $-1 + x/b$ | 0                      | 0        | 0                        | 0               | $1 - 2x/b + x^2/b^2$ | 0                               | $1/3xb/EJ$            |
| CG b          | $x/b$      | 0                      | 0        | 0                        | 0               | $x^2/b^2$            | 0                               | $1/3xb/EJ$            |
| FG 2b         | -1         | $2Fb - 2Fx + 1/2qx^2$  | 0        | $-2Fb + 2Fx - 1/2Fx^2/b$ | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| GF 2b         | 1          | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$             | 0               | 1                    | $(-4/3 + 0)Fb^2/EJ$             | $2xb/EJ$              |
| CB 2b         | 0          | $Fb$                   | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| BC 2b         | 0          | $-Fb$                  | 0        | 0                        | 0               | 0                    | 0                               | 0                     |
| totali        |            |                        |          |                          |                 |                      | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

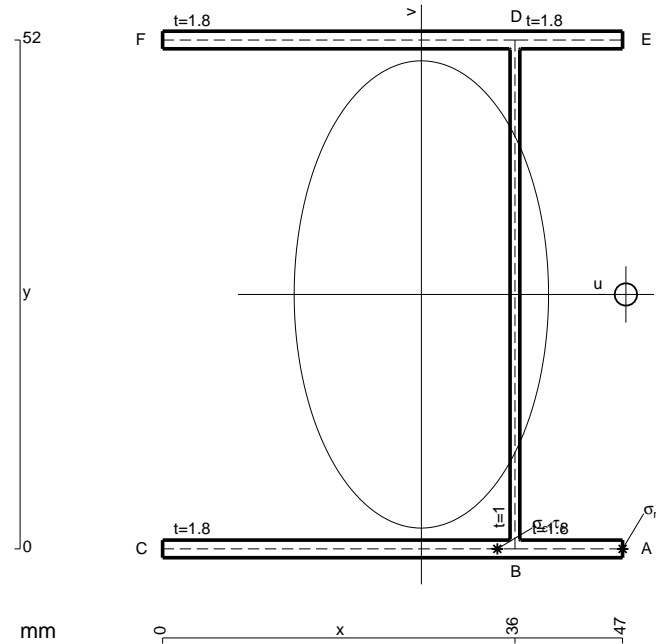


- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 37362. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>o</sub> = 20.9 mm
- x<sub>g</sub> = 26.44 mm
- T<sub>y</sub> = 1560. N
- M<sub>x</sub> = -1014000. Nmm
- x<sub>m</sub> = 47. mm
- u<sub>m</sub> = 20.56 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -209.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 9.561 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -209.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 304.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 11.58 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 293.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 2808. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 568. N/mm<sup>2</sup>






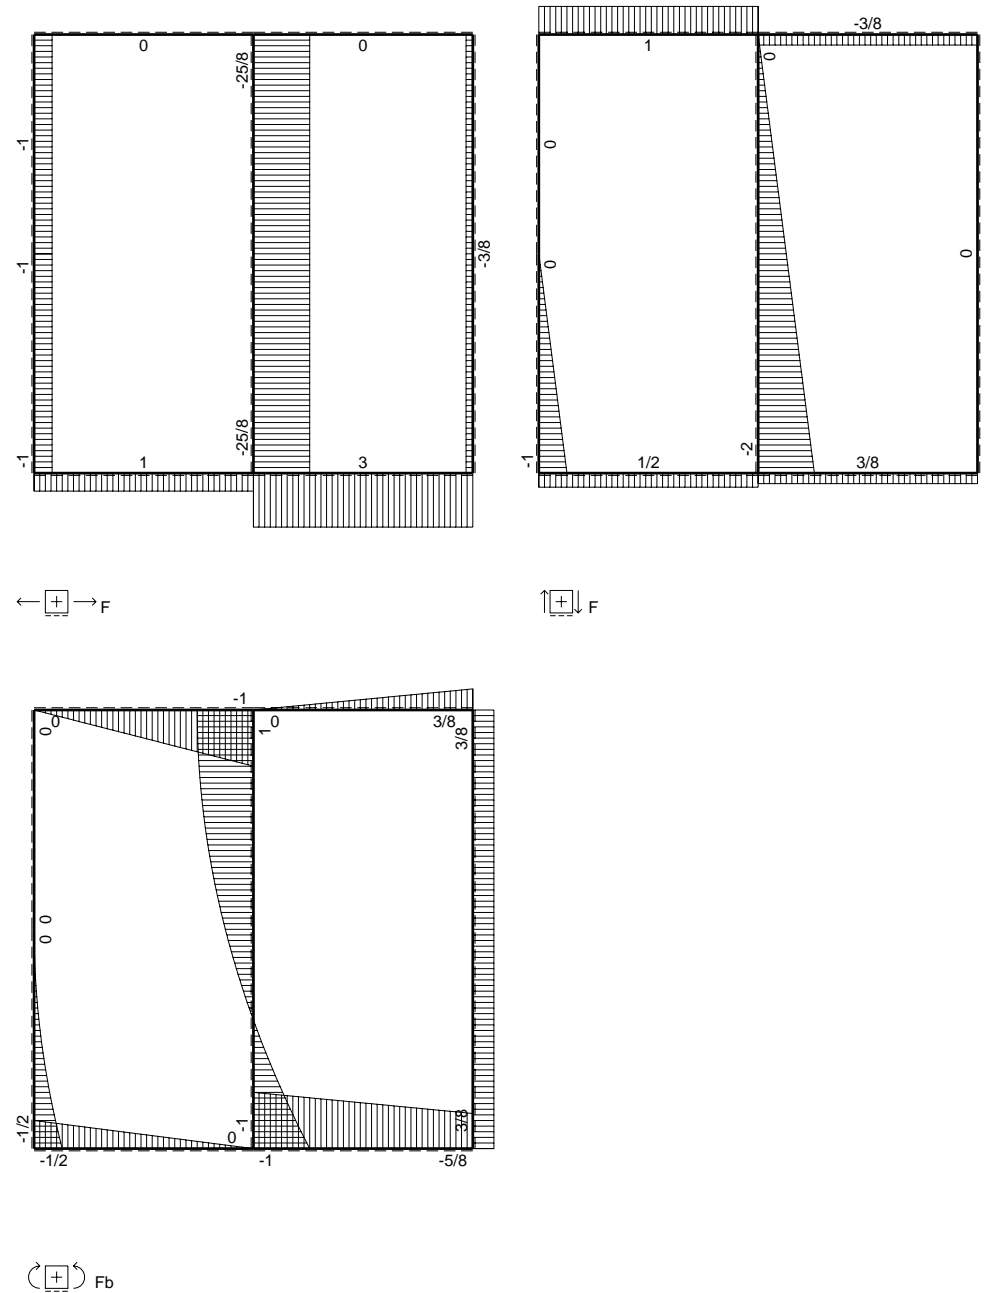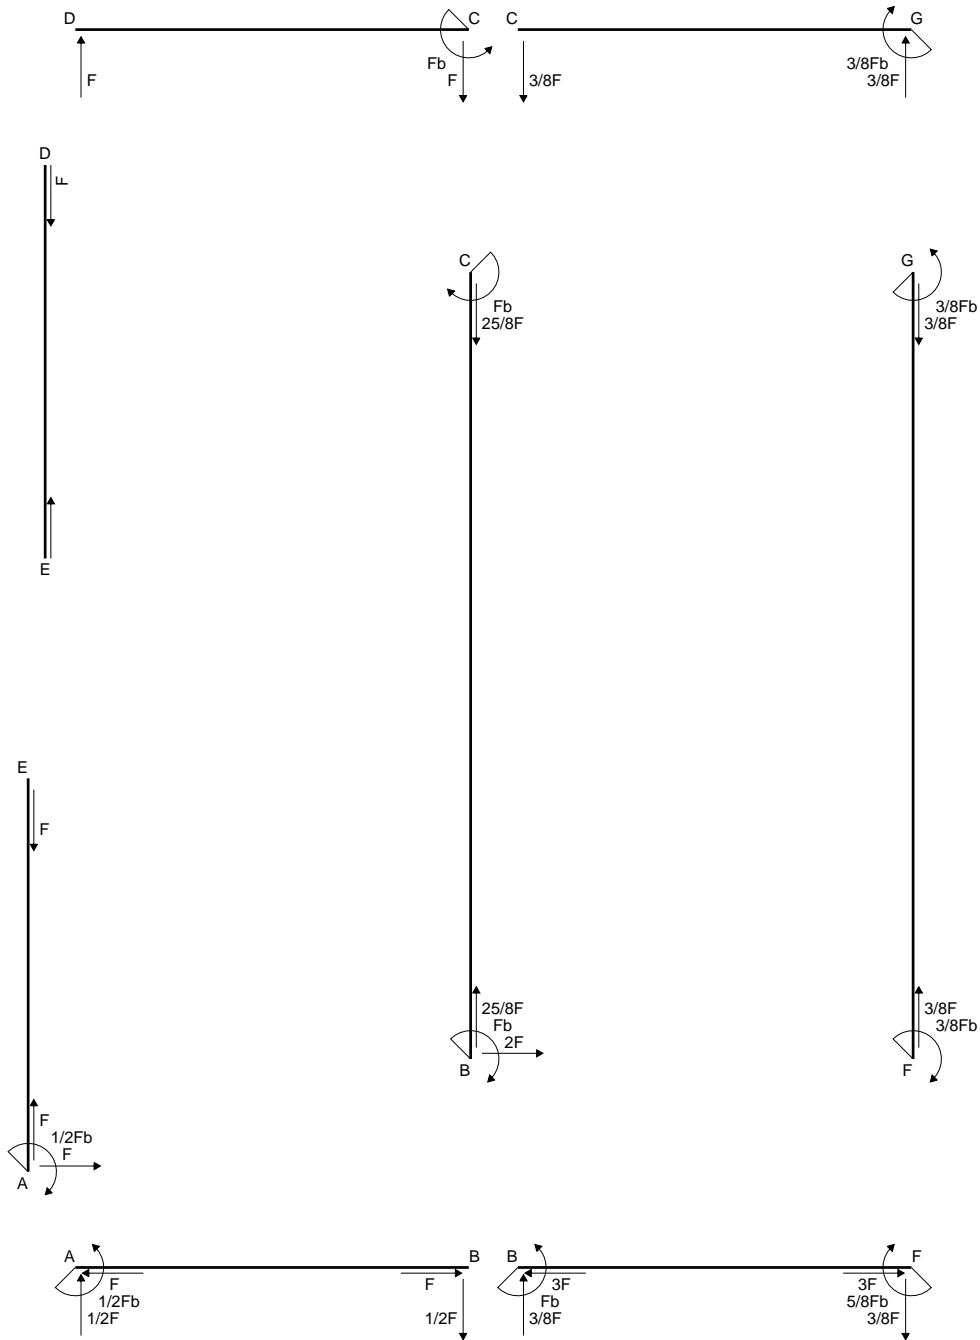


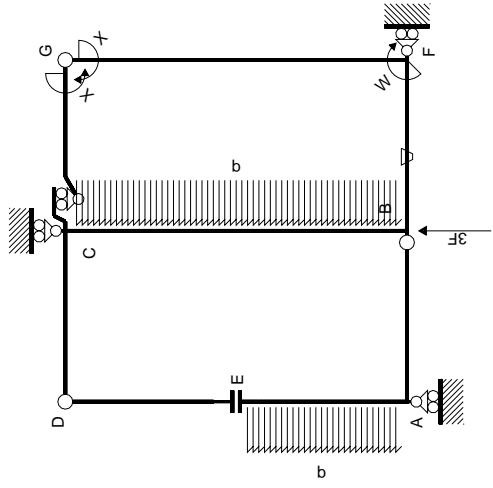

Schema di calcolo iperstatico

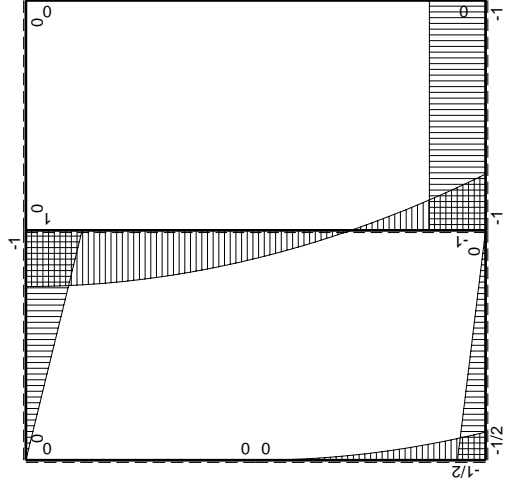

$M_0$  flessione da carichi assegnati

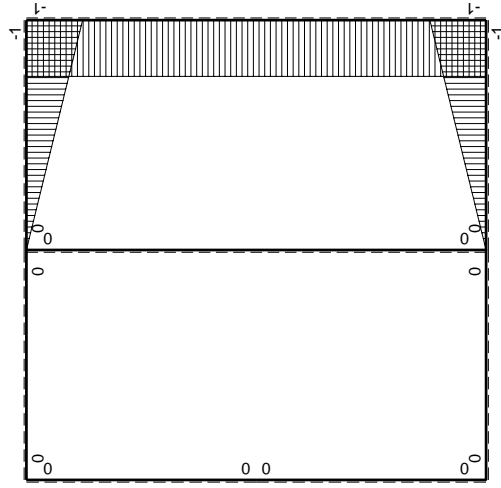

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sup>gc</sup>

| ←      | M <sup>x</sup> (x) | M <sup>o</sup> (x)            | θ      | M <sup>x</sup> M <sup>o</sup> | M <sup>x</sup> θ | M <sup>x</sup> M <sup>x</sup>         | $\int M^x(M^o/EJ+\theta)dx$  | $\int M^x M^x/EJ dx$ |
|--------|--------------------|-------------------------------|--------|-------------------------------|------------------|---------------------------------------|------------------------------|----------------------|
| AB B   | 0                  | -1/2Fb+1/2Fx                  | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BA B   | 0                  | 1/2Fx                         | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| CD B   | 0                  | -Fb+Fx                        | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| DC B   | 0                  | Fx                            | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| DE B   | 0                  | 0                             | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| EA B   | 0                  | -1/2qx <sup>2</sup>           | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| AE B   | 0                  | 1/2Fb-Fx+1/2qx <sup>2</sup>   | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BF B   | -x/b               | -Fb                           | -Fb/EJ | Fx                            | Fx/EJ            | x <sup>2</sup> /b <sup>2</sup>        | (1/2+1/2)Fb <sup>2</sup> /EJ | 1/3xb/EJ             |
| FB B   | 1-x/b              | Fb                            | Fb/EJ  | Fb-Fx                         | Fb/EJ-Fx/EJ      | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 1/3xb/EJ                     | 1/3xb/EJ             |
| GC B   | -1+x/b             | 0                             | 0      | 0                             | 0                | 1-2x/b+x <sup>2</sup> /b <sup>2</sup> | 0+0                          | 1/3xb/EJ             |
| CG B   | x/b                | 0                             | 0      | 0                             | 0                | x <sup>2</sup> /b <sup>2</sup>        | 0+0                          | 2xb/EJ               |
| FG 2b  | -1                 | 0                             | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                    |
| GF 2b  | 1                  | 0                             | 0      | 0                             | 0                | 1                                     | 0+0                          | 0                    |
| CB 2b  | 0                  | Fb-1/2qx <sup>2</sup>         | 0      | 0                             | 0                | 0                                     | 0+0                          | 0                    |
| BC 2b  | 0                  | Fb-2Fx+1/2qx <sup>2</sup>     | 0      | 0                             | 0                | 0                                     | 0+0                          | 8/3xb/EJ             |
| totali |                    |                               |        |                               |                  |                                       |                              |                      |
|        |                    | iperstatica X=W <sup>gc</sup> |        |                               |                  |                                       |                              |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

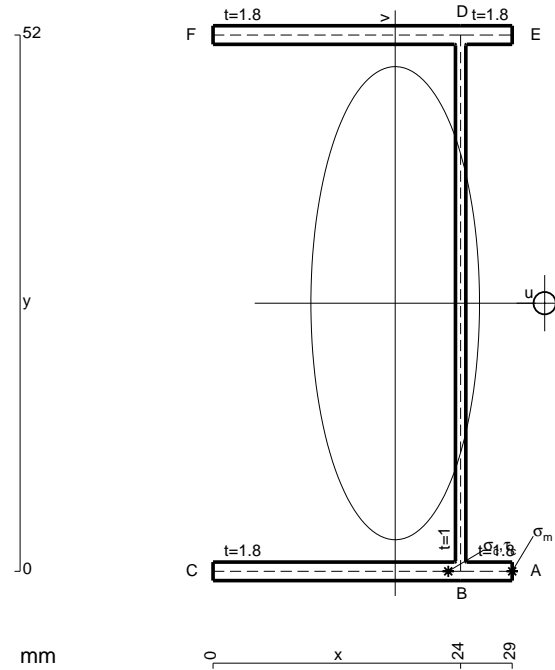


- A = 156.4 mm<sup>2</sup>
- J<sub>u</sub> = 82292. mm<sup>4</sup>
- J<sub>v</sub> = 10449. mm<sup>4</sup>
- J<sub>t</sub> = 130.1 mm<sup>4</sup>
- x<sub>o</sub> = 14.49 mm
- x<sub>g</sub> = 17.66 mm
- N = -2875. N
- T<sub>y</sub> = -1840. N
- M<sub>x</sub> = -634800. Nmm
- x<sub>m</sub> = 29. mm
- u<sub>m</sub> = 11.34 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -218.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 6.341 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -218.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 382.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 13.95 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 368.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 1656. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 698.3 N/mm<sup>2</sup>



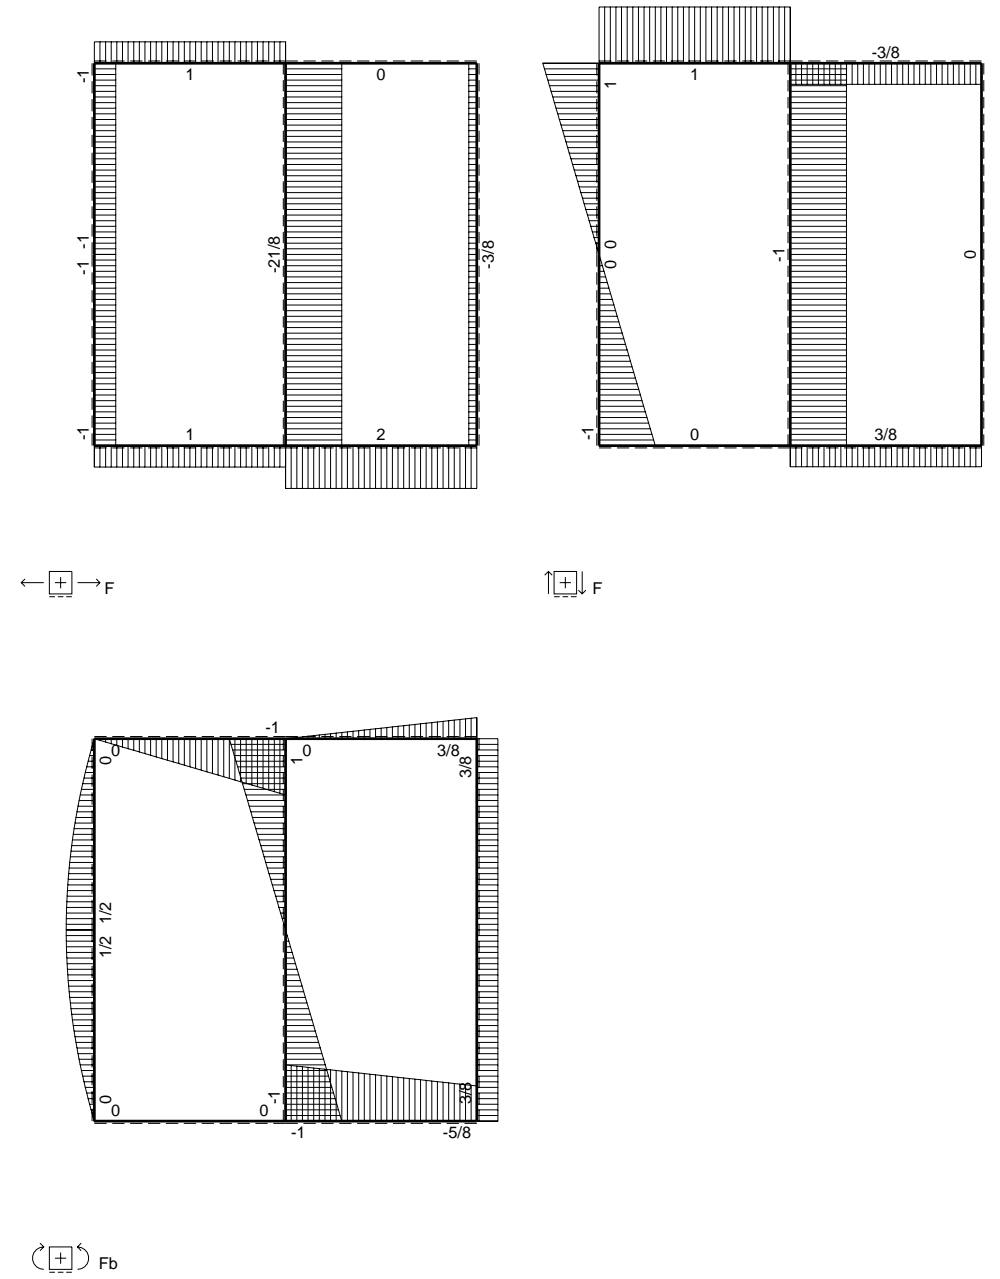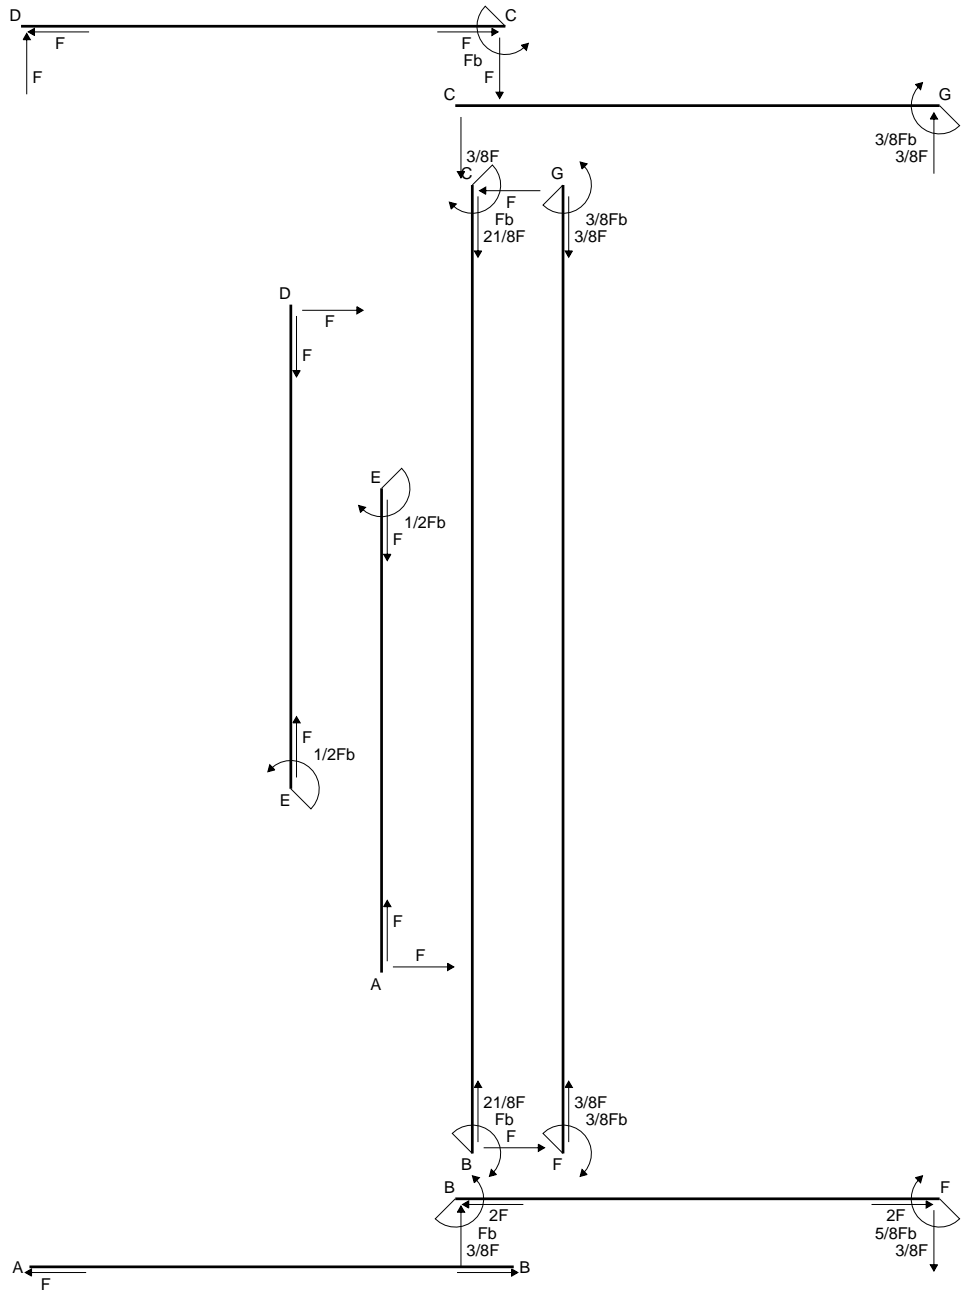


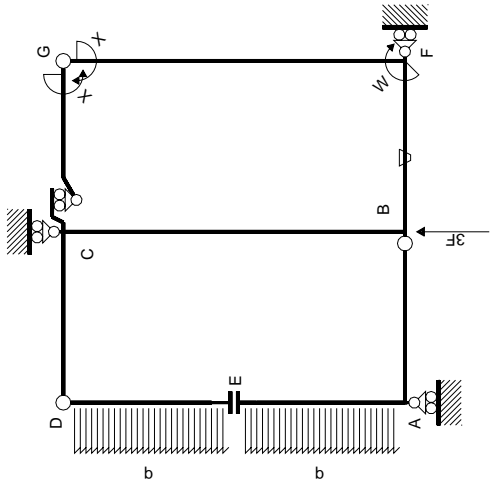

Schema di calcolo iperstatico

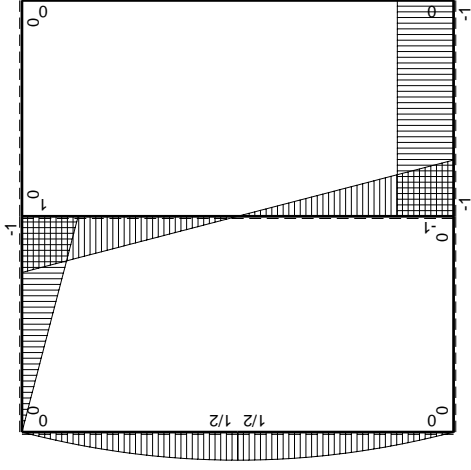

$M_x$  flessione da carichi assegnati

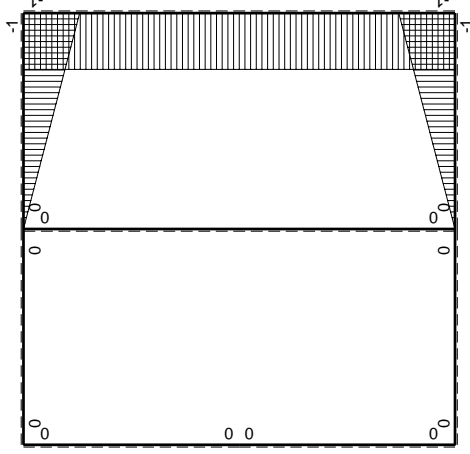

$M_0$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$                  | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|--------|---------------------------|----------|-----------|--------------|------------------|-----------------------------|----------------------|
| AB b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BA b          | 0      | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| CD b          | 0      | -Fb+Fx                    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DC b          | 0      | Fx                        | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DE b          | 0      | Fx-1/2qx <sup>2</sup>     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| ED b          | 0      | -1/2Fb+1/2qx <sup>2</sup> | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| EA b          | 0      | 1/2Fb-1/2qx <sup>2</sup>  | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| AE b          | 0      | -Fx+1/2qx <sup>2</sup>    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BF b          | -x/b   | -Fb                       | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | 1/3xb/EJ             |
| FB b          | 1-x/b  | Fb                        | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1-2x/b+x^2/b^2$            | 1/3xb/EJ             |
| GC b          | -1+x/b | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 1/3xb/EJ             |
| CG b          | x/b    | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 2xb/EJ               |
| FG 2b         | -1     | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 8/3xb/EJ             |
| GF 2b         | 1      | 0                         | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| CB 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BC 2b         | 0      | Fb-Fx                     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| totali        |        |                           |          |           |              |                  |                             |                      |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$






$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


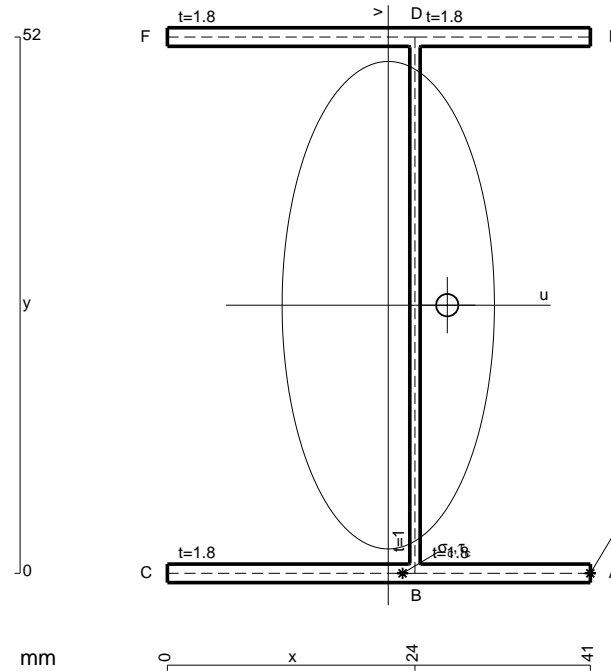


- A = 199.6 mm<sup>2</sup>
- J<sub>u</sub> = 111495. mm<sup>4</sup>
- J<sub>v</sub> = 21147. mm<sup>4</sup>
- J<sub>t</sub> = 176.7 mm<sup>4</sup>
- x<sub>o</sub> = 5.72 mm
- x<sub>g</sub> = 21.41 mm
- N = -3281. N
- T<sub>y</sub> = -1250. N
- M<sub>x</sub> = -912500. Nmm
- x<sub>m</sub> = 41. mm
- u<sub>m</sub> = 19.59 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = -229.2 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 2.588 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = -229.2 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 79.82 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.996 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 72.82 N/mm<sup>2</sup>
- t<sub>c</sub> = 2250. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 267.7 N/mm<sup>2</sup>





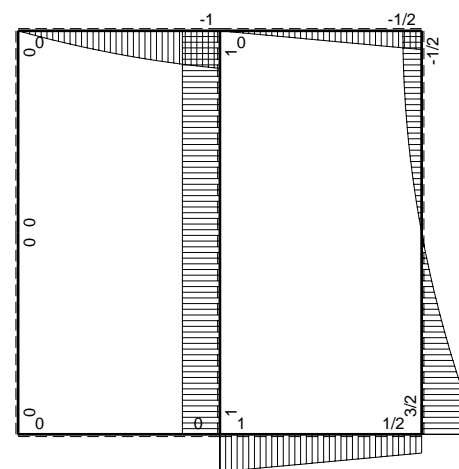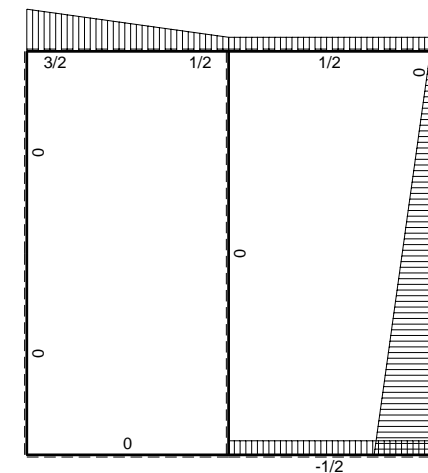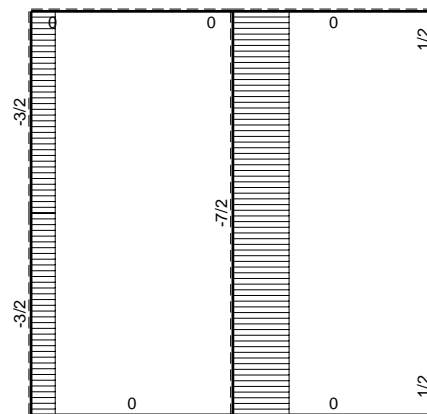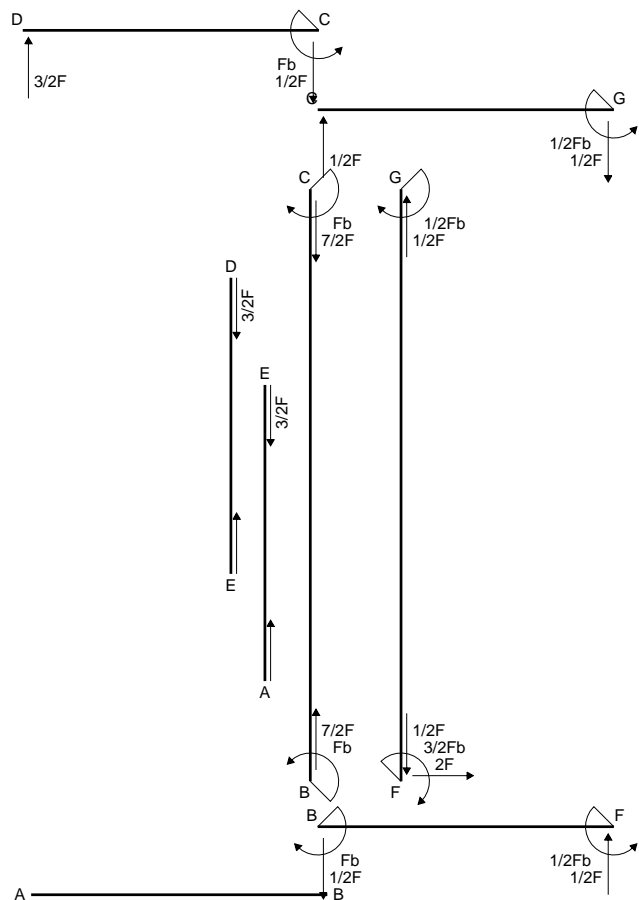

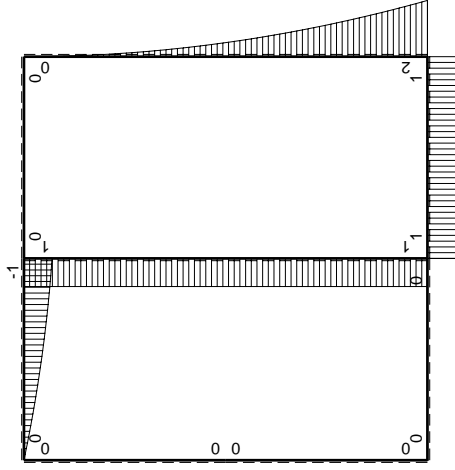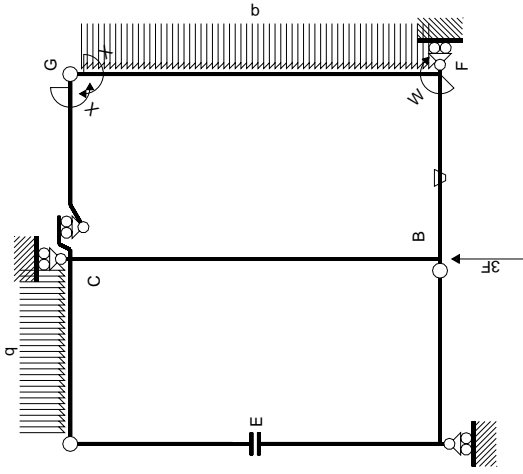

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$           | $M_x(x)$ | $M_0(x)$            | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|------------------------|----------|---------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BA b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| CD b                   | 0        | $-Fb+1/2Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DC b                   | 0        | $3/2Fx-1/2qx^2$     | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DE b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| ED b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| EA b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| AE b                   | 0        | 0                   | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BF b                   | $-x/b$   | Fb                  | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b                   | $1-x/b$  | $-Fb$               | Fb/EJ    | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b                   | $-1+x/b$ | 0                   | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b                   | $x/b$    | 0                   | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b                  | -1       | $2Fb-2Fx+1/2qx^2$   | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b                  | 1        | $-1/2qx^2$          | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b                  | 0        | Fb                  | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BC 2b                  | 0        | $-Fb$               | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| totali                 |          |                     |          |                      |               |                  |                             |                      |
| iperstatica $X=W_{gc}$ |          |                     |          |                      |               |                  |                             |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

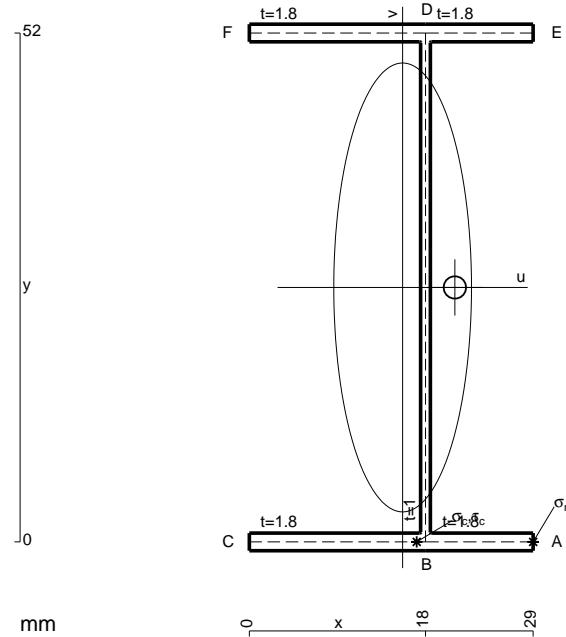

$$A = 156.4 \text{ mm}^2$$

$$J_u = 82292. \text{ mm}^4$$

$$J_v = 7742. \text{ mm}^4$$

$$J_t = 130.1 \text{ mm}^4$$

$$x_o = 5.338 \text{ mm}$$

$$x_g = 15.66 \text{ mm}$$

$$T_y = 1570. \text{ N}$$

$$M_x = -755563. \text{ Nmm}$$

$$x_m = 29. \text{ mm}$$

$$u_m = 13.34 \text{ mm}$$

$$v_m = -26. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -238.7 \text{ N/mm}^2$$

$$x_c = 18. \text{ mm}$$

$$u_c = 2.336 \text{ mm}$$

$$v_c = -26. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -238.7 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 124.9 \text{ N/mm}^2$$



$$\tau_g = TS/tJ_u = 8.929 \text{ N/mm}^2$$

$$\tau_o = Tx_o t/J_t = 116. \text{ N/mm}^2$$

$$t_c = 2826. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 322.1 \text{ N/mm}^2$$



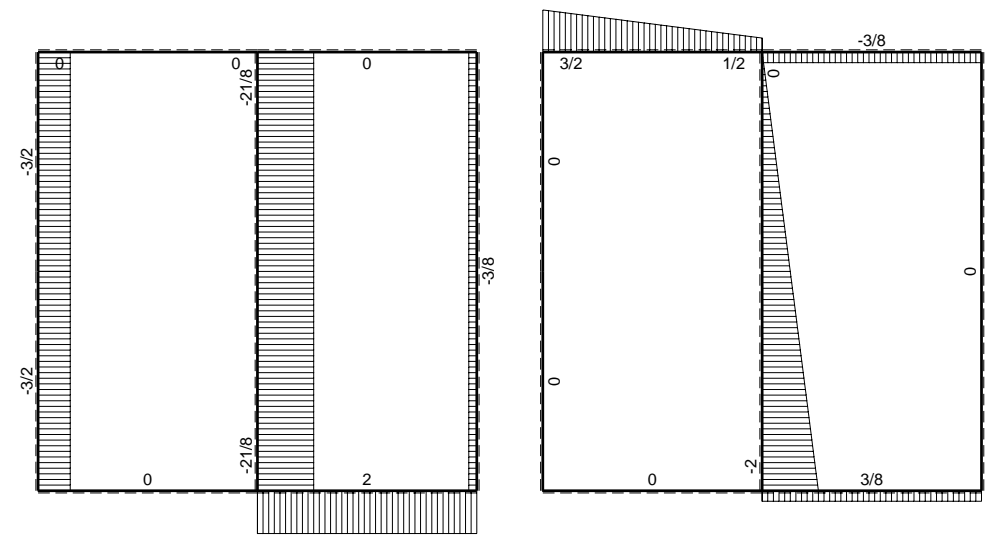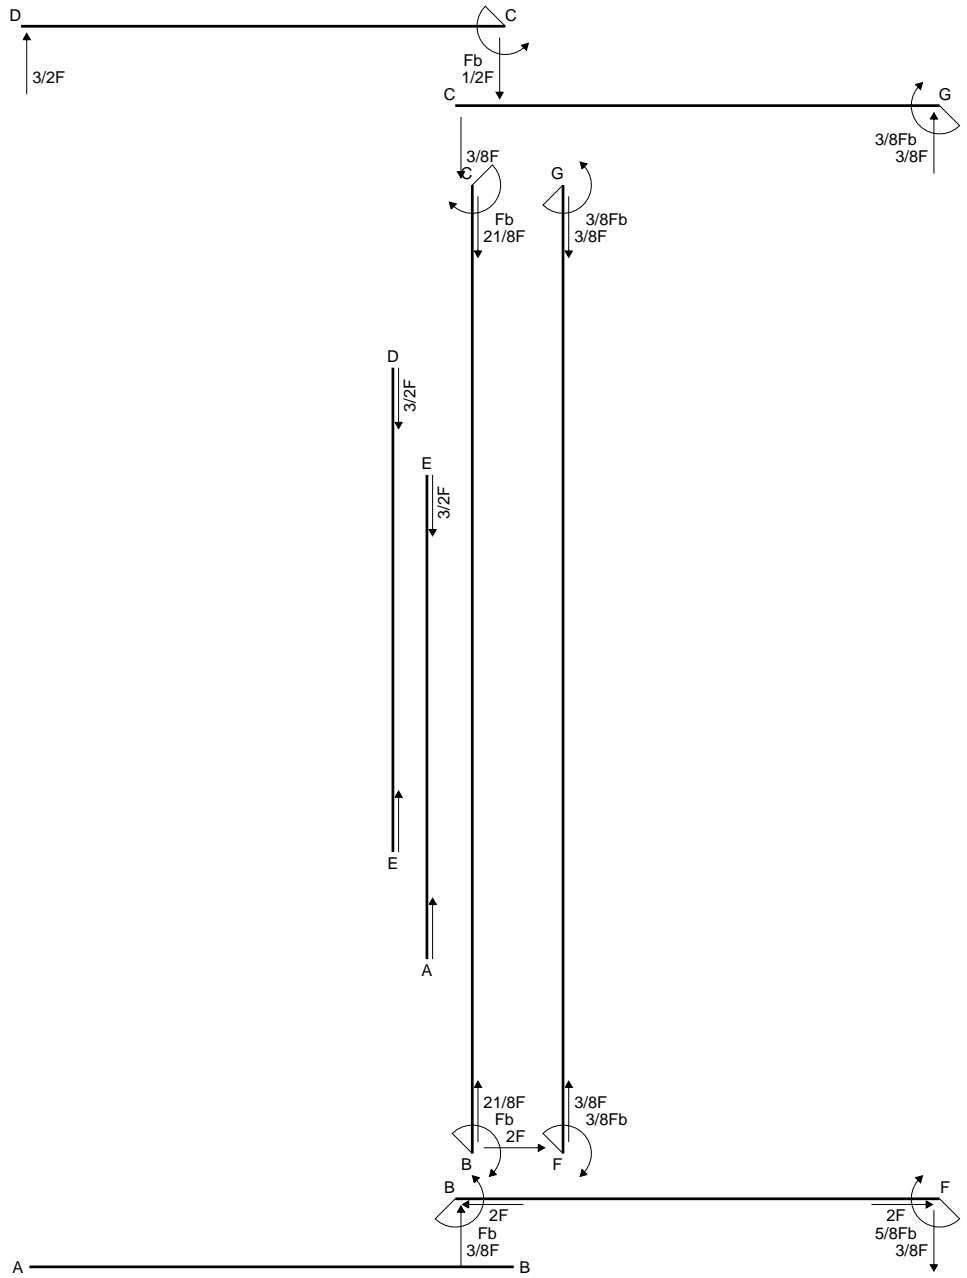


← ⊕ → F

↑ ⊕ ↓ F

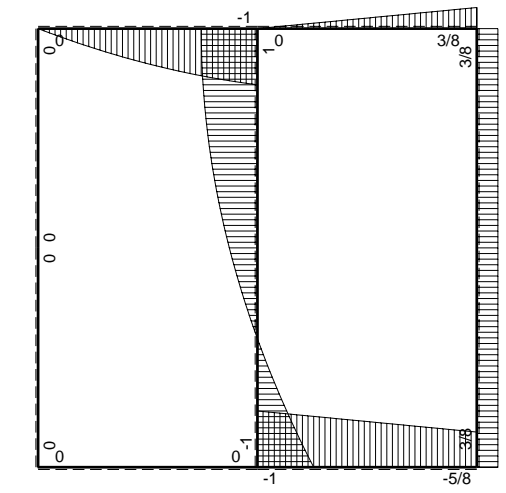


⊕ ⊖ Mb

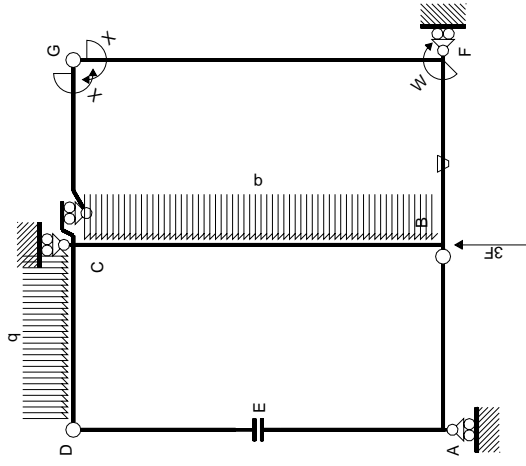

Schema di calcolo iperstatico


$M_0$  flessione da carichi assegnati

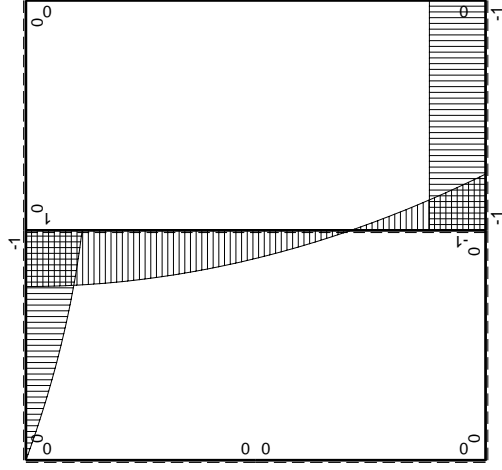

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b          | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b          | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FBB b         | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GCB b         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                    |          |           |               |                  |                             | $Fb^2/EJ$            |
|               |          |                    |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

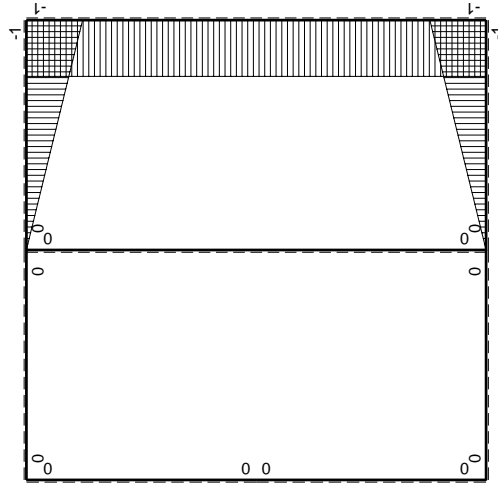

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

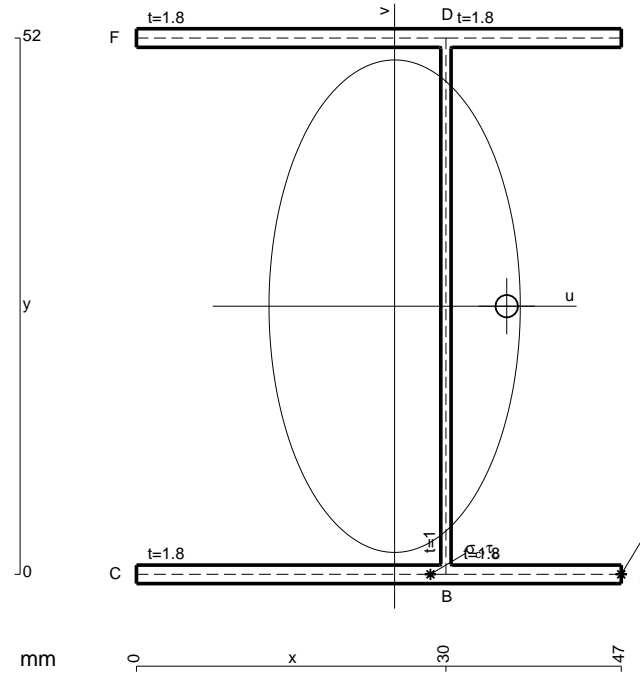


- A = 221.2 mm<sup>2</sup>
- J<sub>u</sub> = 126097. mm<sup>4</sup>
- J<sub>v</sub> = 32827. mm<sup>4</sup>
- J<sub>t</sub> = 200.1 mm<sup>4</sup>
- x<sub>o</sub> = 10.87 mm
- x<sub>g</sub> = 25.03 mm
- N = -5434. N
- T<sub>y</sub> = -4140. N
- M<sub>x</sub> = -848700. Nmm
- x<sub>m</sub> = 47. mm
- u<sub>m</sub> = 21.97 mm
- v<sub>m</sub> = -26. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 4.972 mm
- v<sub>c</sub> = -26. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = -199.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 430.4 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 25.61 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/tJ<sub>t</sub> = 404.8 N/mm<sup>2</sup>
- t<sub>c</sub> = 3726. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 771.7 N/mm<sup>2</sup>






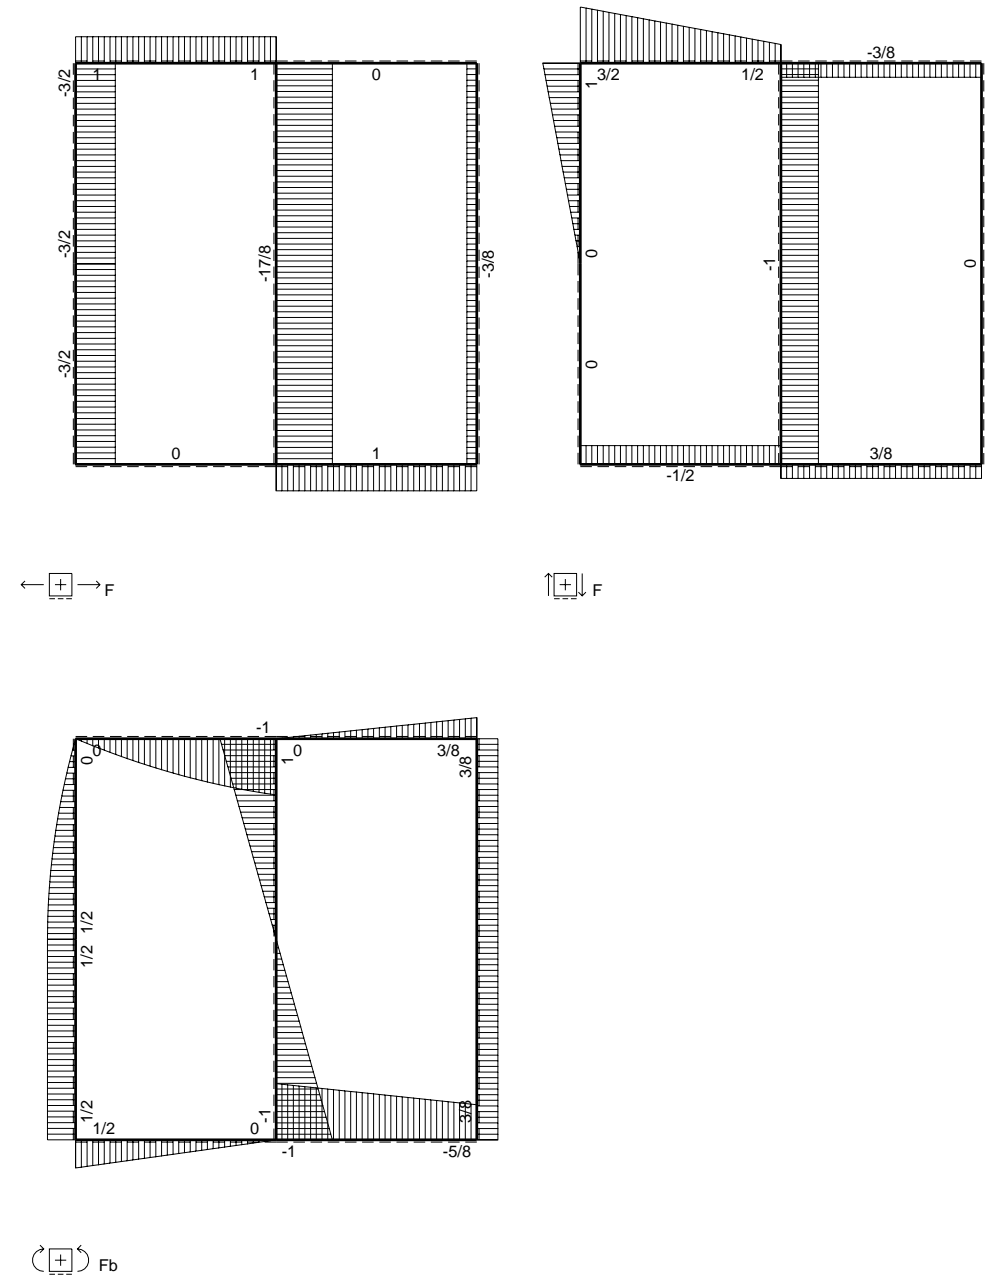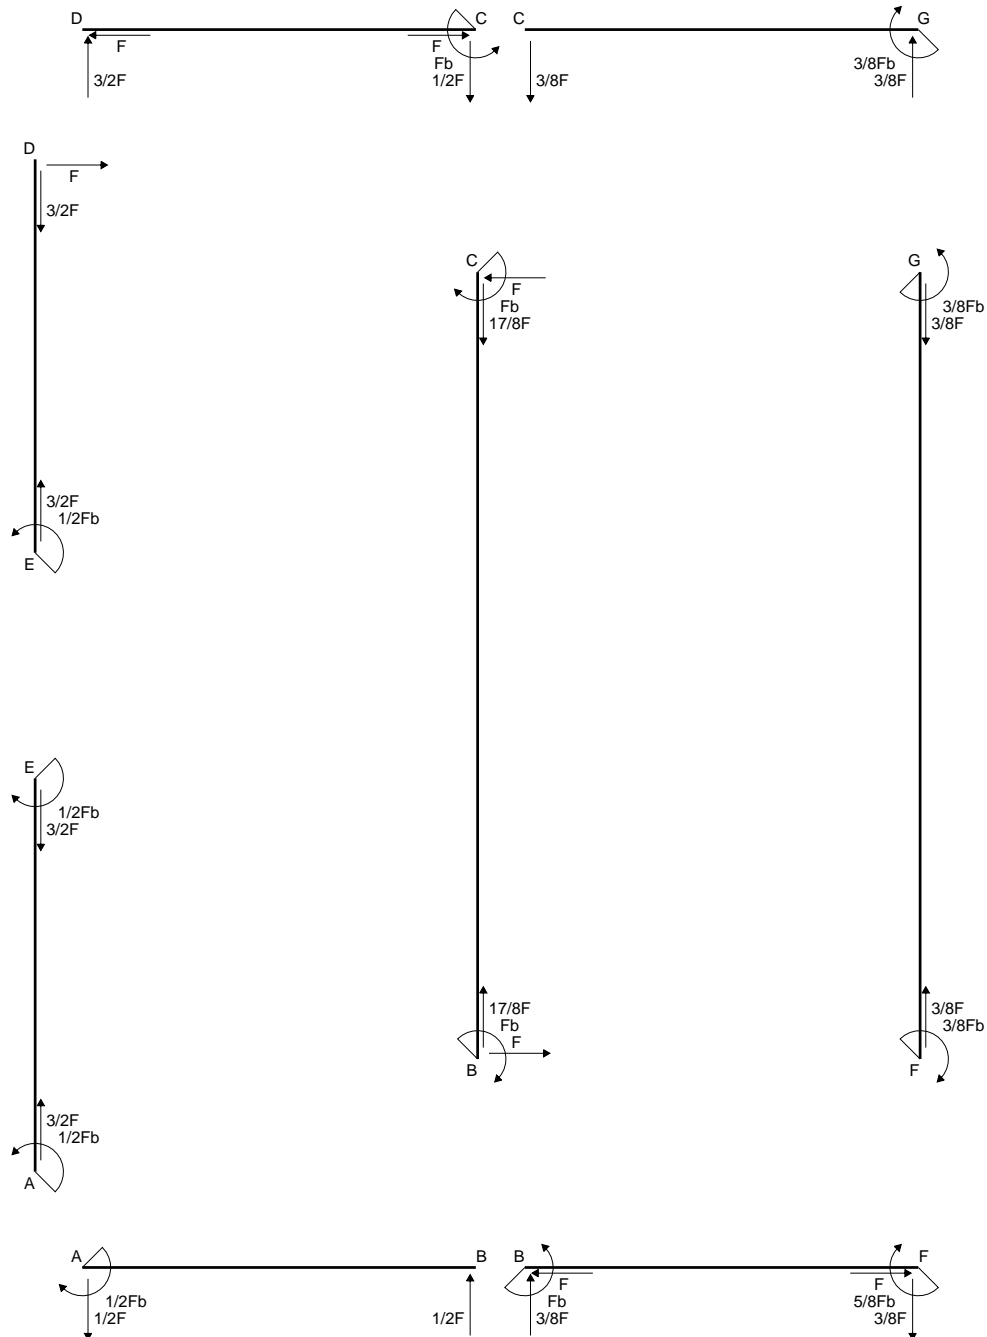


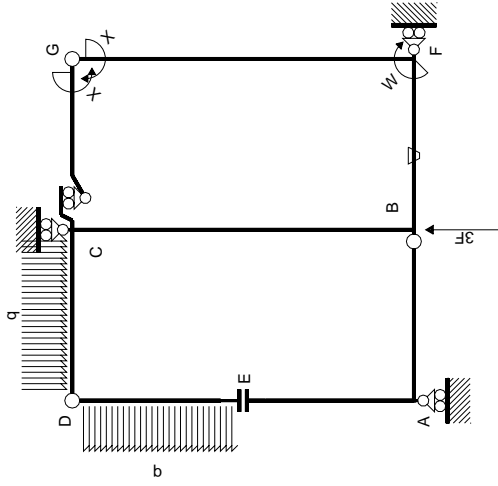

Schema di calcolo iperstatico

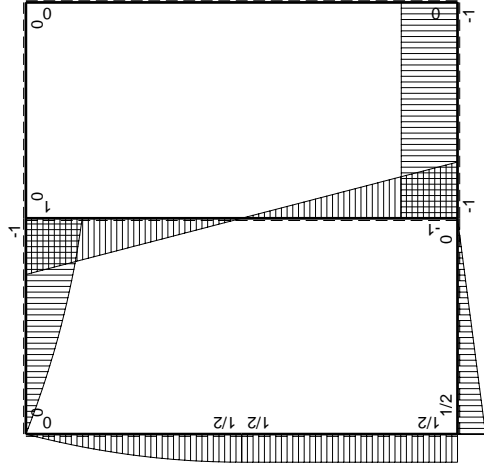

$M_0$  flessione da carichi assegnati

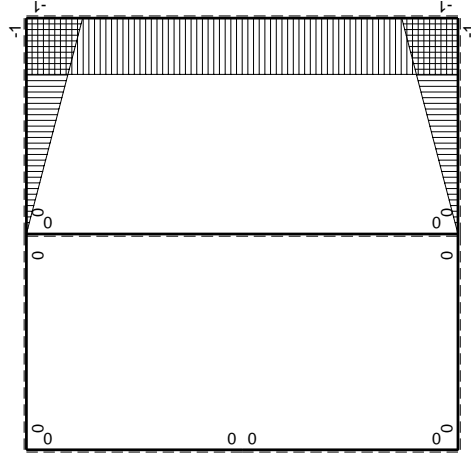

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | $1/2Fb-1/2Fx$      | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | $-1/2Fx$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | $Fx-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b         | 0        | $-1/2Fb+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | $1/2Fb$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | $-1/2Fb$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $Fb/EJ-Fx/EJ$    | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FBB b        | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |
|              |          |                    |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

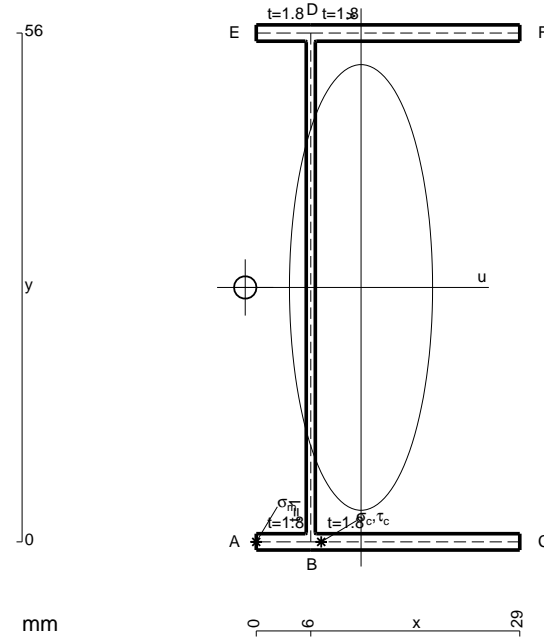


- A = 160.4 mm<sup>2</sup>
- J<sub>u</sub> = 96484. mm<sup>4</sup>
- J<sub>v</sub> = 9950. mm<sup>4</sup>
- J<sub>t</sub> = 131.4 mm<sup>4</sup>
- x<sub>0</sub> = -12.74 mm
- x<sub>g</sub> = 11.53 mm
- N = -2911. N
- T<sub>y</sub> = -1370. N
- M<sub>x</sub> = -657600. Nmm
- u<sub>m</sub> = -11.53 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = -209. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -5.532 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = -209. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 248.3 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.144 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>/J<sub>t</sub> = 239.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 2466. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 478.1 N/mm<sup>2</sup>



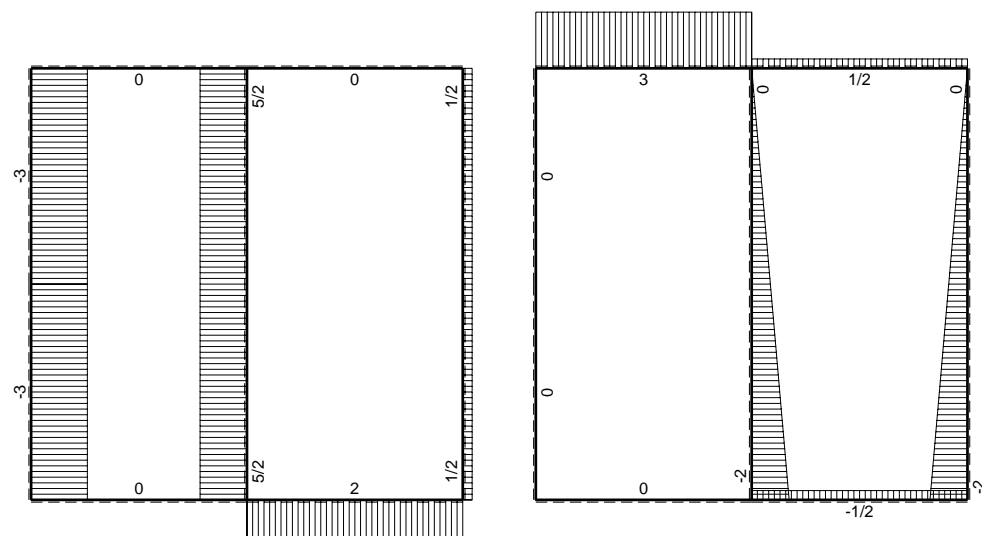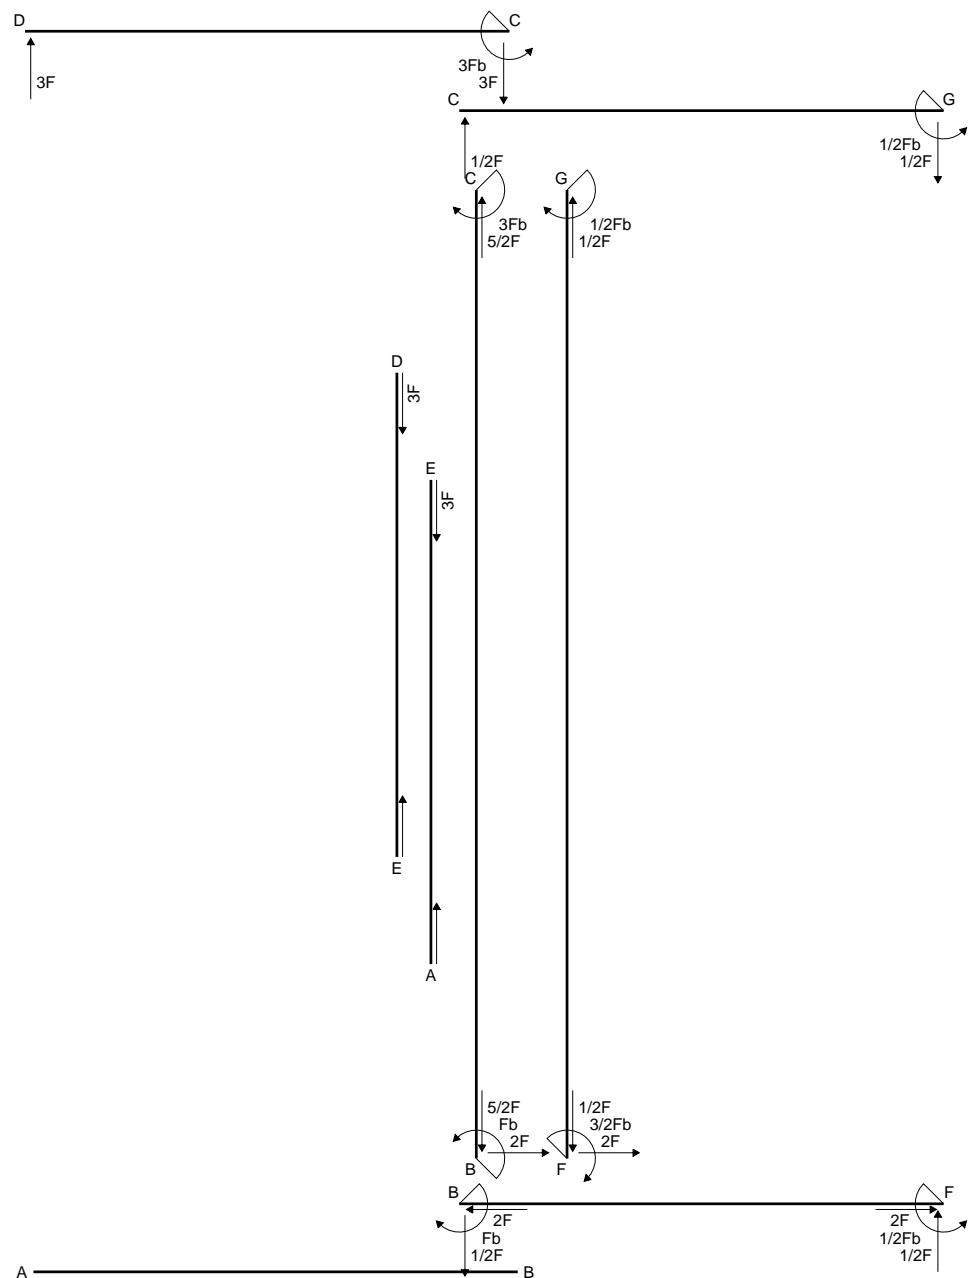


← ⊕ → F


↑ ⊕ ↓ F<sub>b</sub>

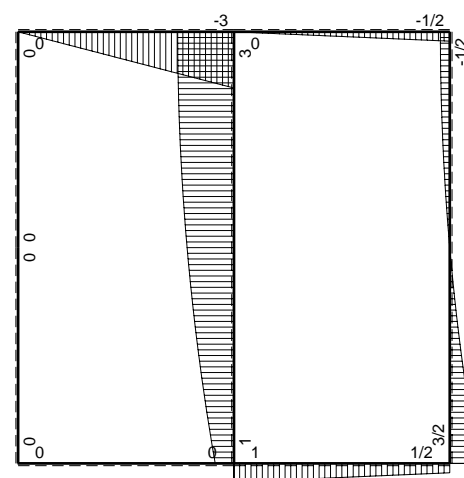

⊕ ⊖ F<sub>b</sub>

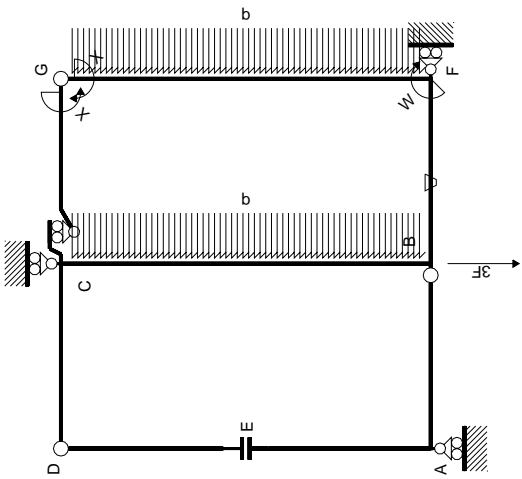

$M_0$  flessione da carichi assegnati

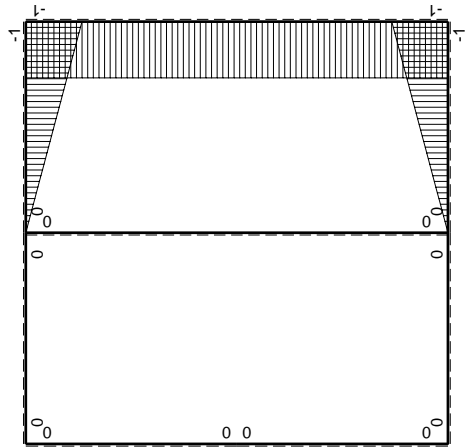

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / EJ dx$ |
|---------------|----------|-------------------|----------|----------------------|---------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| BA b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| CD b          | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| DC b          | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| DE b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| ED b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| EA b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| AE b          | 0        | 0                 | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| BF b          | $-x/b$   | Fb                | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$             | $1/3x^3/EJ$            |
| FB b          | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3x^3/EJ$            |
| GC b          | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0                               | $1/3x^3/EJ$            |
| CG b          | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0                               | 0                      |
| FG 2b         | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2x^3/EJ$              |
| GF 2b         | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | 0                               | 0                      |
| CB 2b         | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| BC 2b         | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0                               | 0                      |
| totali        |          |                   |          |                      |               |                  |                                 |                        |
|               |          |                   |          |                      |               |                  | $-4/3Fb^2/EJ$                   | $8/3x^3/EJ$            |
|               |          |                   |          |                      |               |                  | $1/2Fb$                         |                        |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$





$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


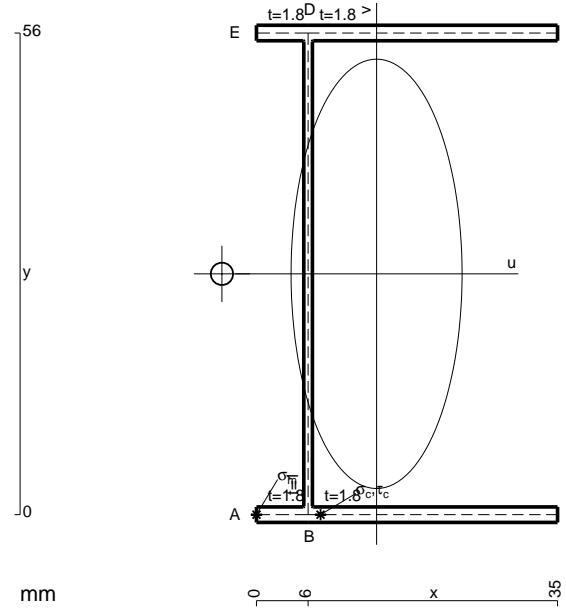


$A = 182. \text{ mm}^2$   
 $J_u = 113419. \text{ mm}^4$   
 $J_v = 17990. \text{ mm}^4$   
 $J_t = 154.7 \text{ mm}^4$   
 $x_o = -17.98 \text{ mm}$   
 $x_g = 13.96 \text{ mm}$   
 $T_y = 1710. \text{ N}$   
 $M_x = -889200. \text{ Nmm}$   
 $u_m = -13.96 \text{ mm}$   
 $v_m = -28. \text{ mm}$   
 $\sigma_m = -Mv/J_u = -219.5 \text{ N/mm}^2$   
 $x_c = 6. \text{ mm}$   
 $u_c = -7.962 \text{ mm}$   
 $v_c = -28. \text{ mm}$   
 $\sigma_c = -Mv/J_u = -219.5 \text{ N/mm}^2$   
 $\tau_c = \tau_g + \tau_{ou} = 369.8 \text{ N/mm}^2$   
 $\tau_g = TS'/tJ_u = 12.24 \text{ N/mm}^2$   
 $\tau_o = Tx_o t/J_t = 357.6 \text{ N/mm}^2$   
 $t_c = 1026. \text{ mm}$   
 $\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 677.1 \text{ N/mm}^2$






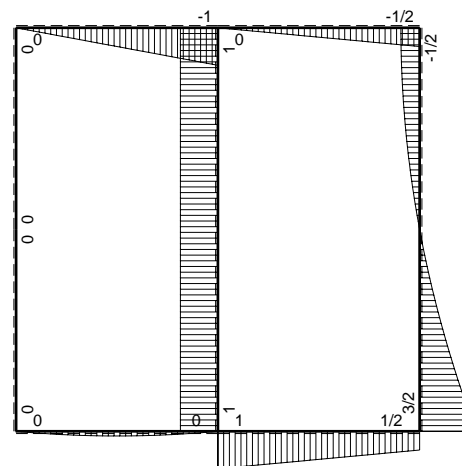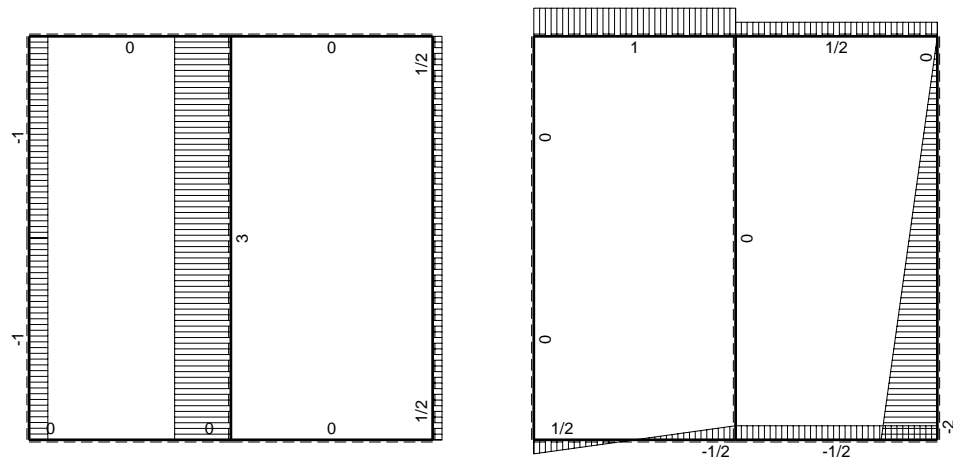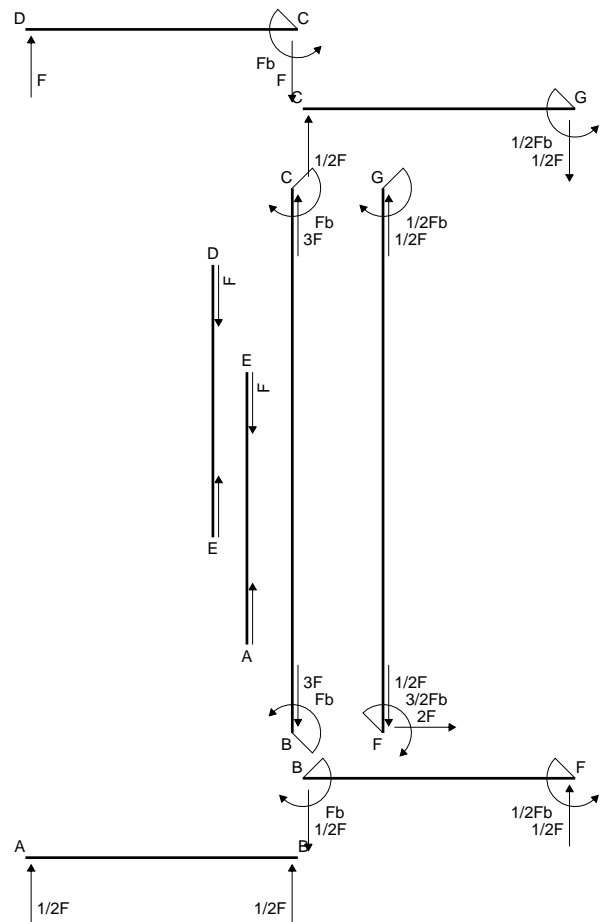

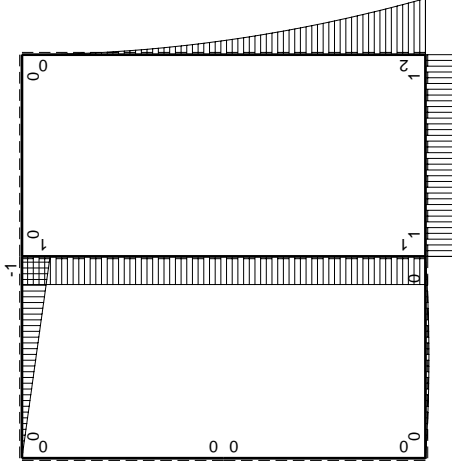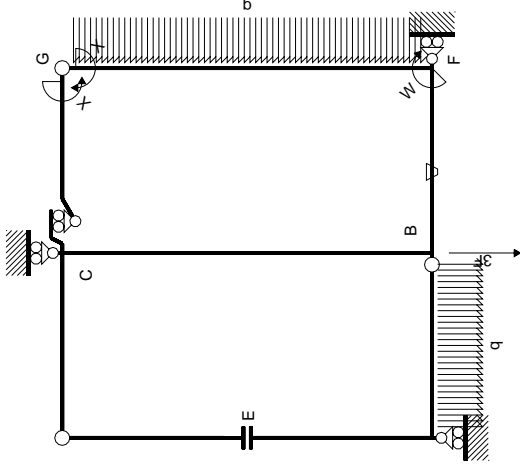

$M_0$  flessione da carichi assegnati

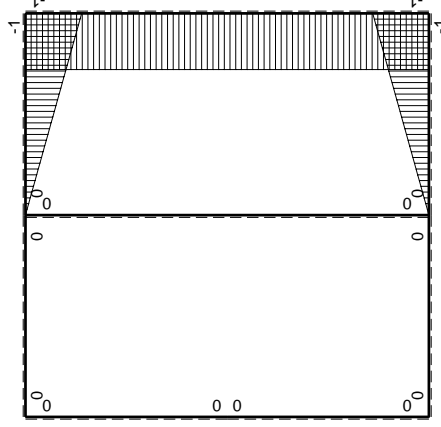

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^0(x)$         | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x(M_0/EJ+\theta)dx$ | $\int M^x M_0/EJdx$ |          |         |                   |          |                      |               |                  |                     |            |          |  |
|---------------|------------------|-------------------|----------|----------------------|---------------|------------------|-----------------------------|---------------------|----------|---------|-------------------|----------|----------------------|---------------|------------------|---------------------|------------|----------|--|
| AB b          | $1/2Fx-1/2qx^2$  | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| BA b          | $-1/2Fx+1/2qx^2$ | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| CD b          | $-b+Fx$          | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| DC b          | $Fx$             | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| DE b          | 0                | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| ED b          | 0                | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| EAB b         | 0                | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| AEA b         | 0                | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| BF b          | $-x/b$           | $Fb$              | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          | 1/3xb/EJ | $-x/b$  | $Fb$              | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$ | $1/3xb/EJ$ | 1/3xb/EJ |  |
| FB b          | $1-x/b$          | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          | 1/3xb/EJ | $1-x/b$ | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$ | $1/3xb/EJ$ | 1/3xb/EJ |  |
| GC b          | $-1+x/b$         | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| CG b          | $x/b$            | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| FG 2b         | $-1$             | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2Xb/EJ$            | 2Xb/EJ   | $-1$    | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$   | $2Xb/EJ$   | 2Xb/EJ   |  |
| GF 2b         | 1                | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2Xb/EJ$            | 2Xb/EJ   | 1       | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$   | $2Xb/EJ$   | 2Xb/EJ   |  |
| CB 2b         | 0                | $Fb$              | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| BC 2b         | 0                | $-Fb$             | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
| totali        | 0                | 0                 | 0        | 0                    | 0             | 0                | 0                           | 0                   | 0        | 0       | 0                 | 0        | 0                    | 0             | 0                | 0                   | 0          | 0        |  |
|               |                  |                   |          |                      |               |                  |                             |                     |          |         |                   |          |                      |               |                  |                     |            |          |  |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

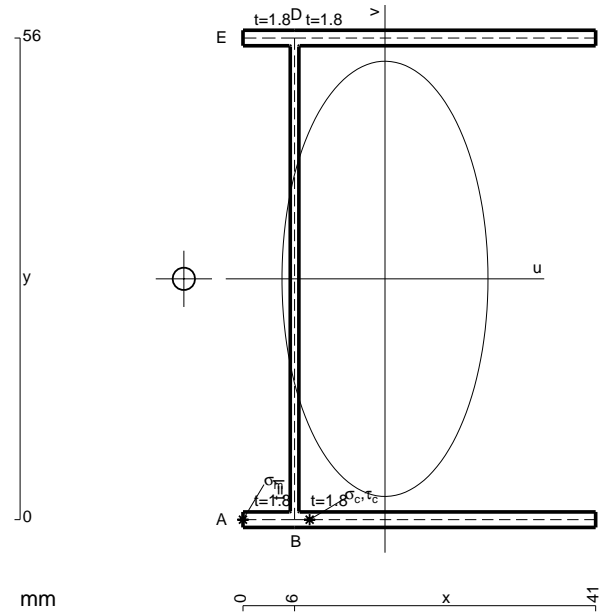

- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 29212. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>0</sub> = -23.38 mm
- x<sub>g</sub> = 16.51 mm
- T<sub>y</sub> = 1870. N
- M<sub>x</sub> = -1065900. Nmm
- u<sub>m</sub> = -16.51 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -229. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -10.51 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -229. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 456.1 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 14.06 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>/J<sub>t</sub> = 442. N/mm<sup>2</sup>
- t<sub>c</sub> = 3366. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 822.4 N/mm<sup>2</sup>



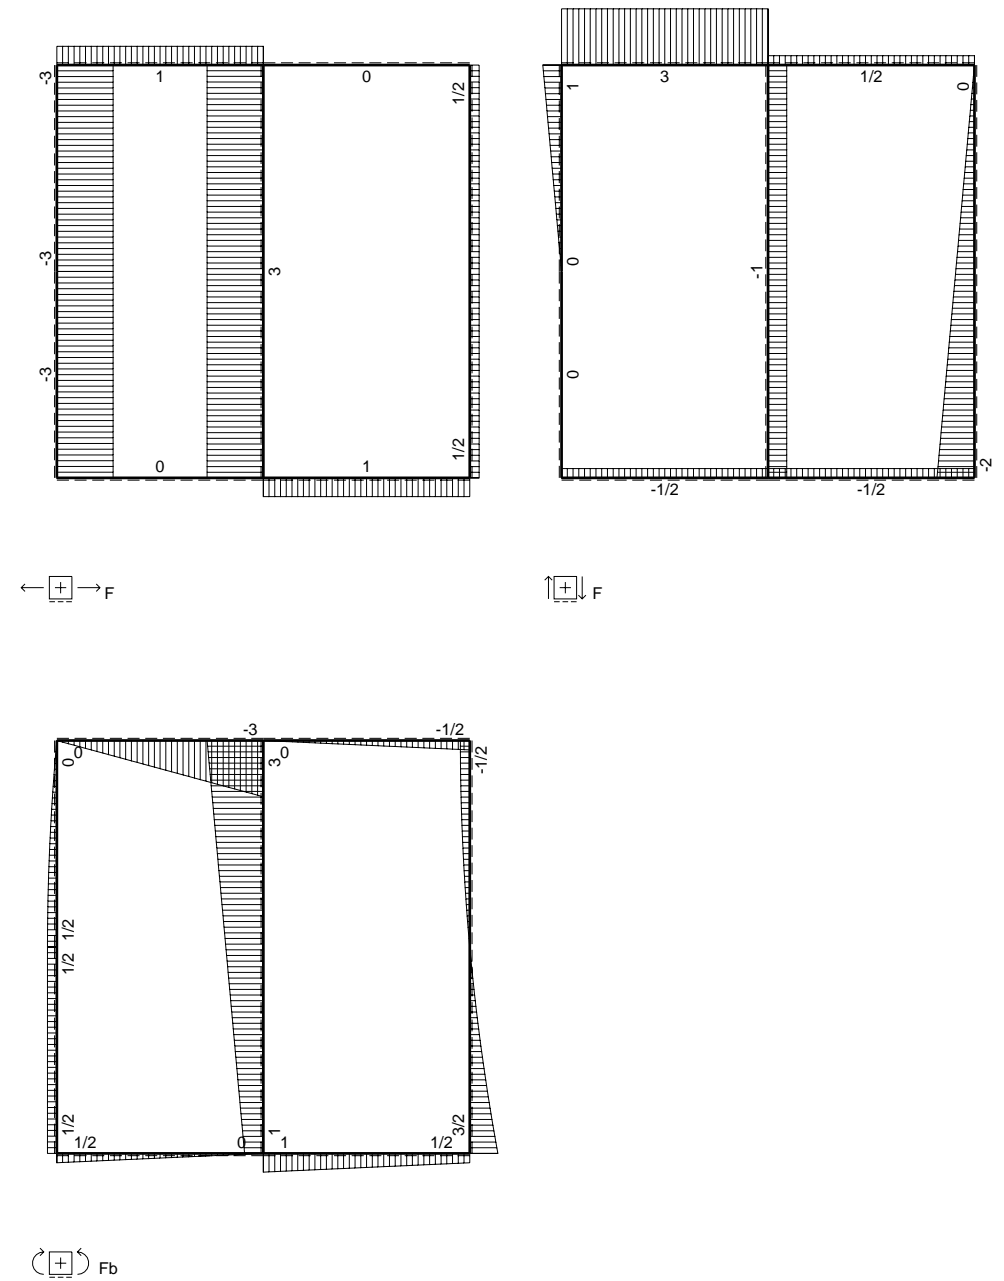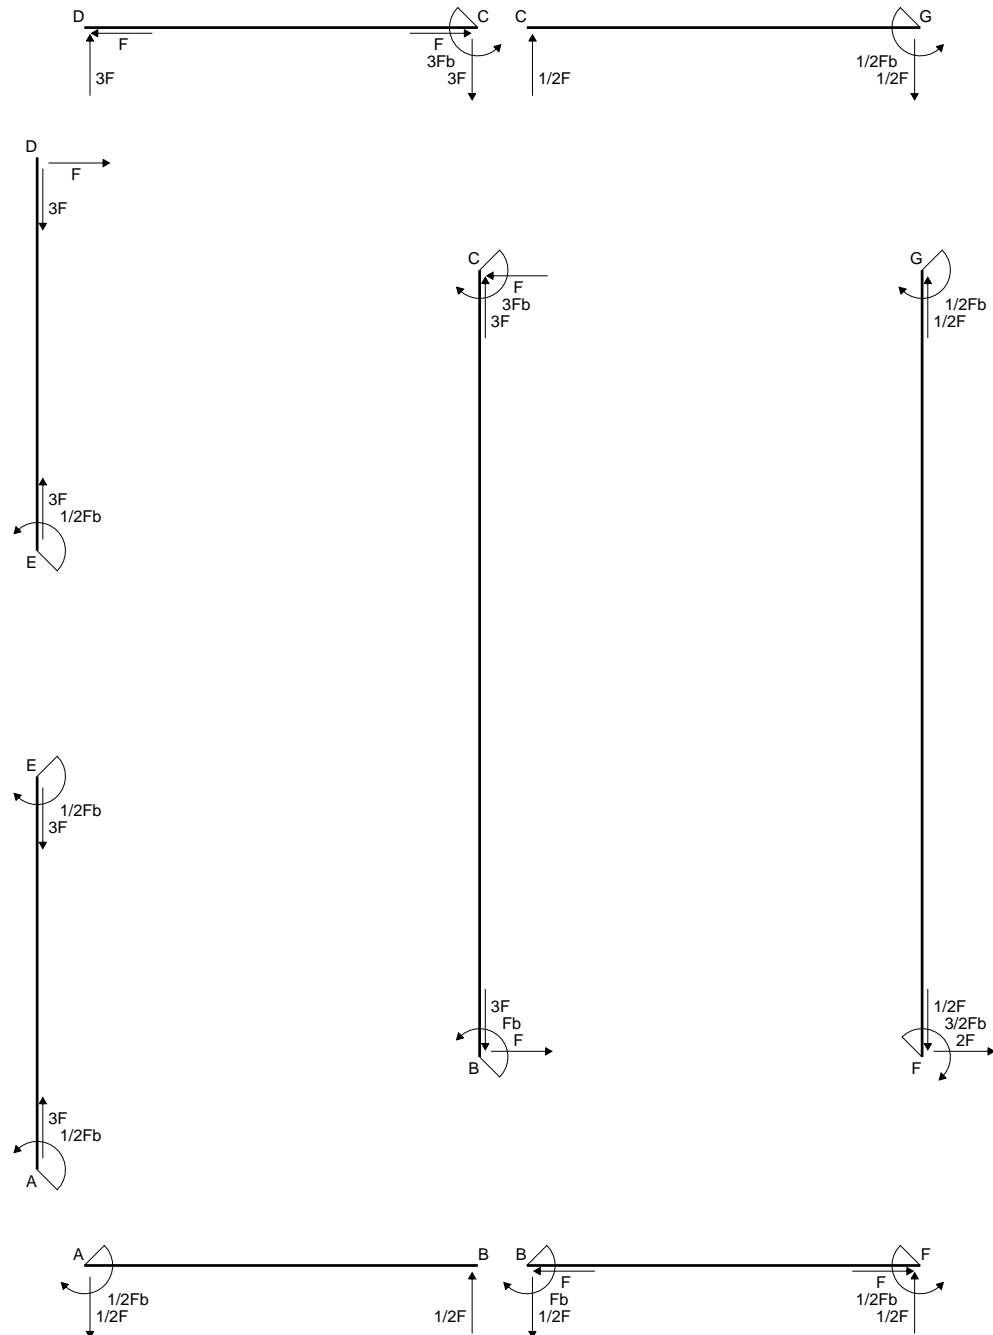

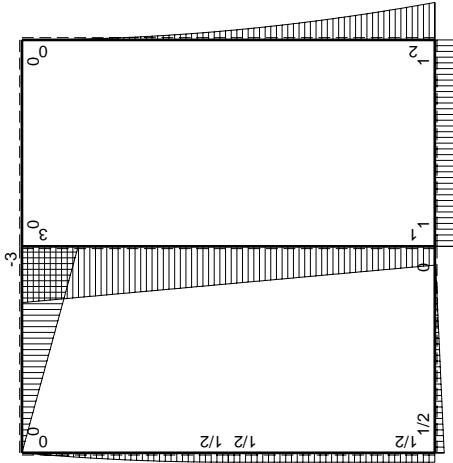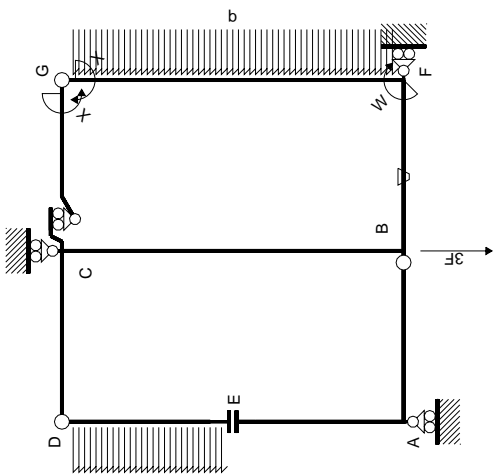

$M_0$  flessione da carichi assegnati

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$  | $M^x M_x$        | $\int M^x(M_0/EJ+\theta)dx$ | $\int M^x M_x/EJ dx$ |
|---------------|----------|-------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b          | 0        | $1/2Fb-1/2Fx$     | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| BA b          | 0        | $-1/2Fx$          | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| CD b          | 0        | $-3Fb+3Fx$        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| DC b          | 0        | $3Fx$             | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| DE b          | 0        | $Fx-1/2qx^2$      | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| ED b          | 0        | $-1/2Fb+1/2qx^2$  | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| EA b          | 0        | $1/2Fb$           | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| AE b          | 0        | $-1/2Fb$          | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| BF b          | $-x/b$   | $Fb$              | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $-1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | $1-x/b$  | $-Fb$             | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b          | $-1+x/b$ | 0                 | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | $x/b$    | 0                 | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b         | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b         | 0        | $3Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $-Fb-Fx$          | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                   |          |                      |               |                  |                             |                      |
|               |          |                   |          |                      |               |                  |                             |                      |

Quadro contributi PLV per iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$



$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$


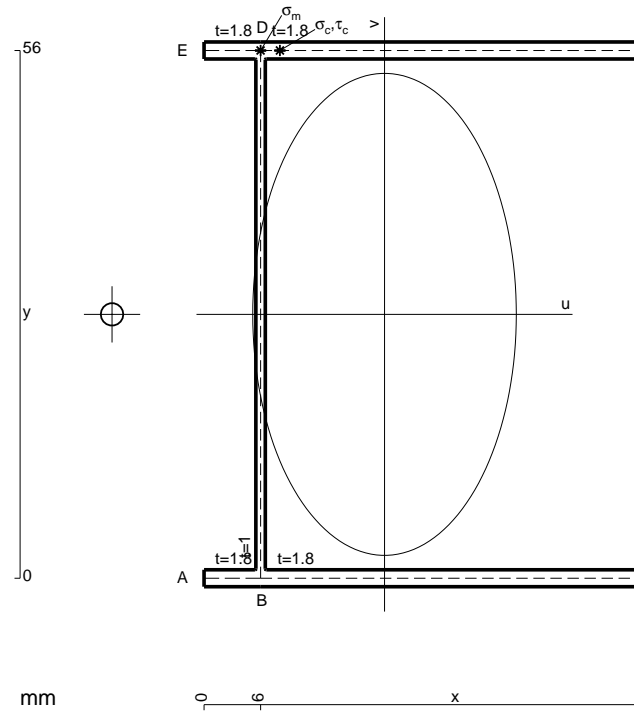


- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 44032. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- x<sub>o</sub> = -28.91 mm
- x<sub>g</sub> = 19.15 mm
- N = 680. N
- T<sub>y</sub> = 2040. N
- M<sub>x</sub> = -1244400. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -13.15 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 239.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -13.15 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 239.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 543. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.9 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 527.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 1224. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 970.5 N/mm<sup>2</sup>






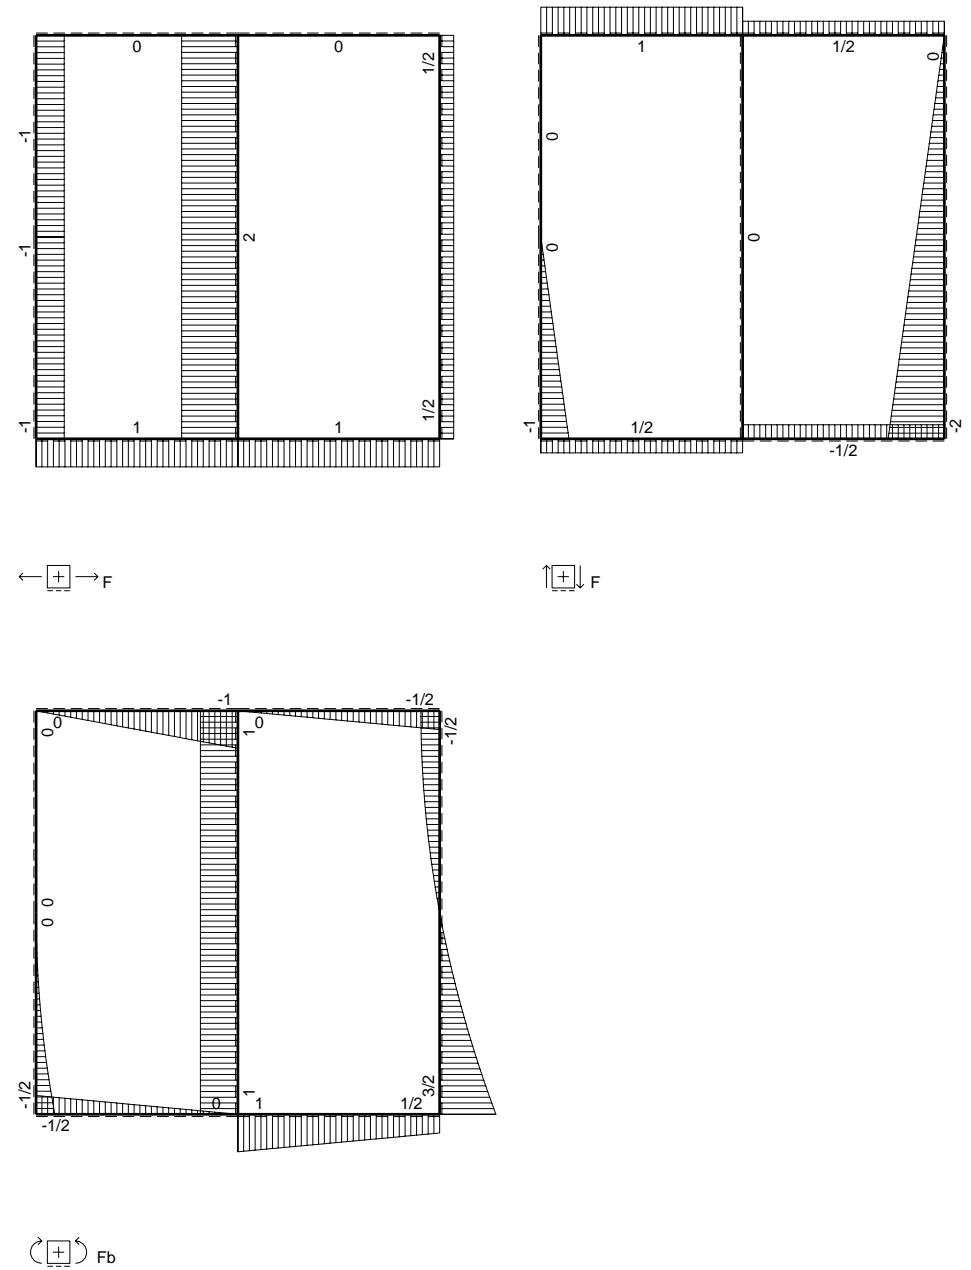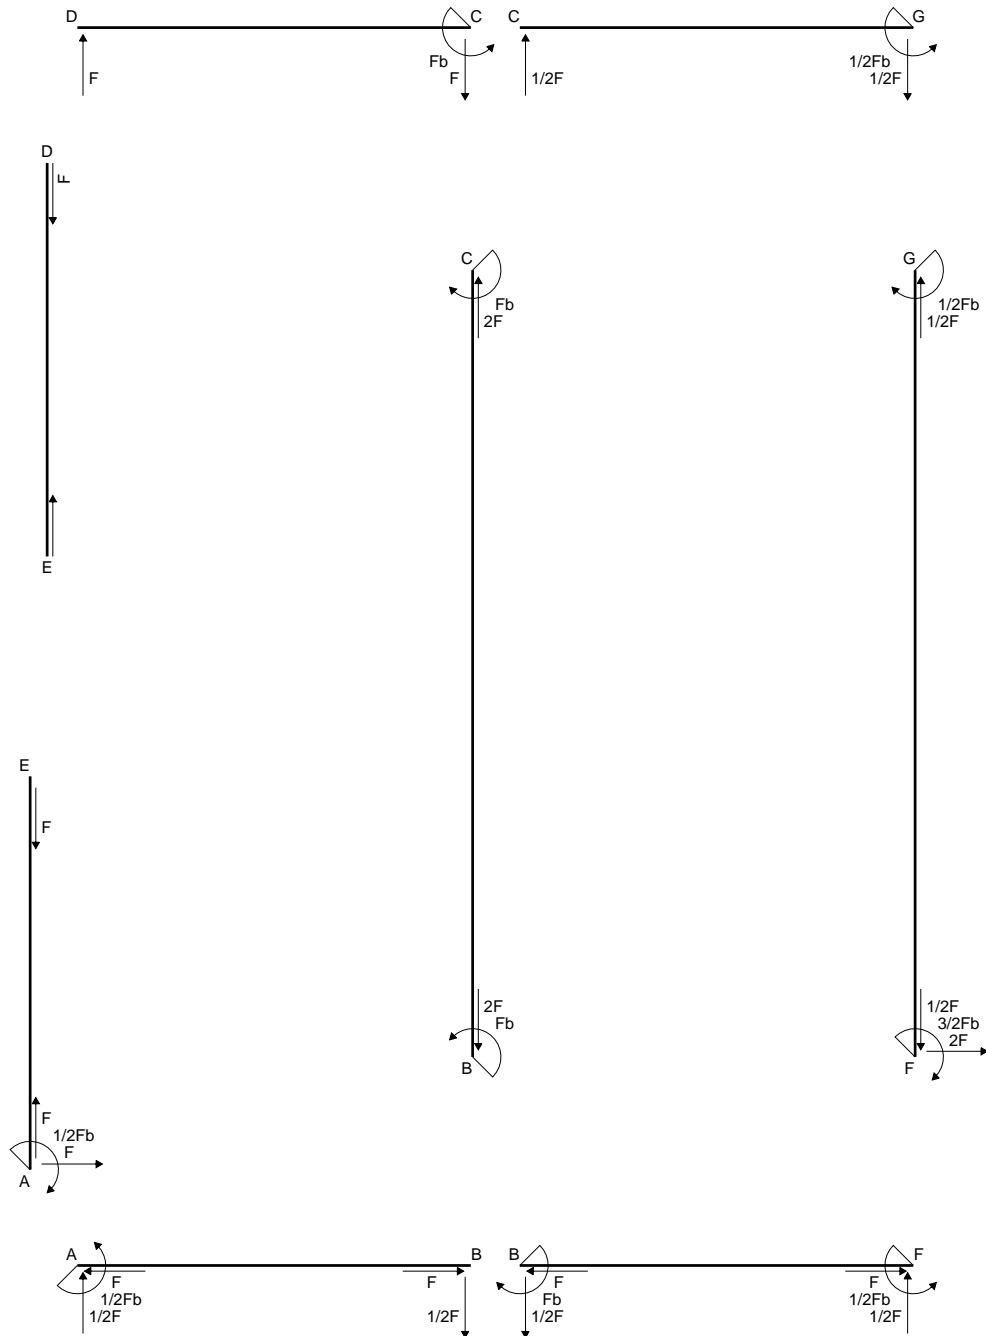

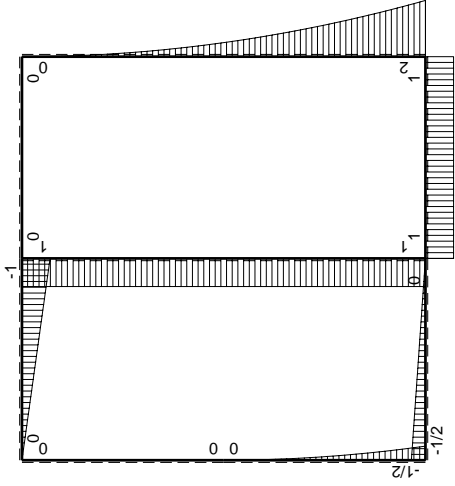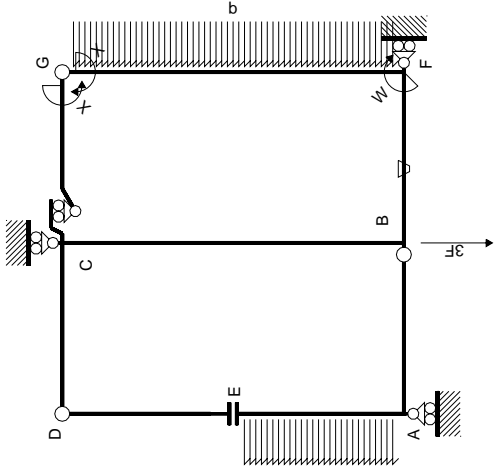

$M_0$  flessione da carichi assegnati

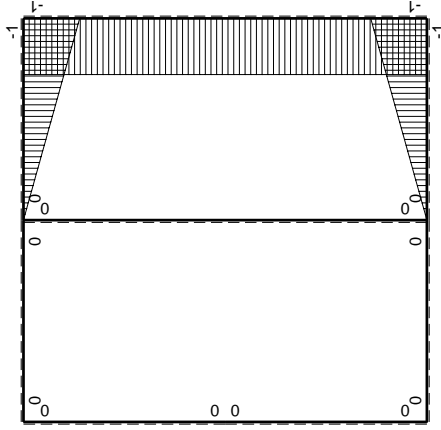

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M^0(x)$           | $\theta$ | $M_x M_0$            | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | $-1/2Fb+1/2Fx$     | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | $1/2Fx$            | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-Fb+Fx$           | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $Fx$               | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| ED b         | 0        | 0                  | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | $-1/2qx^2$         | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $Fb$               | $-Fb/EJ$ | $-Fx$                | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b         | $1-x/b$  | $-Fb$              | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                  | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                  | 0        | 0                    | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | $2Fb-2Fx+1/2qx^2$  | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b        | 1        | $-1/2qx^2$         | 0        | $-1/2Fx^2/b$         | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| CB 2b        | 0        | $Fb$               | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $-Fb$              | 0        | 0                    | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |                      |               |                  | $-4/3Fb^2/EJ$               | $8/3xb/EJ$           |
|              |          |                    |          |                      |               |                  | $1/2Fb$                     |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

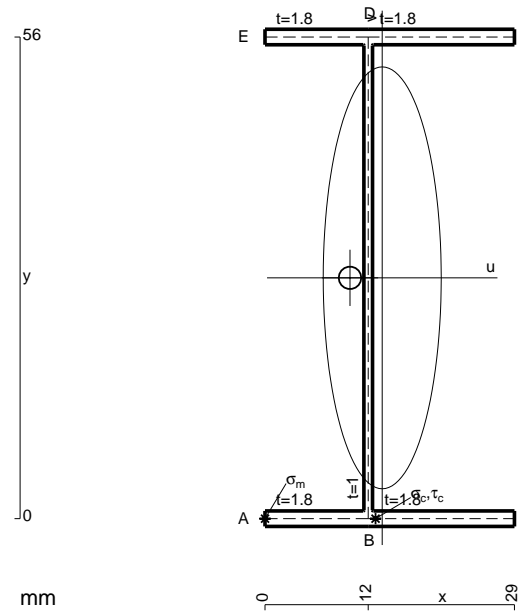

$$A = 160.4 \text{ mm}^2$$

$$J_u = 96484. \text{ mm}^4$$

$$J_v = 7545. \text{ mm}^4$$

$$J_t = 131.4 \text{ mm}^4$$

$$x_o = -3.748 \text{ mm}$$

$$x_g = 13.63 \text{ mm}$$

$$T_y = 1040. \text{ N}$$

$$M_x = -686400. \text{ Nmm}$$

$$u_m = -13.63 \text{ mm}$$

$$v_m = -28. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -199.2 \text{ N/mm}^2$$

$$x_c = 12. \text{ mm}$$

$$u_c = -1.627 \text{ mm}$$

$$v_c = -28. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -199.2 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 58.52 \text{ N/mm}^2$$





$$\tau_g = TS/tJ_u = 5.131 \text{ N/mm}^2$$


$$\tau_o = Tx_o t/J_t = 53.39 \text{ N/mm}^2$$

$$t_c = 1872. \text{ mm}$$


$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 223.5 \text{ N/mm}^2$$



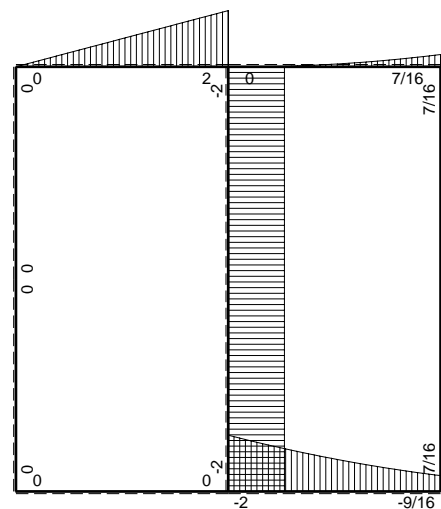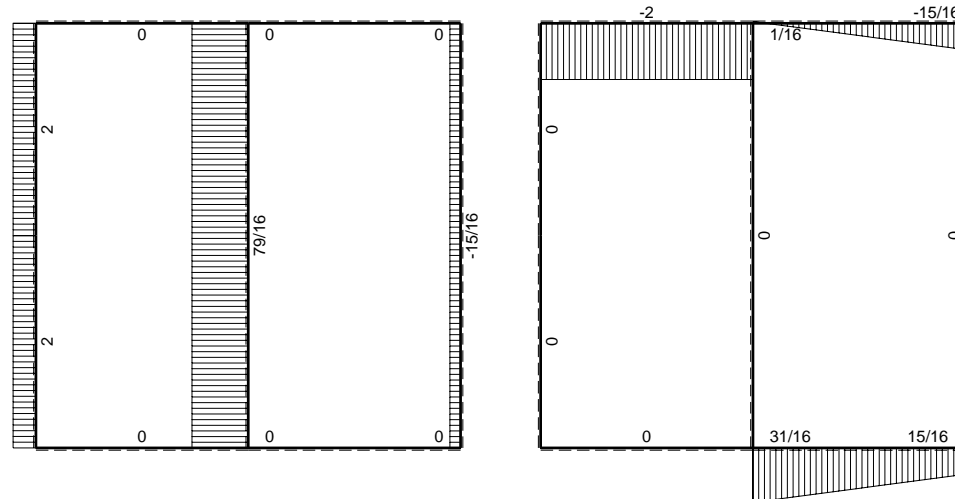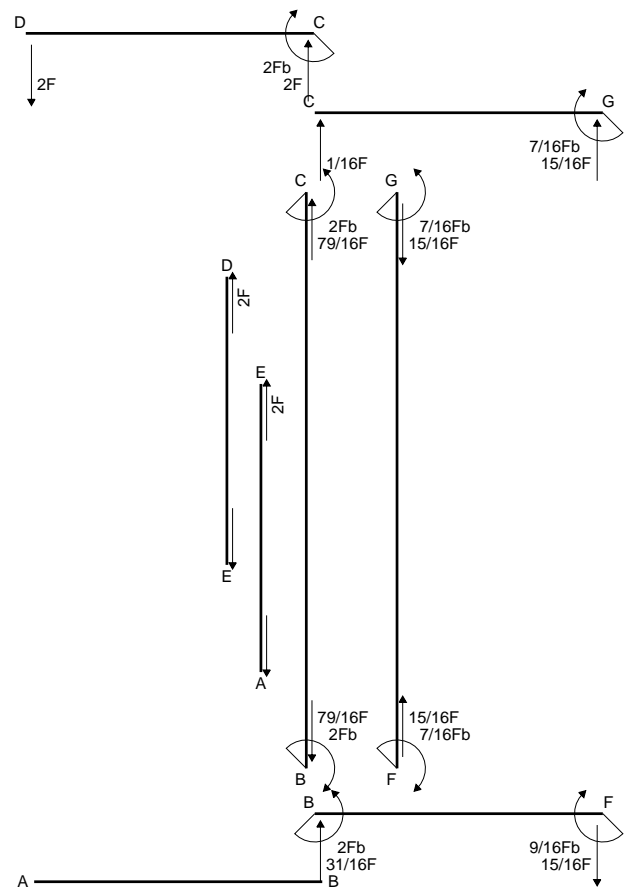


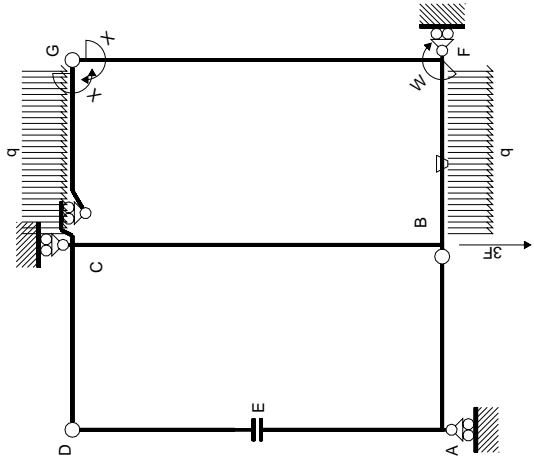

Schema di calcolo iperstatico

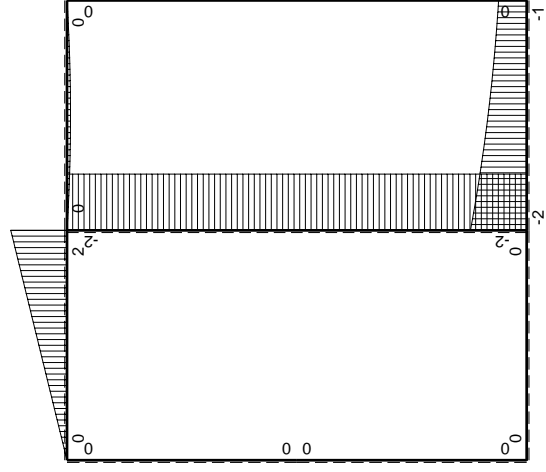

$M_0$  flessione da carichi assegnati

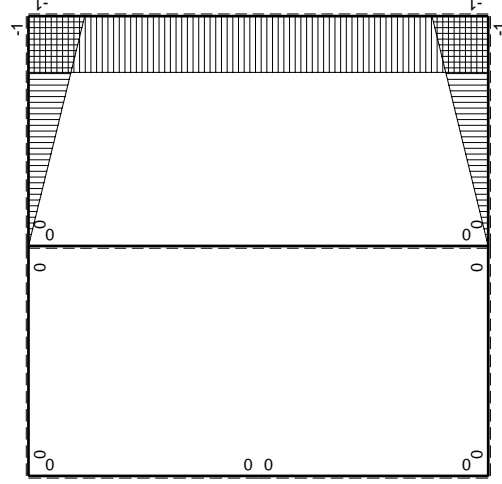

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M^x(x)$ | $M^0(x)$ | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$ | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EIdx$ | AB | BA | CD | DC | DE | ED | EA | AE | BF                     | FB                 | GC               | CG                       | FG                       | GF  | CB  | BC  | totali | iperstatica $X=W_{gc}$ |           |
|---------------|----------|----------|----------|-----------|--------------|-----------|---------------------------------|-----------------------|----|----|----|----|----|----|----|----|------------------------|--------------------|------------------|--------------------------|--------------------------|-----|-----|-----|--------|------------------------|-----------|
|               | 0        | 0        | 0        | 0         | 0            | 0         | $(5/8+1/2)Fb^2/EJ$              | $1/3xb/EJ$            | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | $-x/b$                 | $1-x/b$            | $-1+x/b$         | $x/b$                    | $-1$                     | $1$ | 0   | 0   | totali | $7/6Fb^2/EJ$           | $-7/16Fb$ |
|               | 0        | 0        | 0        | 0         | 0            | 0         | $(1/24+0)Fb^2/EJ$               | $1/3xb/EJ$            | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | $-1/2Fx+3/2Fx-1/2qx^2$ | $Fb+1/2Fx+1/2qx^2$ | $-1/2Fx+1/2qx^2$ | $1/2Fx-1/2qx^2$          | $0$                      | $0$ | $0$ | $0$ |        | $8/3xb/EJ$             |           |
|               | 0        | 0        | 0        | 0         | 0            | 0         | $x^2/b^2$                       | $1/3xb/EJ$            | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | $-Fb/EJ$               | $Fb/EJ$            | $0$              | $1/2Fx-Fx^2/b+1/2qx^3/b$ | $1/2Fx-Fx^2/b+1/2qx^3/b$ | $0$ | $0$ | $0$ |        |                        |           |
|               | 0        | 0        | 0        | 0         | 0            | 0         | $x^2/b^2$                       | $1/3xb/EJ$            | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | $Fb/EJ$                | $Fb/EJ-Fx/EJ$      | $1-2x/b+x^2/b^2$ | $1-2x/b+x^2/b^2$         | $1$                      | $1$ | $0$ | $0$ |        |                        |           |
|               | 0        | 0        | 0        | 0         | 0            | 0         | 0                               | $\int M_x M_x / EIdx$ | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0                      | 0                  | 0                | 0                        | 0                        | 0   | 0   | 0   |        |                        |           |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

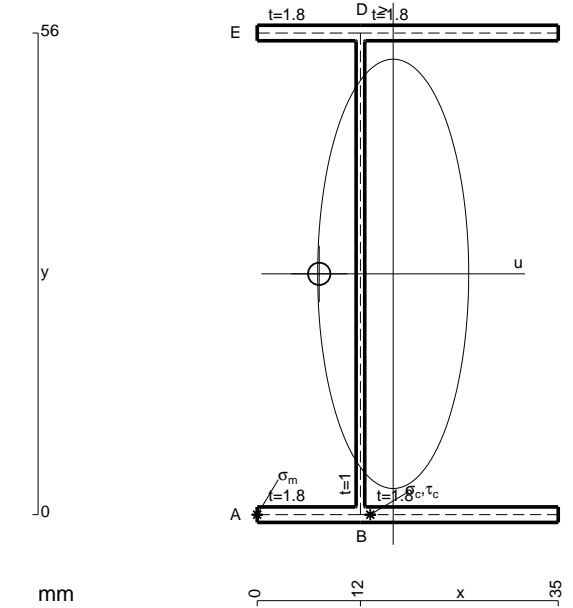

- A = 182. mm<sup>2</sup>
- J<sub>u</sub> = 113419. mm<sup>4</sup>
- J<sub>v</sub> = 14035. mm<sup>4</sup>
- J<sub>t</sub> = 154.7 mm<sup>4</sup>
- x<sub>o</sub> = -8.598 mm
- x<sub>g</sub> = 15.81 mm
- T<sub>y</sub> = -1200. N
- M<sub>x</sub> = 840000. Nmm
- u<sub>m</sub> = -15.81 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 207.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- u<sub>c</sub> = -3.808 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 207.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 126.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS<sub>t</sub>/J<sub>u</sub> = 6.814 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t / J<sub>t</sub> = 120. N/mm<sup>2</sup>
- t<sub>c</sub> = 1080. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 302.1 N/mm<sup>2</sup>






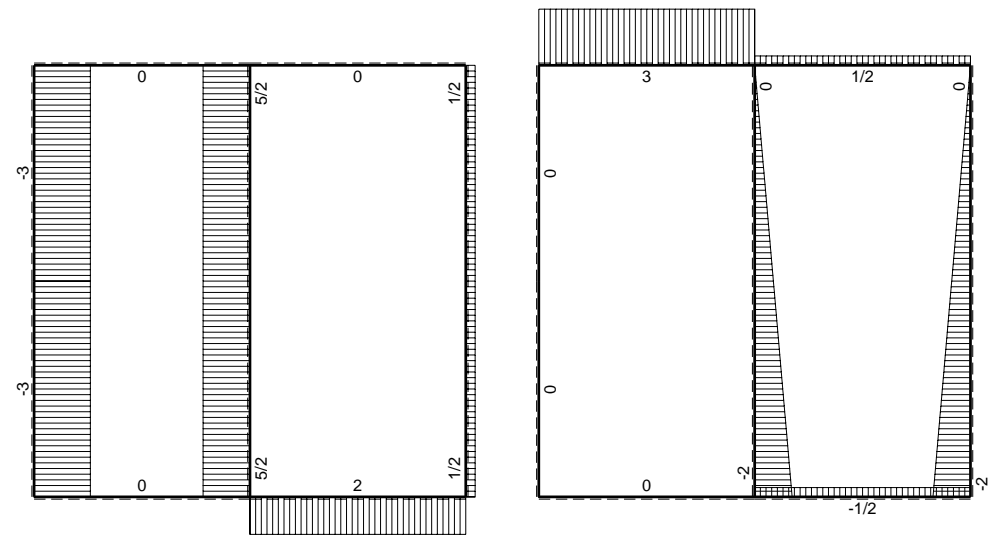
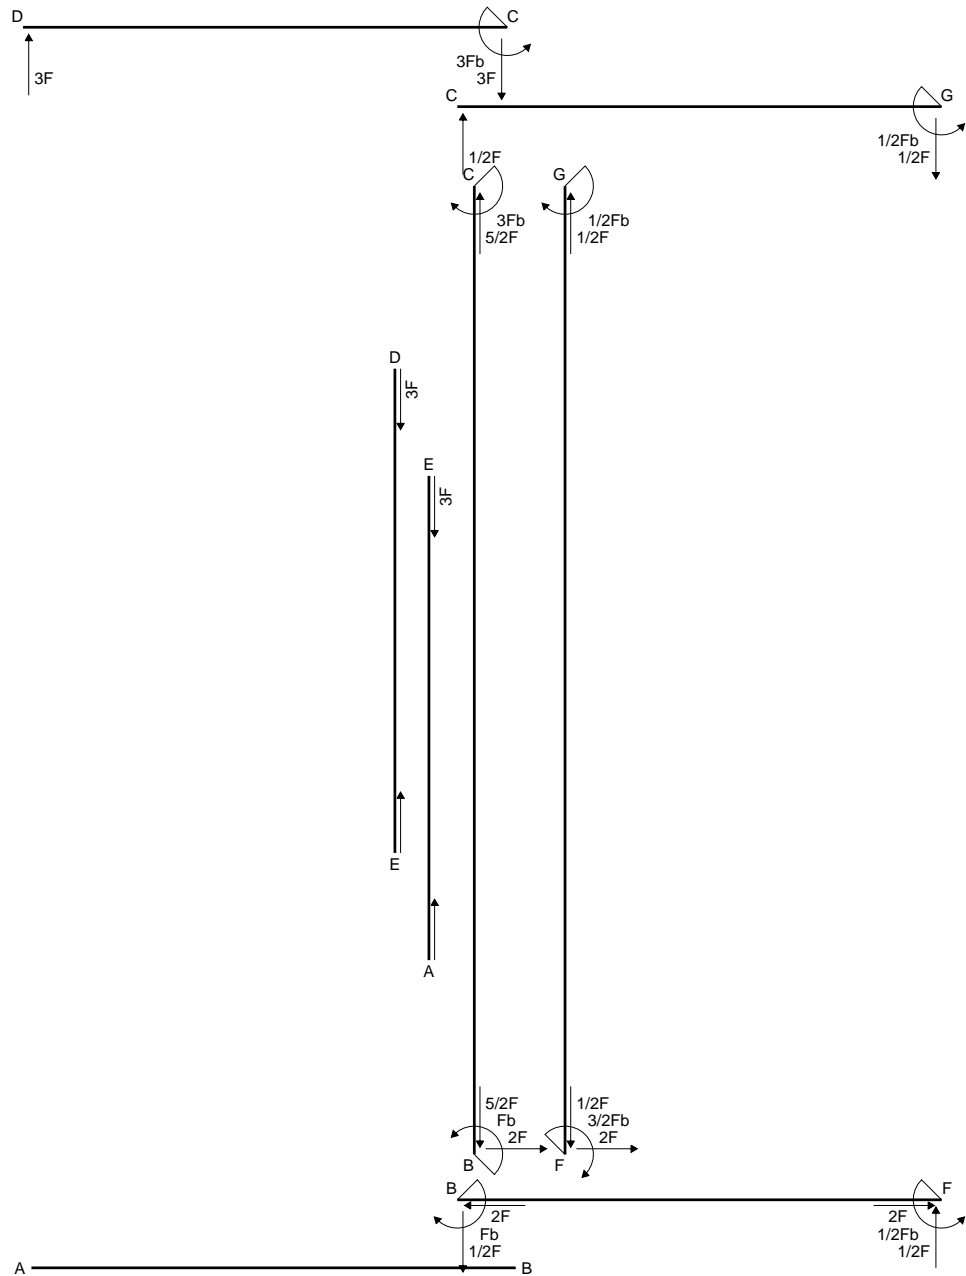


← ⊕ → F


↑ ⊕ ↓ F

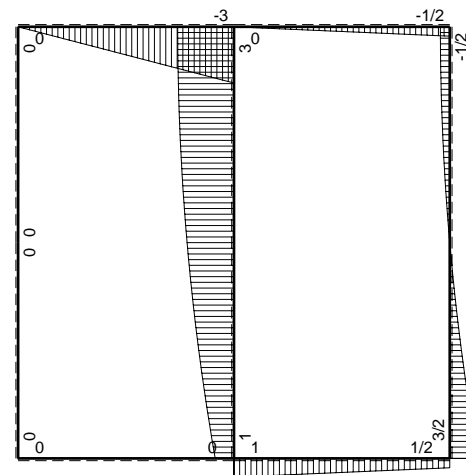

⊕ ⊖ F<sub>b</sub>

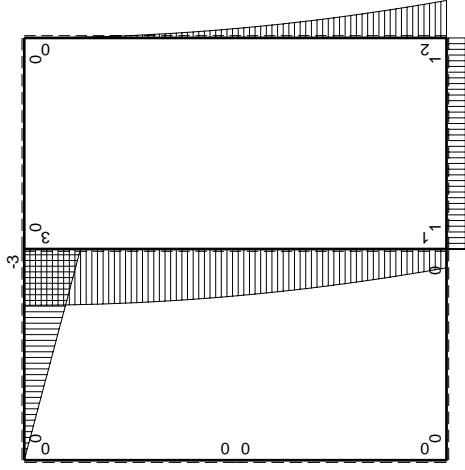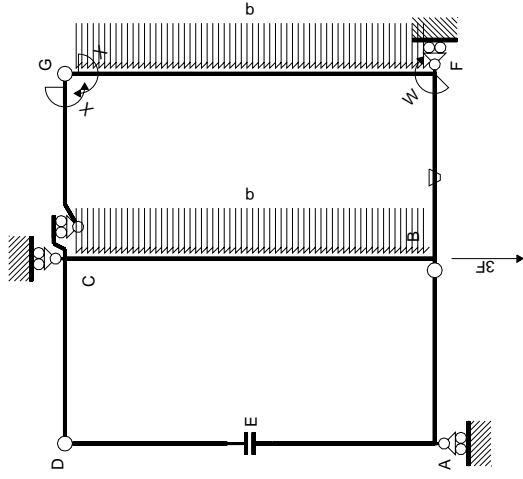

$M_0$  flessione da carichi assegnati

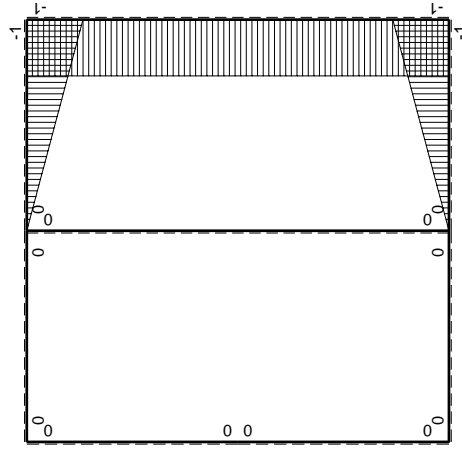

$M_x$  flessione da iperstatica X=1

| ←      | $M^x(x)$ | $M^0(x)$          | $\theta$ | $M^x M_0$            | $M^x \theta$ | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / EJ dx$ | iperstatica X=W <sub>gc</sub> |            |
|--------|----------|-------------------|----------|----------------------|--------------|------------------|---------------------------------|------------------------|-------------------------------|------------|
|        |          |                   |          |                      |              |                  |                                 |                        | totali                        |            |
| AB b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| BA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| CD b   | 0        | -3Fb+3Fx          | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| DC b   | 0        | 3Fx               | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| DE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| ED b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| EA b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| AE b   | 0        | 0                 | 0        | 0                    | 0            | 0                | 0                               | 0                      | 0                             | 0          |
| BF b   | -x/b     | Fb                | -Fb/EJ   | -Fx                  | Fx/EJ        | $x^2/b^2$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / EJ dx$ | $(-1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$ |
| FB b   | 1-x/b    | -Fb               | Fb/EJ    | -Fb+Fx               | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ |                                 |                        | $1/3xb/EJ$                    |            |
| GC b   | -1+x/b   | 0                 | 0        | 0                    | 0            | $1-2x/b+x^2/b^2$ |                                 |                        | 0+0                           |            |
| CG b   | x/b      | 0                 | 0        | 0                    | 0            | $x^2/b^2$        |                                 |                        | 0+0                           |            |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$ | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0            | 1                |                                 |                        | $(-4/3+0)Fb^2/EJ$             | $2xb/EJ$   |
| GF 2b  | 1        | $-1/2qx^2$        | 0        | $-1/2Fx^2/b$         | 0            | 1                |                                 |                        |                               |            |
| CB 2b  | 0        | $3Fb-1/2qx^2$     | 0        | 0                    | 0            | 0                |                                 |                        | 0+0                           |            |
| BC 2b  | 0        | $-Fb-2Fx+1/2qx^2$ | 0        | 0                    | 0            | 0                |                                 |                        |                               |            |
| totali |          |                   |          |                      |              |                  |                                 |                        | $-4/3Fb^2/EJ$                 | $8/3xb/EJ$ |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

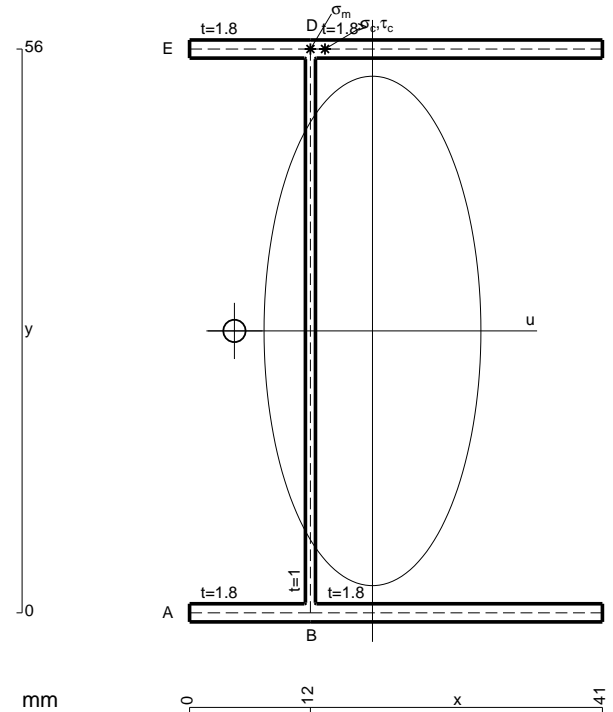


- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 23610. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>o</sub> = -13.71 mm
- x<sub>g</sub> = 18.16 mm
- T<sub>y</sub> = 1380. N
- M<sub>x</sub> = -1021200. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -6.162 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = -M<sub>v</sub>/J<sub>u</sub> = 219.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -6.162 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = -M<sub>v</sub>/J<sub>u</sub> = 219.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 199.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = T<sub>S</sub>/t<sub>J<sub>u</sub></sub> = 8.596 N/mm<sup>2</sup>
- τ<sub>o</sub> = T<sub>x<sub>o</sub></sub>/J<sub>t</sub> = 191.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 828. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 409.7 N/mm<sup>2</sup>



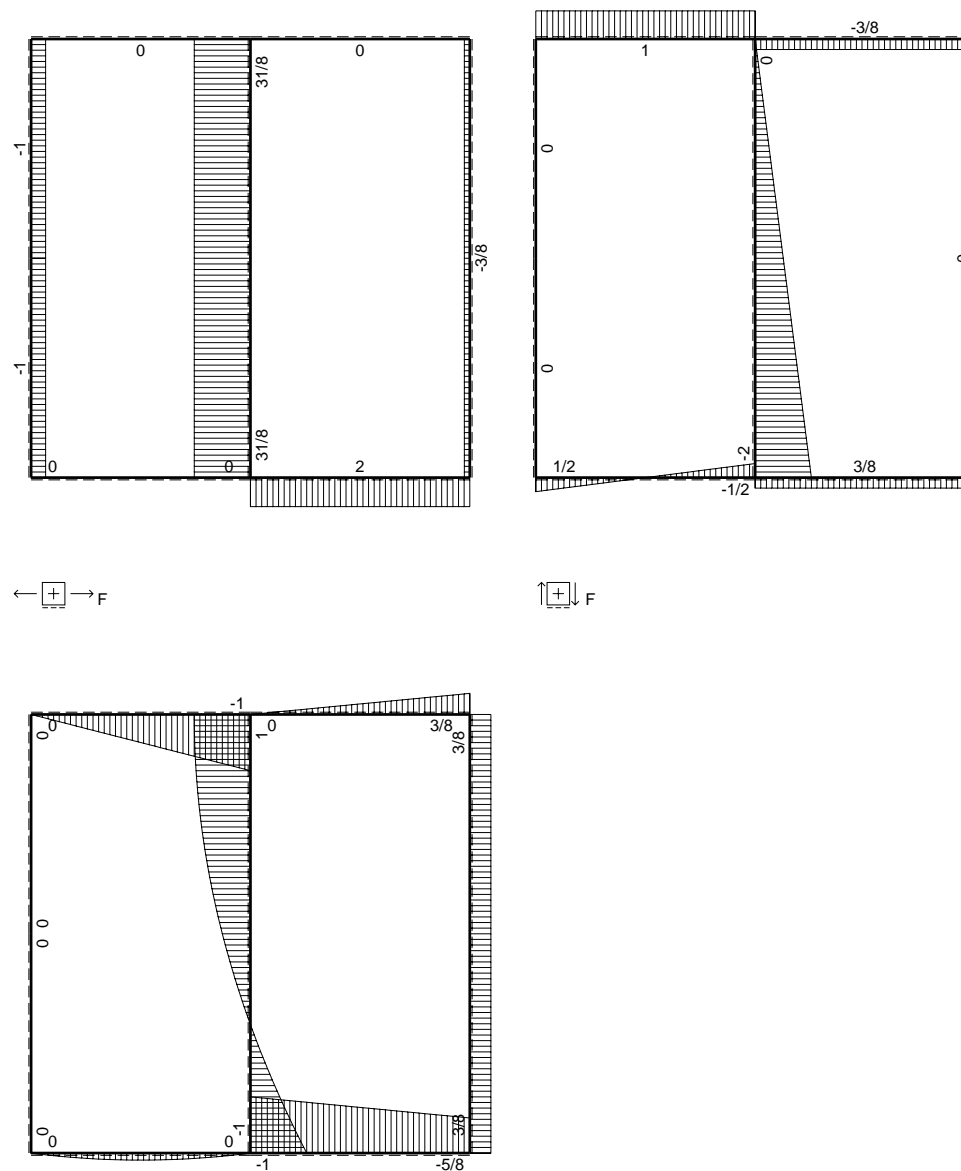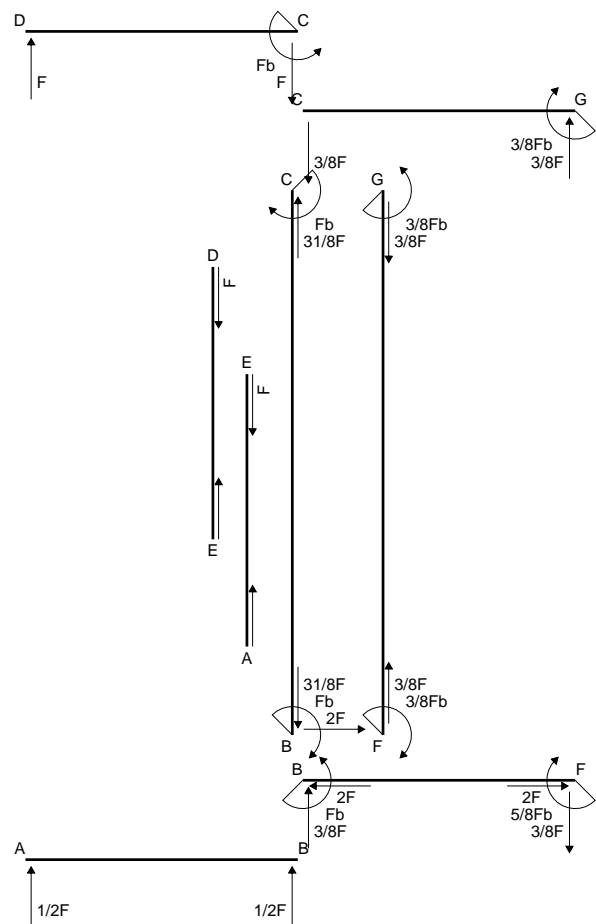


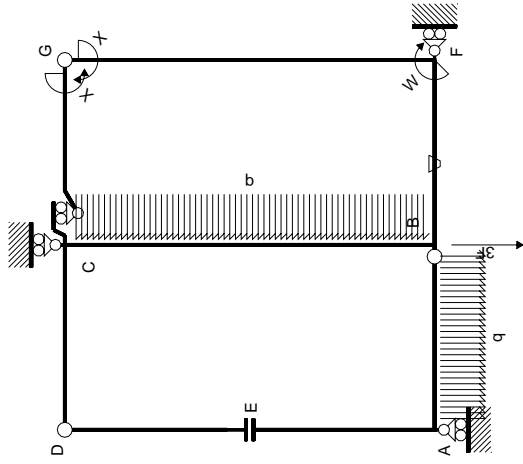

Schema di calcolo iperstatico

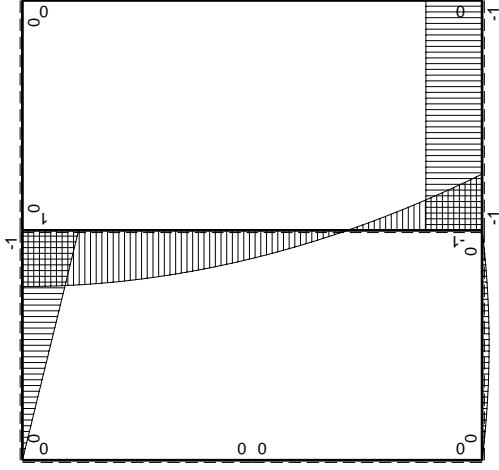

$M_0$  flessione da carichi assegnati

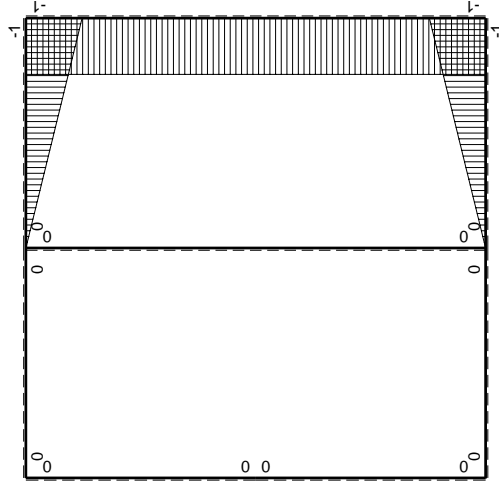

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| ED b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

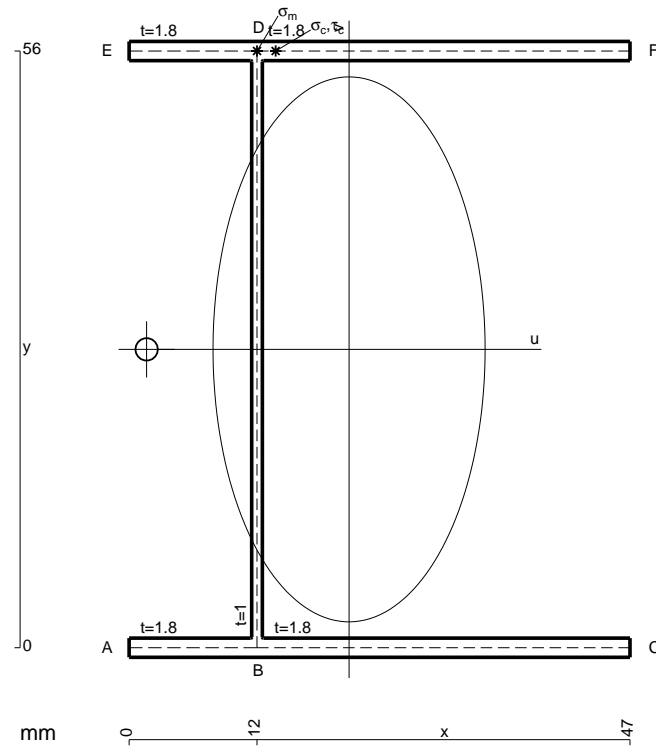


- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 36711. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- x<sub>o</sub> = -19. mm
- x<sub>g</sub> = 20.64 mm
- N = 5309. N
- T<sub>y</sub> = -2740. N
- M<sub>x</sub> = -1082300. Nmm
- x<sub>m</sub> = 12. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -8.64 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 12. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -8.64 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 483.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 18.23 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 465.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 2466. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 868.2 N/mm<sup>2</sup>






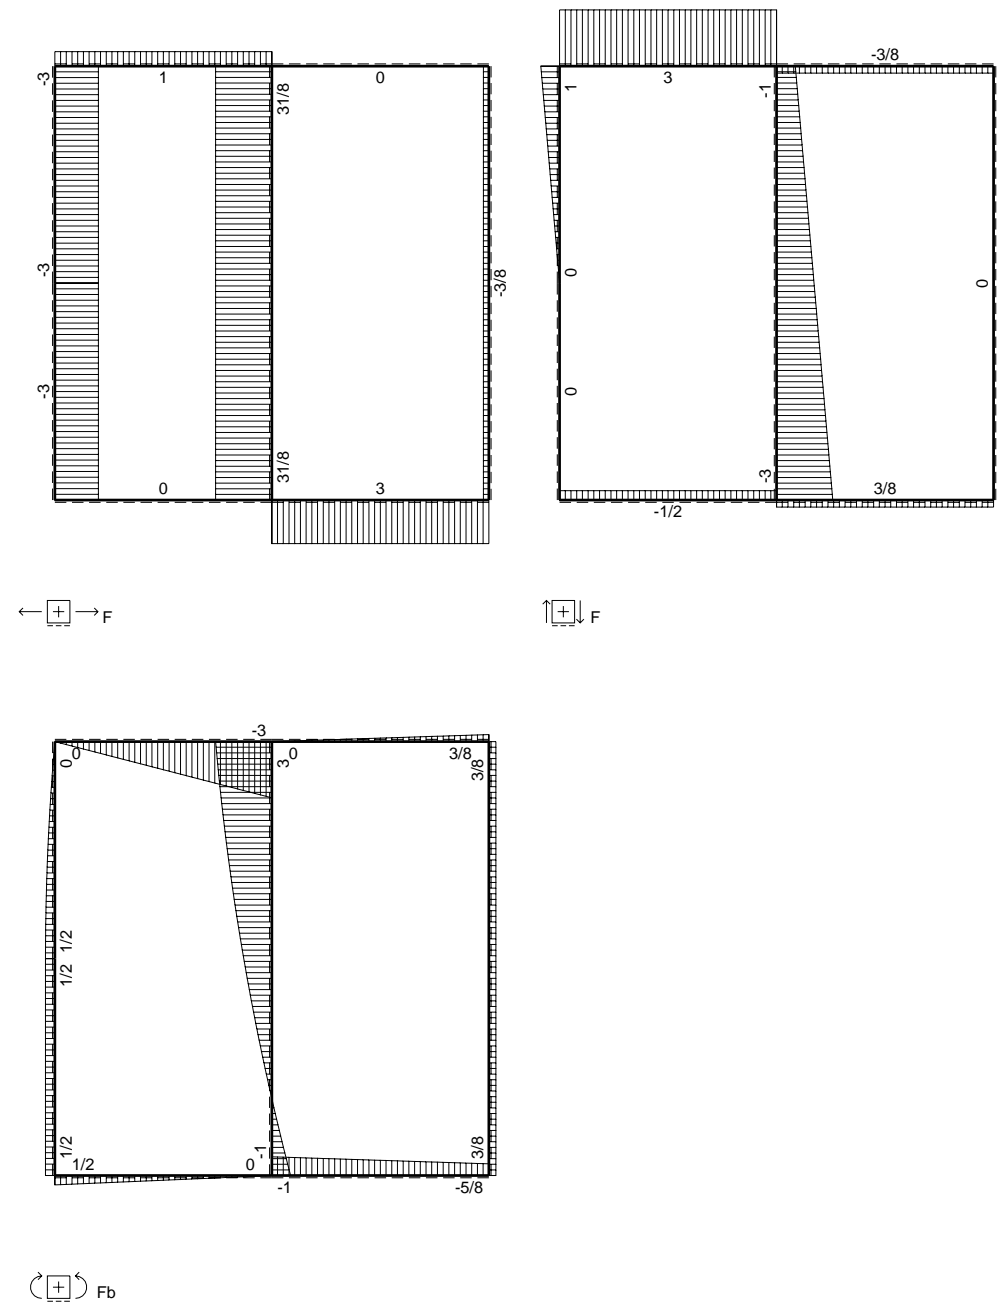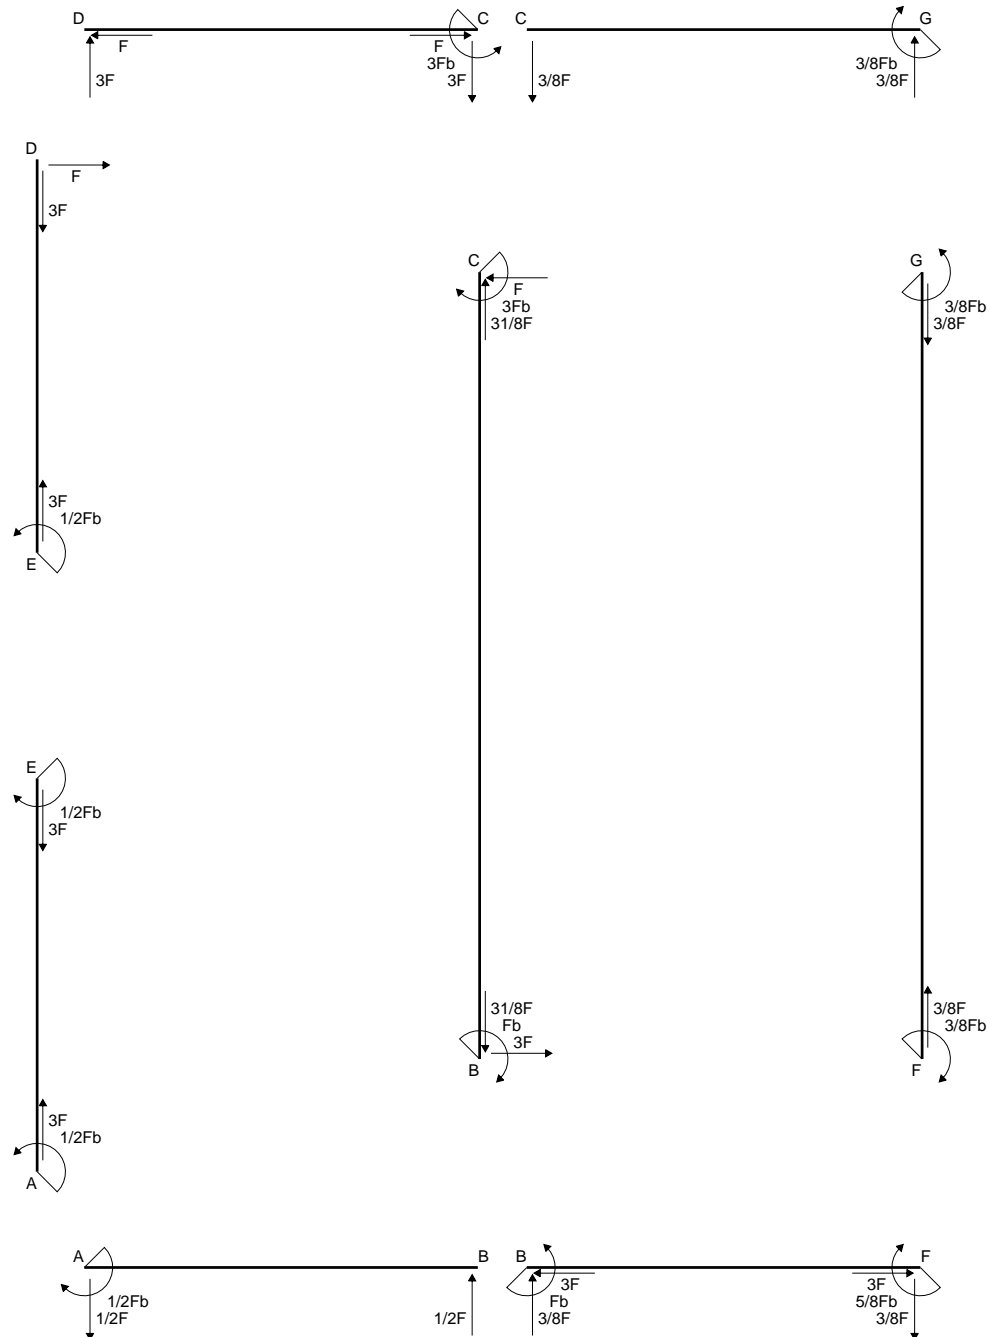

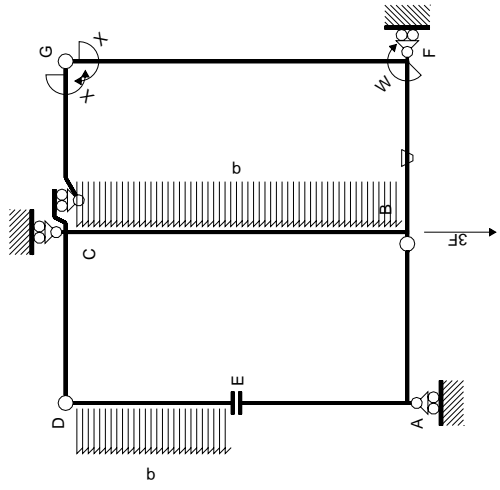

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

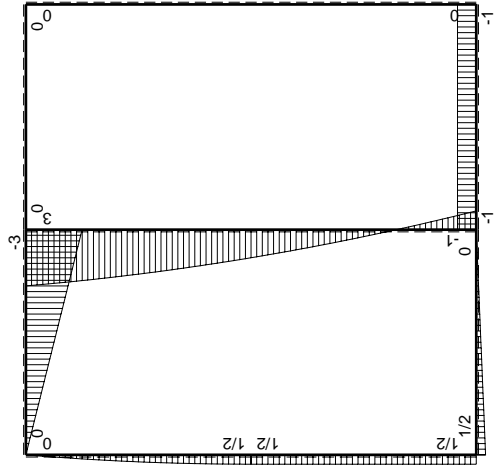

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$              | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$       | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|-----------------------|----------|-----------|-----------------|-----------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2 Fb - 1/2 Fx$     | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BA b          | 0        | $-1/2 Fx$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$          | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DC b          | 0        | $3Fx$                 | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| DE b          | 0        | $Fx - 1/2 qx^2$       | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| ED b          | 0        | $-1/2 Fb + 1/2 qx^2$  | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| EA b          | 0        | $1/2 Fb$              | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| AE b          | 0        | $-1/2 Fb$             | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fb/EJ - Fx/EJ$ | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 x b^3/EJ$         |
| FB b          | $1-x/b$  | $Fb$                  | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$              | $1/3 x b^3/EJ$         |
| GC b          | $-1+x/b$ | 0                     | 0        | 0         | 0               | 0               | $x^2/b^2$                       | $1/3 x b^3/EJ$         |
| CG b          | $x/b$    | 0                     | 0        | 0         | 0               | 0               | $1-2x/b + x^2/b^2$              | $1/3 x b^3/EJ$         |
| FG 2b         | -1       | 0                     | 0        | 0         | 0               | 0               | 1                               | $2x b^2/EJ$            |
| GF 2b         | 1        | 0                     | 0        | 0         | 0               | 0               | 1                               | $2x b^2/EJ$            |
| CB 2b         | 0        | $3Fb - Fx - 1/2 qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 3Fx + 1/2 qx^2$ | 0        | 0         | 0               | 0               | 0+0                             | 0                      |
| totali        |          |                       |          |           |                 |                 |                                 | $8/3 x b^3/EJ$         |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

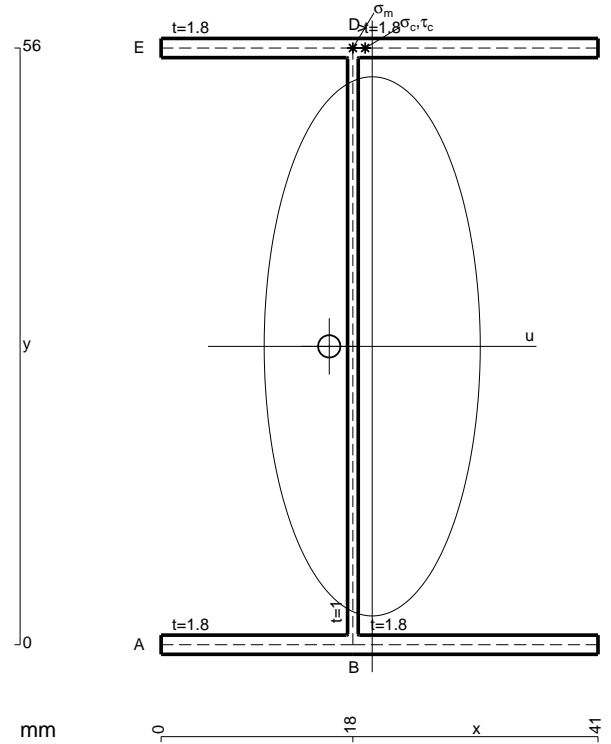


- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 20930. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>o</sub> = -4.032 mm
- x<sub>g</sub> = 19.81 mm
- N = 440. N
- T<sub>y</sub> = 1320. N
- M<sub>x</sub> = -1095600. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -1.812 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 237.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -1.812 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 237.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 60.32 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.521 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 53.79 N/mm<sup>2</sup>
- t<sub>c</sub> = 792. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 259.5 N/mm<sup>2</sup>



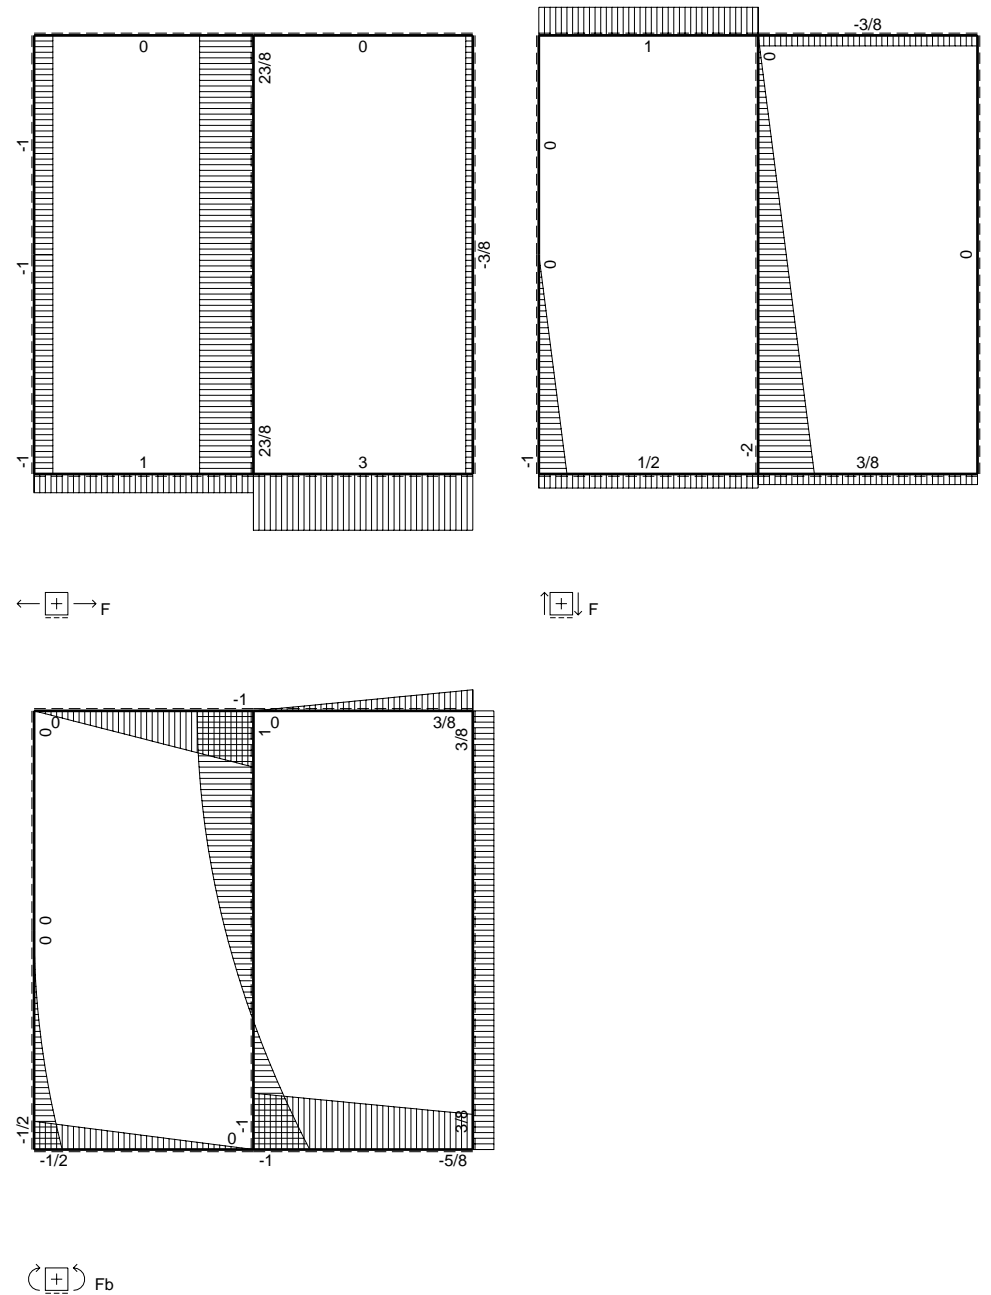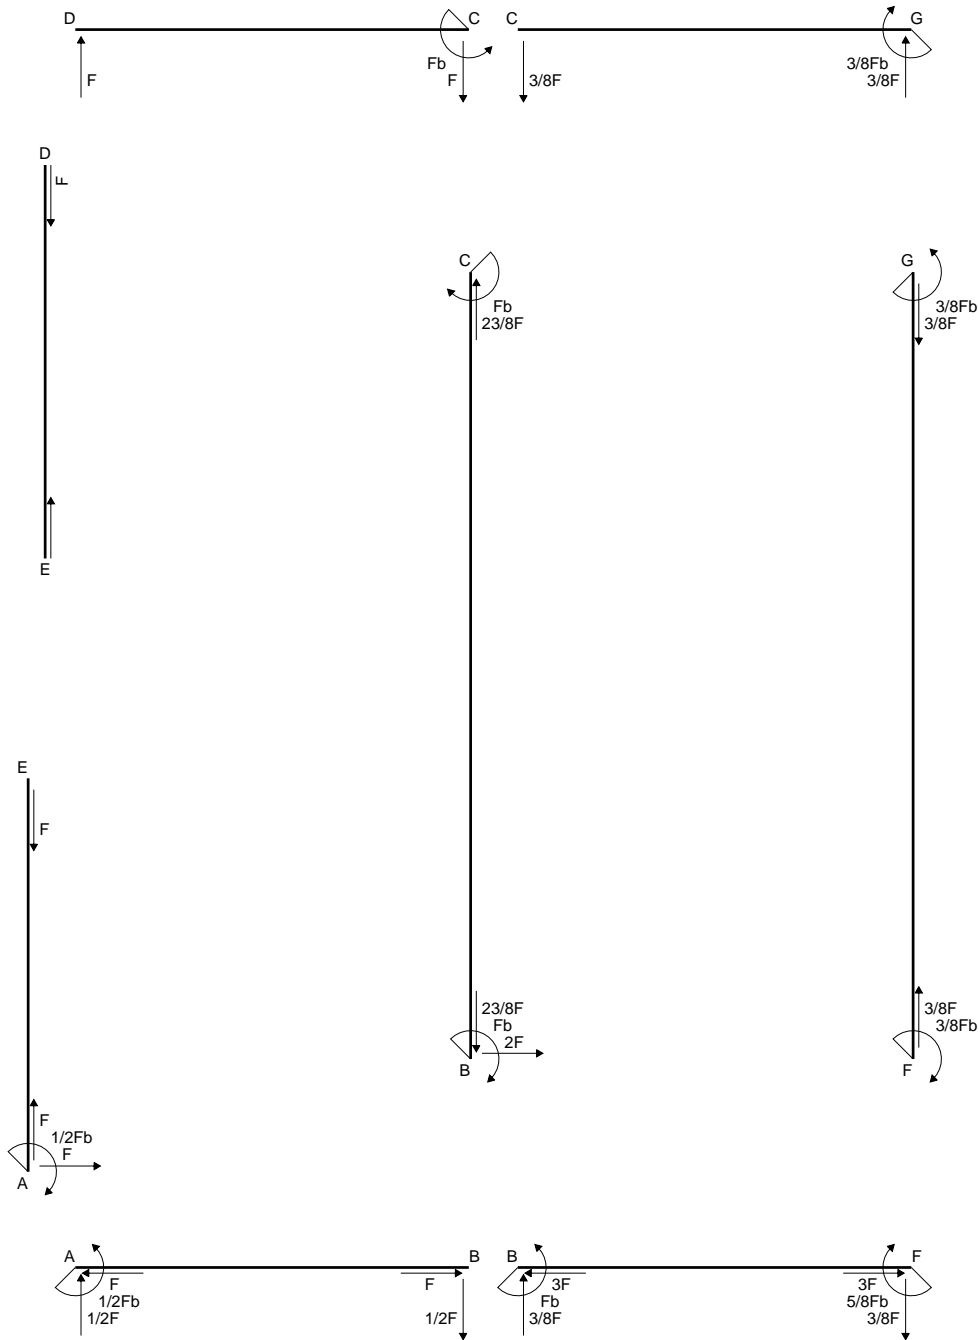


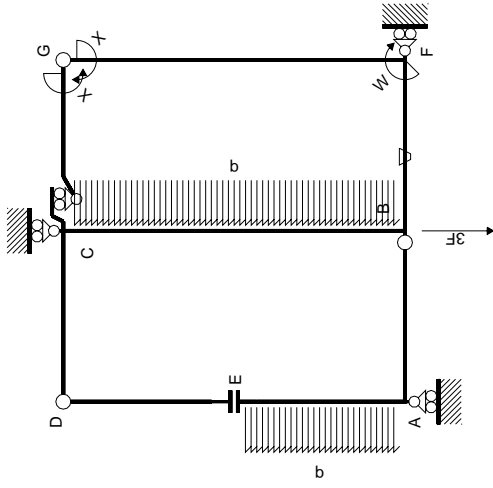

Schema di calcolo iperstatico

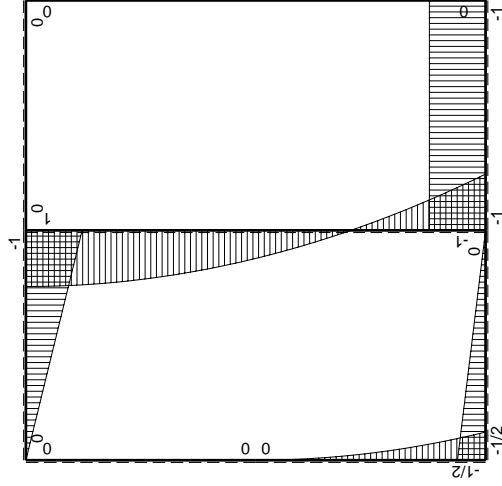

$M_0$  flessione da carichi assegnati

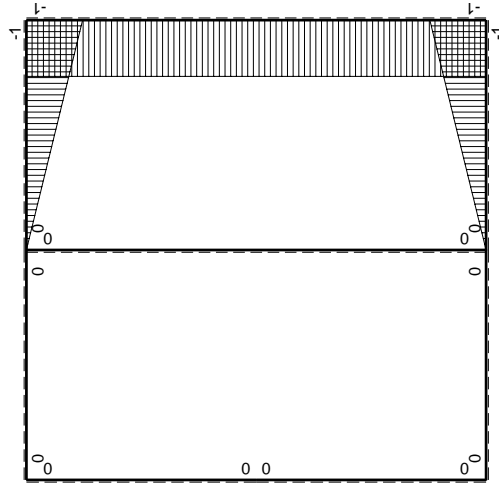

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $-1/2Fb+1/2Fx$     | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BA b          | 0        | $1/2Fx$            | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb+Fx$           | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$               | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| EA b          | 0        | $-1/2qx^2$         | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| AE b          | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                             | 0                      |
| totali        |          |                    |          |           |               |                  |                                 | $8/3xb/EJ$             |
|               |          |                    |          |           |               |                  |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$





$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

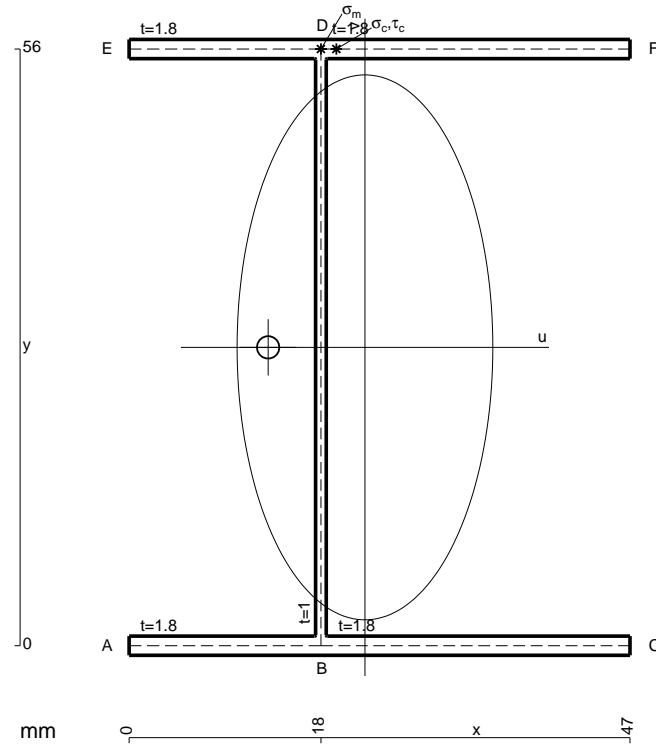

- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 32420. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- x<sub>o</sub> = -9.086 mm
- x<sub>g</sub> = 22.13 mm
- N = 5951. N
- T<sub>y</sub> = -4140. N
- M<sub>x</sub> = -910800. Nmm
- x<sub>m</sub> = 18. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = -4.132 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 199.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = -4.132 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 199.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 359. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 22.82 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> t/J<sub>t</sub> = 336.2 N/mm<sup>2</sup>
- t<sub>c</sub> = 3726. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 653.1 N/mm<sup>2</sup>





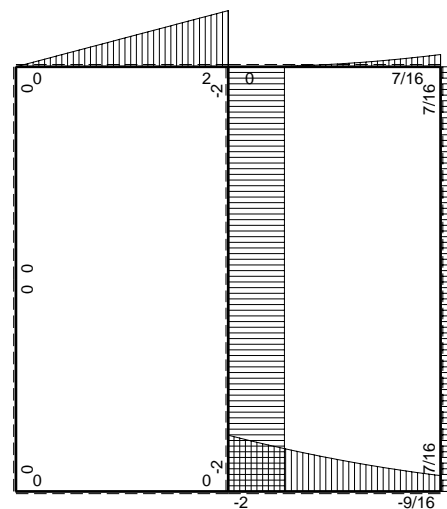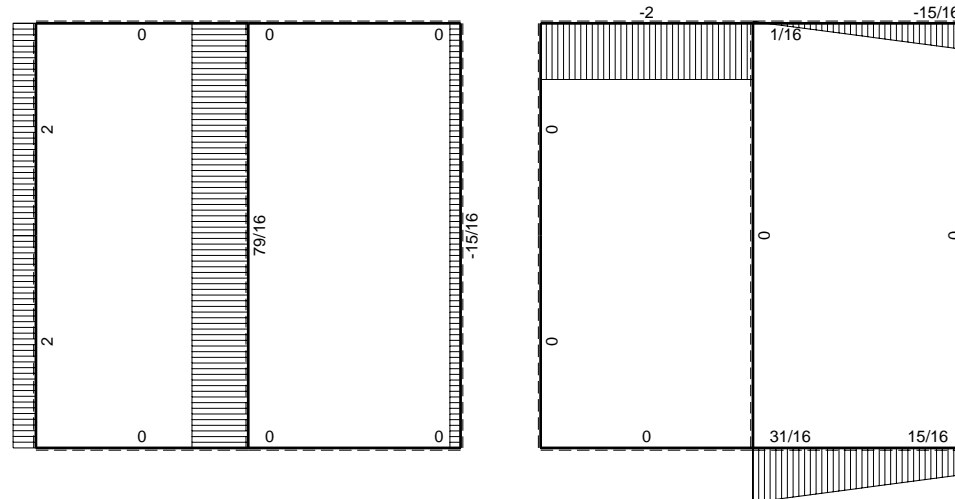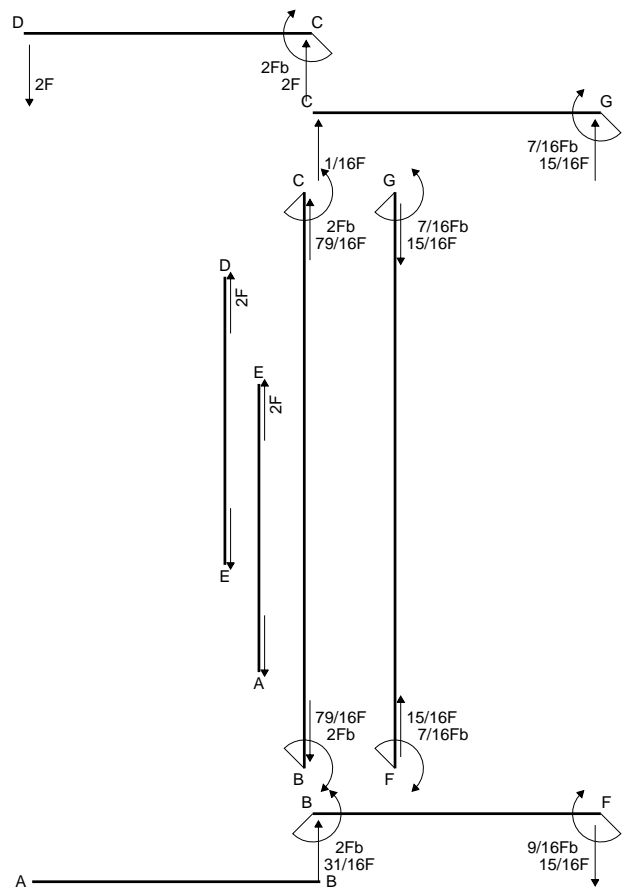



$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (2x/b - 3/2 x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (x/b) \theta dx$$

$$= [x^2/b - 1/2 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b + 1/8 b) Fb 1/EJ + (1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - 1/2 x/b - 1/2 x^3/b^3) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [x - 1/4 x^2/b - 1/8 x^4/b^3]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/4 b - 1/8 b) Fb 1/EJ + (-b + 1/2 b) \theta = 9/8 Fb^2/EJ$$

$$L_{GC}^{x_0} = \int_0^b (1/2 x/b - x^2/b^2 + 1/2 x^3/b^3) Fb 1/EJ dx = [1/4 x^2/b - 1/3 x^3/b^2 + 1/8 x^4/b^3]_0^b Fb 1/EJ$$

$$= (1/4 b - 1/3 b + 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$






$$L_{CG}^{x_0} = \int_0^b (1/2 x^2/b^2 - 1/2 x^3/b^3) Fb 1/EJ dx = [1/6 x^3/b^2 - 1/8 x^4/b^3]_0^b Fb 1/EJ$$



$$= (1/6 b - 1/8 b) Fb 1/EJ = 1/24 Fb^2/EJ$$

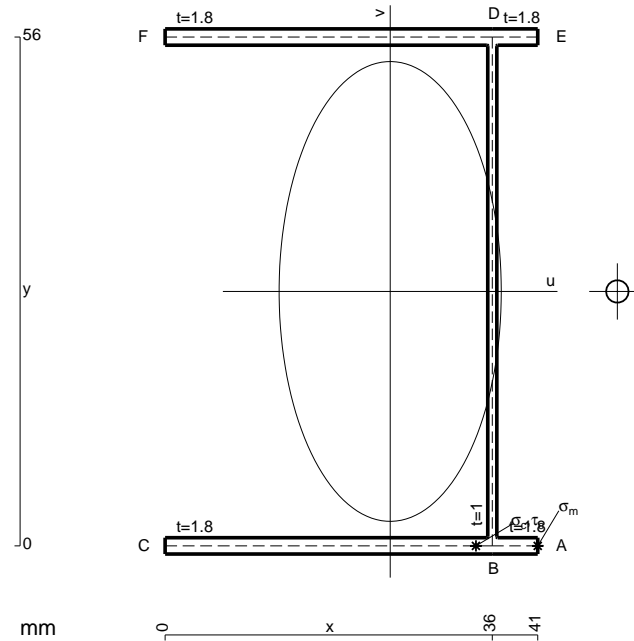


- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 30430. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>o</sub> = 25. mm
- x<sub>g</sub> = 24.76 mm
- T<sub>y</sub> = -2020. N
- M<sub>x</sub> = 969600. Nmm
- x<sub>m</sub> = 41. mm
- u<sub>m</sub> = 16.24 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = 208.3 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- u<sub>c</sub> = 11.24 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = 208.3 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 526. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.62 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 510.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 1818. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 934.6 N/mm<sup>2</sup>



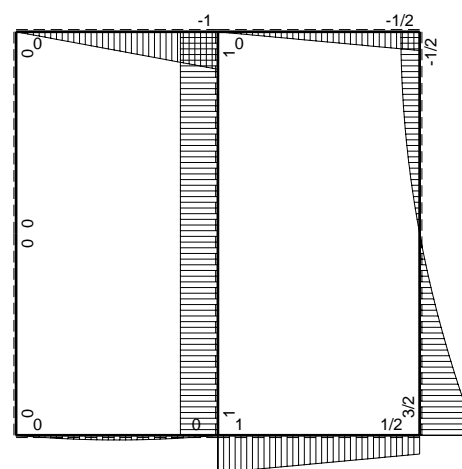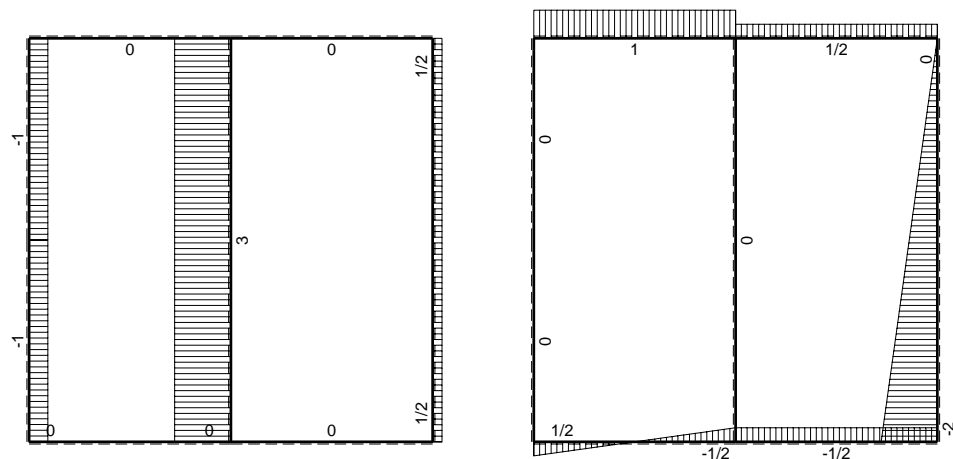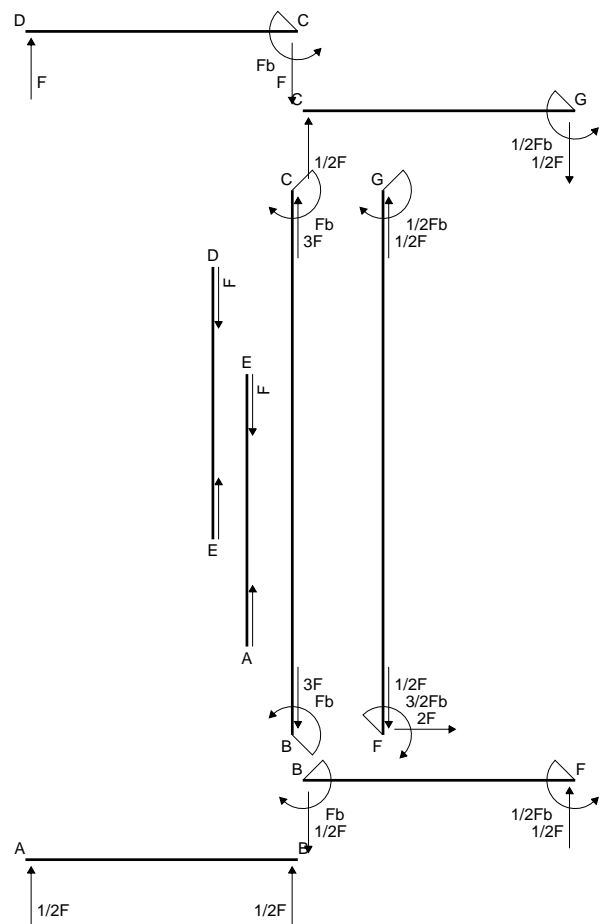

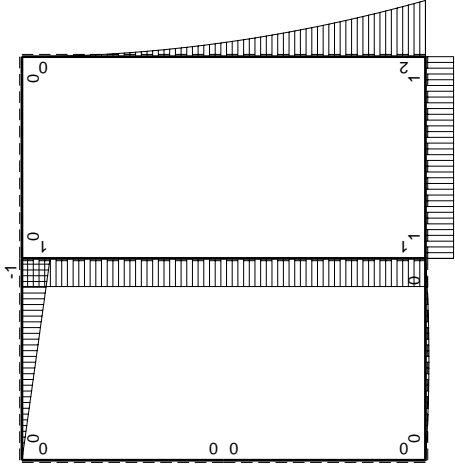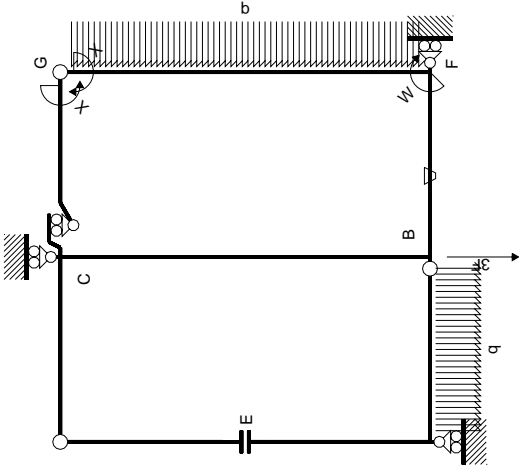

$M_0$  flessione da carichi assegnati

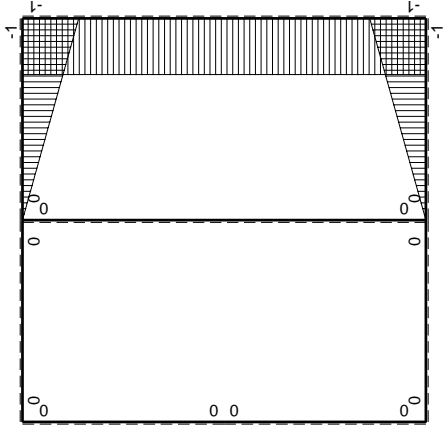

$M_x$  flessione da iperstatica X=1

Quadro contributi PLV per iperstatica X=W<sub>gc</sub>

| ←      | M <sup>0</sup> (x) | θ     | M <sup>x</sup> M <sub>0</sub> | M <sup>x</sup> θ | M <sup>x</sup> M <sub>x</sub> | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJdx$ |
|--------|--------------------|-------|-------------------------------|------------------|-------------------------------|-----------------------------|---------------------|
| AB b   | $1/2Fx-1/2qx^2$    | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BA b   | $-1/2Fx+1/2qx^2$   | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| CD b   | -b+Fx              | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| DC b   | Fx                 | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| DE b   | 0                  | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| ED b   | 0                  | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| EA b   | 0                  | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| AE b   | 0                  | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BF b   | -x/b               | -b/EJ | -Fx/EJ                        | Fx/EJ            | $x^2/b^2$                     | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          |
| FB b   | 1-x/b              | Fb/EJ | -b+Fx                         | Fb/EJ-Fx/EJ      | $1-2x/b+x^2/b^2$              | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$          |
| GC b   | -1+x/b             | 0     | 0                             | 0                | $1-2x/b+x^2/b^2$              | 0+0                         | $1/3xb/EJ$          |
| CG b   | x/b                | 0     | 0                             | 0                | $x^2/b^2$                     | 0+0                         | $1/3xb/EJ$          |
| FG 2b  | $-1/2Fx+1/2qx^2$   | 0     | $-2Fb+2Fx-1/2Fx^2/b$          | 0                | 1                             | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$            |
| GF 2b  | $-1/2qx^2$         | 0     | $-1/2Fx^2/b$                  | 0                | 1                             | 0+0                         | 0                   |
| CB 2b  | Fb                 | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| BC 2b  | -Fb                | 0     | 0                             | 0                | 0                             | 0+0                         | 0                   |
| totali |                    |       |                               |                  |                               | $-4/3Fb^2/EJ$               | $8/3xb/EJ$          |

iperstatica X=W<sub>gc</sub>

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$






$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

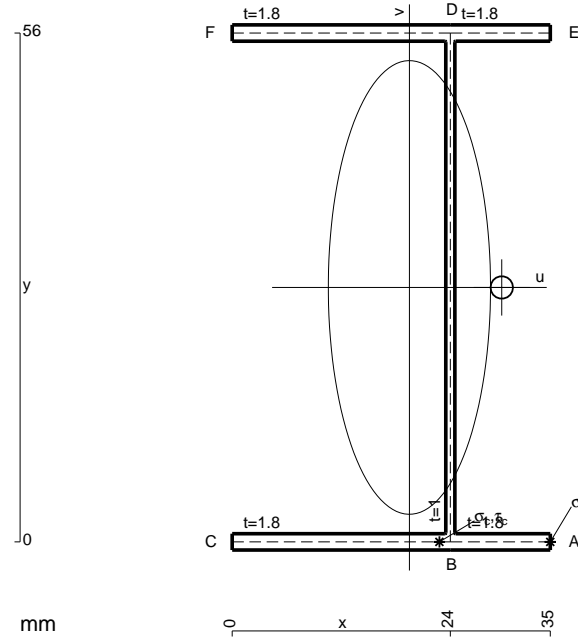


- A = 182. mm<sup>2</sup>
- J<sub>u</sub> = 113419. mm<sup>4</sup>
- J<sub>v</sub> = 14501. mm<sup>4</sup>
- J<sub>t</sub> = 154.7 mm<sup>4</sup>
- x<sub>o</sub> = 10.16 mm
- x<sub>g</sub> = 19.5 mm
- T<sub>y</sub> = 1710. N
- M<sub>x</sub> = -889200. Nmm
- x<sub>m</sub> = 35. mm
- u<sub>m</sub> = 15.5 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -219.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 4.5 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -219.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 212.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.13 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 202.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 3078. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 428.2 N/mm<sup>2</sup>






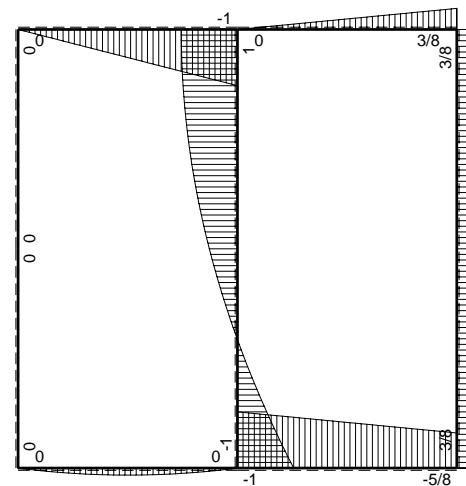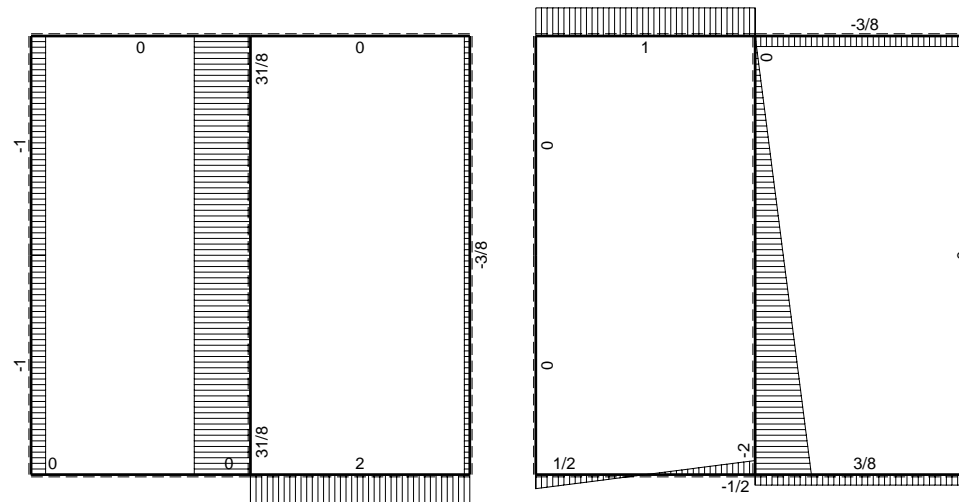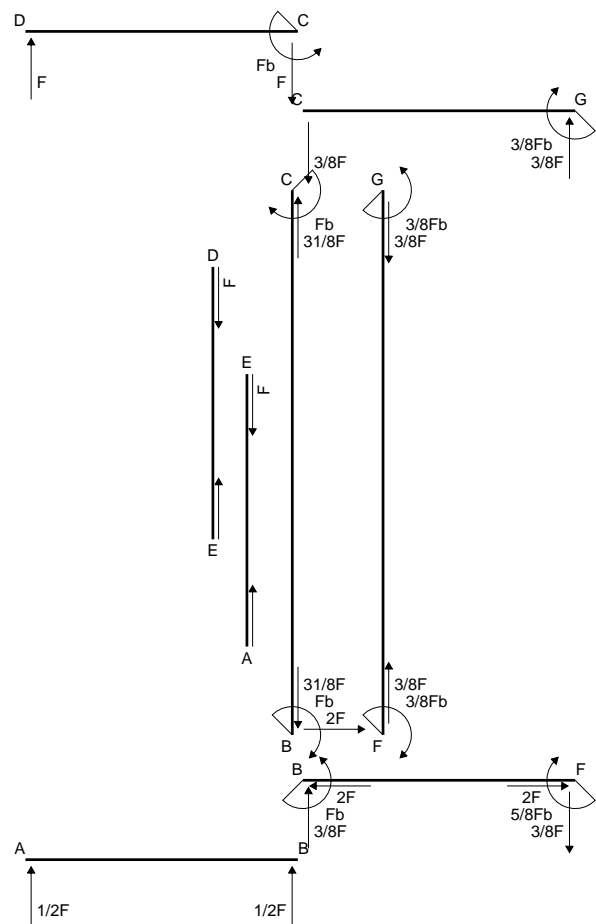


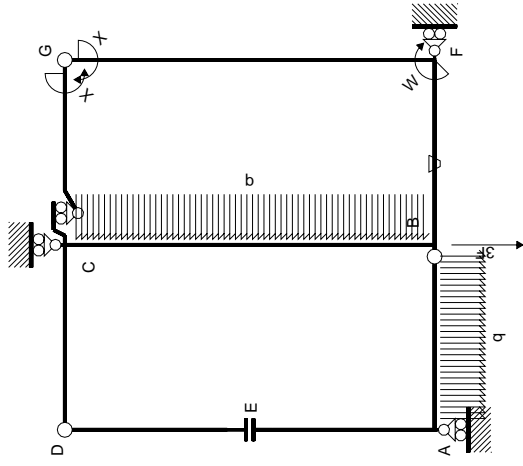

Schema di calcolo iperstatico

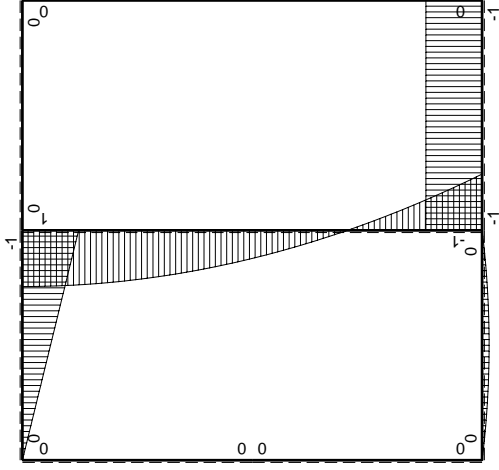

$M_0$  flessione da carichi assegnati

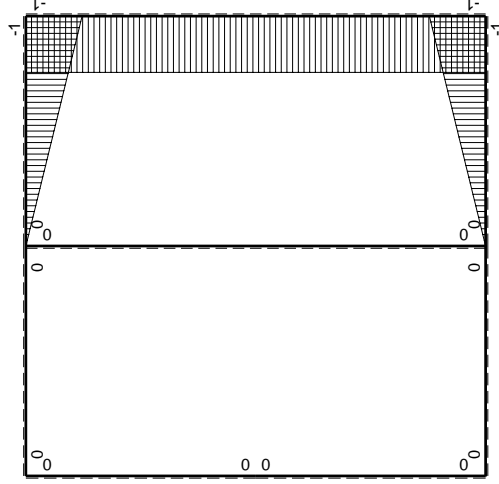

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fx - 1/2qx^2$    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx + 1/2qx^2$   | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| CD b          | 0        | $-Fb + Fx$           | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DC b          | 0        | $Fx$                 | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| DE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| EA b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| AE b          | 0        | 0                    | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$             |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ - Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                      | $1/3xb/EJ$             |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$             |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$             |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                | 0+0                             | $2xb/EJ$               |
| CB 2b         | 0        | $Fb - 1/2qx^2$       | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 2Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                  |                                 | $8/3xb/EJ$             |
|               |          |                      |          |           |                 |                  |                                 | $-3/8Fb$               |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

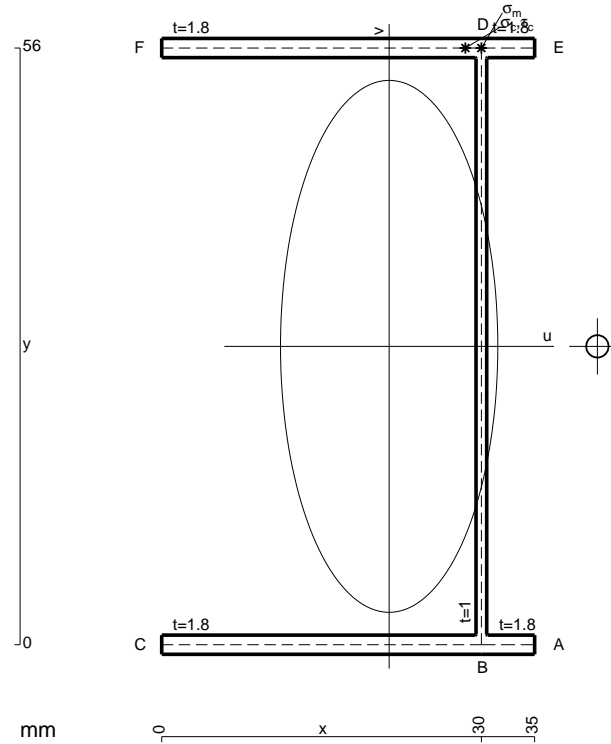

- A = 182. mm<sup>2</sup>
- J<sub>u</sub> = 113419. mm<sup>4</sup>
- J<sub>v</sub> = 18920. mm<sup>4</sup>
- J<sub>t</sub> = 154.7 mm<sup>4</sup>
- x<sub>o</sub> = 19.54 mm
- x<sub>g</sub> = 21.35 mm
- N = 5464. N
- T<sub>y</sub> = -2820. N
- M<sub>x</sub> = -803700. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 8.654 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 228.4 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 8.654 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 228.4 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 661.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 20.89 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub>/J<sub>t</sub> = 641. N/mm<sup>2</sup>
- t<sub>c</sub> = 2538. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 1169. N/mm<sup>2</sup>




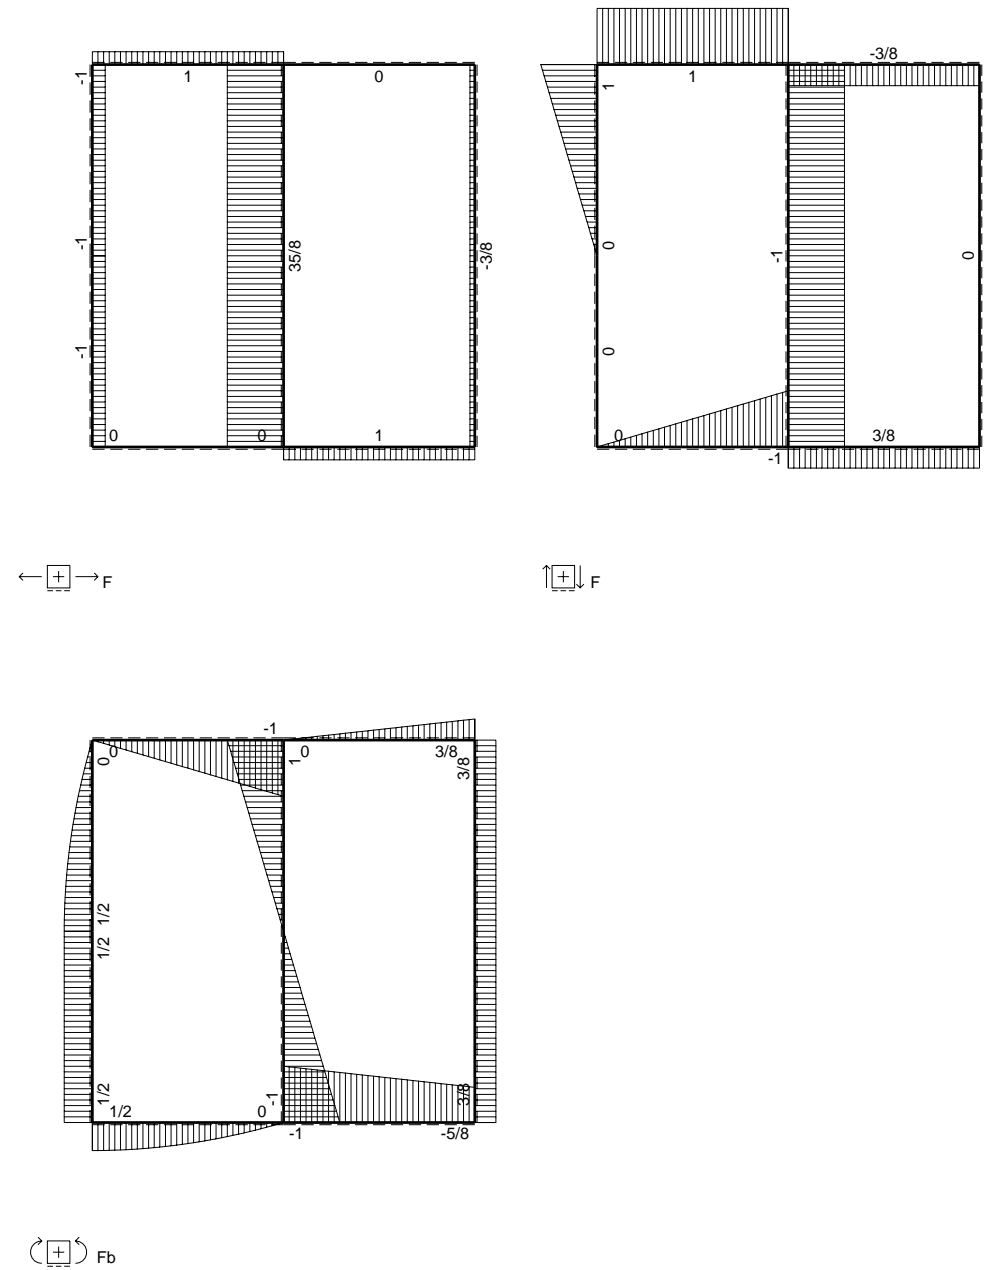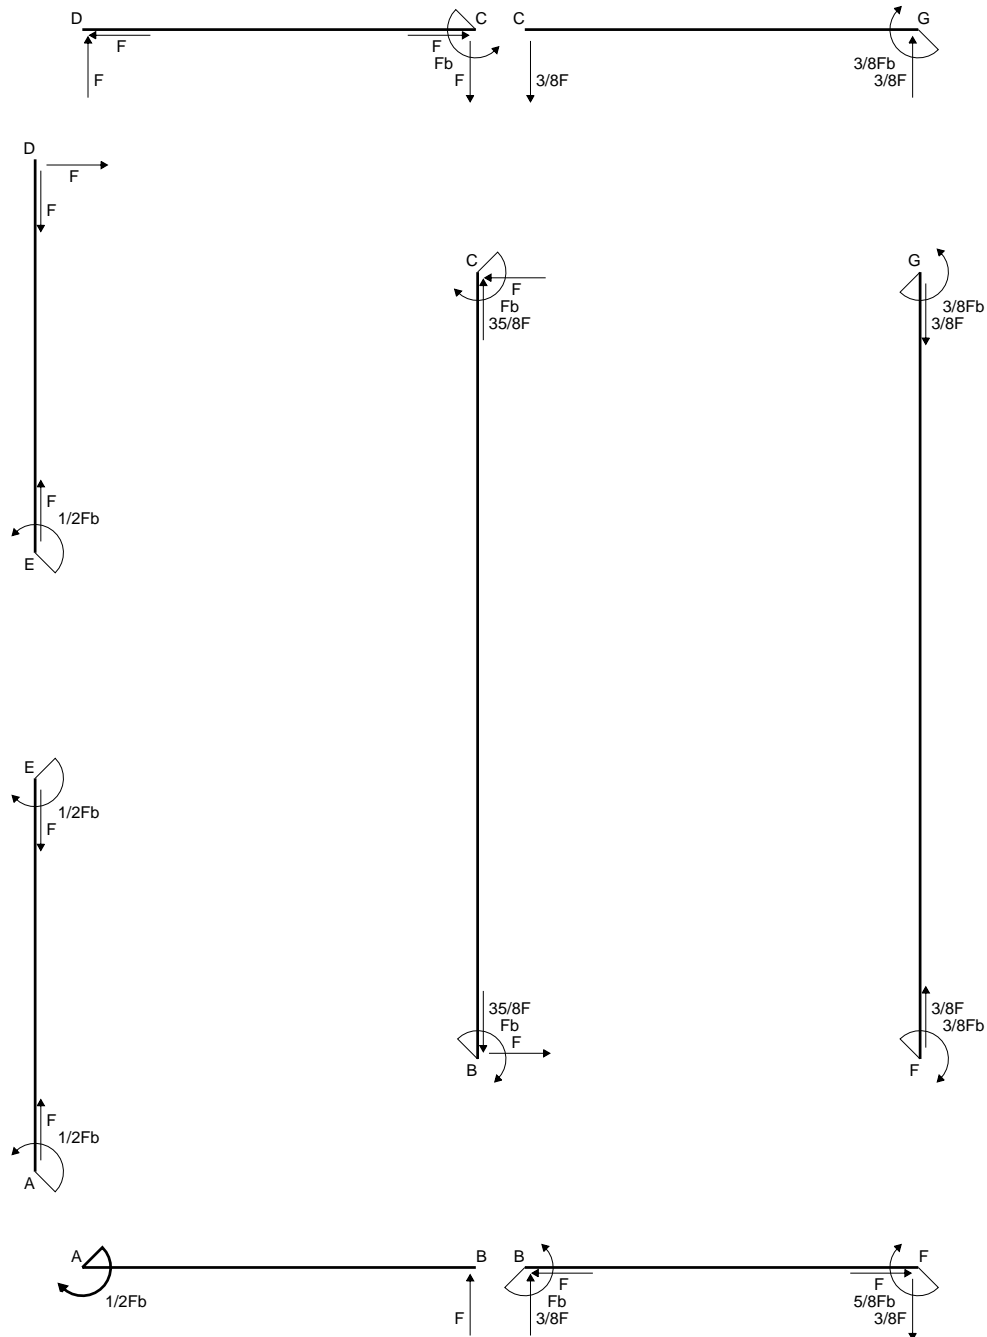

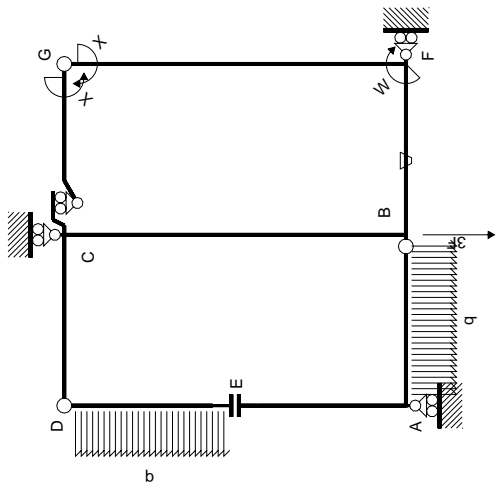

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

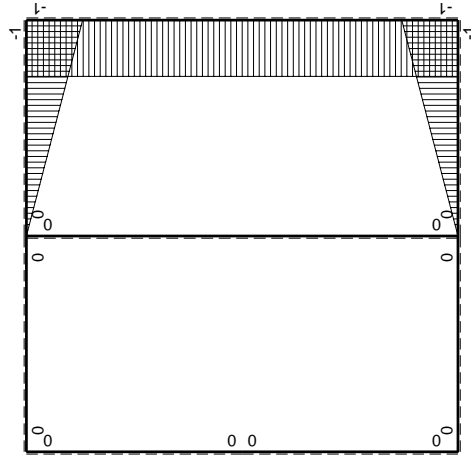

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$ | $\theta$  | $M_x M_0$          | $M_x \theta$ | $M_x M_x$       | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|-----------------------|----------|-----------|--------------------|--------------|-----------------|-----------------------------|----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| BA b          | $-Fx + 1/2 q x^2$     | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| CD b          | $-Fb + Fx$            | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| DC b          | $Fx$                  | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| DE b          | $Fx - 1/2 q x^2$      | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| EA b          | $1/2 Fb$              | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| AE b          | $-1/2 Fb$             | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| BF b          | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$            | $Fx/EJ$      | $Fb/EJ - Fx/EJ$ | $(1/2 + 1/2) Fb^2/EJ$       | $1/3 Xb^3/EJ$        |
| FB b          | $1-x/b$               | $Fb/EJ$  | $Fb - Fx$ | $1-2x/b + x^2/b^2$ | $x^2/b^2$    | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$          | $1/3 Xb^3/EJ$        |
| GC b          | $-1+x/b$              | 0        | 0         | 0                  | 0            | 0               | 0+0                         | $1/3 Xb^3/EJ$        |
| CG b          | $x/b$                 | 0        | 0         | 0                  | 0            | 0               | 0+0                         | $1/3 Xb^3/EJ$        |
| FG 2b         | -1                    | 0        | 0         | 0                  | 0            | 0               | 0+0                         | $2Xb/EJ$             |
| GF 2b         | 1                     | 0        | 0         | 0                  | 0            | 0               | 0+0                         | $2Xb/EJ$             |
| CB 2b         | $Fb - Fx$             | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| BC 2b         | $Fb - Fx$             | 0        | 0         | 0                  | 0            | 0               | 0+0                         | 0                    |
| totali        |                       |          |           |                    |              |                 |                             | $8/3 Xb^3/EJ$        |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


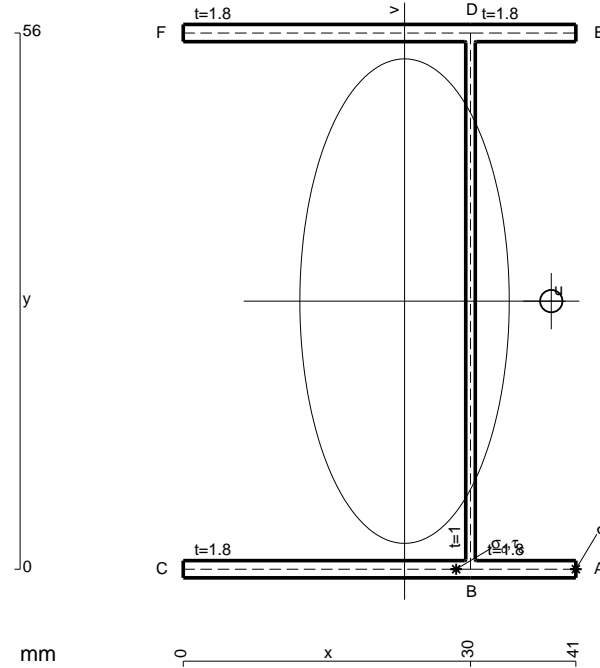


- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 24340. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>o</sub> = 15.32 mm
- x<sub>g</sub> = 23.11 mm
- N = 6869. N
- T<sub>y</sub> = -1570. N
- M<sub>x</sub> = 957700. Nmm
- x<sub>m</sub> = 41. mm
- u<sub>m</sub> = 17.89 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 239.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- u<sub>c</sub> = 6.887 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 239.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 253.2 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.12 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 243.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 2826. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 499.7 N/mm<sup>2</sup>






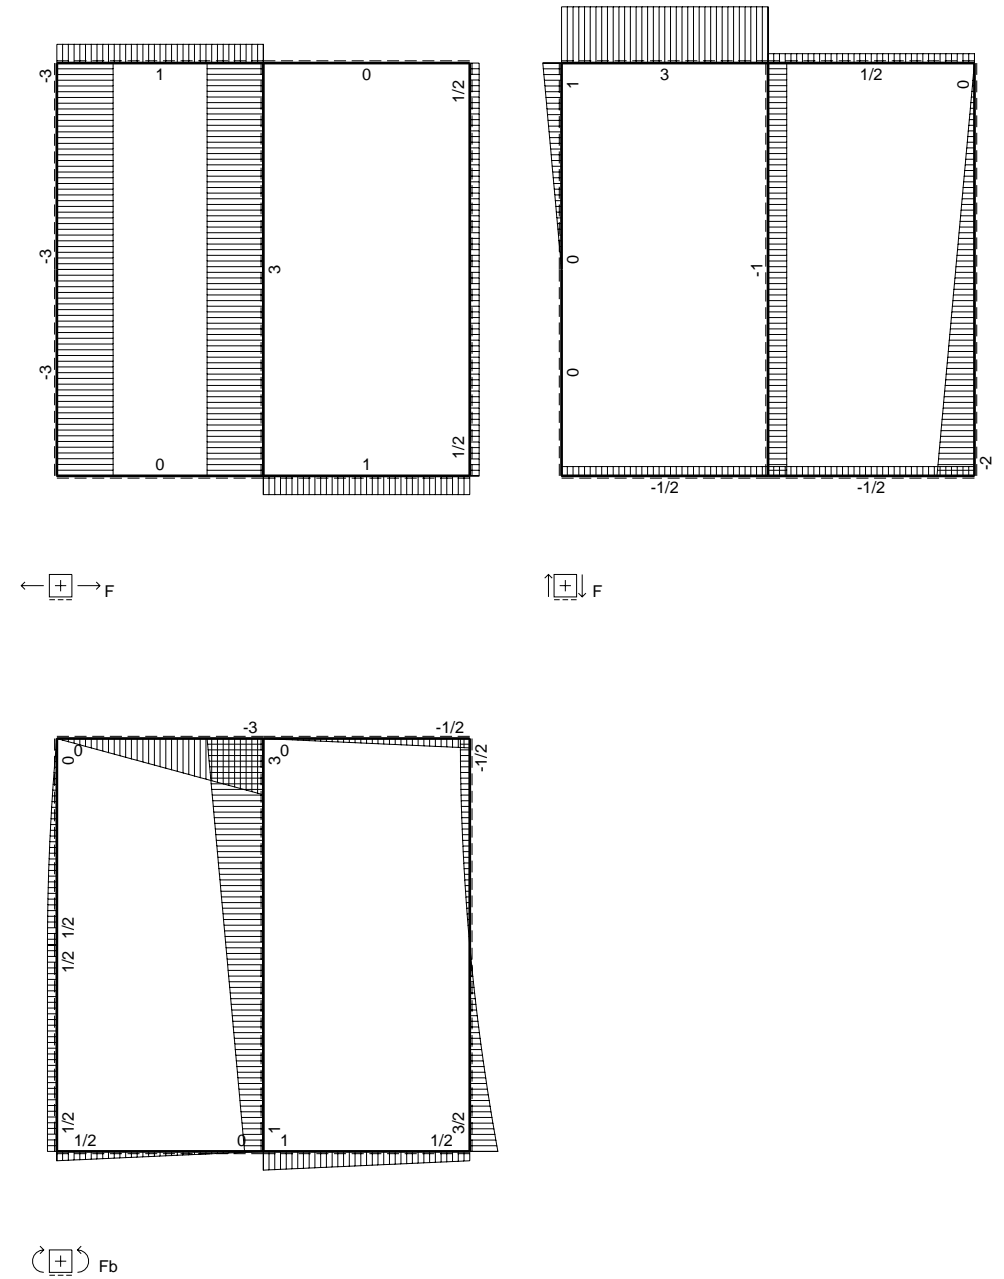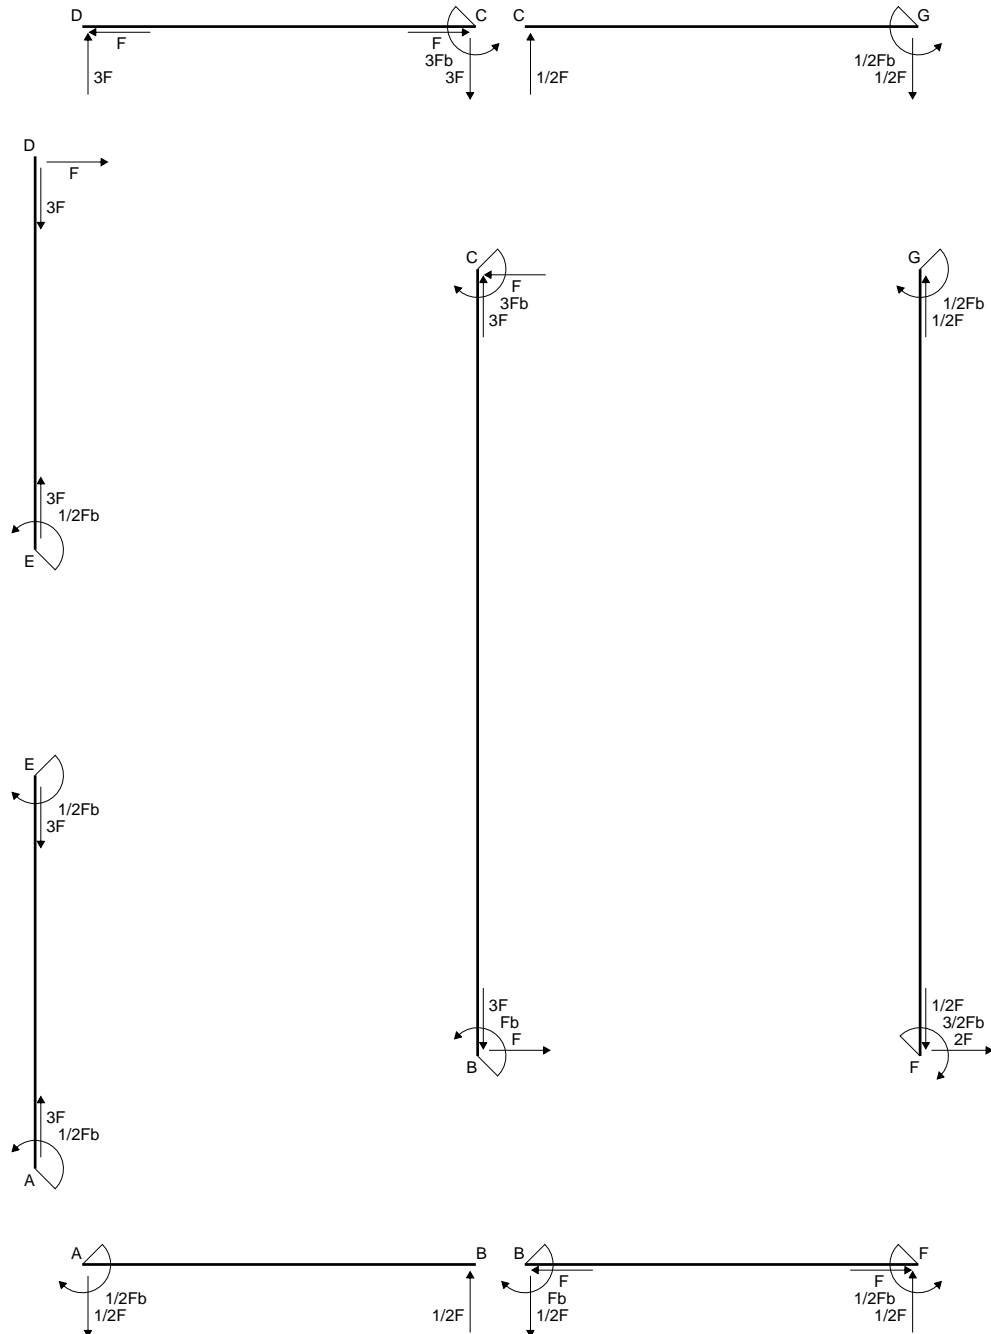

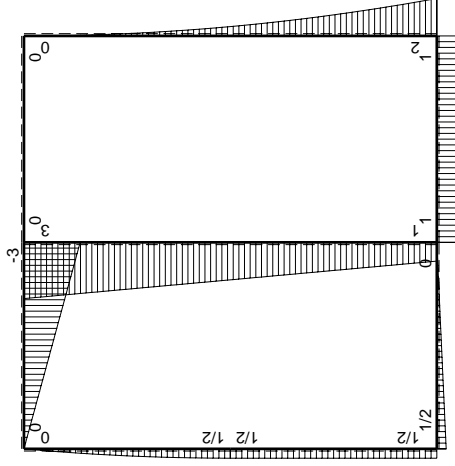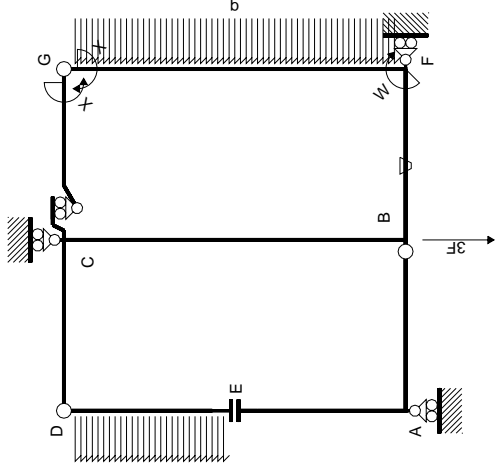

$M_0$  flessione da carichi assegnati

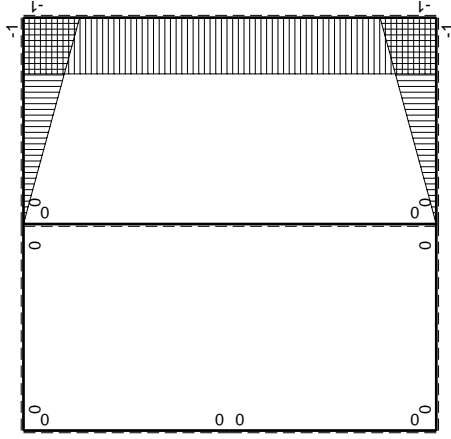

$M_x$  flessione da iperstatica X=1

| ←     | $M(x)$ | $M_0(x)$                   | $\theta$ | $M_x M_0$                      | $M_x \theta$ | $M_x M_x$                      | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / E dx$ | totali   |          | iperstatica X=W <sub>gc</sub> |
|-------|--------|----------------------------|----------|--------------------------------|--------------|--------------------------------|---------------------------------|-----------------------|----------|----------|-------------------------------|
|       |        |                            |          |                                |              |                                |                                 |                       | AB b     | BA b     |                               |
| AB b  | 0      | 1/2Fb-1/2Fx                | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| BA b  | 0      | -1/2Fx                     | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| CD b  | 0      | -3Fb+3Fx                   | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| DC b  | 0      | 3Fx                        | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| DE b  | 0      | Fx-1/2qx <sup>2</sup>      | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| ED b  | 0      | -1/2Fb+1/2qx <sup>2</sup>  | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| EA b  | 0      | 1/2Fb                      | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| AE b  | 0      | -1/2Fb                     | 0        | 0                              | 0            | 0                              | 0                               | 0                     | 0        | 0        | 0                             |
| BF b  | -x/b   | Fb                         | -Fb/EJ   | -Fx                            | Fx/EJ        | x <sup>2</sup> /b <sup>2</sup> | $(-1/2+1/2)Fb^2/EJ$             | 1/3Xb/EJ              | 1/3Xb/EJ | 1/3Xb/EJ | 1/3Xb/EJ                      |
| FB b  | 1-x/b  | -Fb                        | Fb/EJ    | -Fb+Fx                         | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$               | $(-1/2+1/2)Fb^2/EJ$             | 1/3Xb/EJ              | 1/3Xb/EJ | 1/3Xb/EJ | 1/3Xb/EJ                      |
| GC b  | -1+x/b | 0                          | 0        | 0                              | 0            | $1-2x/b+x^2/b^2$               | 0+0                             | 1/3Xb/EJ              | 1/3Xb/EJ | 1/3Xb/EJ | 1/3Xb/EJ                      |
| CG b  | x/b    | 0                          | 0        | 0                              | 0            | x <sup>2</sup> /b <sup>2</sup> | 0+0                             | 1/3Xb/EJ              | 1/3Xb/EJ | 1/3Xb/EJ | 1/3Xb/EJ                      |
| FG 2b | -1     | 2Fb-2Fx+1/2qx <sup>2</sup> | 0        | -2Fb+2Fx-1/2Fx <sup>2</sup> /b | 0            | 1                              | $(-4/3+0)Fb^2/EJ$               | 2Xb/EJ                | 2Xb/EJ   | 2Xb/EJ   | 2Xb/EJ                        |
| GF 2b | 1      | -1/2qx <sup>2</sup>        | 0        | -1/2Fx <sup>2</sup> /b         | 0            | 1                              | $(-4/3+0)Fb^2/EJ$               | 2Xb/EJ                | 2Xb/EJ   | 2Xb/EJ   | 2Xb/EJ                        |
| CB 2b | 0      | 3Fb-Fx                     | 0        | 0                              | 0            | 0                              | 0+0                             | 8/3Xb/EJ              | 8/3Xb/EJ | 8/3Xb/EJ | 8/3Xb/EJ                      |
| BC 2b | 0      | -Fb-Fx                     | 0        | 0                              | 0            | 0                              | 0+0                             | 8/3Xb/EJ              | 8/3Xb/EJ | 8/3Xb/EJ | 8/3Xb/EJ                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

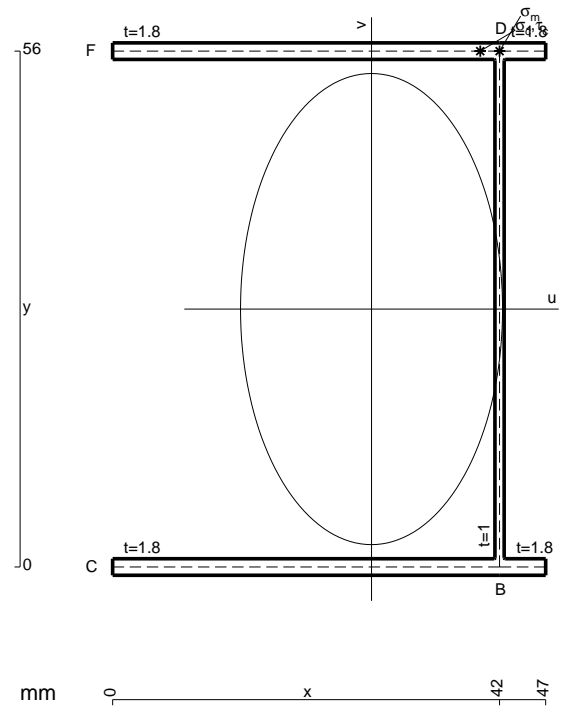

- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 45547. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- X<sub>o</sub> = 30.56 mm
- X<sub>g</sub> = 28.1 mm
- N = 520. N
- T<sub>y</sub> = 1560. N
- M<sub>x</sub> = -1029600. Nmm
- x<sub>m</sub> = 42. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 13.9 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 198. N/mm<sup>2</sup>
- X<sub>c</sub> = 42. mm
- Y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 13.9 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 198. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 438.5 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 12.46 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 426.1 N/mm<sup>2</sup>
- t<sub>c</sub> = 936. mm
- σ<sub>o</sub> = √(σ<sup>2</sup>+3τ<sup>2</sup>) = 785. N/mm<sup>2</sup>





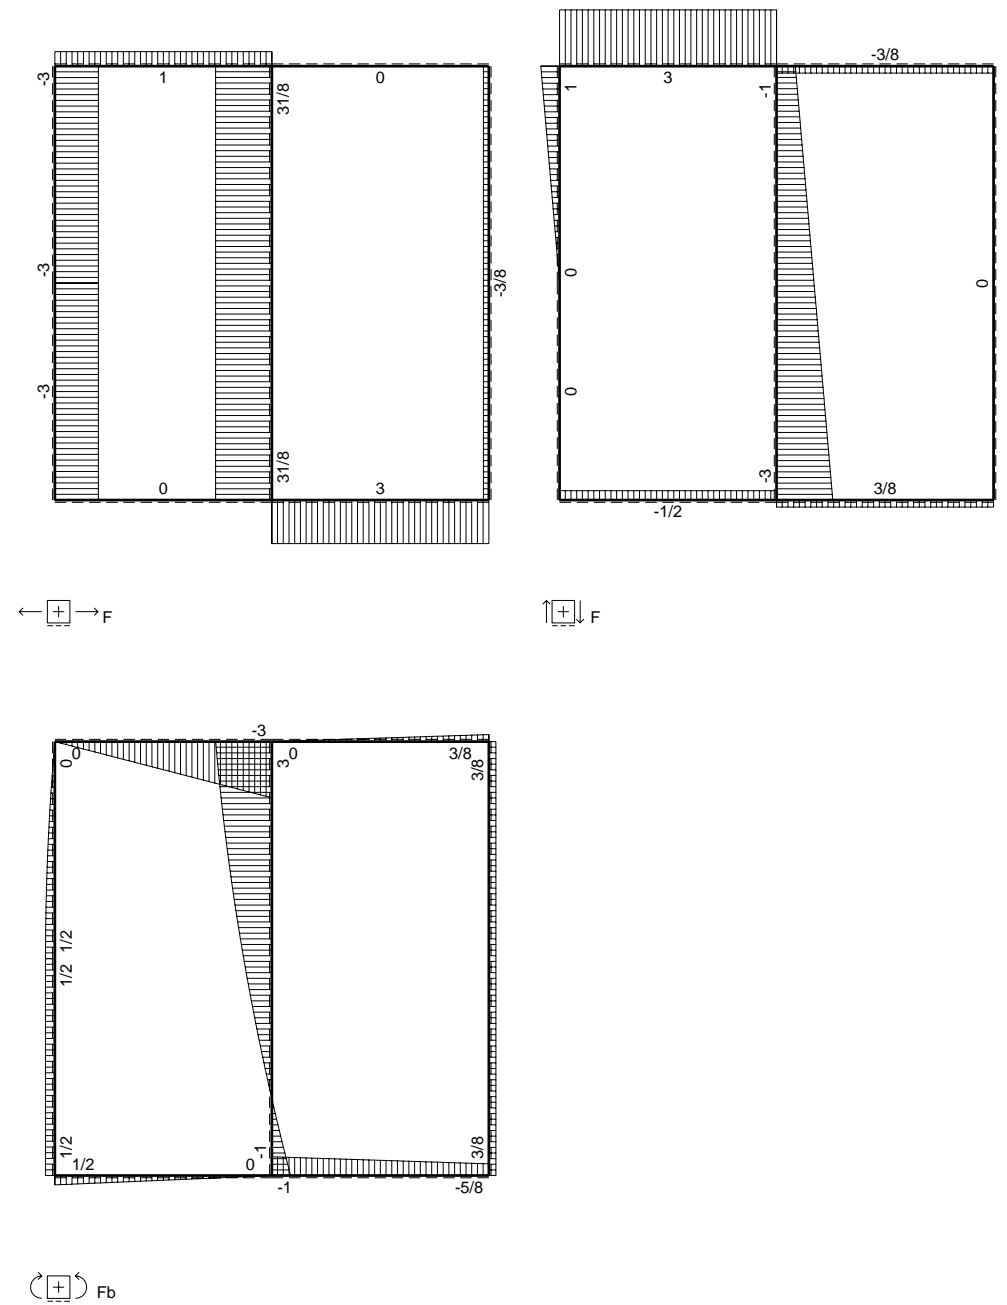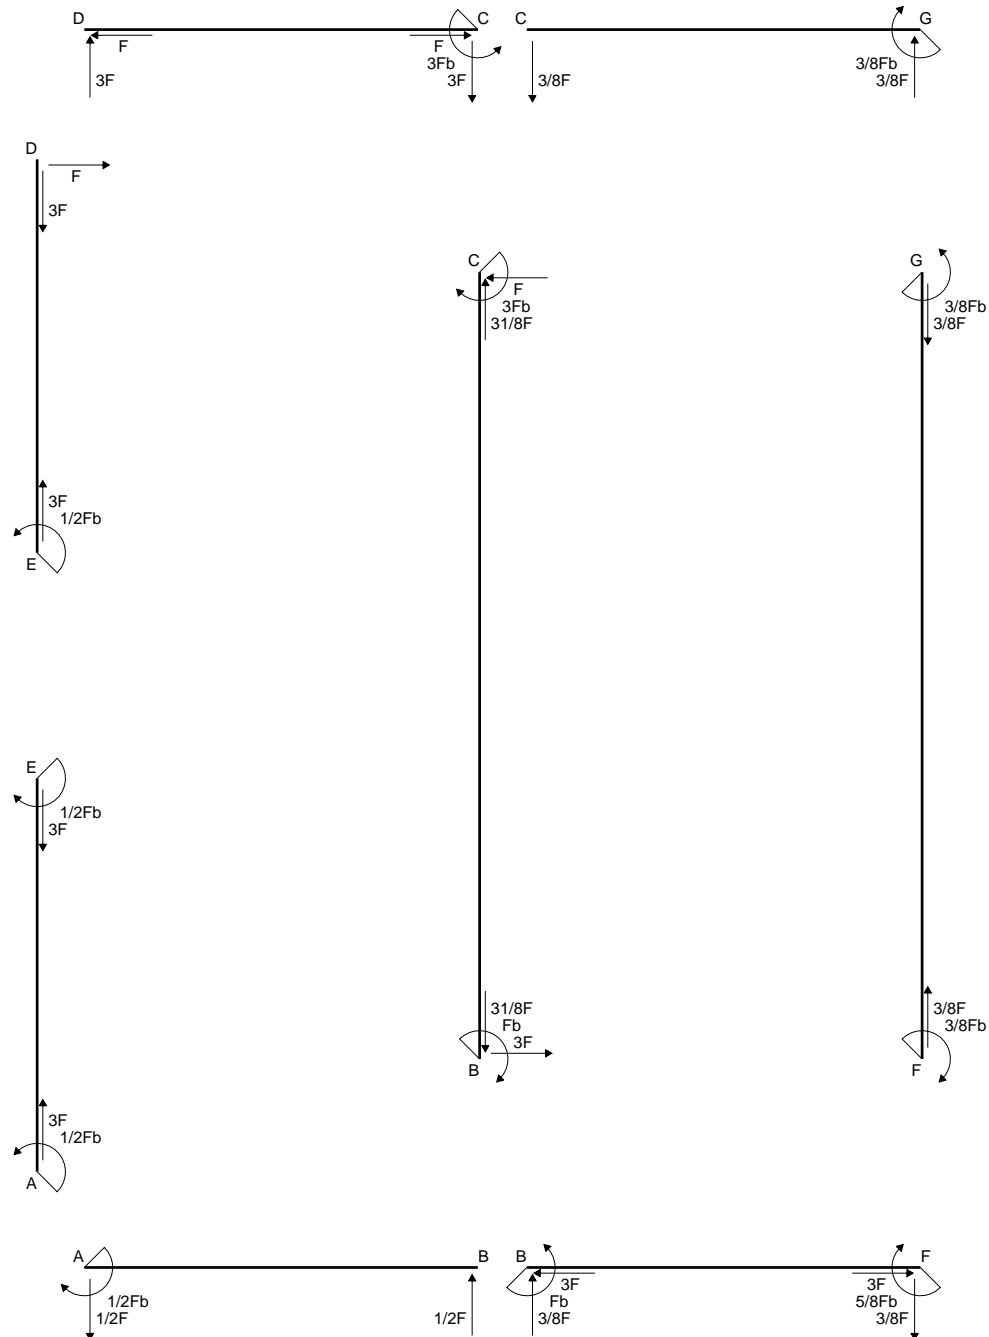

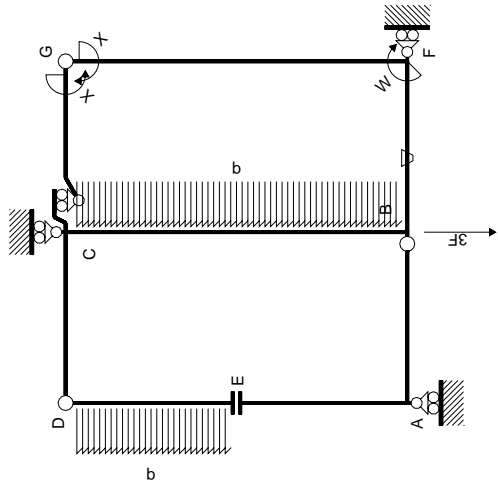

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

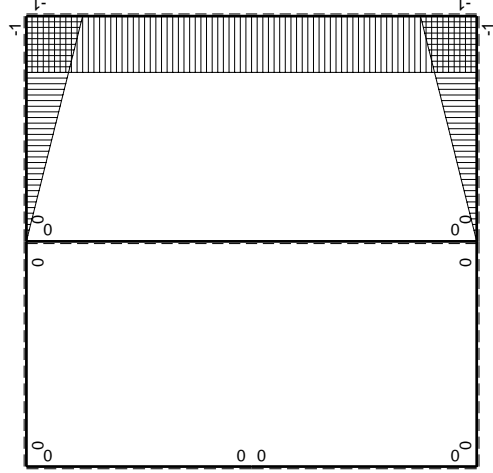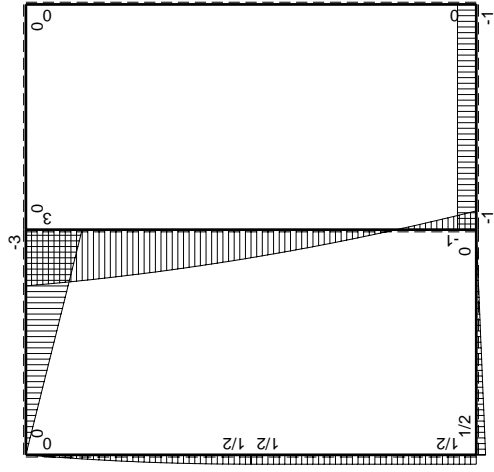

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$   | $M_0(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$    | $M_x M_x$            | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / EJ dx$ |
|---------------|----------|----------------------|----------|-----------|-----------------|----------------------|---------------------------------|------------------------|
| AB b          | 0        | $1/2Fb - 1/2Fx$      | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BA b          | 0        | $-1/2Fx$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| CD b          | 0        | $-3Fb + 3Fx$         | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DC b          | 0        | $3Fx$                | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| DE b          | 0        | $Fx - 1/2qx^2$       | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| ED b          | 0        | $-1/2Fb + 1/2qx^2$   | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| EA b          | 0        | $1/2Fb$              | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| AE b          | 0        | $-1/2Fb$             | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BF b          | $-x/b$   | $-Fb$                | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $x^2/b^2$            | $(1/2 + 1/2)Fb^2/EJ$            | $1/3x^3b/EJ$           |
| FB b          | $1-x/b$  | $Fb$                 | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $1 - 2x/b + x^2/b^2$ | $1/2 + 1/2)Fb^2/EJ$             | $1/3x^3b/EJ$           |
| GC b          | $-1+x/b$ | 0                    | 0        | 0         | 0               | $1 - 2x/b + x^2/b^2$ | 0+0                             | $1/3x^3b/EJ$           |
| CG b          | $x/b$    | 0                    | 0        | 0         | 0               | $x^2/b^2$            | 0+0                             | $1/3x^3b/EJ$           |
| FG 2b         | -1       | 0                    | 0        | 0         | 0               | 1                    | 0+0                             | $2x^2b/EJ$             |
| GF 2b         | 1        | 0                    | 0        | 0         | 0               | 1                    | 0+0                             | $2x^2b/EJ$             |
| CB 2b         | 0        | $3Fb - Fx - 1/2qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| BC 2b         | 0        | $Fb - 3Fx + 1/2qx^2$ | 0        | 0         | 0               | 0                    | 0+0                             | 0                      |
| totali        |          |                      |          |           |                 |                      |                                 | $8/3x^3b/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

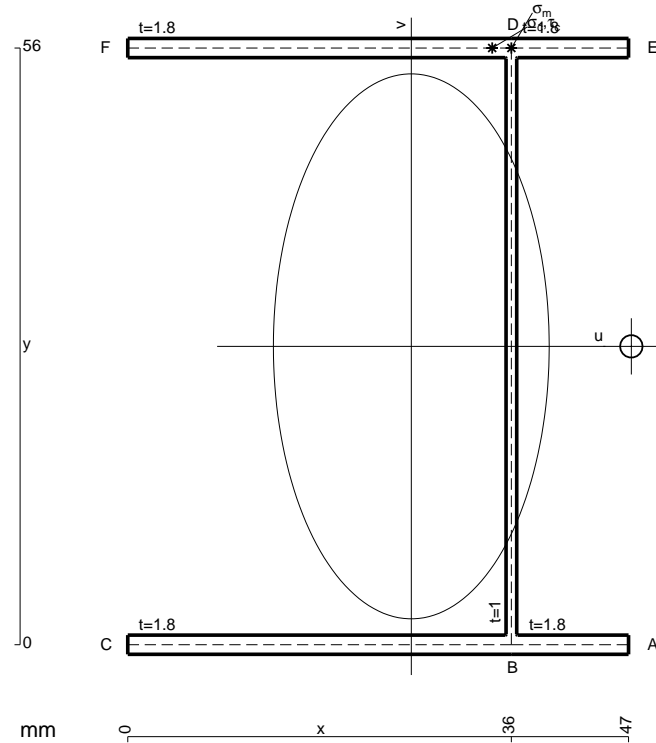


- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 37721. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- x<sub>o</sub> = 20.65 mm
- x<sub>g</sub> = 26.61 mm
- N = 520. N
- T<sub>y</sub> = 1560. N
- M<sub>x</sub> = -1092000. Nmm
- x<sub>m</sub> = 36. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 9.392 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 36. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 9.392 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 209.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 298.6 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 10.68 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 287.9 N/mm<sup>2</sup>
- t<sub>c</sub> = 936. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 558.1 N/mm<sup>2</sup>






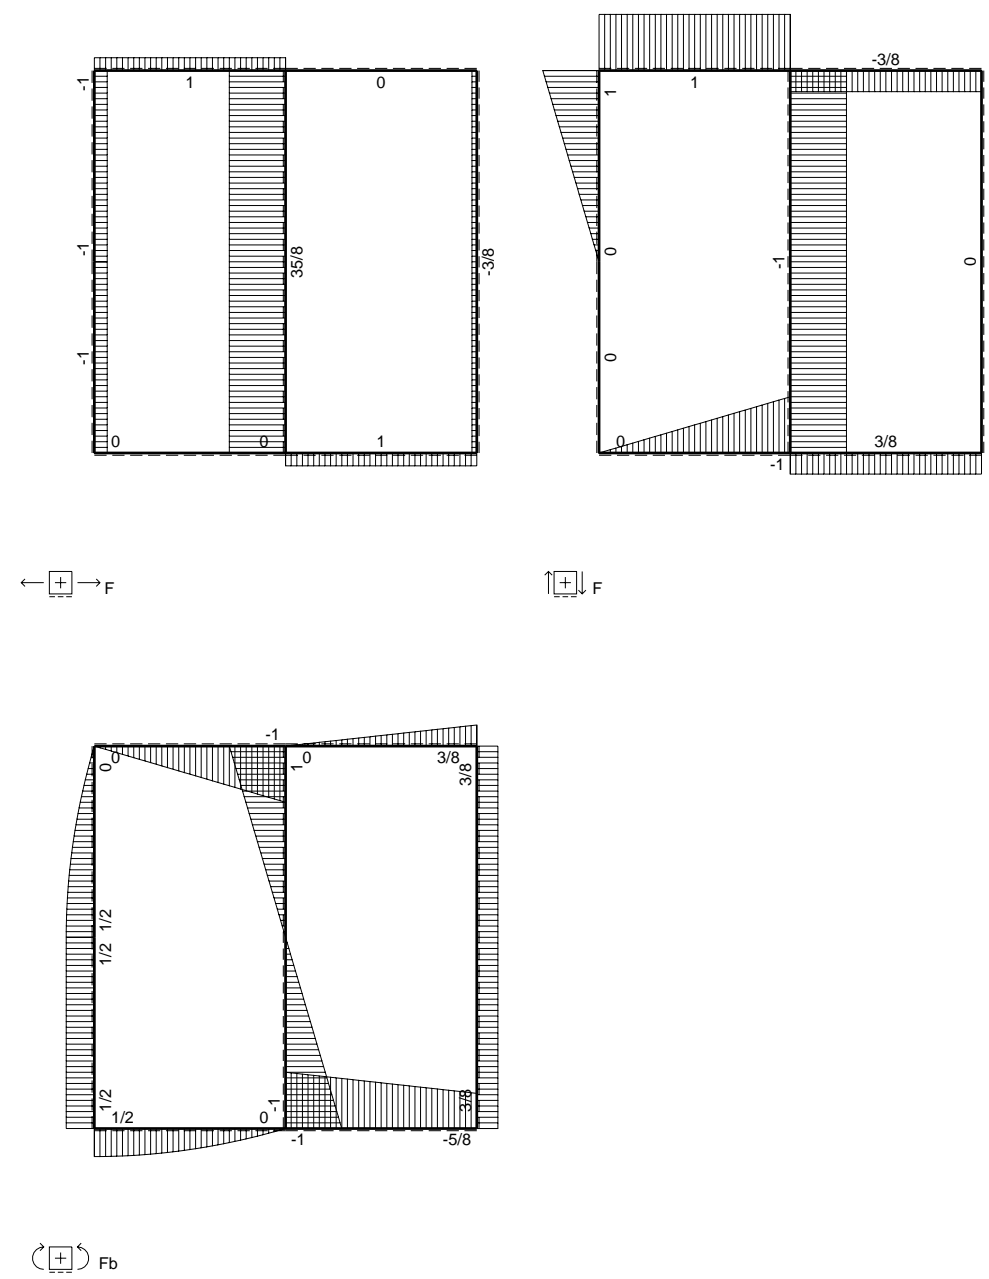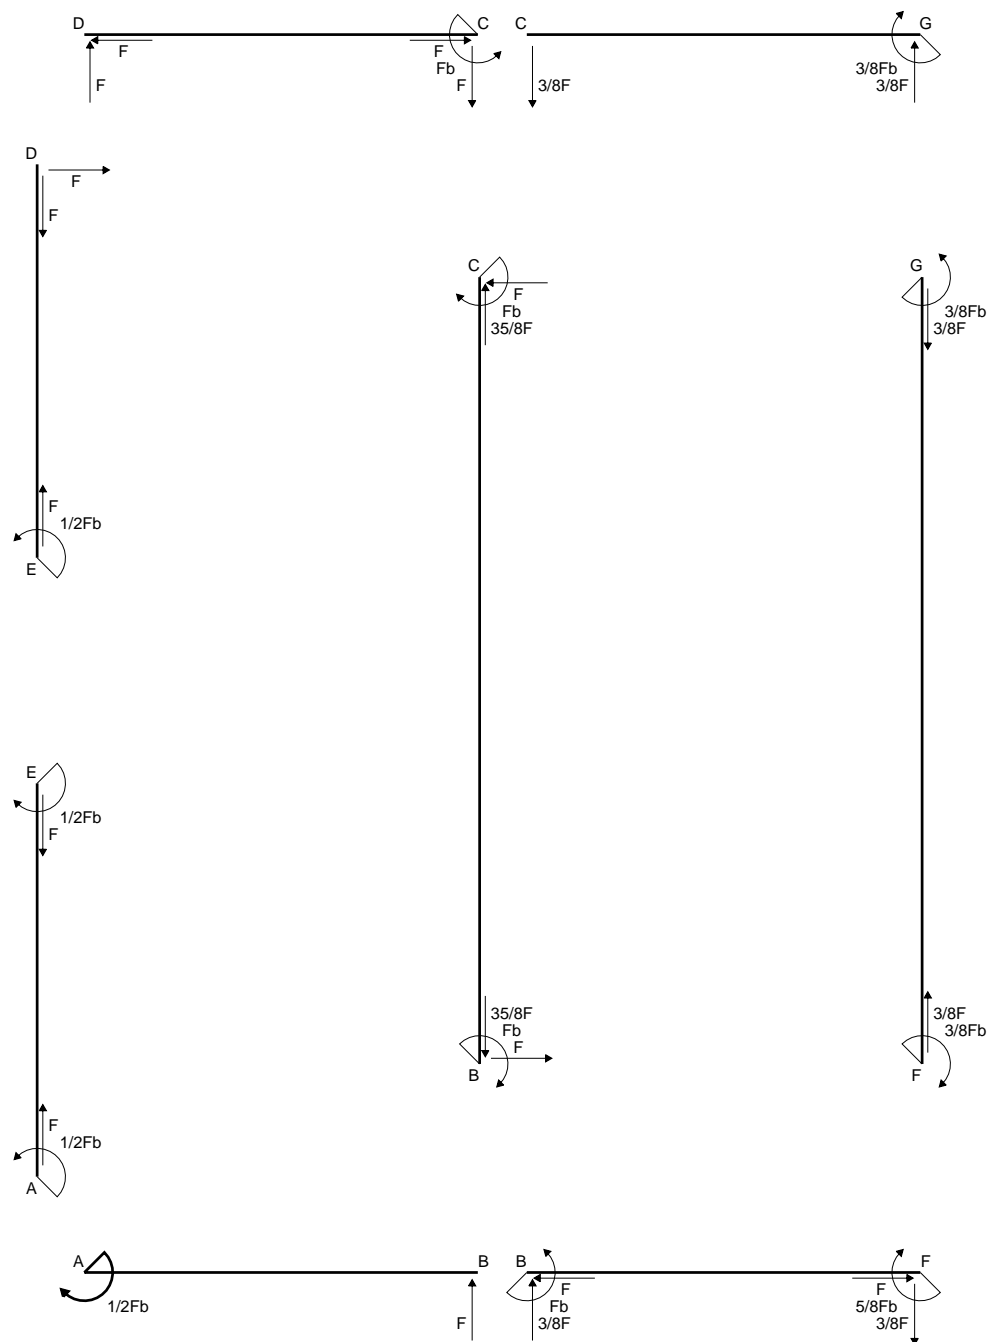


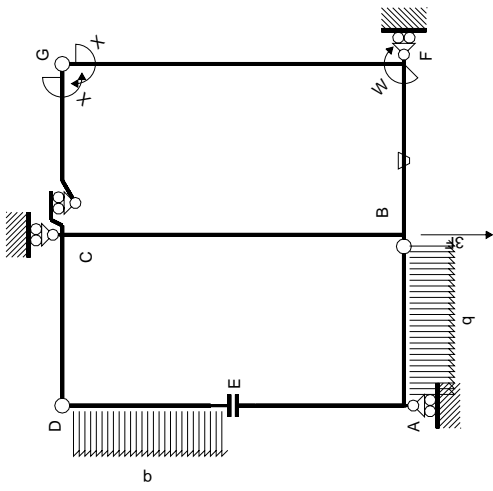

Schema di calcolo iperstatico

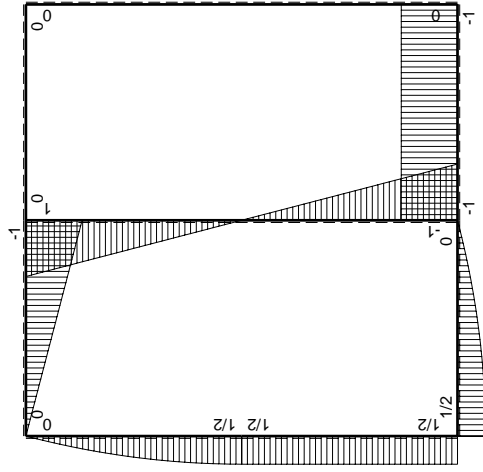

$M_0$  flessione da carichi assegnati

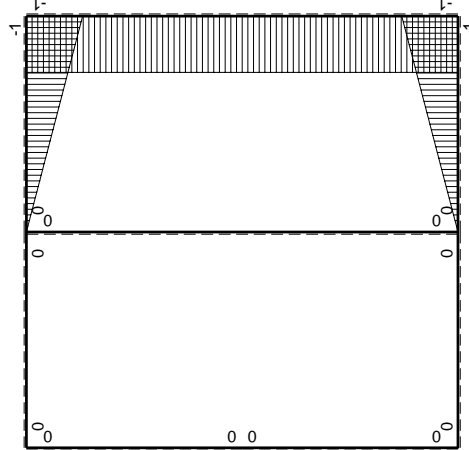

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$                | $M_0(x)$ | $\theta$  | $M_x M_0$       | $M_x \theta$       | $M_x M_x$          | $\int M_x (M_0/EJ + \theta) dx$ | $\int M_x M_x / Edx$ |
|---------------|-----------------------|----------|-----------|-----------------|--------------------|--------------------|---------------------------------|----------------------|
| AB b          | $1/2 Fb - 1/2 q x^2$  | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| BA b          | $-Fb + 1/2 q x^2$     | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| CD b          | $-Fb + Fx$            | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| DC b          | $Fx$                  | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| DE b          | $Fx - 1/2 q x^2$      | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| ED b          | $-1/2 Fb + 1/2 q x^2$ | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| EA b          | $1/2 Fb$              | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| AE b          | $-1/2 Fb$             | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| BF b          | $-Fb$                 | $-Fb/EJ$ | $Fx$      | $Fx/EJ$         | $Fb/EJ - Fx/EJ$    | $1-2x/b + x^2/b^2$ | $(1/2 + 1/2) Fb^2/EJ$           | $1/3 Xb/EJ$          |
| FB b          | $1-x/b$               | $Fb/EJ$  | $Fb - Fx$ | $Fb/EJ - Fx/EJ$ | $1-2x/b + x^2/b^2$ | $x^2/b^2$          | $1/3 Xb/EJ$                     | $1/3 Xb/EJ$          |
| GC b          | $-1+x/b$              | 0        | 0         | 0               | 0                  | $1-2x/b + x^2/b^2$ | 0+0                             | $1/3 Xb/EJ$          |
| CG b          | $x/b$                 | 0        | 0         | 0               | 0                  | $x^2/b^2$          | 0+0                             | $1/3 Xb/EJ$          |
| FG 2b         | -1                    | 0        | 0         | 0               | 0                  | 1                  | 0+0                             | $2Xb/EJ$             |
| GF 2b         | 1                     | 0        | 0         | 0               | 0                  | 1                  | 0+0                             | $2Xb/EJ$             |
| CB 2b         | $Fb - Fx$             | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| BC 2b         | $Fb - Fx$             | 0        | 0         | 0               | 0                  | 0                  | 0+0                             | 0                    |
| totali        |                       |          |           |                 |                    |                    |                                 | $8/3 Xb/EJ$          |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

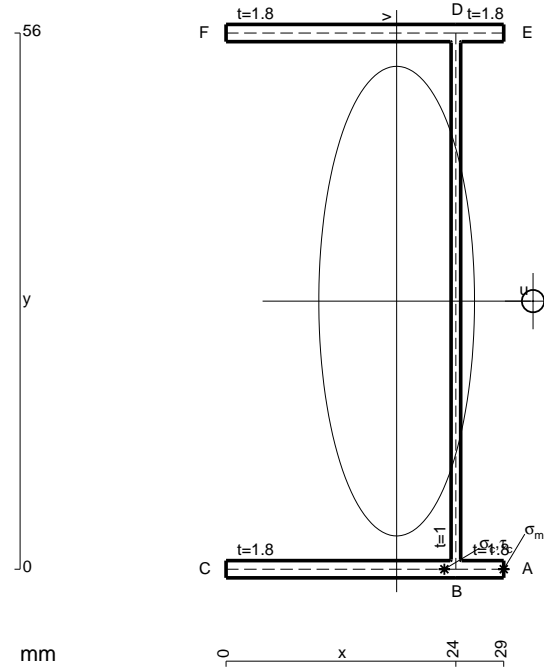


- A = 160.4 mm<sup>2</sup>
- J<sub>u</sub> = 96484. mm<sup>4</sup>
- J<sub>v</sub> = 10606. mm<sup>4</sup>
- J<sub>t</sub> = 131.4 mm<sup>4</sup>
- x<sub>o</sub> = 14.24 mm
- x<sub>g</sub> = 17.82 mm
- N = 3938. N
- T<sub>y</sub> = -900. N
- M<sub>x</sub> = 666000. Nmm
- x<sub>m</sub> = 29. mm
- u<sub>m</sub> = 11.18 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 217.8 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- u<sub>c</sub> = 6.183 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 217.8 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 181.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.268 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 175.6 N/mm<sup>2</sup>
- t<sub>c</sub> = 1620. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 382.9 N/mm<sup>2</sup>



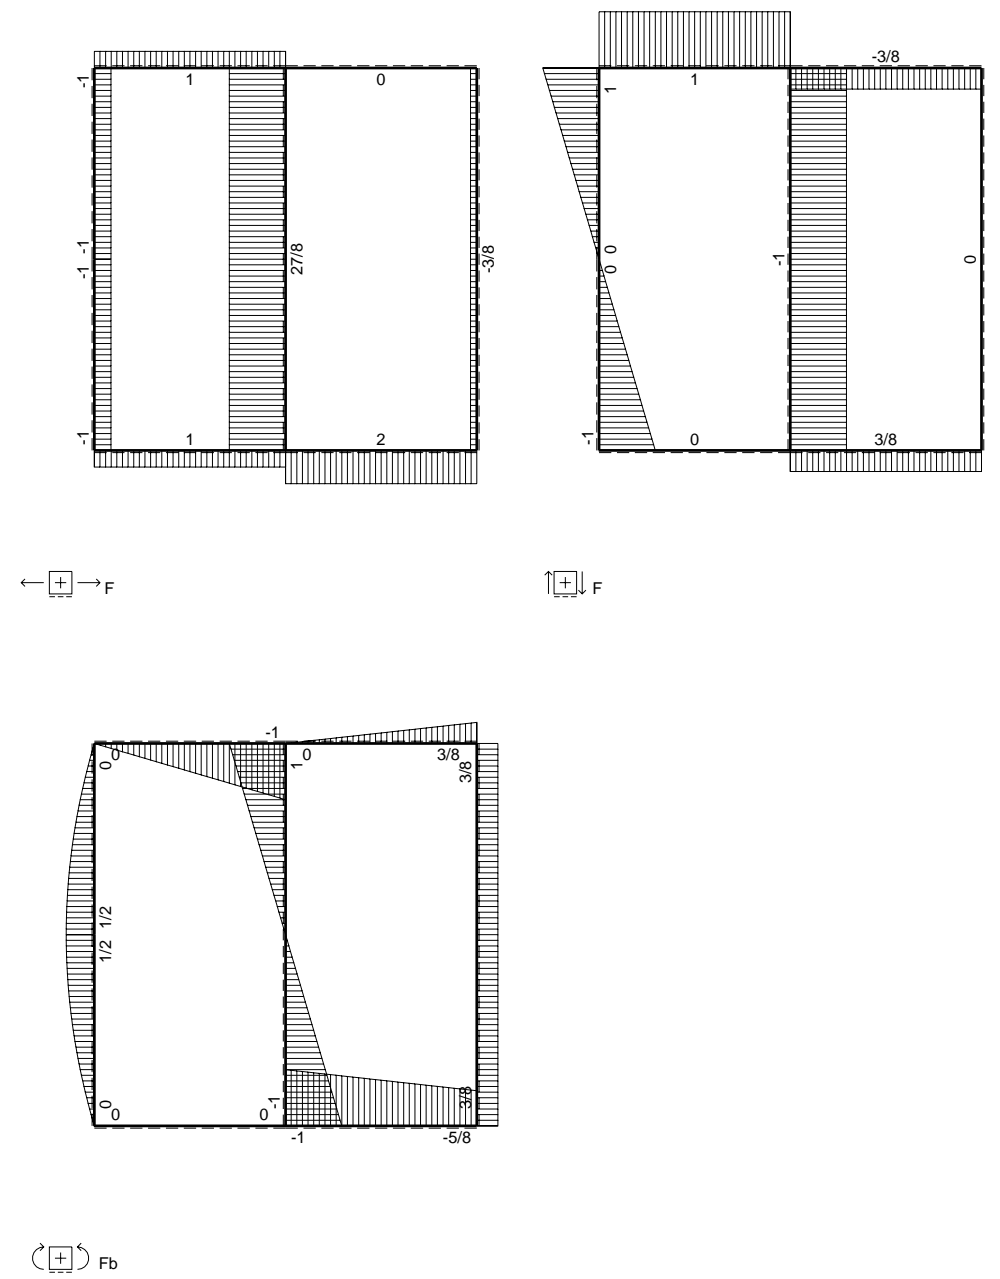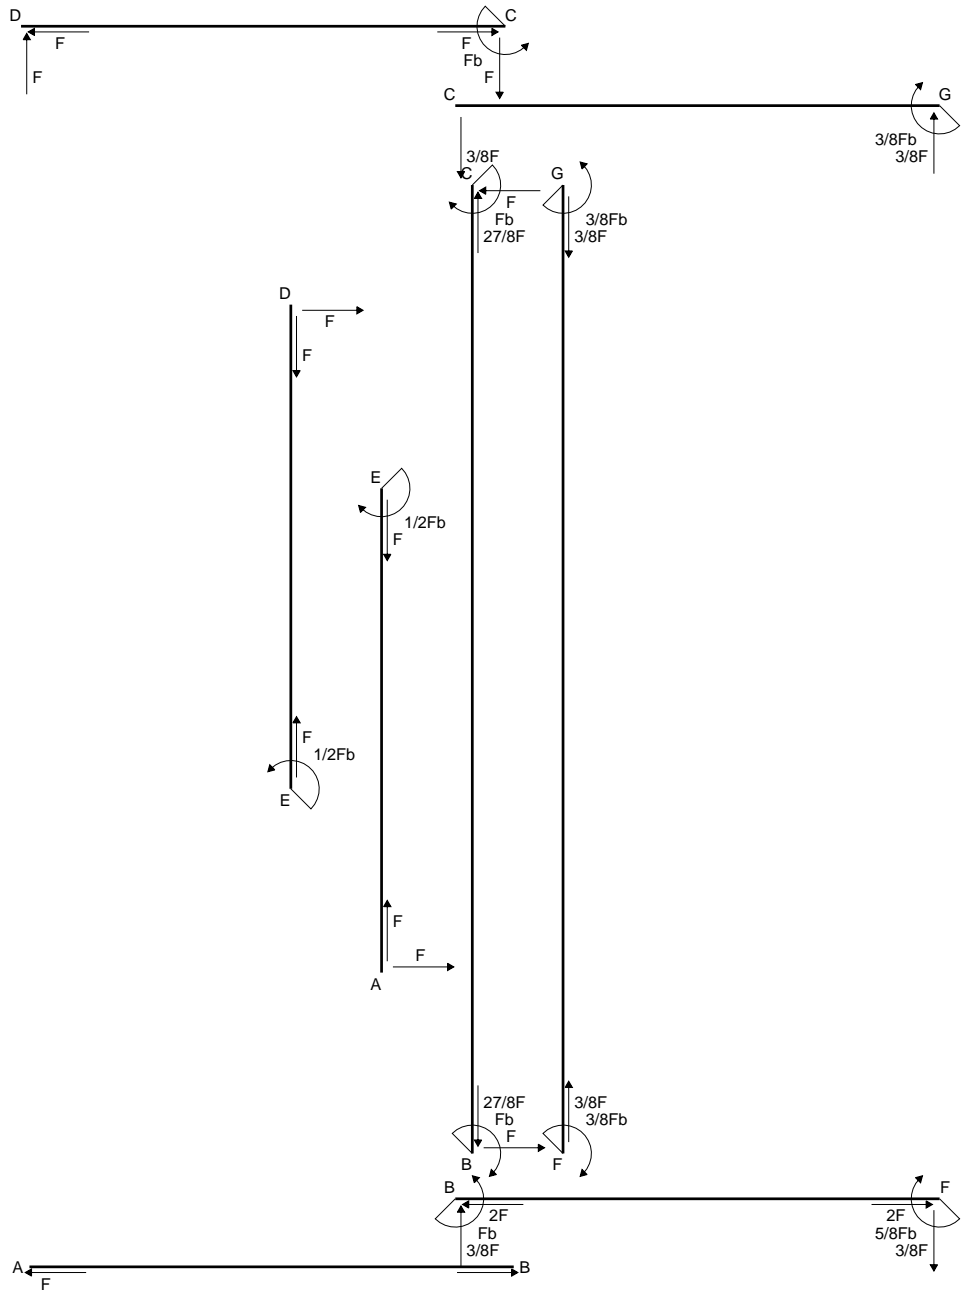


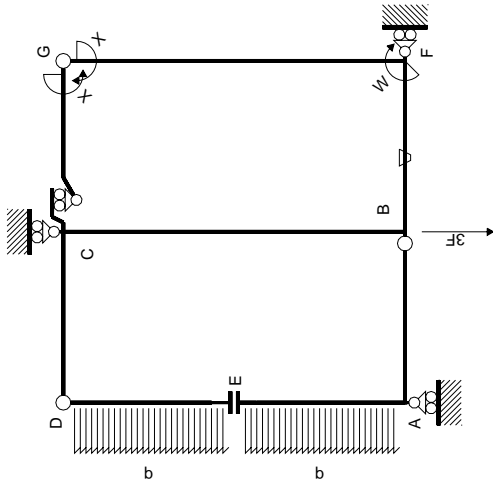

Schema di calcolo iperstatico

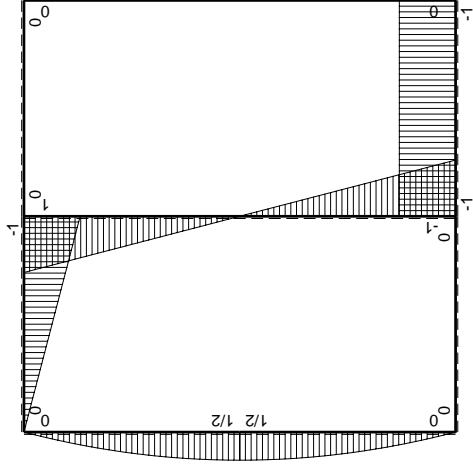

$M_0$  flessione da carichi assegnati

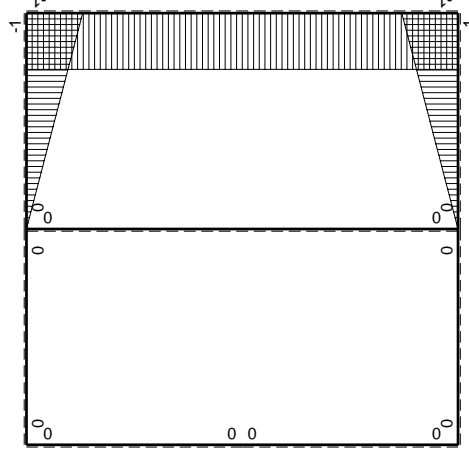

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|--------|------------------|----------|-----------|--------------|------------------|-----------------------------|----------------------|
| AB b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BA b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| CD b          | 0      | -Fb+Fx           | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DC b          | 0      | Fx               | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DE b          | 0      | $Fx-1/2qx^2$     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| ED b          | 0      | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| EA b          | 0      | $1/2Fb-1/2qx^2$  | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| AE b          | 0      | $-Fx+1/2qx^2$    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BF b          | -x/b   | -Fb              | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | 1-x/b  | Fb               | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b          | -1+x/b | 0                | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | x/b    | 0                | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1     | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1      | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BC 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| totali        |        |                  |          |           |              |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$


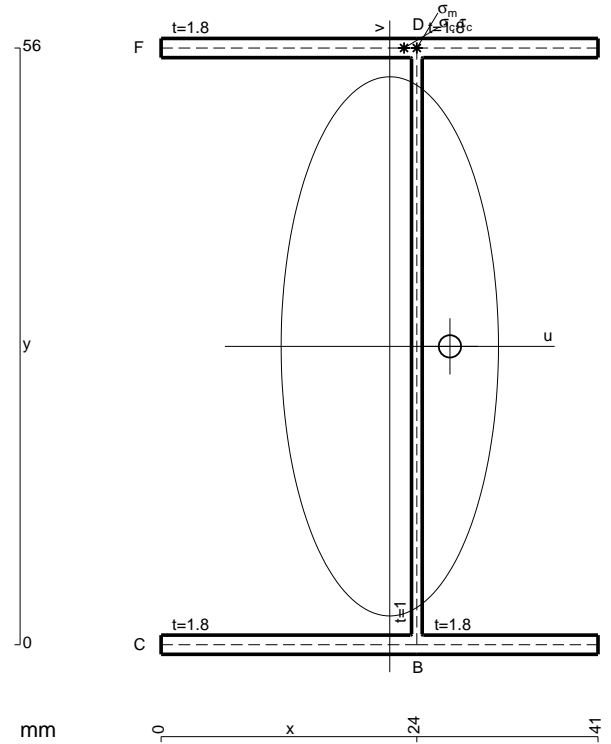


- A = 203.6 mm<sup>2</sup>
- J<sub>u</sub> = 130353. mm<sup>4</sup>
- J<sub>v</sub> = 21174. mm<sup>4</sup>
- J<sub>t</sub> = 178.1 mm<sup>4</sup>
- x<sub>o</sub> = 5.644 mm
- x<sub>g</sub> = 21.46 mm
- N = 4151. N
- T<sub>y</sub> = -1230. N
- M<sub>x</sub> = -971700. Nmm
- x<sub>m</sub> = 24. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 2.537 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 24. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 2.537 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 76.52 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 6.341 N/mm<sup>2</sup>
- τ<sub>o</sub> = T x<sub>o</sub> / J<sub>t</sub> = 70.18 N/mm<sup>2</sup>
- t<sub>c</sub> = 2214. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 264.7 N/mm<sup>2</sup>





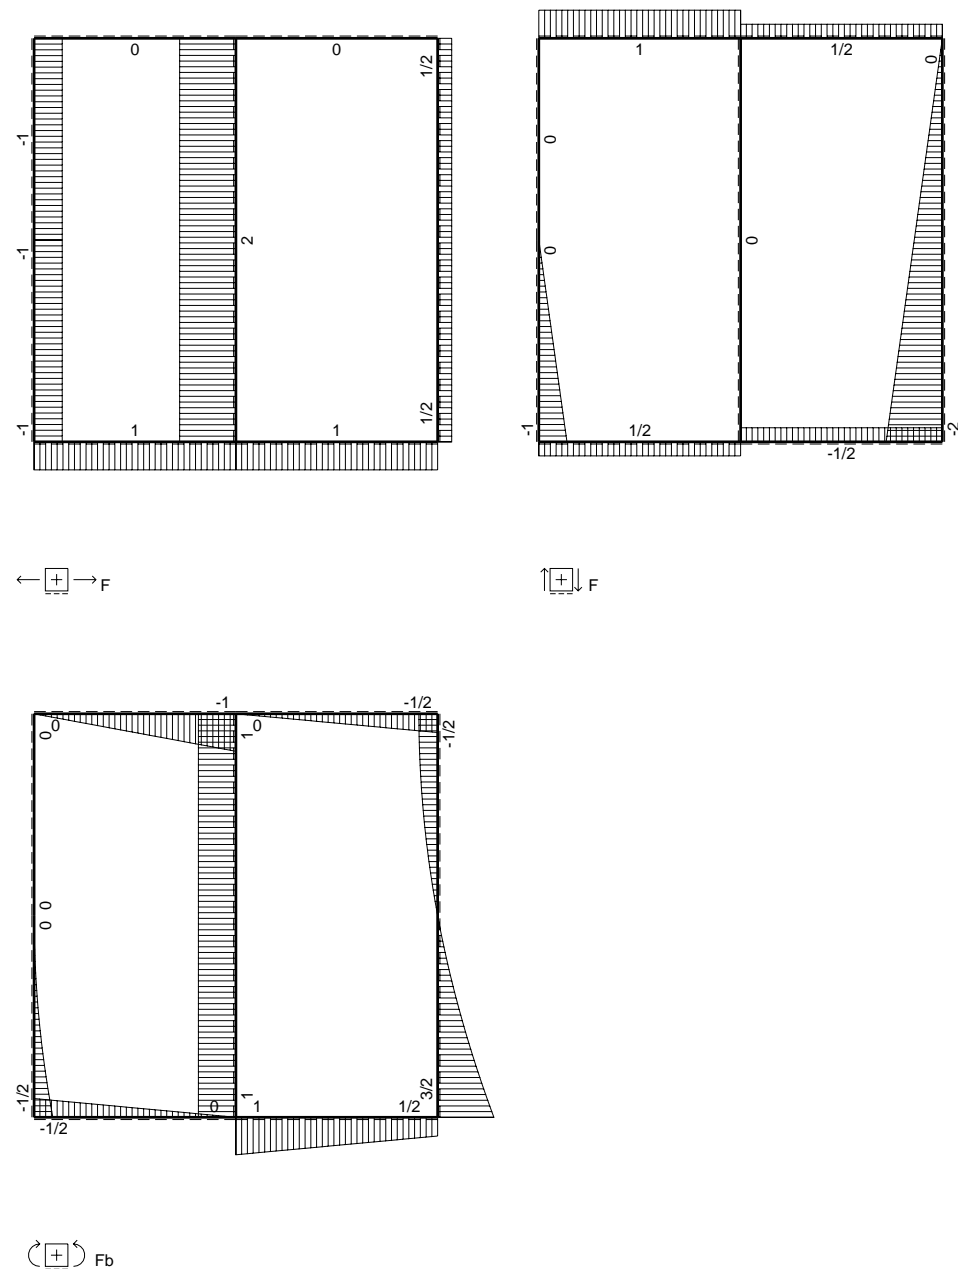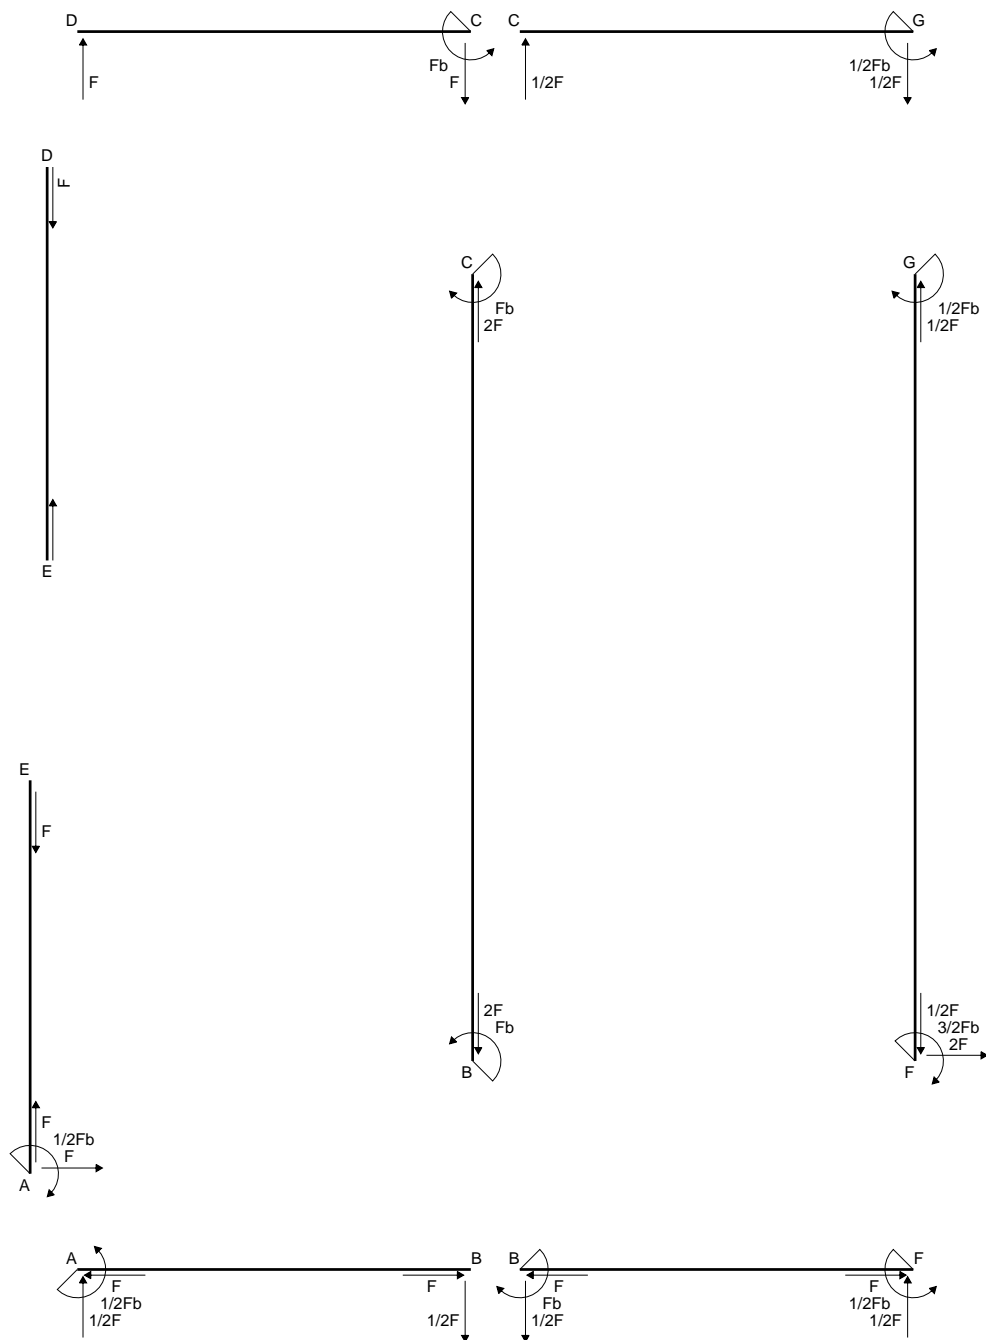

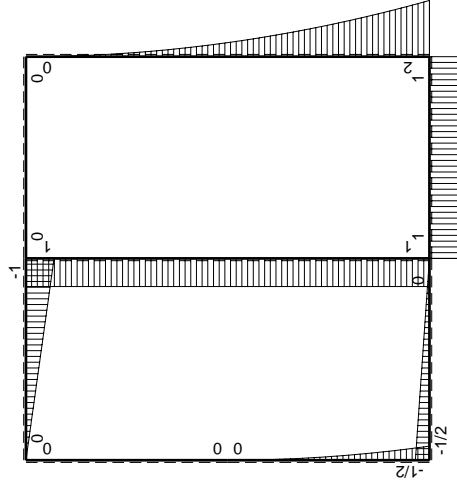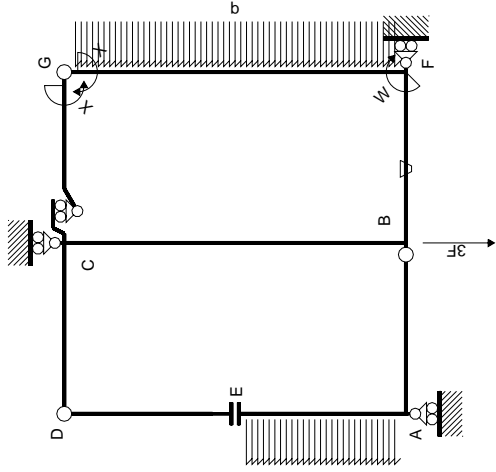

$M_0$  flessione da carichi assegnati



$M_x$  flessione da iperstatica  $X=1$

| Quadro contributi PLV per iperstatica $X=W_{gc}$ |          | $M^x(x)$               | $M^0(x)$ | $\theta$             | $M^x M_0$ | $M^x \theta$  | $M^x M_x$        | $\int M^x (M_0/EJ + \theta) dx$ | $\int M^x M_x / E dx$ |  |
|--|----------|------------------------|----------|----------------------|-----------|---------------|------------------|---------------------------------|-----------------------|--|
| AB b   | 0        | $-1/2Fb+1/2Fx$         | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| BA b   | 0        | $1/2Fx$                | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| CD b   | 0        | $-Fb+Fx$               | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| DC b   | 0        | $Fx$                   | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| DE b   | 0        | 0                      | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| ED b   | 0        | 0                      | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| EA b   | 0        | $-1/2qx^2$             | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| AE b   | 0        | $1/2Fb-Fx+1/2qx^2$     | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| BF b   | $-x/b$   | $Fb$                   | $-Fb/EJ$ | $-Fx/EJ$             | $-Fx$     | $Fx/EJ$       | $x^2/b^2$        | $-1/2+1/2)Fb^2/EJ$              | $1/3xb/EJ$            |  |
| FB b   | $1-x/b$  | $-Fb$                  | $Fb/EJ$  | $-Fb+Fx$             | $-Fb+Fx$  | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $(-1/2+1/2)Fb^2/EJ$             | $1/3xb/EJ$            |  |
| GC b   | $-1+x/b$ | 0                      | 0        | 0                    | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3xb/EJ$            |  |
| CG b   | $x/b$    | 0                      | 0        | 0                    | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3xb/EJ$            |  |
| FG 2b  | -1       | $2Fb-2Fx+1/2qx^2$      | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0         | 0             | 1                | $(-4/3+0)Fb^2/EJ$               | $2xb/EJ$              |  |
| GF 2b  | 1        | $-1/2qx^2$             | 0        | $-1/2Fx^2/b$         | 0         | 0             | 1                | 0+0                             | 0                     |  |
| CB 2b  | 0        | $Fb$                   | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| BC 2b  | 0        | $-Fb$                  | 0        | 0                    | 0         | 0             | 0                | 0                               | 0                     |  |
| totali   |          |                        |          |                      |           |               |                  | $-4/3Fb^2/EJ$                   | $8/3xb/EJ$            |  |
|  |          | iperstatica $X=W_{gc}$ |          |                      |           |               |                  |                                 |                       |  |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x\theta} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x\theta} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x\theta} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$



$$L_{GF}^{x\theta} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$


$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

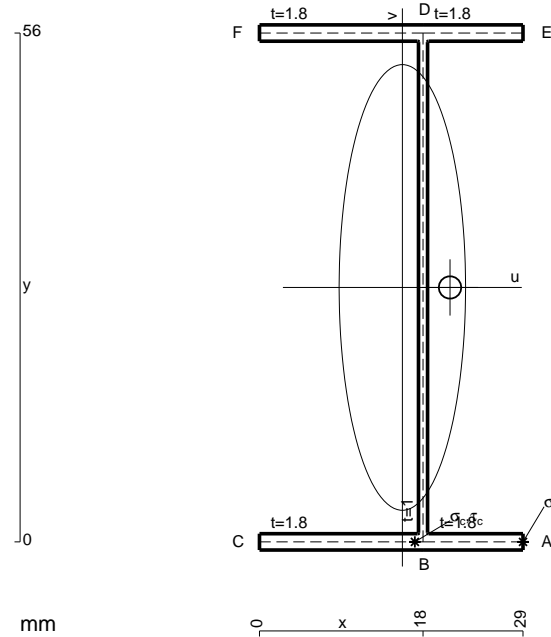

- A = 160.4 mm<sup>2</sup>
- J<sub>u</sub> = 96484. mm<sup>4</sup>
- J<sub>v</sub> = 7763. mm<sup>4</sup>
- J<sub>t</sub> = 131.4 mm<sup>4</sup>
- x<sub>o</sub> = 5.247 mm
- x<sub>g</sub> = 15.72 mm
- T<sub>y</sub> = 990. N
- M<sub>x</sub> = -821700. Nmm
- x<sub>m</sub> = 29. mm
- u<sub>m</sub> = 13.28 mm
- v<sub>m</sub> = -28. mm
- σ<sub>m</sub> = -Mv/J<sub>u</sub> = -238.5 N/mm<sup>2</sup>
- x<sub>c</sub> = 18. mm
- u<sub>c</sub> = 2.278 mm
- v<sub>c</sub> = -28. mm
- σ<sub>c</sub> = -Mv/J<sub>u</sub> = -238.5 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 76.32 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 5.171 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 71.15 N/mm<sup>2</sup>
- t<sub>c</sub> = 1782. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 272.6 N/mm<sup>2</sup>




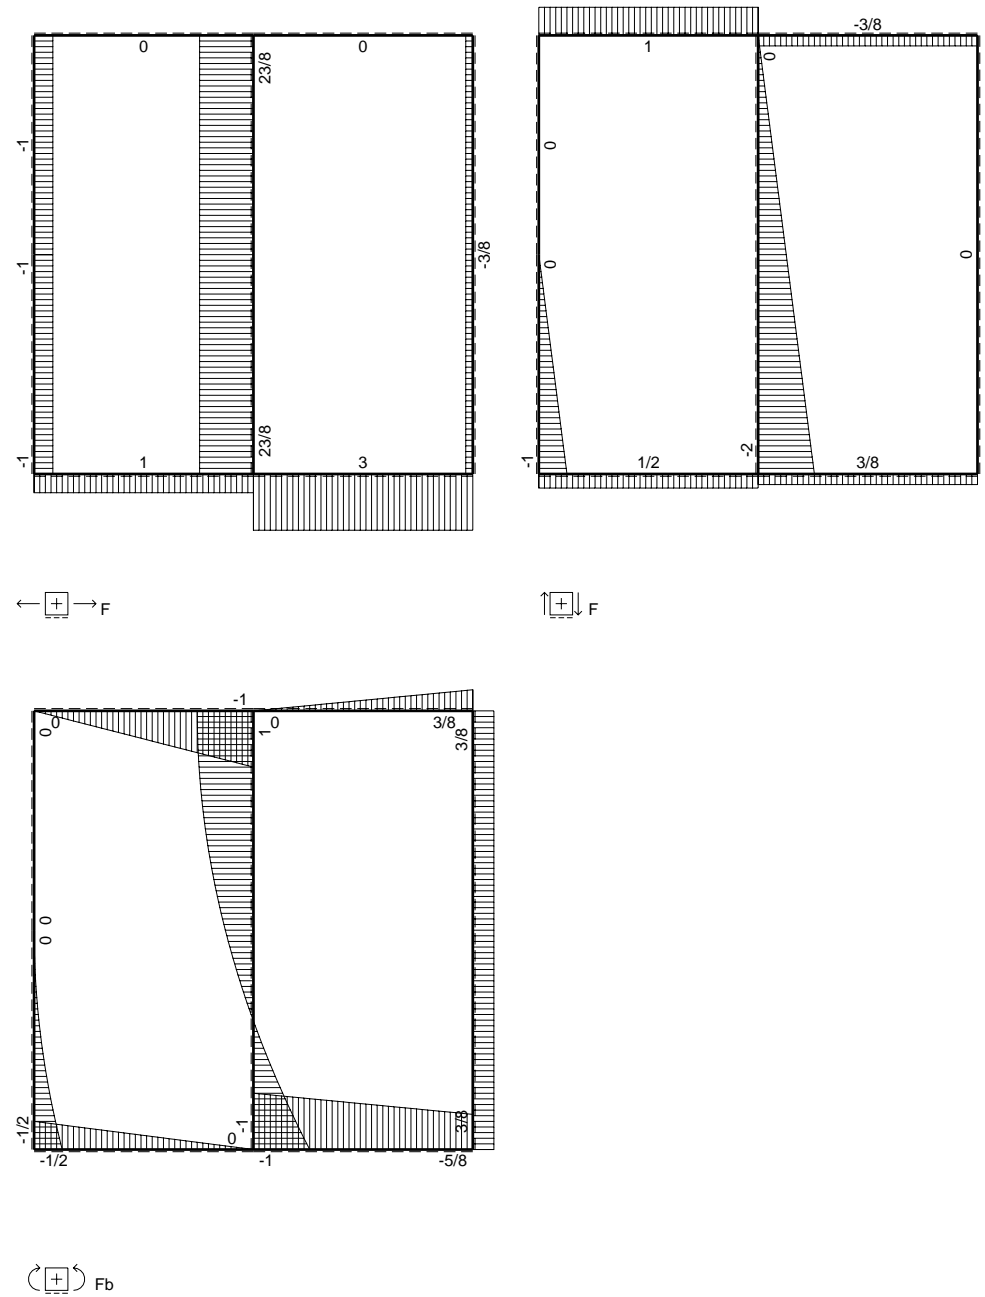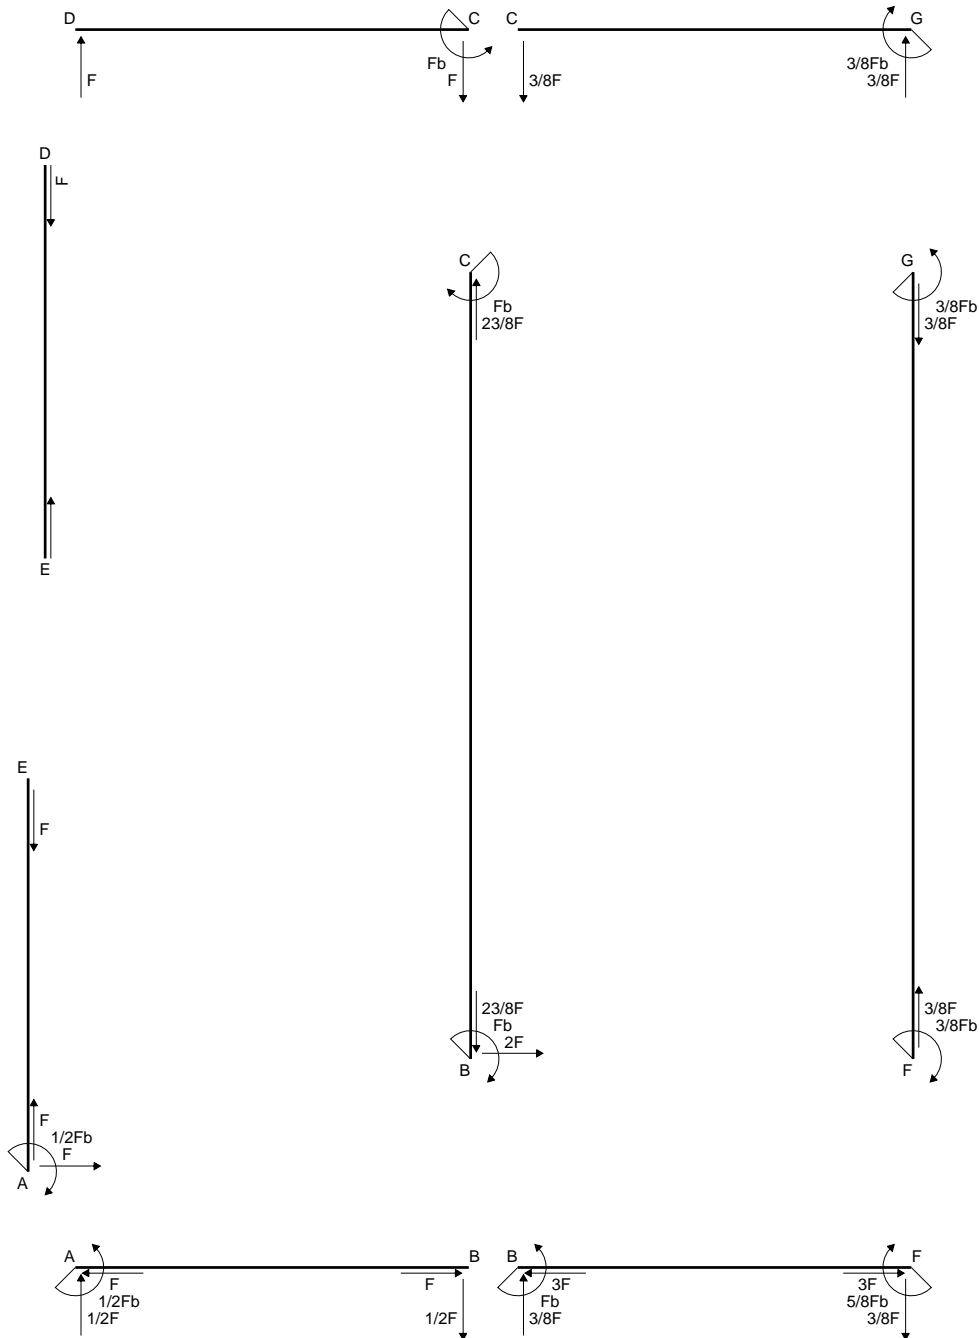

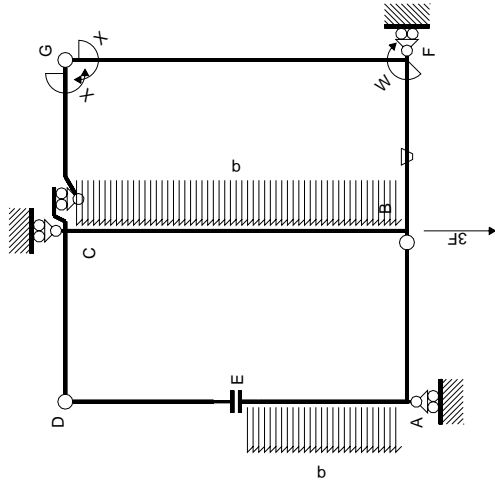


Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

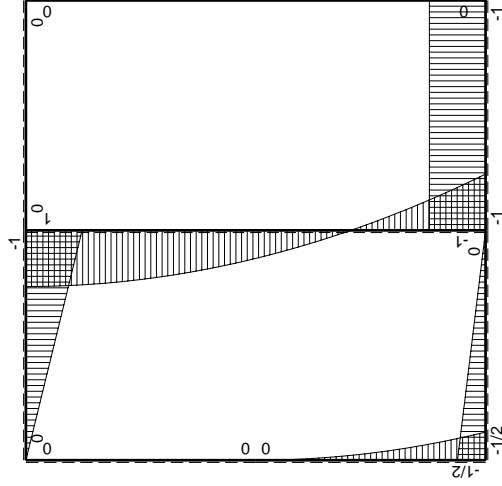

$M_x$  flessione da iperstatica  $X=1$

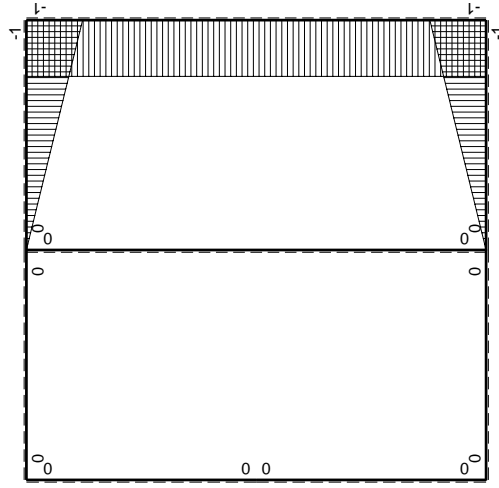

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M_x(x)$ | $M(x)$             | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB B          | 0        | $-1/2Fb+1/2Fx$     | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA B          | 0        | $1/2Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD B          | 0        | $-Fb+Fx$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC B          | 0        | $Fx$               | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE B          | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EAB           | 0        | $-1/2qx^2$         | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BAE           | 0        | $1/2Fb-Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF B          | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| BFB           | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC B          | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CB G          | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b         | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali        |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |
|               |          |                    |          |           |               |                  |                             | $-3/8Fb$             |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

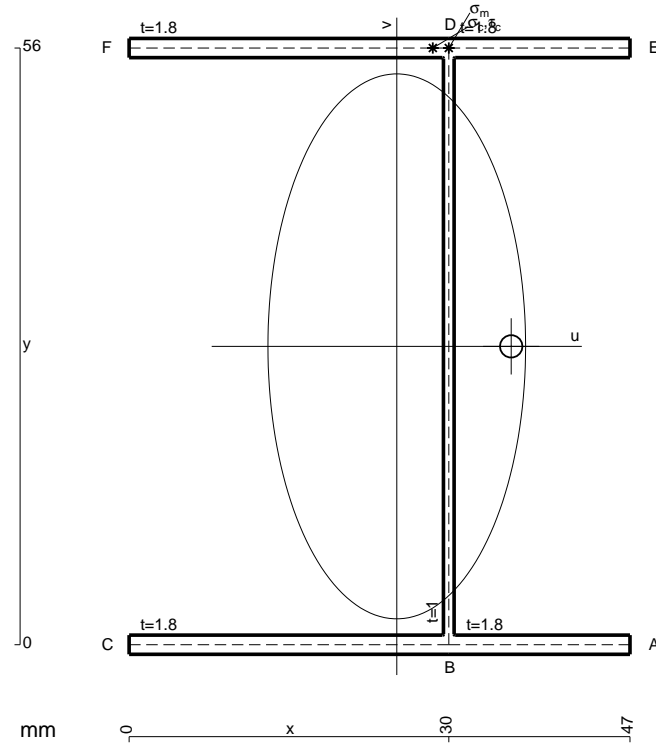


- A = 225.2 mm<sup>2</sup>
- J<sub>u</sub> = 147287. mm<sup>4</sup>
- J<sub>v</sub> = 32925. mm<sup>4</sup>
- J<sub>t</sub> = 201.4 mm<sup>4</sup>
- x<sub>o</sub> = 10.74 mm
- x<sub>g</sub> = 25.12 mm
- N = 5951. N
- T<sub>y</sub> = -4140. N
- M<sub>x</sub> = -910800. Nmm
- x<sub>m</sub> = 30. mm
- y<sub>m</sub> = 56. mm
- u<sub>m</sub> = 4.884 mm
- v<sub>m</sub> = 28. mm
- σ<sub>m</sub> = N/A-Mv/J<sub>u</sub> = 199.6 N/mm<sup>2</sup>
- x<sub>c</sub> = 30. mm
- y<sub>c</sub> = 56. mm
- u<sub>c</sub> = 4.884 mm
- v<sub>c</sub> = 28. mm
- σ<sub>c</sub> = N/A-Mv/J<sub>u</sub> = 199.6 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub>+τ<sub>ou</sub> = 420.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 23.61 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 397.3 N/mm<sup>2</sup>
- t<sub>c</sub> = 3726. mm
- σ<sub>o</sub> = √σ<sup>2</sup>+3τ<sup>2</sup> = 755.9 N/mm<sup>2</sup>






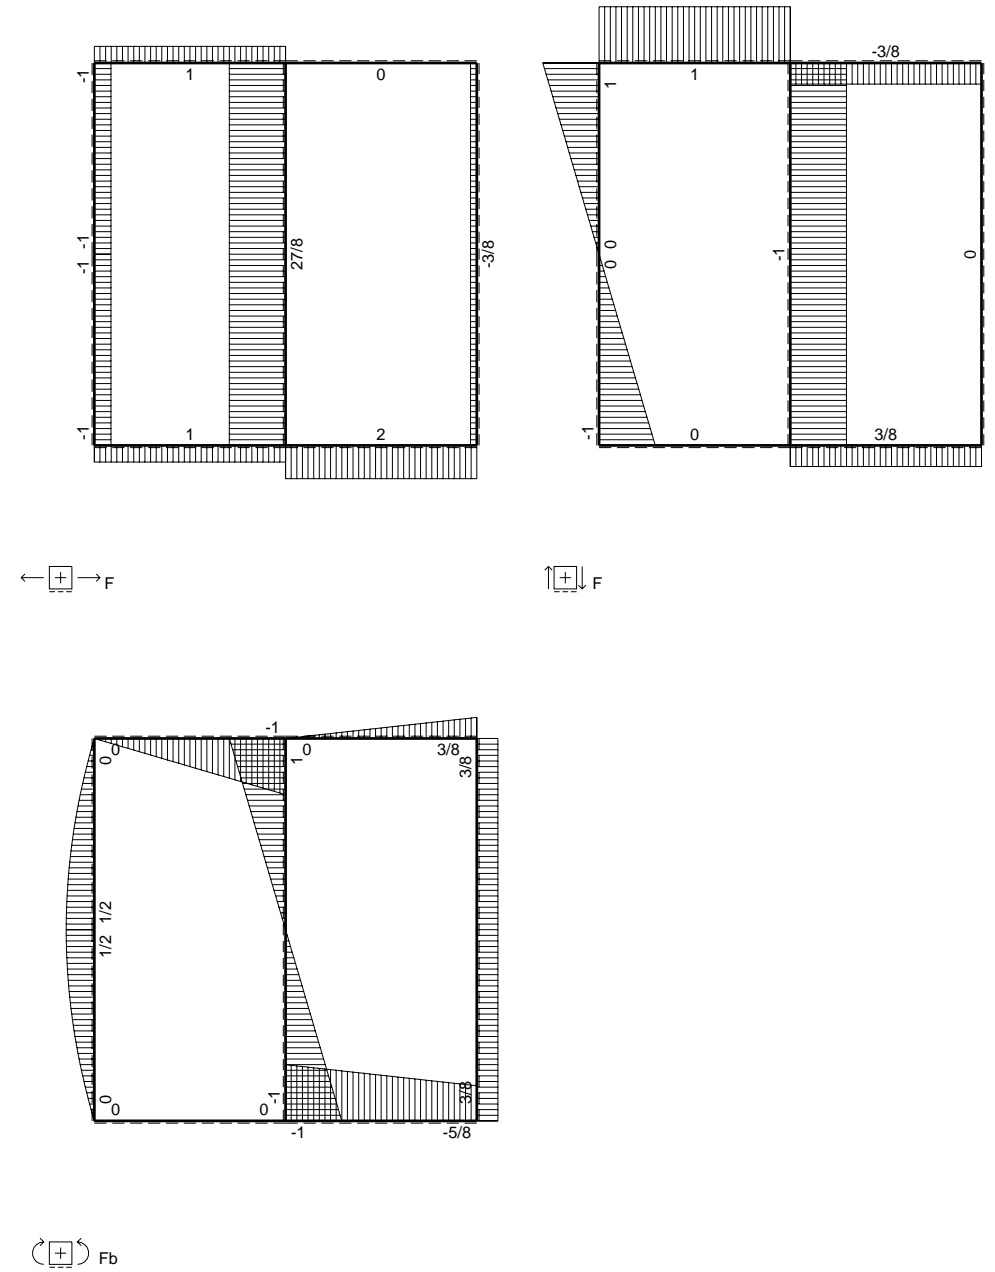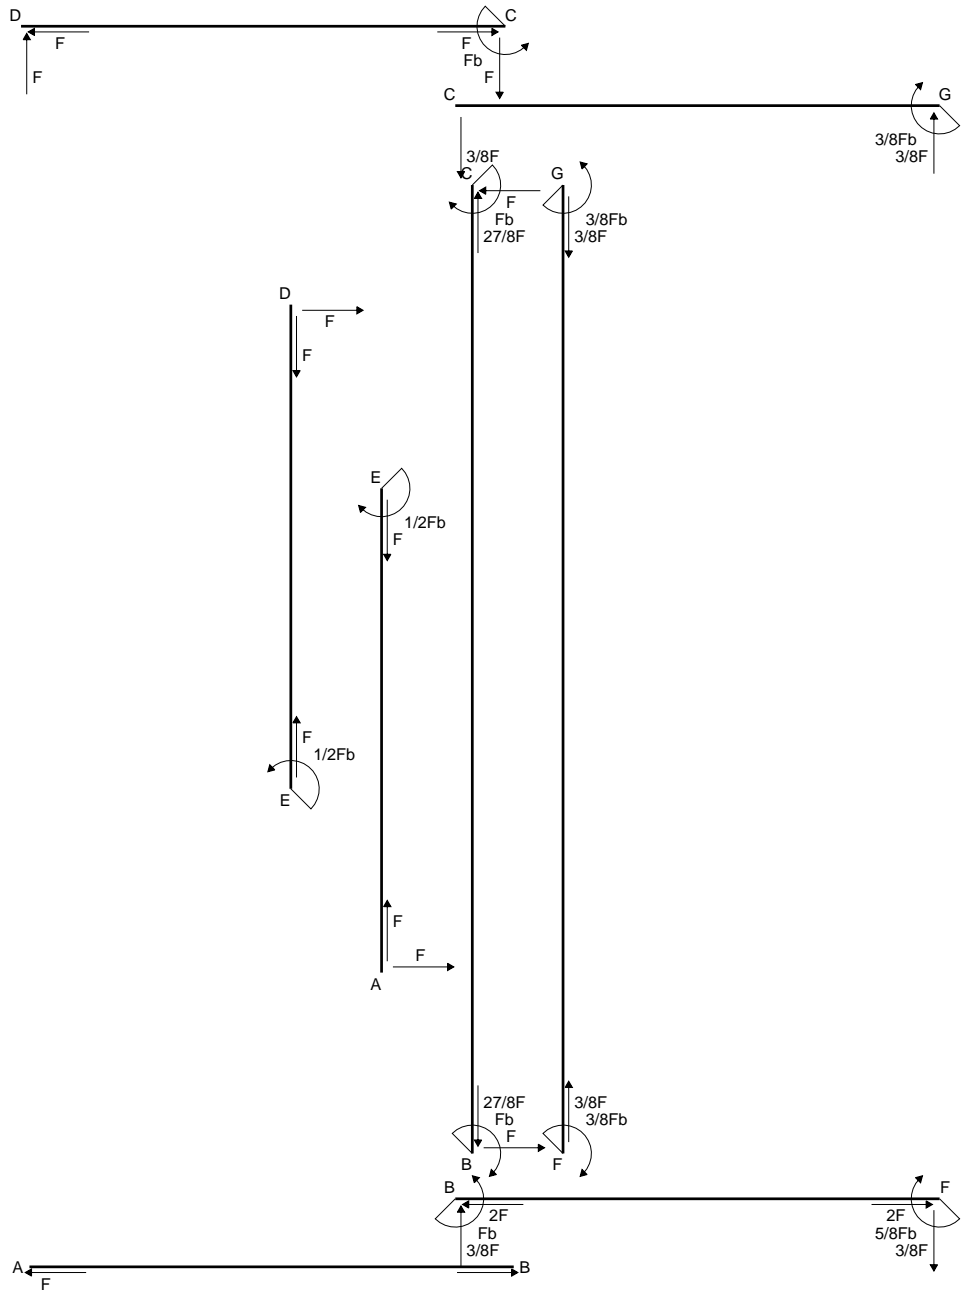


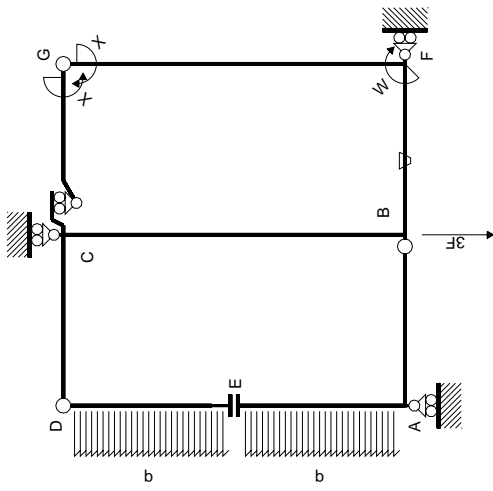

Schema di calcolo iperstatico

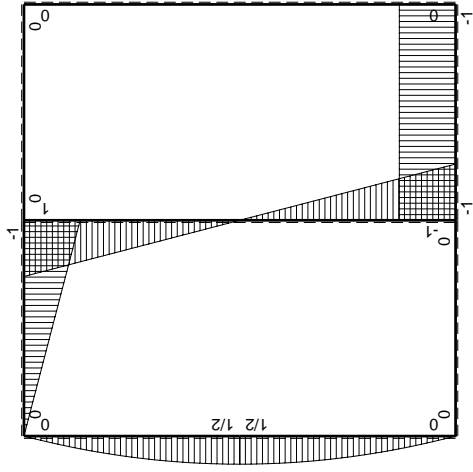

$M_0$  flessione da carichi assegnati

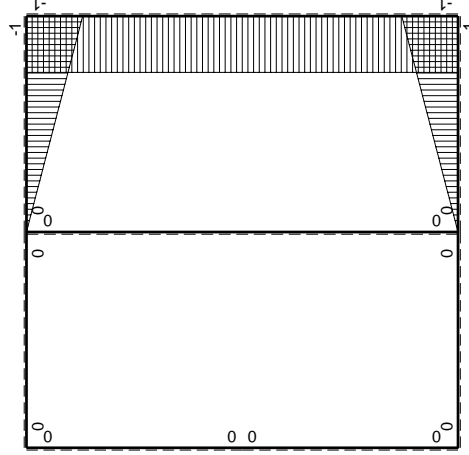

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$ | $M(x)$ | $M_0(x)$         | $\theta$ | $M_x M_0$ | $M_x \theta$ | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|---------------|--------|------------------|----------|-----------|--------------|------------------|-----------------------------|----------------------|
| AB b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BA b          | 0      | 0                | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| CD b          | 0      | -Fb+Fx           | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DC b          | 0      | Fx               | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| DE b          | 0      | $Fx-1/2qx^2$     | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| ED b          | 0      | $-1/2Fb+1/2qx^2$ | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| EA b          | 0      | $1/2Fb-1/2qx^2$  | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| AE b          | 0      | $-Fx+1/2qx^2$    | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BF b          | -x/b   | -Fb              | -Fb/EJ   | Fx        | Fx/EJ        | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FB b          | 1-x/b  | Fb               | Fb/EJ    | Fb-Fx     | Fb/EJ-Fx/EJ  | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$           | $1/3xb/EJ$           |
| GC b          | -1+x/b | 0                | 0        | 0         | 0            | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b          | x/b    | 0                | 0        | 0         | 0            | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b         | -1     | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b         | 1      | 0                | 0        | 0         | 0            | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| BC 2b         | 0      | Fb-Fx            | 0        | 0         | 0            | 0                | 0+0                         | 0                    |
| totali        |        |                  |          |           |              |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$





$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

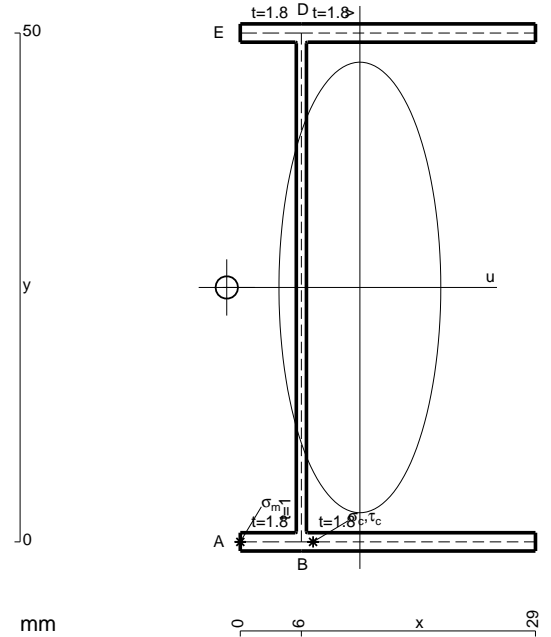


- A = 154.4 mm<sup>2</sup>
- J<sub>u</sub> = 75667. mm<sup>4</sup>
- J<sub>v</sub> = 9759. mm<sup>4</sup>
- J<sub>t</sub> = 129.4 mm<sup>4</sup>
- x<sub>0</sub> = -13.08 mm
- x<sub>g</sub> = 11.75 mm
- N = 4219. N
- T<sub>y</sub> = -1250. N
- M<sub>x</sub> = 550000. Nmm
- u<sub>m</sub> = -11.75 mm
- v<sub>m</sub> = -25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 209. N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- u<sub>c</sub> = -5.747 mm
- v<sub>c</sub> = -25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 209. N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 236.9 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 9.499 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>0</sub>/J<sub>t</sub> = 227.4 N/mm<sup>2</sup>
- t<sub>c</sub> = 2250. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 460.4 N/mm<sup>2</sup>



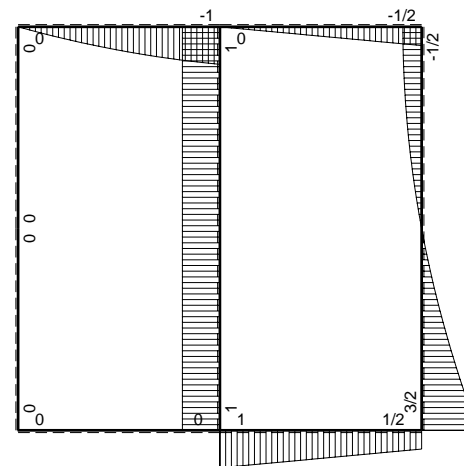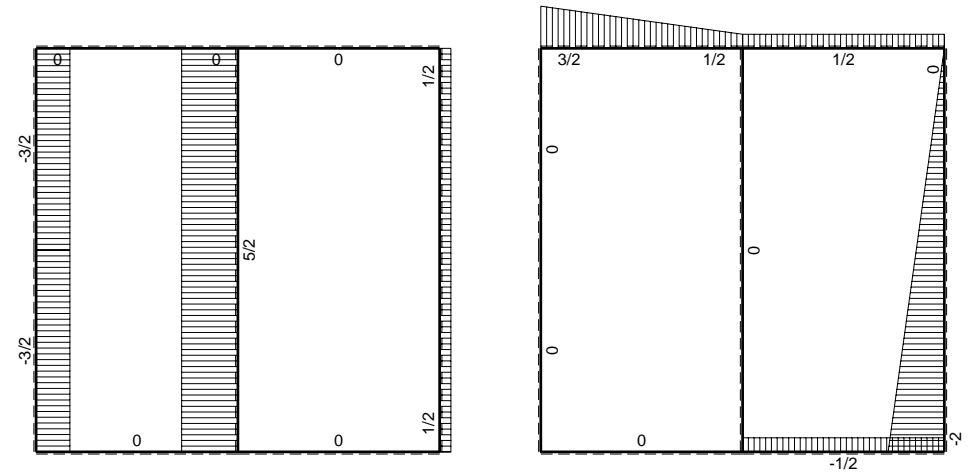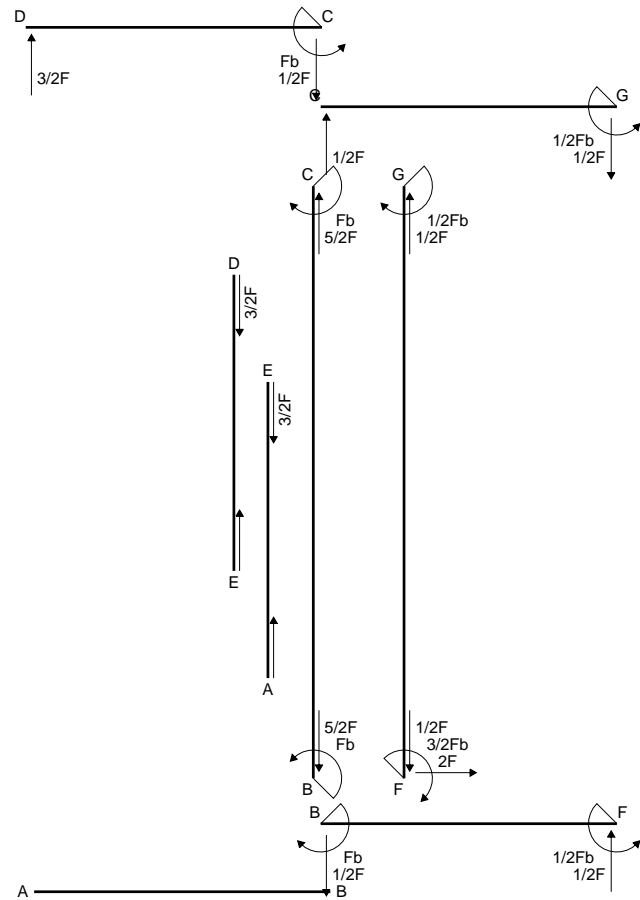

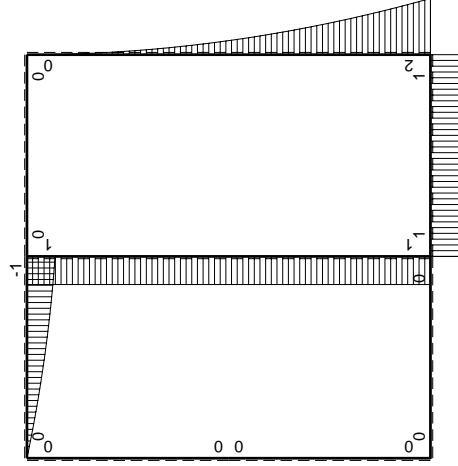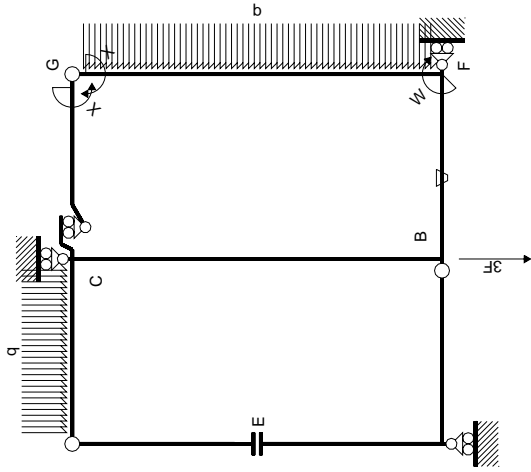

$M_0$  flessione da carichi assegnati

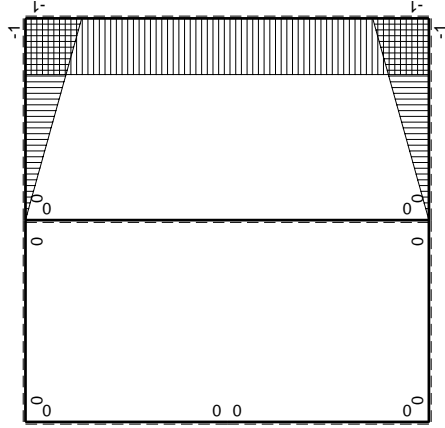

$M_x$  flessione da iperstatica X=1

| Quadro contributi PLV per iperstatica X=W <sub>GC</sub> |          | $\theta$                      | $M_0(x)$            | $M_x(x)$ | $M_y(x)$ | $M_z(x)$             | $M_\theta$    | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_y M_y/EJ dx$ |
|---|----------|-------------------------------|---------------------|----------|----------|----------------------|---------------|------------------|-----------------------------|----------------------|
| AB b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| BA b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| CD b  | 0        | 0                             | $-Fb+1/2Fx+1/2qx^2$ | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| DC b  | 0        | 0                             | $3/2Fx-1/2qx^2$     | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| DE b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| ED b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| EA b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| AE b  | 0        | 0                             | 0                   | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| BF b  | $-x/b$   | $Fb/EJ$                       | $Fb$                | $-Fb$    | $Fb/EJ$  | $-Fb+Fx$             | $Fx/EJ$       | $x^2/b^2$        | $(-1/2+1/2)Fb^2/EJ$         | $1/3xb/EJ$           |
| FB b  | $1-x/b$  | $Fb/EJ$                       | $-Fb$               | $-Fb$    | $Fb/EJ$  | $-Fb+Fx$             | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $-1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| GC b  | $-1+x/b$ | 0                             | 0                   | 0        | 0        | 0                    | 0             | $1-2x/b+x^2/b^2$ | 0                           | 0                    |
| CG b  | $x/b$    | 0                             | 0                   | 0        | 0        | 0                    | 0             | $x^2/b^2$        | 0                           | 0                    |
| FG 2b   | -1       | 0                             | $2Fb-2Fx+1/2qx^2$   | 0        | 0        | $-2Fb+2Fx-1/2Fx^2/b$ | 0             | 1                | $(-4/3+0)Fb^2/EJ$           | $2xb/EJ$             |
| GF 2b   | 1        | 0                             | $-1/2qx^2$          | 0        | 0        | $-1/2Fx^2/b$         | 0             | 1                | 0                           | 0                    |
| CB 2b   | 0        | 0                             | $Fb$                | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| BC 2b   | 0        | 0                             | $-Fb$               | 0        | 0        | 0                    | 0             | 0                | 0                           | 0                    |
| totali  |          |                               |                     |          |          |                      |               |                  |                             |                      |
|   |          | iperstatica X=W <sub>GC</sub> |                     |          |          |                      |               |                  |                             |                      |
|   |          | $1/2Fb$                       |                     |          |          |                      |               |                  |                             |                      |
|   |          | $-4/3Fb^2/EJ$                 |                     |          |          |                      |               |                  |                             |                      |
|   |          | $8/3xb/EJ$                    |                     |          |          |                      |               |                  |                             |                      |

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (-x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [-1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (-1/2 b) Fb 1/EJ + (1/2 b) \theta = 0$$

$$L_{FB}^{x_0} = \int_0^b (-1 + x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx$$

$$= [-x + 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$


$$= (-b + 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = 0$$

$$L_{FG}^{x_0} = \int_0^{2b} (-2 + 2x/b - 1/2 x^2/b^2) Fb 1/EJ dx = [-2x + x^2/b - 1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4b + 4b - 4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

$$L_{GF}^{x_0} = \int_0^{2b} (-1/2 x^2/b^2) Fb 1/EJ dx = [-1/6 x^3/b^2]_0^{2b} Fb 1/EJ$$

$$= (-4/3 b) Fb 1/EJ = -4/3 Fb^2/EJ$$

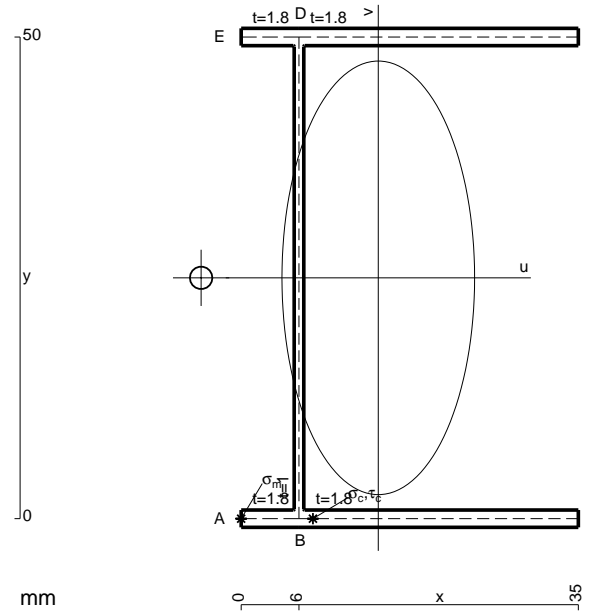

$$A = 176. \text{ mm}^2$$

$$J_u = 89167. \text{ mm}^4$$

$$J_v = 17596. \text{ mm}^4$$

$$J_t = 152.7 \text{ mm}^4$$

$$x_o = -18.39 \text{ mm}$$

$$x_g = 14.23 \text{ mm}$$

$$T_y = 2610. \text{ N}$$

$$M_x = -783000. \text{ Nmm}$$

$$u_m = -14.23 \text{ mm}$$

$$v_m = -25. \text{ mm}$$

$$\sigma_m = -Mv/J_u = -219.5 \text{ N/mm}^2$$

$$x_c = 6. \text{ mm}$$

$$u_c = -8.233 \text{ mm}$$

$$v_c = -25. \text{ mm}$$

$$\sigma_c = -Mv/J_u = -219.5 \text{ N/mm}^2$$

$$\tau_c = \tau_g + \tau_{ou} = 586.8 \text{ N/mm}^2$$

$$\tau_g = TS'/J_u = 21.22 \text{ N/mm}^2$$



$$\tau_o = Tx_o t/J_t = 565.6 \text{ N/mm}^2$$

$$t_c = 4698. \text{ mm}$$

$$\sigma_o = \sqrt{\sigma^2 + 3\tau^2} = 1040. \text{ N/mm}^2$$






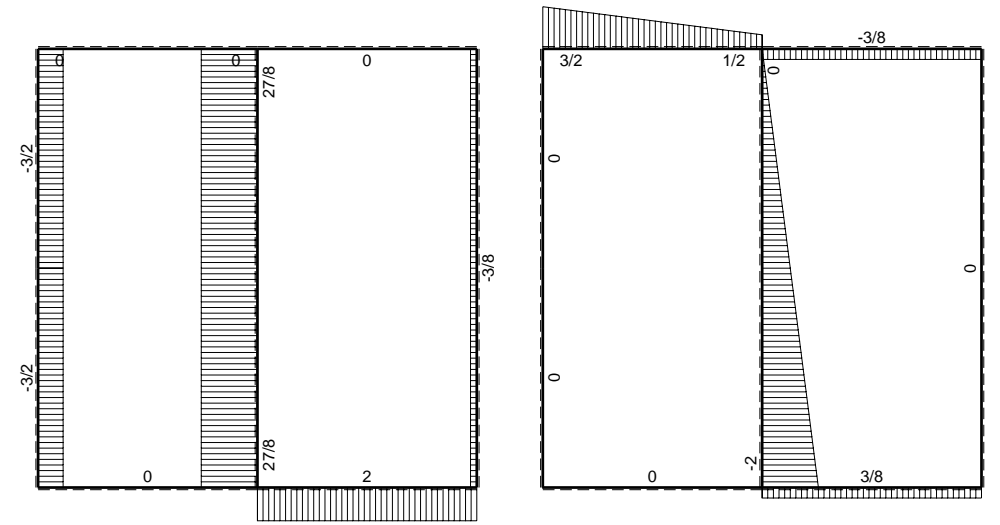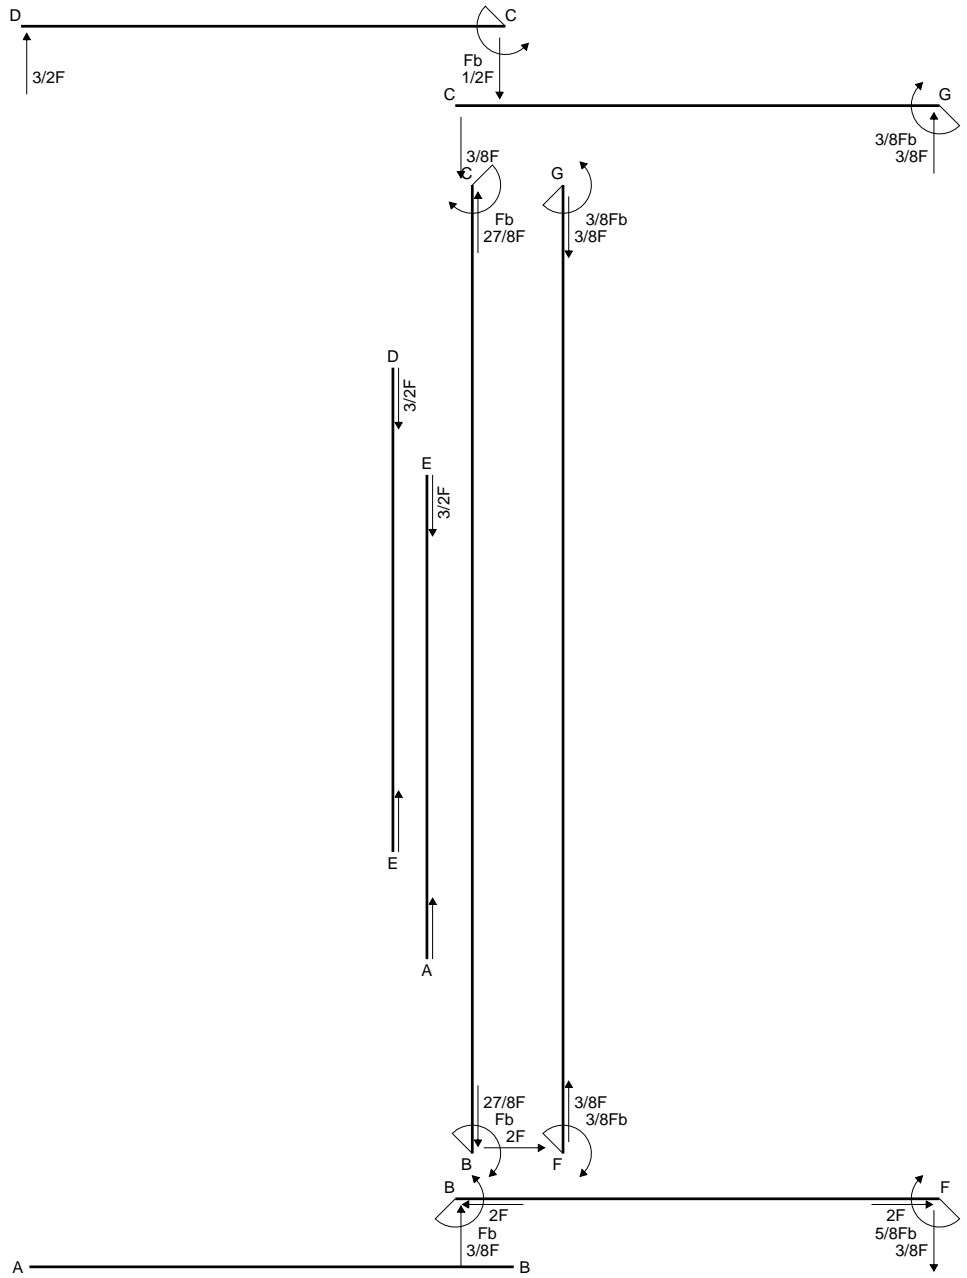


$\leftarrow \oplus \rightarrow F$

$\uparrow \oplus \downarrow F$

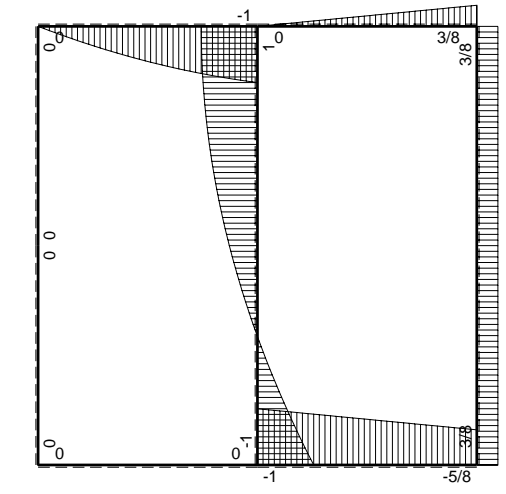


$\oplus \curvearrowright F_b$

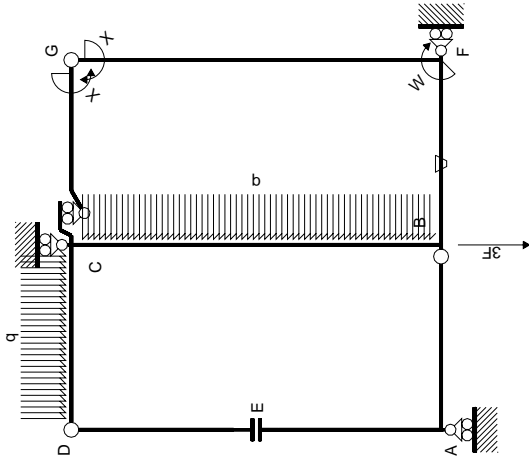

Schema di calcolo iperstatico


$M_0$  flessione da carichi assegnati

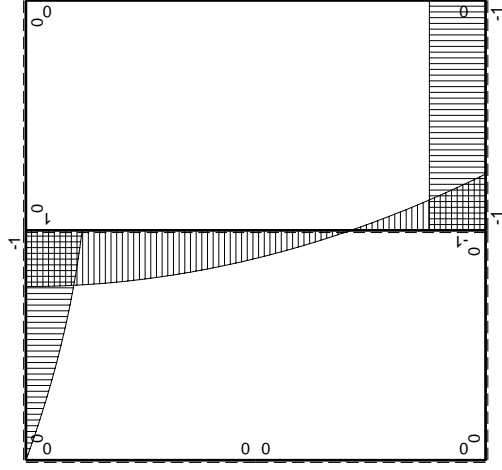

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\rightarrow$          | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x (M_0/EJ + \theta) dx$ | $\int X M_x M_x / EJ dx$ |
|------------------------|----------|--------------------|----------|-----------|---------------|------------------|---------------------------------|--------------------------|
| AB b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| BA b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| CD b                   | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| DC b                   | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| DE b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| ED b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| EA b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| AE b                   | 0        | 0                  | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| BF b                   | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$              | $1/3Xb/EJ$               |
| FBB b                  | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/2+1/2)Fb^2/EJ$               | $1/3Xb/EJ$               |
| GCB b                  | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                             | $1/3Xb/EJ$               |
| CG b                   | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                             | $1/3Xb/EJ$               |
| FG 2b                  | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2Xb/EJ$                 |
| GF 2b                  | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                             | $2Xb/EJ$                 |
| CB 2b                  | 0        | $Fb-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| BC 2b                  | 0        | $Fb-2Fx+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                             | 0                        |
| totali                 |          |                    |          |           |               |                  |                                 |                          |
| iperstatica $X=W_{gc}$ |          |                    |          |           |               |                  |                                 |                          |
|                        |          |                    |          |           |               |                  |                                 | $-3/8Fb$                 |

Sviluppi di calcolo iperstatica

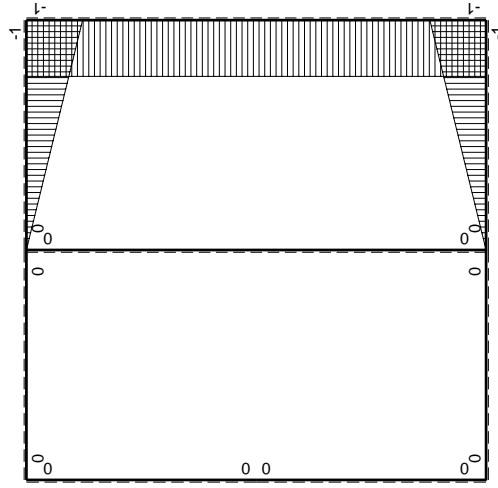

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$



$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$



$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

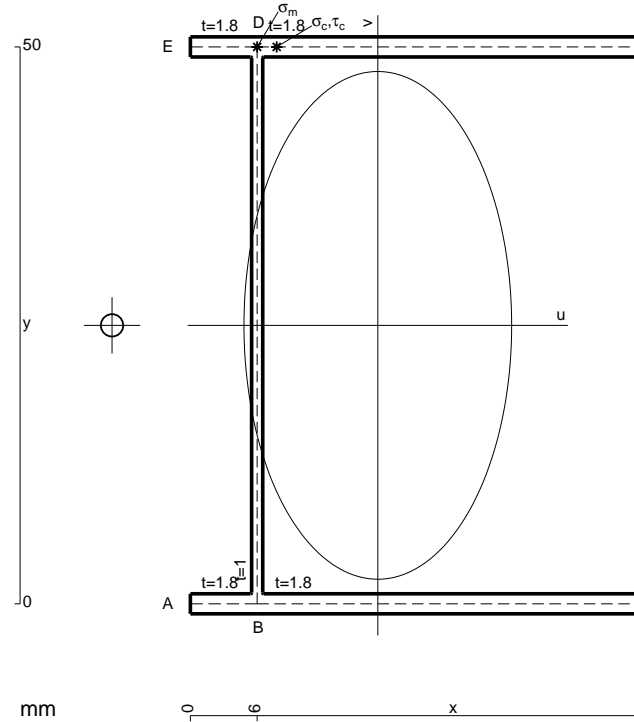

- A = 197.6 mm<sup>2</sup>
- J<sub>u</sub> = 102667. mm<sup>4</sup>
- J<sub>v</sub> = 28529. mm<sup>4</sup>
- J<sub>t</sub> = 176.1 mm<sup>4</sup>
- x<sub>o</sub> = -23.86 mm
- x<sub>g</sub> = 16.83 mm
- N = 5400. N
- T<sub>y</sub> = -3200. N
- M<sub>x</sub> = -832000. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -10.83 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 229.9 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -10.83 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 229.9 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 807.8 N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 27.27 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>t/J<sub>t</sub> = 780.5 N/mm<sup>2</sup>
- t<sub>c</sub> = 2880. mm
- σ<sub>o</sub> = √(σ<sup>2</sup> + 3τ<sup>2</sup>) = 1418. N/mm<sup>2</sup>




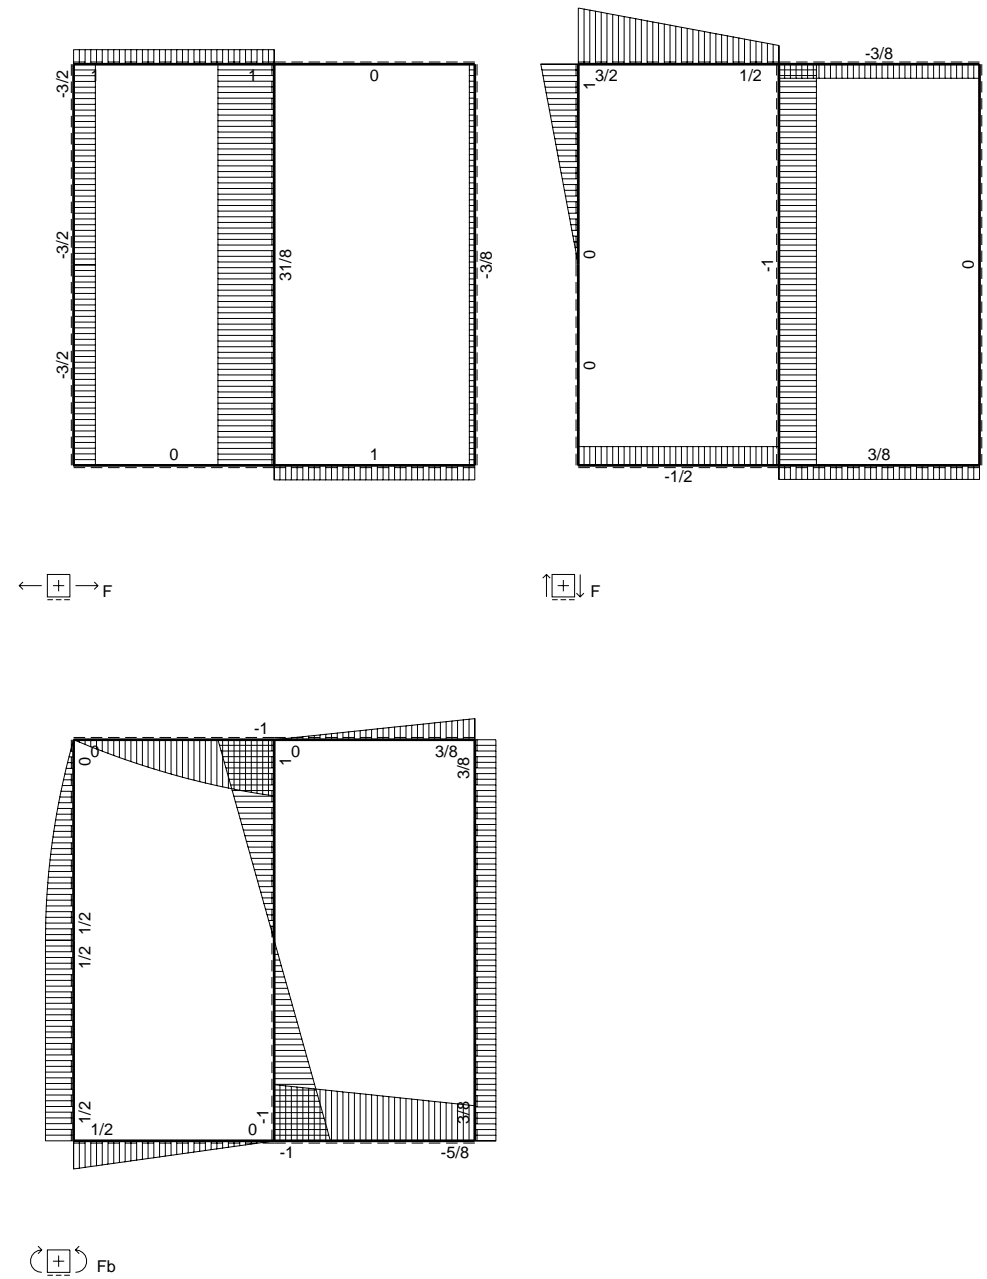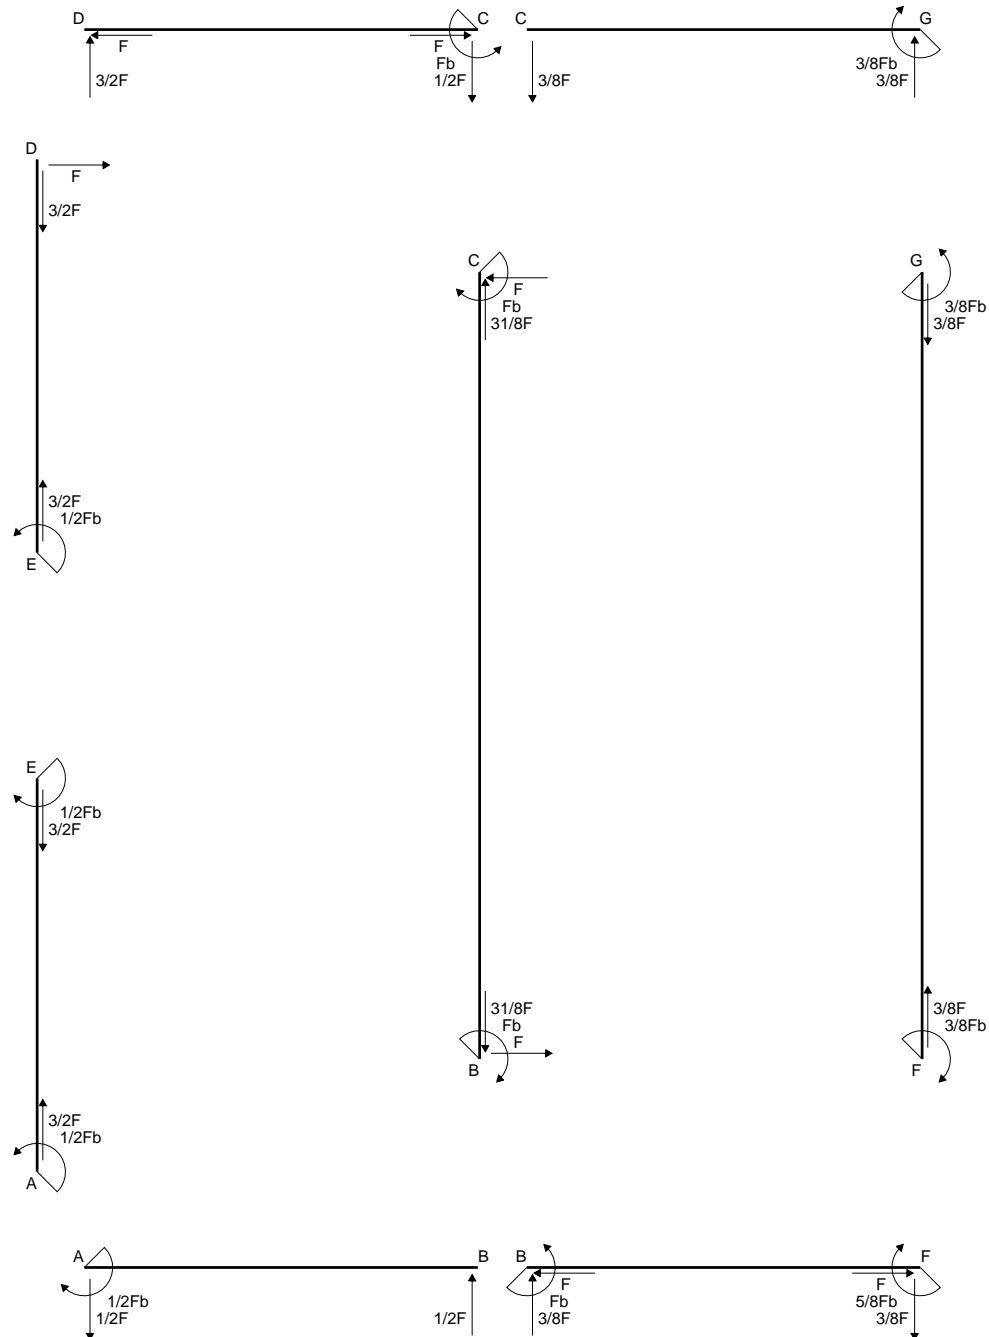

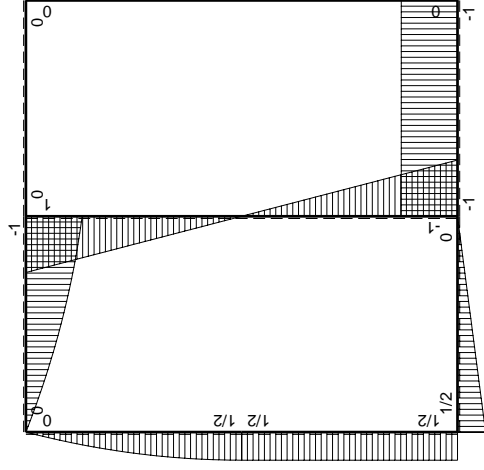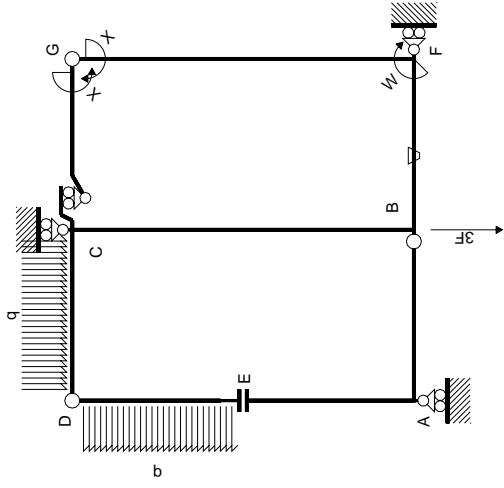

Schema di calcolo iperstatico

$M_0$  flessione da carichi assegnati

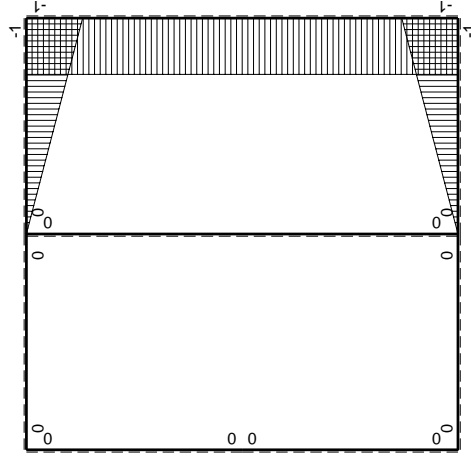

$M_x$  flessione da iperstatica  $X=1$

Quadro contributi PLV per iperstatica  $X=W_{gc}$

| $\leftarrow$ | $M(x)$   | $M_0(x)$           | $\theta$ | $M_x M_0$ | $M_x \theta$  | $M_x M_x$        | $\int M_x(M_0/EJ+\theta)dx$ | $\int M_x M_x/EJ dx$ |
|--------------|----------|--------------------|----------|-----------|---------------|------------------|-----------------------------|----------------------|
| AB b         | 0        | $1/2Fb-1/2Fx$      | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BA b         | 0        | $-1/2Fx$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| CD b         | 0        | $-b+1/2Fx+1/2qx^2$ | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DC b         | 0        | $3/2Fx-1/2qx^2$    | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| DE b         | 0        | $Fx-1/2qx^2$       | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| ED b         | 0        | $-1/2Fb+1/2qx^2$   | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| EA b         | 0        | $1/2Fb$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| AE b         | 0        | $-1/2Fb$           | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BF b         | $-x/b$   | $-Fb$              | $-Fb/EJ$ | $Fx$      | $Fx/EJ$       | $x^2/b^2$        | $(1/2+1/2)Fb^2/EJ$          | $1/3xb/EJ$           |
| FBB b        | $1-x/b$  | $Fb$               | $Fb/EJ$  | $Fb-Fx$   | $Fb/EJ-Fx/EJ$ | $1-2x/b+x^2/b^2$ | $1/3xb/EJ$                  | $1/3xb/EJ$           |
| GC b         | $-1+x/b$ | 0                  | 0        | 0         | 0             | $1-2x/b+x^2/b^2$ | 0+0                         | $1/3xb/EJ$           |
| CG b         | $x/b$    | 0                  | 0        | 0         | 0             | $x^2/b^2$        | 0+0                         | $1/3xb/EJ$           |
| FG 2b        | -1       | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| GF 2b        | 1        | 0                  | 0        | 0         | 0             | 1                | 0+0                         | $2xb/EJ$             |
| CB 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| BC 2b        | 0        | $Fb-Fx$            | 0        | 0         | 0             | 0                | 0+0                         | 0                    |
| totali       |          |                    |          |           |               |                  |                             | $8/3xb/EJ$           |

iperstatica  $X=W_{gc}$

Sviluppi di calcolo iperstatica

$$L_{BF}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FB}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{GC}^{xx} = \int_0^b (1 - 2x/b + x^2/b^2) 1/EJ dx = [x - x^2/b + 1/3 x^3/b^2]_0^b 1/EJ$$

$$= (b - b + 1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{CG}^{xx} = \int_0^b (x^2/b^2) 1/EJ dx = [1/3 x^3/b^2]_0^b 1/EJ$$

$$= (1/3 b) 1/EJ = 1/3 b/EJ$$

$$L_{FG}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$

$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{GF}^{xx} = \int_0^{2b} (1) 1/EJ dx = [x]_0^{2b} 1/EJ$$


$$= (2b) 1/EJ = 2 b/EJ$$

$$L_{BF}^{x_0} = \int_0^b (x/b) Fb 1/EJ dx + \int_0^b (x/b) \theta dx = [1/2 x^2/b]_0^b Fb 1/EJ + [1/2 x^2/b]_0^b \theta$$

$$= (1/2 b) Fb 1/EJ + (1/2 b) \theta = Fb^2/EJ$$

$$L_{FB}^{x_0} = \int_0^b (1 - x/b) Fb 1/EJ dx + \int_0^b (-1 + x/b) \theta dx = [x - 1/2 x^2/b]_0^b Fb 1/EJ + [-x + 1/2 x^2/b]_0^b \theta$$

$$= (b - 1/2 b) Fb 1/EJ + (-b + 1/2 b) \theta = Fb^2/EJ$$

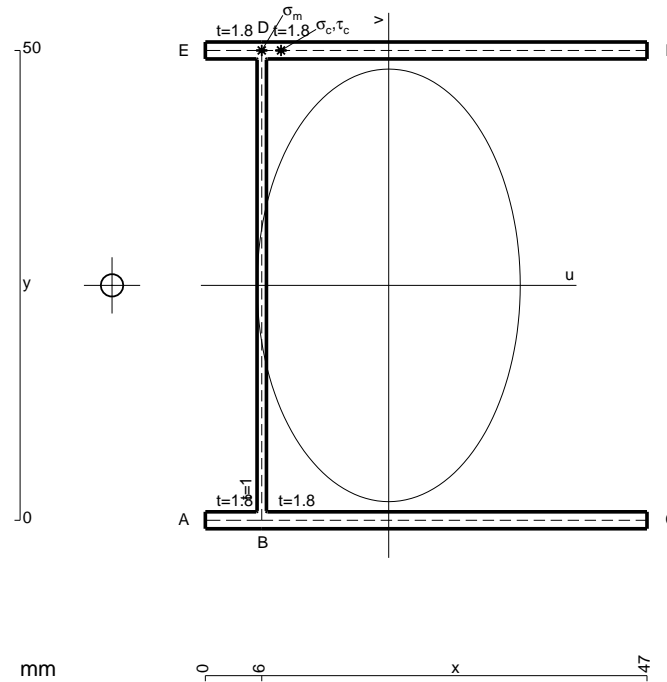

- A = 219.2 mm<sup>2</sup>
- J<sub>u</sub> = 116167. mm<sup>4</sup>
- J<sub>v</sub> = 42967. mm<sup>4</sup>
- J<sub>t</sub> = 199.4 mm<sup>4</sup>
- x<sub>o</sub> = -29.44 mm
- x<sub>g</sub> = 19.51 mm
- N = 6704. N
- T<sub>y</sub> = -1730. N
- M<sub>x</sub> = -968800. Nmm
- x<sub>m</sub> = 6. mm
- y<sub>m</sub> = 50. mm
- u<sub>m</sub> = -13.51 mm
- v<sub>m</sub> = 25. mm
- σ<sub>m</sub> = N/A - Mv/J<sub>u</sub> = 239.1 N/mm<sup>2</sup>
- x<sub>c</sub> = 6. mm
- y<sub>c</sub> = 50. mm
- u<sub>c</sub> = -13.51 mm
- v<sub>c</sub> = 25. mm
- σ<sub>c</sub> = N/A - Mv/J<sub>u</sub> = 239.1 N/mm<sup>2</sup>
- τ<sub>c</sub> = τ<sub>g</sub> + τ<sub>ou</sub> = 475. N/mm<sup>2</sup>
- τ<sub>g</sub> = TS/tJ<sub>u</sub> = 15.26 N/mm<sup>2</sup>
- τ<sub>o</sub> = Tx<sub>o</sub>/J<sub>t</sub> = 459.7 N/mm<sup>2</sup>
- t<sub>c</sub> = 3114. mm
- σ<sub>o</sub> = √σ<sup>2</sup> + 3τ<sup>2</sup> = 856.8 N/mm<sup>2</sup>

